

General Description

The MIC4685 is a high-efficiency 200kHz stepdown (buck) switching regulator. Power conversion efficiency of above 85% is easily obtainable for a wide variety of applications. The MIC4685 achieves 3A of continuous current in the 7-pin SPAK package.

The thermal performance of the SPAK allows it to replace TO-220s and TO-263s (D²PAKs) in many applications. The SPAK saves board space with a 36% smaller footprint than TO-263.

High-efficiency is maintained over a wide output current range by utilizing a boost capacitor to increase the voltage available to saturate the internal power switch. As a result of this high-efficiency, only the ground plane of the PCB is needed for a heat sink.

The MIC4685 allows for a high degree of safety. It has a wide input voltage range of 4V to 30V (34V transient), allowing it to be used in applications where input voltage transients may be present. Built-in safety features include over-current protection, frequency-foldback short-circuit protection, and thermal shutdown.

The MIC4685 is available in a 7-pin SPAK package with a junction temperature range of -40°C to +125°C.

Data sheets and support documentation can be found on Micrel's web site at www.micrel.com.


Features

- Low 2mm profile SPAK package
- 3A continuous output current
- Wide 4V to 30V input voltage range (34V transient)
- Fixed 200kHz PWM operation
- Over 85% efficiency
- Output voltage adjustable to 1.235V
- All surface mount solution
- Internally compensated with fast transient response
- Over-current protection
- Frequency foldback short-circuit protection
- Thermal shutdown

Applications

- Point-of-load power supplies
- Simple high-efficiency step-down regulators
- 5V to 3.3V/2A conversion
- 12V to 5V/3.3V/2.5V/1.8V 3A conversion
- Dual-output ±5V conversion
- Base stations
- LCD power supplies
- Battery chargers

Typical Application

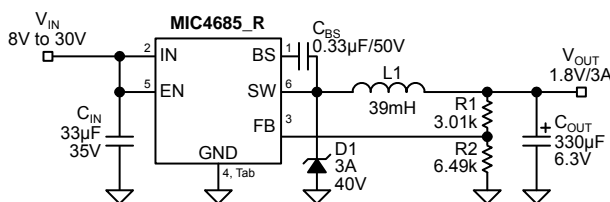

1.8V Output Converter

SuperSwitcher is a trademark of Micrel, Inc


Micrel Inc. • 2180 Fortune Drive • San Jose, CA 95131 • USA • tel +1 (408) 944-0800 • fax + 1 (408) 474-1000 • <http://www.micrel.com>

Ordering Information

| Part Number | | Voltage | Junction Temp. Range | Package |
|-------------|-----------------|---------|----------------------|------------------|
| Standard | RoHS Compliant* | | | |
| MIC4685BR | MIC4685WR | Adj. | -40° to +125°C | 7-Pin SPAK |
| | MIC4685WR EV | Adj. | | Evaluation Board |

* RoHS compliant with 'high-melting solder' exemption.

Pin Configuration

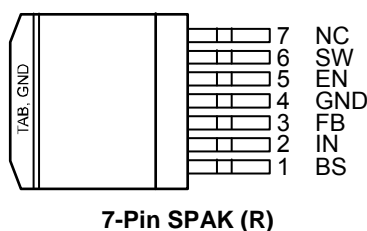

Pin Description

| Pin Number | Pin Name | Pin Function |
|------------|----------|---|
| 1 | BS | Bootstrap Voltage Node (External Component): Connect to external boost capacitor. |
| 2 | IN | Supply (Input): Unregulated +4V to 30V supply voltage (34V transient) |
| 3 | FB | Feedback (Input): Outback voltage feedback to regulator. Connect to 1.235V tap of resistive divider. |
| 4, Tab | GND | Ground |
| 5 | EN | Enable (Input): Logic high = enable; logic low = shutdown |
| 6 | SW | Switch (Output): Emitter of NPN output switch. Connect to external storage inductor and Schottky diode. |
| 7 | NC | No Connect. Tie this pin-to-ground. |

Detailed Pin Description

Switch (SW, Pin 6)

The switch pin is tied to the emitter of the main internal NPN transistor. This pin is biased up to the input voltage, minus the V_{SAT} , of the main NPN pass element. The emitter is also driven negative when the output inductor's magnetic field collapses at turn-off. During the OFF time, the SW pin is clamped by the output Schottky diode typically to a $-0.5V$.

Ground (GND, Pin 4, Tab)

There are two main areas of concern when it comes to the ground pin, EMI and ground current. In a buck regulator or any other non-isolated switching regulator, the output capacitor(s) and diode(s) ground is referenced back to the switching regulator's or controller's ground pin. Any resistance between these reference points causes an offset voltage/IR drop proportional to load current and poor load regulation. This is why it's important to keep the output grounds placed as close as possible to the switching regulator's ground pin. To keep radiated EMI to a minimum, it is necessary to place the input capacitor ground lead as close as possible to the switching regulator's ground pin.

Input Voltage (V_{IN} , Pin 2)

The V_{IN} pin is the collector of the main NPN pass element. This pin is also connected to the internal regulator. The output diode or clamping diode should have its cathode as close as possible to this point to avoid voltage spikes adding to the voltage across the collector.

Bootstrap (BS, Pin 1)

The bootstrap pin, in conjunction with the external bootstrap capacitor, provides a bias voltage higher than the input voltage to the MIC4685's main NPN pass element. The bootstrap capacitor sees the dv/dt of the switching action at the SW pin as an AC voltage. The bootstrap capacitor then couples the AC voltage back to the BS pin, plus the dc offset of V_{IN} where it is rectified and used to provide additional drive to the main switch; in this case, a NPN transistor.

This additional drive reduces the NPN's saturation voltage and increases efficiency, from a V_{SAT} of 1.8V, and 75% efficiency to a V_{SAT} of 0.5V and 88% efficiency respectively.

Feedback (FB, Pin 3)

The feedback pin is tied to the inverting side of an error amplifier. The noninverting side is tied to a 1.235V bandgap reference. An external resistor voltage divider is required from the output-to-ground, with the center tied to the feedback pin. See Tables 1 and 2 for recommended resistor values.

Enable (EN, Pin 5)

The enable (EN) input is used to turn on the regulator and is TTL compatible. Note: connect the enable pin to the input if unused. A logic-high enables the regulator. A logic-low shuts down the regulator and reduces the stand-by quiescent input current to typically $150\mu A$. The enable pin has an up-per threshold of 2.0V minimum and lower threshold of 0.8V maximum. The hysteresis provided by the upper and lower thresholds acts as an UVLO and prevents unwanted turn on of the regulator due to noise.

Absolute Maximum Ratings⁽¹⁾

| | |
|--|-------------------|
| Supply Voltage (V_{IN}) ⁽¹⁾ | +34V |
| Enable Voltage (V_{EN})..... | -0.3V to V_{IN} |
| Steady-State Output Switch Voltage (V_{SW})..... | -1V to V_{IN} |
| Feedback Voltage (V_{FB}) | +12V |
| Storage Temperature (T_s)..... | -65°C to +150°C |
| EDS Rating ⁽³⁾ | 2kV |

Operating Ratings⁽²⁾

| | |
|--|-----------------|
| Supply Voltage (V_{IN}) ⁽⁴⁾ | +4V to +30V |
| Junction Temperature (T_J) | -40°C to +125°C |
| Package Thermal Resistance | |
| SPAK-7 (θ_{JA})..... | 11.8°C/W |
| SPAK-7 (θ_{JC})..... | 2.2°C/W |

Electrical Characteristics


$V_{IN} = V_{EN} = 12V$; $V_{OUT} = 5V$; $I_{OUT} = 500mA$; $T_A = 25^\circ C$, **bold** values indicate $-40^\circ C \leq T_J \leq +125^\circ C$, unless noted.

| Parameter | Condition | Min | Typ | Max | Units |
|-----------------------------|---|--------------|-------|--------------|---------|
| MIC4685 [Adjustable] | | | | | |
| Feedback Voltage | ($\pm 2\%$) | 1.210 | 1.235 | 1.260 | V |
| | ($\pm 3\%$) | 1.198 | | 1.272 | V |
| | $8V \leq V_{IN} \leq 30V$, $0.1A \leq I_{LOAD} \leq 1A$, $V_{OUT} = 5V$, Note 4 | 1.186 | 1.235 | 1.284 | V |
| | | 1.173 | | 1.297 | V |
| Feedback Bias Current | | | 50 | | nA |
| Maximum Duty Cycle | $V_{FB} = 1.0V$ | | 94 | | % |
| Output Leakage Current | $V_{IN} = 30V$, $V_{EN} = 0V$, $V_{SW} = 0V$ | | 5 | 500 | μA |
| | $V_{IN} = 30V$, $V_{EN} = 0V$, $V_{SW} = 1V$ | | 1.4 | 20 | mA |
| Quiescent Current | $V_{FB} = 1.5V$ | | 6 | 12 | mA |
| Bootstrap Drive Current | $V_{FB} = 1.5V$, $V_{SW} = 0V$ | 250 | 380 | | mA |
| Bootstrap Voltage | $I_{BS} = 10mA$, $V_{FB} = 1.5V$, $V_{SW} = 0V$ | 5.5 | 6.2 | | V |
| Frequency Fold Back | $V_{FB} = 0V$ | 30 | 70 | 120 | kHz |
| Oscillator Frequency | | 180 | 200 | 225 | kHz |
| Saturation Voltage | $I_{OUT} = 1A$ | | 0.59 | | V |
| Short Circuit Current Limit | $V_{FB} = 0V$, <i>See Test Circuit</i> | 3.5 | | 6 | A |
| Shutdown Current | $V_{EN} = 0V$ | | 150 | 200 | μA |
| Enable Input Logic Level | regulator on | 2 | | | V |
| | regulator off | | | 0.8 | V |
| Enable Pin Input Current | $V_{EN} = 0V$ (regulator off) | | 16 | 50 | μA |
| | $V_{EN} = 0V$ (regulator on) | -1 | -0.83 | | mA |
| Thermal Shutdown @ T_J | | | 160 | | °C |

Notes:


- Exceeding the absolute maximum rating may damage the device.
- The device is not guaranteed to function outside its operating rating.
- Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k Ω in series with 100pF.
- 2.5V of headroom is required between V_{IN} and V_{OUT} . The headroom can be reduced by implementing a bootstrap diode as seen on the 5V to 3.3V circuit on page 1.

Test Circuit

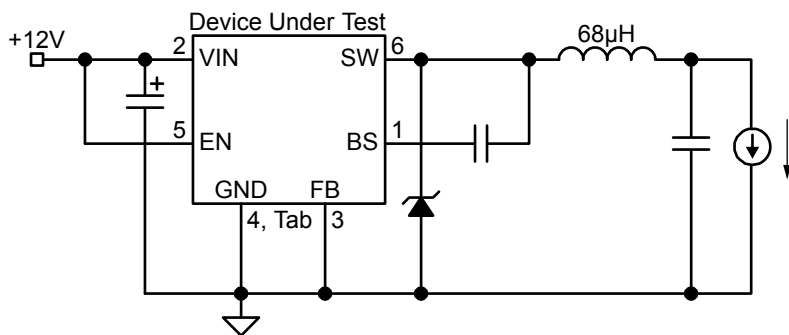

Current Limit Test Circuit













Shutdown Input Behavior








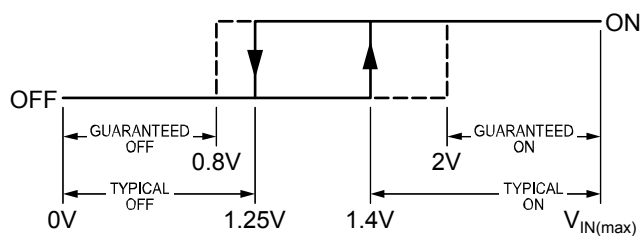


Enable Hysteresis

Typical Characteristics









(TA = 25°C unless otherwise noted)

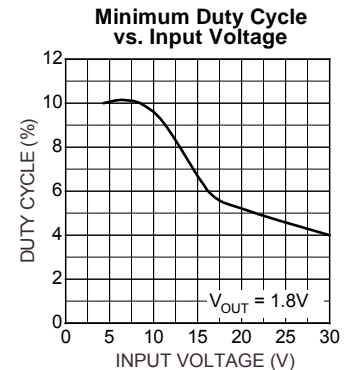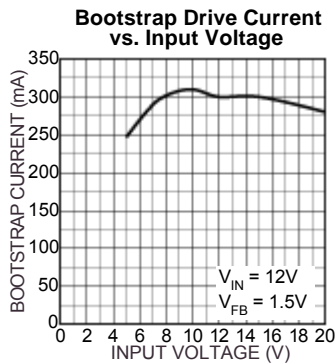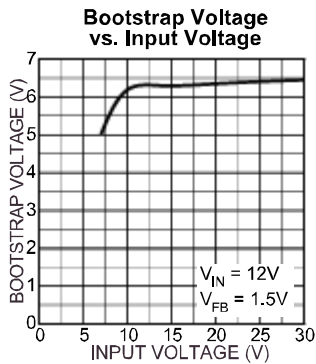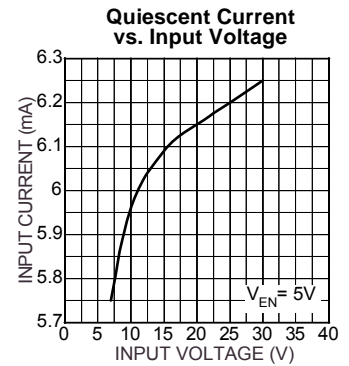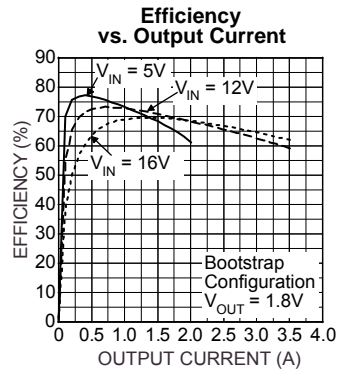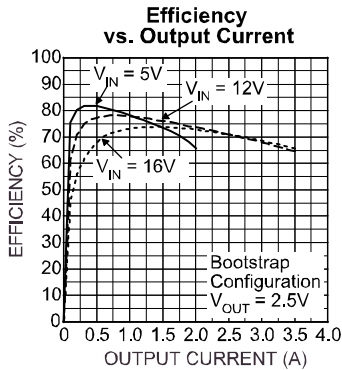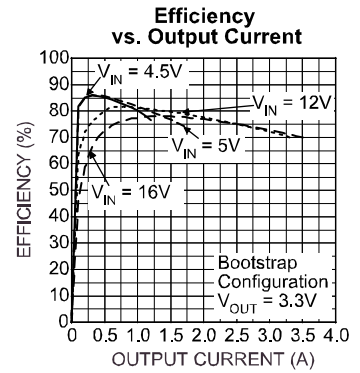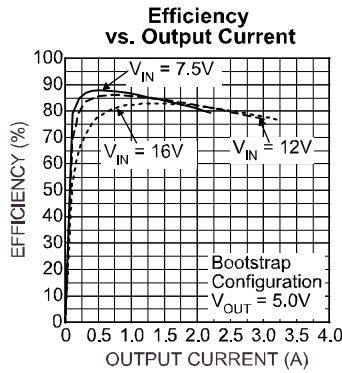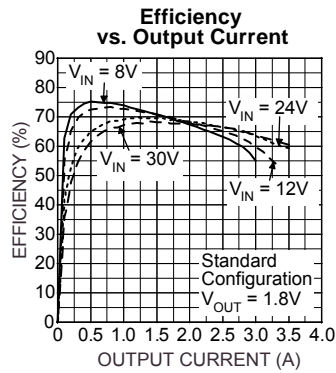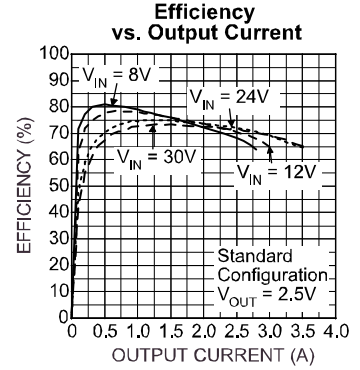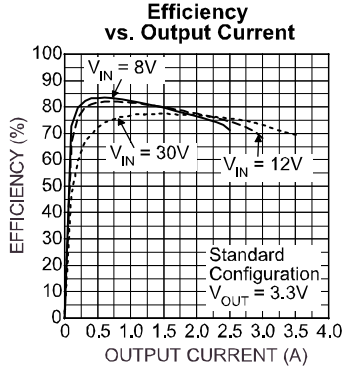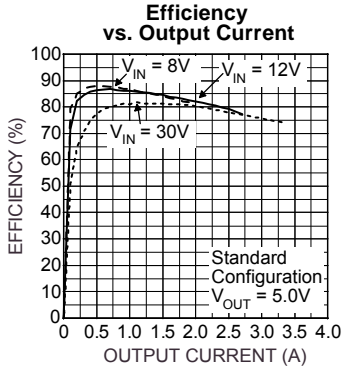

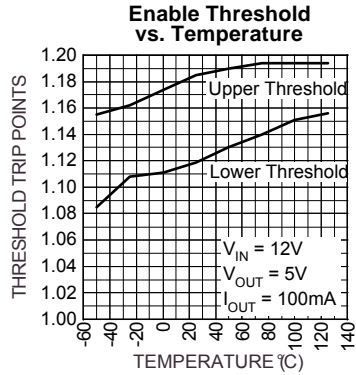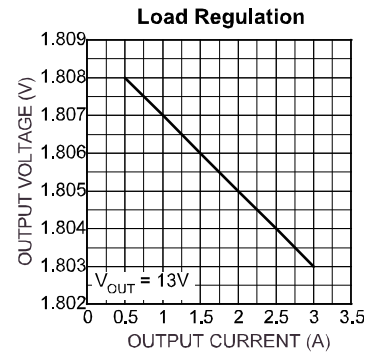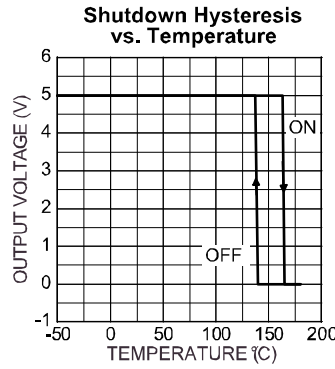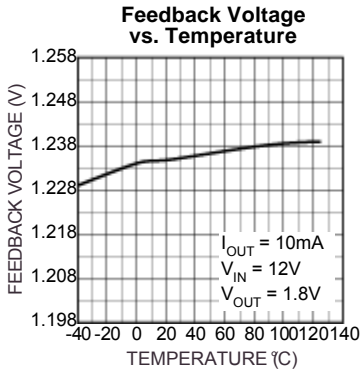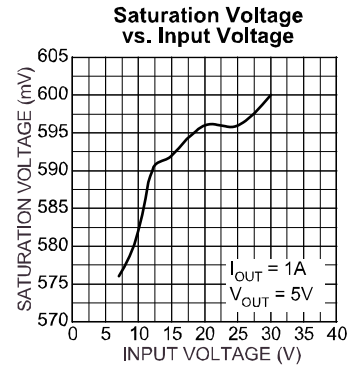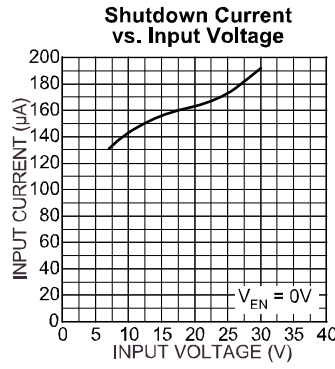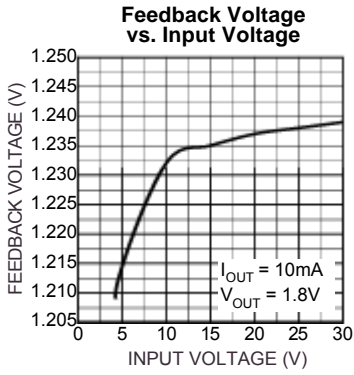



Typical Safe Operating Area (SOA)

(SOA measured on the MIC4685 Evaluation Board*)

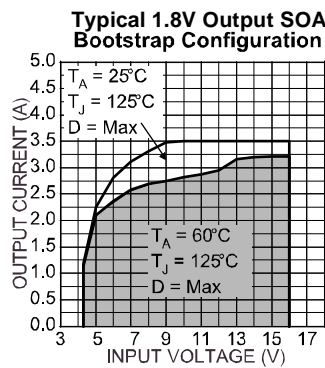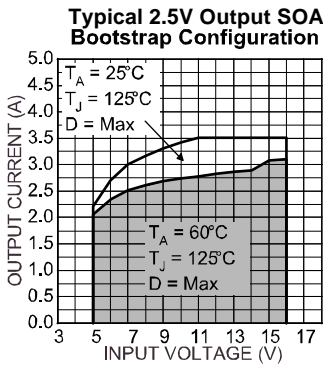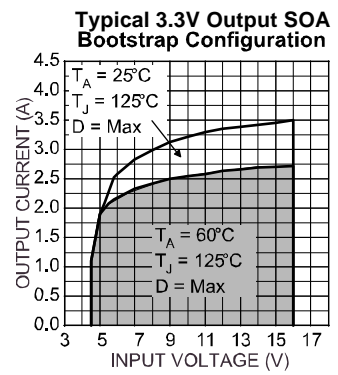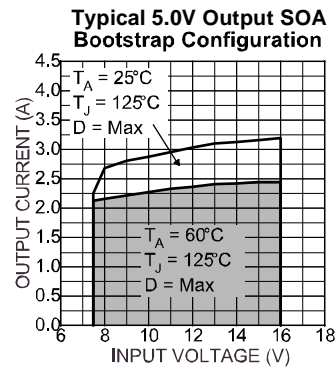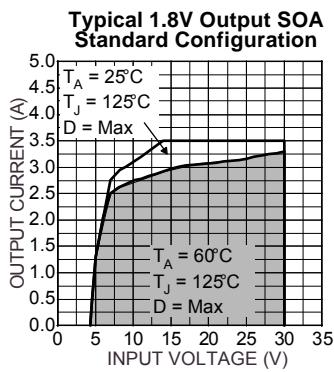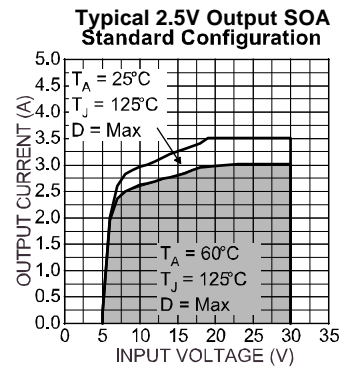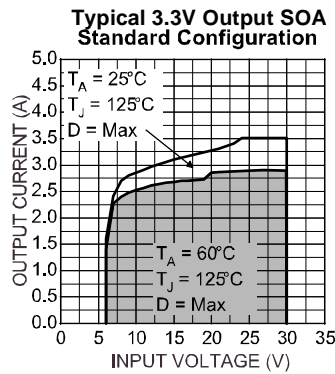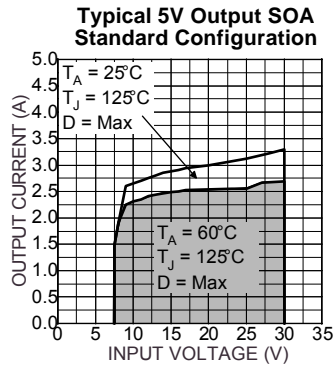

* $I_{OUT} < 3A$, D1: Diode Inc. B340 (3A/40V)
 $I_{OUT} < 3A$, D1: SBM1040 (10A/40V)

Functional Characteristics

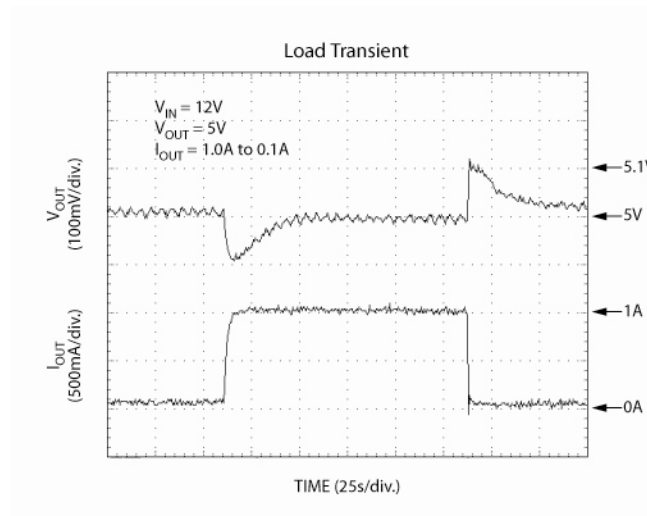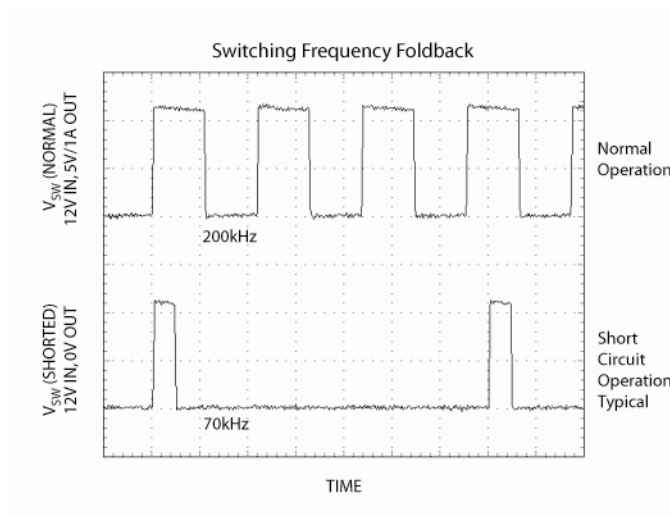

Frequency Foldback

The MIC4685 folds the switching frequency back during a hard short circuit condition to reduce the energy per cycle and protect the device.

Functional Diagram

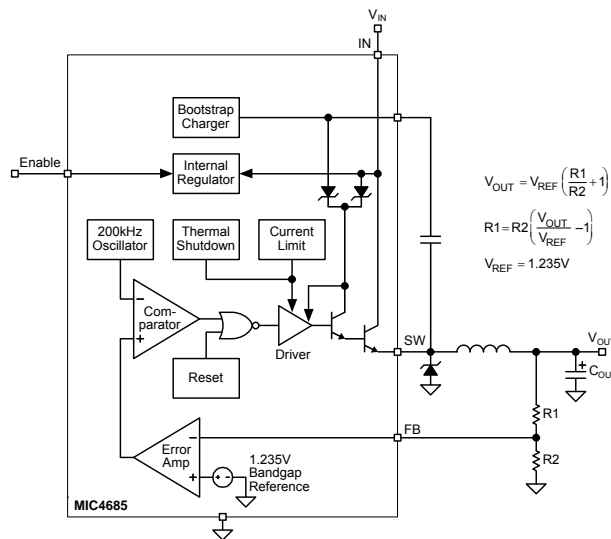


Figure 1. Adjustable Regulator

Functional Description

The MIC4685 is a variable duty cycle switch-mode regulator with an internal power switch. Refer to the above block diagram.

Supply Voltage

The MIC4685 operates from a +4V to +30V (34V transient) unregulated input. Highest efficiency operation is from a supply voltage around +12V. See the efficiency curves in the "Typical Characteristics" section on page 5.

Enable/Shutdown

The enable (EN) input is TTL compatible. Tie the input high if unused. A logic-high enables the regulator. A logic-low shuts down the internal regulator which reduces the current to typically 150µA when $V_{EN} = 0V$.

Feedback

In the adjustable version, an external resistive voltage divider is required from the output voltage to ground, center tapped to the FB pin. See Table 1 and Table 2 for recommended resistor values.

Duty Cycle Control

A fixed-gain error amplifier compares the feedback signal with a 1.235V bandgap voltage reference. The resulting error amplifier output voltage is compared to a 200kHz sawtooth waveform to produce a voltage controlled variable duty cycle output.

A higher feedback voltage increases the error amplifier output voltage. A higher error amplifier voltage (comparator inverting input) causes the comparator to detect only the peaks of the sawtooth, reducing the duty cycle of the comparator output. A lower feedback voltage increases the duty cycle. The MIC4685 uses a voltage-mode control architecture.

Output Switching

When the internal switch is ON, an increasing current flows from the supply V_{IN} , through external storage inductor L1, to output capacitor C_{OUT} and the load. Energy is stored in the inductor as the current increases with time.

When the internal switch is turned OFF, the collapse of the magnetic field in L1 forces current to flow through fast recovery diode D1, charging C_{OUT} .

Output Capacitor

External output capacitor C_{OUT} provides stabilization and reduces ripple.

Return Paths

During the ON portion of the cycle, the output capacitor and load currents return to the supply ground. During the OFF portion of the cycle, current is being supplied to the output capacitor and load by storage inductor L1, which means that D1 is part of the high-current return path.

Application Information

Adjustable Regulators

Adjustable regulators require a 1.235V feedback signal. Recommended voltage-divider resistor values for common output voltages are detailed in Table 1.

For other voltages, the resistor values can be determined using the following formulas:

$$V_{OUT} = V_{REF} \left(\frac{R1}{R2} + 1 \right)$$

$$R1 = R2 \left(\frac{V_{OUT}}{V_{REF}} - 1 \right)$$

$$V_{REF} = 1.235V$$

Thermal Considerations

The MIC4685 is capable of high current due to the thermally optimized SPAK package.

One limitation of the maximum output current on any MIC4685 design is the junction-to-ambient thermal resistance (θ_{JA}) of the design (package and ground plane).

Examining θ_{JA} in more detail:

$$\theta_{JA} = (\theta_{JC} + \theta_{CA})$$

where:

θ_{JC} = junction-to-case thermal resistance

θ_{CA} = case-to-ambient thermal resistance

θ_{JC} is a relatively constant 2.2°C/W for a 7-pin SPAK.

θ_{CA} is dependent upon layout and is primarily governed by the connection of pins 4, and Tab to the ground plane. The purpose of the ground plane is to function as a heat sink.

Checking the Maximum Junction Temperature:

For this example, with an output power (P_{OUT}) of 7.5W, (5V output at 1.5A with $V_{IN} = 12V$) and 60°C maximum ambient temperature, what is the junction temperature?

Referring to the "Typical Characteristics: 5V Output Efficiency" graph, read the efficiency (η) for 1.5A output current at $V_{IN} = 12V$ or perform your own measurement.

$$\eta = 84\%$$

The efficiency is used to determine how much of the output power (P_{OUT}) is dissipated in the regulator circuit (P_D).

$$P_D = \frac{P_{OUT}}{\eta} - P_{OUT}$$

$$P_D = \frac{7.5W}{0.84} - 7.5W$$

$$P_D = 1.43W$$

A worst-case rule of thumb is to assume that 80% of the total output power dissipation is in the MIC4685 ($P_{D(IC)}$) and 20% is in the diode-inductor-capacitor circuit.

$$P_{D(IC)} = 0.8 P_D$$

$$P_{D(IC)} = 0.8 \times 1.43W$$

$$P_{D(IC)} = 1.14W$$

Calculate the worst-case junction temperature:

$$T_J = P_{D(IC)} \theta_{JC} + (T_C - T_A) + T_{A(max)}$$

where:

T_J = MIC4685 junction temperature

$P_{D(IC)}$ = MIC4685 power dissipation

θ_{JC} = junction-to-case thermal resistance.

The θ_{JC} for the MIC4685's 7-pin SPAK is approximately 2.2°C/W.

T_C = "pin" temperature measurement taken at the Tab.

T_A = ambient temperature

$T_{A(max)}$ = maximum ambient operating temperature for the specific design.

Calculating the maximum junction temperature given a maximum ambient temperature of 60°C:

$$T_J = 1.14 \times 2.2^\circ C + (46^\circ C - 25^\circ C) + 60^\circ C$$

$$T_J = 83.5^\circ C$$

This value is within the allowable maximum operating junction temperature of 125°C as listed in "Operating Ratings." Typical thermal shutdown is 160°C and is listed in "Electrical Characteristics." Also refer to the "Typical Safe Operating Area (SOA)" graphs in this document.

Layout Considerations

Layout is very important when designing any switching regulator. Rapidly changing currents, through the printed circuit board traces and stray inductance, can generate voltage transients which can cause problems.

To minimize stray inductance and ground loops, keep trace lengths as short as possible. For example, keep D1 close to pin 6 and pin 4, and Tab, keep L1 away from sensitive node FB, and keep C_{IN} close to pin 2 and pin 4, and Tab. See “*Applications Information: Thermal Considerations*” for ground plane layout.

The feedback pin should be kept as far way from the switching elements (usually L1 and D1) as possible.

A circuit with sample layouts are provided. See Figure 6. Gerber files are available upon request.

Bootstrap Diode

The bootstrap diode provides an external bias source directly to the main pass element, this reduces V_{SAT} thus allowing the MIC4685 to be used in very low head-room applications i.e., $5V_{IN}$ to $3.3V_{OUT}$ with high efficiencies. Bootstrap diode not for use if V_{IN} exceeds $16V$, V_{IN} . See Figure 2.

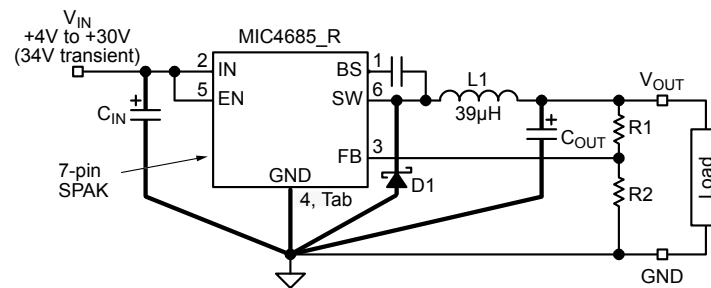


Figure 2. Critical Traces for Layout

Recommended Components for a Given Output Voltage (Bootstrap Configuration)

| V _{OUT} | I _{OUT} * | R1 | R2 | V _{IN} | C1 | D1 | D2 | L1 | C4 |
|------------------|--------------------|-------|-------|-----------------|---|--|--------------------------------|----------------------------------|---|
| 5.0V | 2.1A | 3.01k | 976Ω | 7.5V – 16V | 47μF, 20V Vishay-Dale 595D476X0020D2T | 3A, 30V Schottky + Vishay B330A | 1A, 20V Schottky B120-E3 | 39μH Sumida CDRH127R-390MC | 330μF, 6.3V Vishay-Dale 594D337X06R3D2T |
| 3.3V | 2.2A | 3.01k | 1.78k | 6.0V – 16V | 47μF, 20V Vishay-Dale 595D476X0020D2T | 3A, 30V Schottky B330A | 1A, 20V Schottky B120-E3 | 39μH Sumida CDRH127R-390MC | 330μF, 6.3V Vishay-Dale 594D337X06R3D2T |
| 2.5V | 2.0A | 3.01k | 2.94k | 5.0V – 16V | 47μF, 20V Vishay-Dale 595D476X0020D2T | 3A, 30V Schottky B330A | 1A, 20V Schottky B120-E3 | 39μH Sumida CDRH127R-390MC | 330μF, 6.3V Vishay-Dale 594D337X06R3D2T |
| 1.8V | 2.0A | 3.01k | 6.49k | 5.0V – 16V | 47μF, 20V Vishay-Dale 595D476X0020D2T | 3A, 30V Schottky + Vishay B330A | 1A, 20V Schottky B120-E3 | 39μH Sumida CDRH127R-390MC | 330μF, 6.3V Vishay-Dale 594D337X06R3D2T |

* Maximum output current at minimum input voltage. See SOA curves for maximum output current vs. Input voltage.

Table 1. Recommended Components for Common Output Voltages

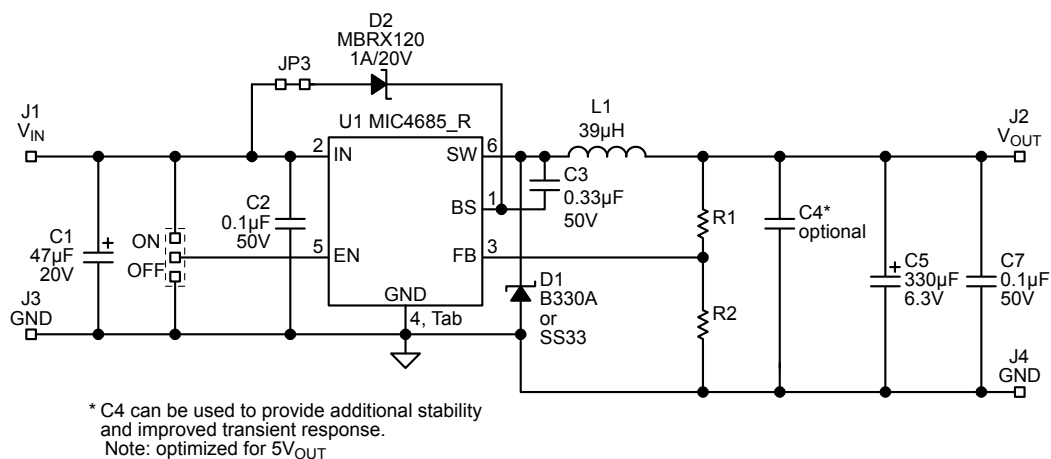



Figure 3. Schematic Diagram

Recommended Components for a Given Output Voltage (Standard Configuration)

| V _{OUT} | I _{OUT} * | R1 | R2 | V _{IN} | C1 | D1 | L1 | C5 |
|------------------|--------------------|-------|-------|-----------------|---|---|---------------------------------|---|
| 5.0V | 2.0A | 3.01k | 976Ω | 8V – 30V | 33μF, 35V Vishay-Dale 595D336X0035R2T | 3A, 40V Schottky B340A-E3 | 39μH Sumida CDRH127-390MC | 330μF, 6.3V Vishay-Dale 594D337X06R3D2T |
| 3.3V | 2.4A | 3.01k | 1.78k | 8V – 26V | 33μF, 35V Vishay-Dale 595D336X0035R2T | 3A, 40V Schottky B340A-E3 | 39μH Sumida CDRH127-390MC | 330μF, 6.3V Vishay-Dale 594D337X06R3D2T |
| 2.5V | 2.35A | 3.01k | 2.94k | 7V – 23V | 33μF, 35V Vishay-Dale 595D336X0035R2T | 3A, 40V Schottky B340A-E3 | 39μH Sumida CDRH127-390MC | 330μF, 6.3V Vishay-Dale 594D337X06R3D2T |
| 1.8V | 2.0A | 3.01k | 6.49k | 6V – 16V | 33μF, 35V Vishay-Dale 595D336X0035R2T | 3A, 40V Schottky + Vishay B340A-E3 | 39μH Sumida CDRH127-390MC | 330μF, 6.3V Vishay-Dale 594D337X06R3D2T |

* Maximum output current at minimum input voltage. See SOA curves for maximum output current vs. Input voltage.

Table 2. Recommended Components for Common Output Voltages

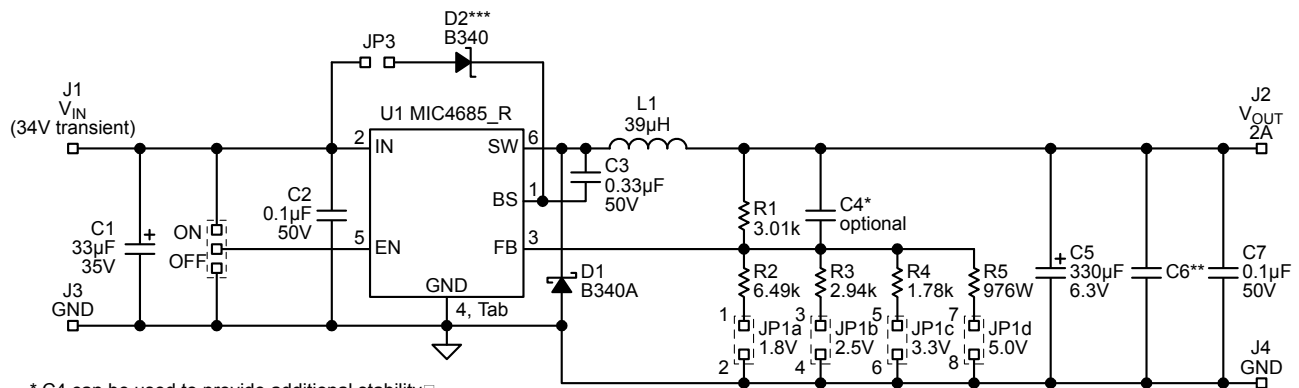

* C4 can be used to provide additional stability and improved transient response.
 Note: optimized for 5V_{OUT}
 ** C6 Optional
 *** D2 is not used for standard configuration and JP3 is open.

Figure 4. Evaluation Board Schematic Diagram

Printed Circuit Board

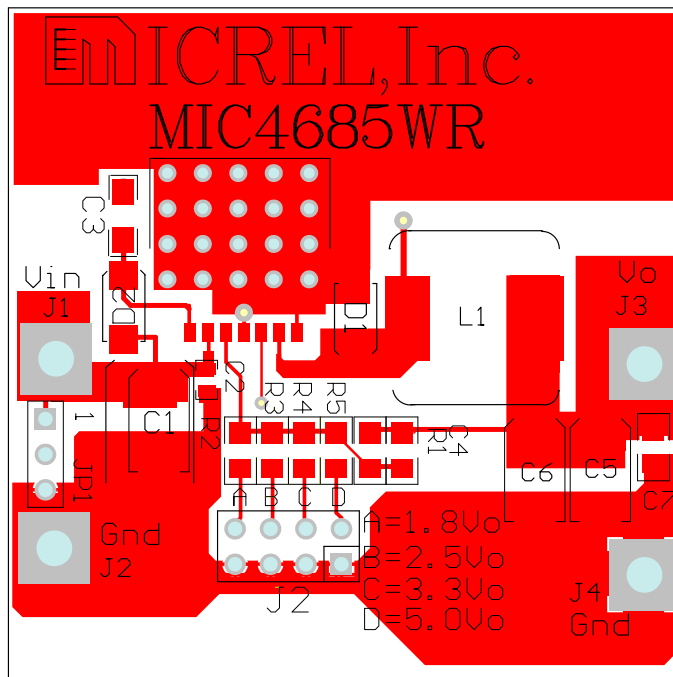


Figure 5a. Top Layer

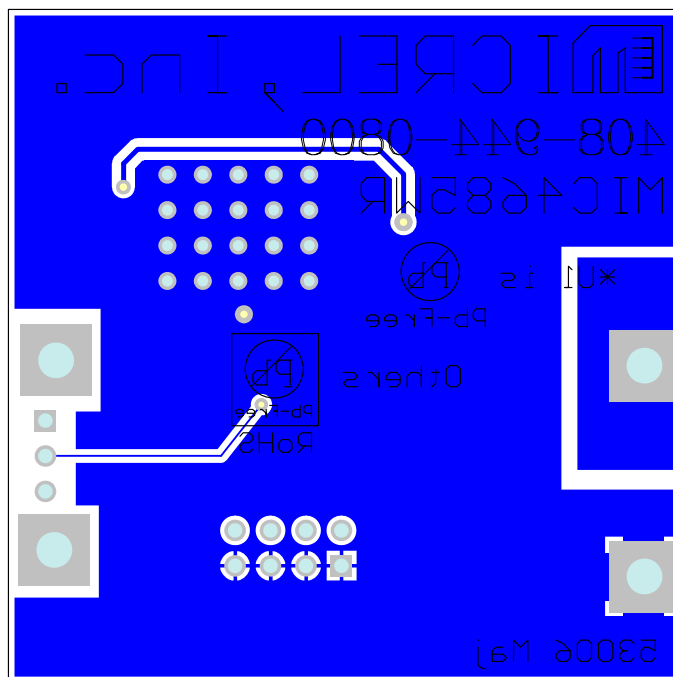


Figure 5b. Bottom Layer



Abbreviated Bill of Materials (Critical Components)

| Item | Part Number | Manufacturer | Description | Qty. |
|-----------|---------------------|---|--------------------------------------|----------|
| C1 | 594D336X0035R2T | Vishay Sprague ⁽¹⁾ | 33 μ F 35V | 1 |
| C2, C7 | VJ0805Y104KXAAB | Vitramon | 0.1 μ F 50V | 2 |
| C3 | GRM426X7R334K50 | Murata ⁽⁵⁾ | 0.33 μ F, 50V ceramic capacitor | |
| | VJ1206Y334KXAAT | Vishay ⁽¹⁾ | 0.33 μ F, 50V ceramic capacitor | |
| C4* | Optional | | 1800pF, 50V ceramic | 1 |
| C5 | 594D337X06R3D2T | Vishay Sprague ⁽¹⁾ | 330 μ F, 6.3V, tantalum | 1 |
| D1 | B340A | Diode Inc ⁽²⁾ | Schottky 3A 40V | 1 |
| | B340LA-EA | Vishay ⁽¹⁾ | Schottky 3A 40V | 1 |
| | SSA34A | Vishay ⁽¹⁾ | Schottky 3A 40V | 1 |
| | B340A | Vishay ⁽¹⁾ | Schottky 3A 40V | 1 |
| D2 | B120-EA | Vishay ⁽¹⁾ | Schottky 3A 40V | 1 |
| | B340A | Diode Inc ⁽²⁾ | Schottky 3A 40V | 1 |
| | MBRX120 | Micro Commercial Component ⁽⁴⁾ | Schottky 1A 20V | |
| L1 | CDRH127-390MC | Sumida ⁽³⁾ | 39 μ H | 1 |
| R1 | CRCW08053011FKEY3 | Vishay ⁽¹⁾ | 3K01, 1%, 1/10W, 805 | 1 |
| R2 | CRCW08056491FKEY3 | Vishay ⁽¹⁾ | 6K49, 1%, 1/10W, 805 | 1 |
| R3 | CRCW08052941FKEY3 | Vishay ⁽¹⁾ | 2K94, 1%, 1/10W, 805 | 1 |
| R4 | CRCW08051781FKEY3 | Vishay ⁽¹⁾ | 1K78, 1%, 1/10W, 805 | 1 |
| R5 | CRCW08051781FKEY3 | Vishay ⁽¹⁾ | 976 Ω , 1%, 1/10W, 805 | 1 |
| U1 | MIC4685BR/WR | Micrel, Inc.⁽⁶⁾ | 3A 200kHz SPAK Buck Regulator | 1 |


Notes:

1. Vishay Sprague, Inc.: www.vishay.com
2. Diodes Inc.: www.diodes.com
3. Sumida: www.sumida.com
4. Micro Commercial Component: www.mccsemi.com
5. Murata: www.murata.com
6. **Micrel, Inc.:** www.website.com

Package Information

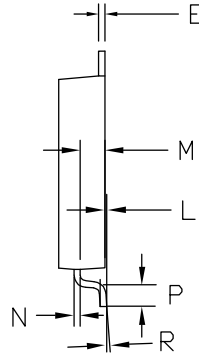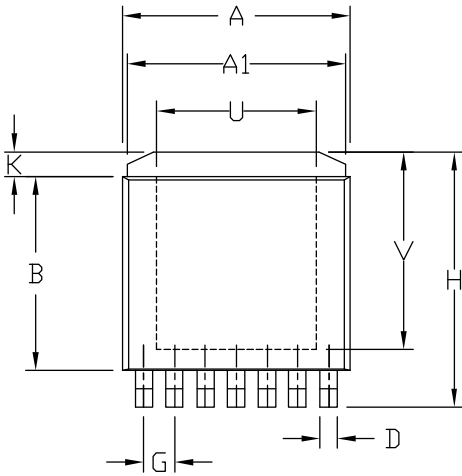

| | INCHES | | MILLIMETERS | |
|----|--------|-------|-------------|-------|
| | | | | |
| A | 0.365 | 0.375 | 9.27 | 9.52 |
| A1 | 0.350 | 0.360 | 8.89 | 9.14 |
| B | 0.310 | 0.320 | 7.87 | 8.13 |
| C | 0.070 | 0.080 | 1.78 | 2.03 |
| D | 0.025 | 0.031 | 0.63 | 0.79 |
| E | 0.010 | BSC | 0.25 | BSC |
| G | 0.050 | BSC | 1.27 | BSC |
| H | 0.410 | 0.420 | 10.41 | 10.67 |
| K | 0.030 | 0.050 | 0.76 | 1.27 |
| L | 0.001 | 0.005 | 0.03 | 0.13 |
| M | 0.035 | 0.045 | 0.89 | 1.14 |
| N | 0.010 | BSC | 0.25 | BSC |
| P | 0.031 | 0.041 | 0.79 | 1.04 |
| R | 0* | 6* | 0* | 6* |
| U | 0.256 | BSC | 6.50 | BSC |
| V | 0.316 | BSC | 8.03 | BSC |



1. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
2. DIMENSION INCLUDES PLATING THICKNESS.

7-SPAK (R)

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA
 TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2004 Micrel, Incorporated.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Voltage Regulators](#) category:

Click to view products by [Microchip](#) manufacturer:

Other Similar products are found below :

[FAN53610AUC33X](#) [FAN53611AUC123X](#) [FAN48610BUC33X](#) [FAN48610BUC45X](#) [FAN48617UC50X](#) [R3](#) [430464BB](#) [MIC45116-1YMP-T1](#) [KE177614](#) [MAX809TTR](#) [NCV891234MW50R2G](#) [NCP81103MNTXG](#) [NCP81203PMNTXG](#) [NCP81208MNTXG](#) [NCP81109GMNTXG](#) [SCY1751FCCT1G](#) [NCP81109JMNTXG](#) [AP3409ADNTR-G1](#) [LTM8064IY](#) [LT8315EFE#TRPBF](#) [NCV1077CSTBT3G](#) [XCL207A123CR-G](#) [MPM54304GMN-0002](#) [MPM54304GMN-0003](#) [XDPE132G5CG000XUMA1](#) [DA9121-B0V76](#) [LTC3644IY#PBF](#) [MP8757GL-P](#) [MIC23356YFT-TR](#) [LD8116CGL](#) [HG2269M/TR](#) [OB2269](#) [XD3526](#) [U6215A](#) [U6215B](#) [U6620S](#) [LTC3803ES6#TR](#) [LTC3803ES6#TRM](#) [LTC3412IFE](#) [LT1425IS](#) [MAX25203BATJA/VY+](#) [MAX77874CEWM+](#) [XC9236D08CER-G](#) [ISL95338IRTZ](#) [MP3416GJ-P](#) [BD9S201NUX-CE2](#) [MP5461GC-Z](#) [MPQ4415AGQB-Z](#) [MPQ4590GS-Z](#) [MCP1603-330IMC](#)