


**SOT-23 Plastic-Encapsulate Transistor**

**BC846A, B** TRANSISTOR (NPN)  
**BC847A, B, C**  
**BC848A, B, C**

**SOT-23**

1. BASE
2. EMITTER
3. COLLECTOR

**FEATURES**

- Ideally suited for automatic insertion
- For Switching and AF Amplifier Applications

**PACKAGE SPECIFICATIONS**

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (pcs)	Box Size (mm)	QTY/Box (pcs)	Carton Size (mm)	Q'TY/Carton (pcs)
SOT-23	7'	330	3000	203×203×195	45000	438×438×220	180000

**MAXIMUM RATINGS (T<sub>a</sub>=25°C unless otherwise noted)**

Symbol	Parameter	Value	Unit
V <sub>CBO</sub>	Collector-Base Voltage	BC846	80
		BC847	50
		BC848	30
V <sub>CEO</sub>	Collector-Emitter Voltage	BC846	65
		BC847	45
		BC848	30
V <sub>EBO</sub>	Emitter-Base Voltage	6	V
I <sub>C</sub>	Collector Current –Continuous	0.1	A
P <sub>C</sub> *	Collector Power Dissipation	200	mW
T <sub>J</sub>	Junction Temperature	150	°C
T <sub>stg</sub>	Storage Temperature	-65-150	°C

**DEVICE MARKING**

**BC846A=1A; BC846B=1B;**  
**BC847A=1E; BC847B=1F; BC847C=1G;**  
**BC848A=1J; BC848B=1K; BC848C=1L**











**ELECTRICAL CHARACTERISTICS (T<sub>a</sub>=25°C unless otherwise specified)**

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	BC846 BC847 BC848	V <sub>CBO</sub>	I <sub>C</sub> = 10μA, I <sub>E</sub> =0	80 50 30		V
Collector-emitter breakdown voltage	BC846 BC847 BC848	V <sub>CEO</sub>	I <sub>C</sub> = 10mA, I <sub>B</sub> =0	65 45 30		V
Emitter-base breakdown voltage		V <sub>EBO</sub>	I <sub>E</sub> = 10μA, I <sub>C</sub> =0	6		V
Collector cut-off current	BC846 BC847 BC848	I <sub>CBO</sub>	V <sub>CB</sub> =70 V, I <sub>E</sub> =0 V <sub>CB</sub> =50 V, I <sub>E</sub> =0 V <sub>CB</sub> =30 V, I <sub>E</sub> =0		0.1	μA
Collector cut-off current	BC846 BC847 BC848	I <sub>CEO</sub>	V <sub>CE</sub> =60 V, I <sub>B</sub> =0 V <sub>CE</sub> =45 V, I <sub>B</sub> =0 V <sub>CE</sub> =30 V, I <sub>B</sub> =0		0.1	μA
Emitter cut-off current		I <sub>EBO</sub>	V <sub>EB</sub> =5 V, I <sub>C</sub> =0		0.1	μA
DC current gain	BC846A,847A,848A BC846B,847B,848B BC847C,BC848C	h <sub>FE</sub>	V <sub>CE</sub> = 5V, I <sub>C</sub> = 2mA	110 200 420	220 450 800	
Collector-emitter saturation voltage		V <sub>CE(sat)</sub>	I <sub>C</sub> =100mA, I <sub>B</sub> = 5mA		0.5	V
Base-emitter saturation voltage		V <sub>BE(sat)</sub>	I <sub>C</sub> =100mA, I <sub>B</sub> = 5mA		1.1	V
Transition frequency		f <sub>T</sub>	V <sub>CE</sub> = 5 V, I <sub>C</sub> = 10mA f=100MHz	100		MHz
Collector output capacitance		C <sub>ob</sub>	V <sub>CB</sub> =10V,f=1MHz		4.5	pF


The above data are for reference only.

Typical Characteristics

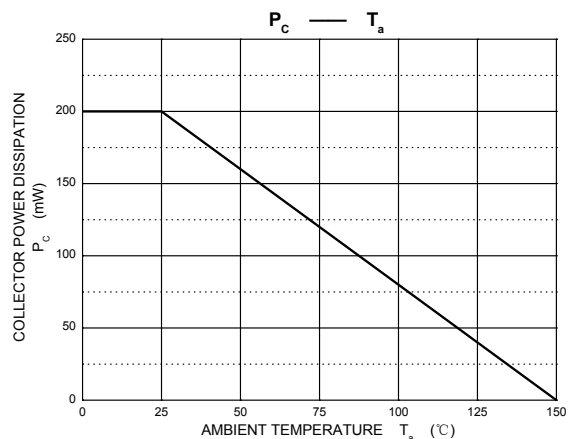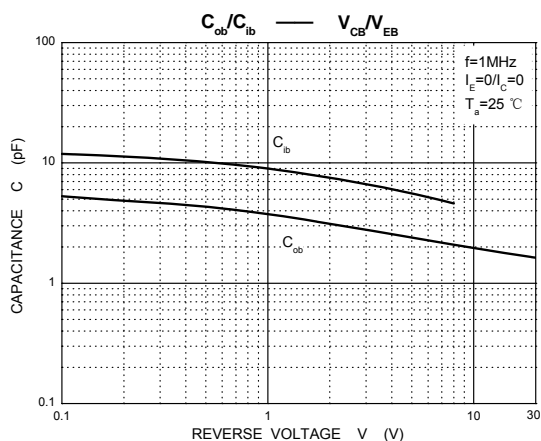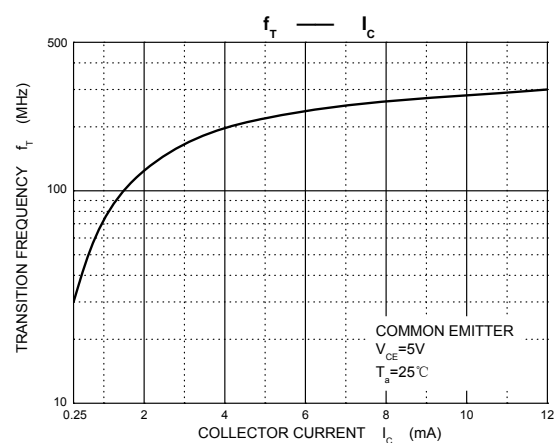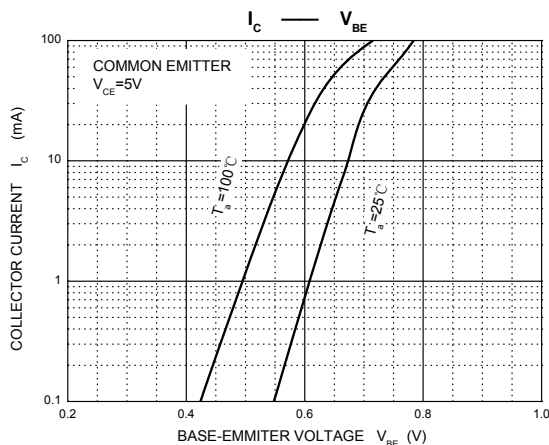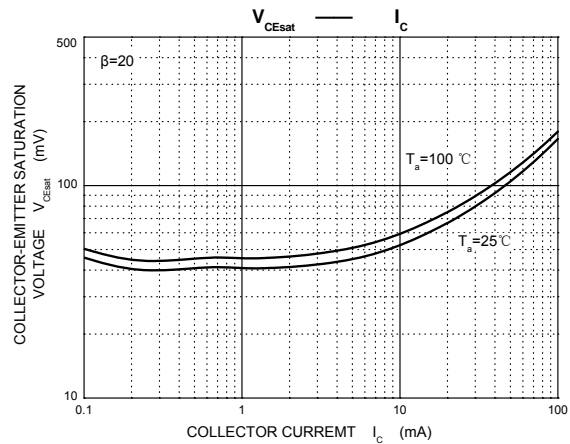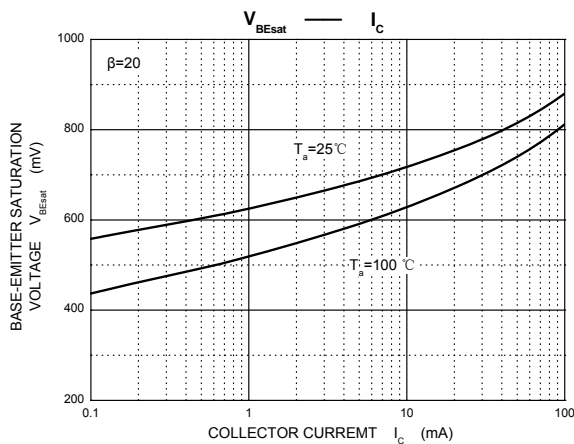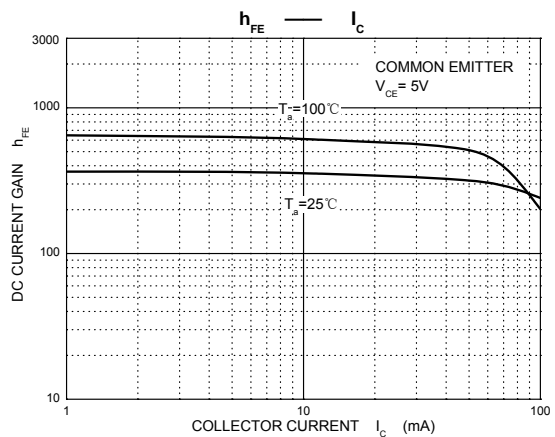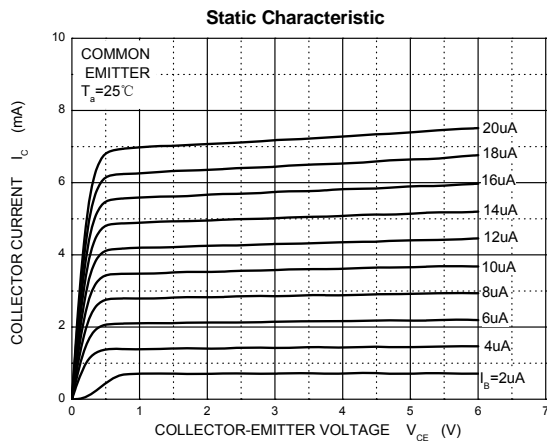


## Outline Drawing

### SOT-23 Package Outline Dimensions

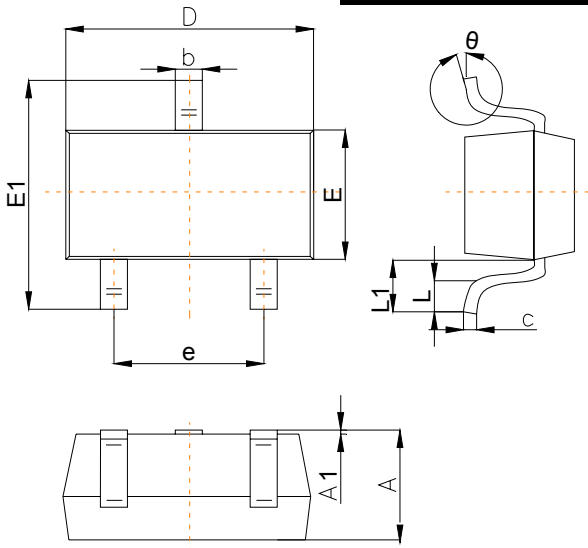

Symbol	Dimensions In Millimeters		
	Min	Typ	Max
A	1.00		1.40
A1			0.10
b	0.35		0.50
c	0.10		0.20
D	2.70	2.90	3.10
E	1.40		1.60
E1	2.4		2.80
e		1.90	
L	0.10		0.30
L1	0.4		
$\theta$	0°		10°

### Suggested Pad Layout

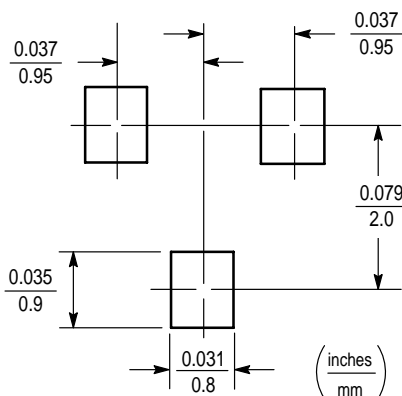

**Note:**

1. Controlling dimension: in/millimeters.
2. General tolerance:  $\pm 0.05$ mm.
3. The pad layout is for reference purposes only.

### Important Notice and Disclaimer

Microdiode Electronics (Jiangsu) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Microdiode Electronics (Jiangsu) makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Microdiode Electronics (Jiangsu) assume any liability for application assistance or customer product design. Microdiode Electronics (Jiangsu) does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Microdiode Electronics (Jiangsu).

Microdiode Electronics (Jiangsu) products are not authorized for use as critical components in life support devices or systems without express written approval of Microdiode Electronics (Jiangsu).

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Microdiode Electronics manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)  
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)