

PM4358 COMET OCTAL


8-Channel Combined E1/T1/J1 Transceiver/Framer

Released
Product Brief

PRODUCT HIGHLIGHTS

- Programmable integrated termination: T1 100Ω, J1 110Ω, E1 120Ω, E1 75Ω.
- Internal support for redundancy (Y-cable) applications.
- Small footprint 256-pin fine pitch CABGA (17 mm by 17 mm) package.
- Low power dissipation of 165 mW per channel.
- 100% pin and software compatible with PM4359 COMET TETRA, software compatible with PM4351 COMET and PM4354 COMET QUAD.
- Software selectable between T1/J1 and E1 operation on a per device basis.
- Provides digitally programmable longhaul and shorthaul pulse templates and line build out.
- Meets or exceeds T1/J1 and E1 shorthaul and longhaul network access specifications including ANSI T1.102, T1.403, T1.408, AT&T TR 62411, ITU-T G.703, G.704 as well as ETSI 300-011, CTR-4, CTR-12 and CTR-13.
- Provides an 8-bit microprocessor bus interface or SPI compatible hardware only interface for configuration, control, and status monitoring.
- Provides transmit and receive jitter attenuation.
- Provides eight full-featured HDLC controllers, each with 128-byte transmit and receive FIFO buffers.
- Provides a two-frame payload slip buffer to allow independent backplane and line timing.
- Automatically generates and transmits DS-1 performance report messages to ANSI T1.231 and ANSI T1.408 specifications.
- Provides PRBS generators and detectors on each tributary for error testing at DS1, E1 and N x 64 Kbit/s rates as recommended in ITU-T 0.151 and 0.152.
- Provides encoding and decoding of B8ZS, HDB3 and AMI line codes.
- Provides receive equalization, clock recovery and line performance monitoring.
- Uses line rate system clock.
- Provides an IEEE P1149.1 (JTAG) compliant test access port (TAP) and controller for boundary scan test.
- Implemented in a low power 1.8/3.3 V CMOS technology.
- Provides a -40 °C to +85 °C industrial temperature operating range.

BLOCK

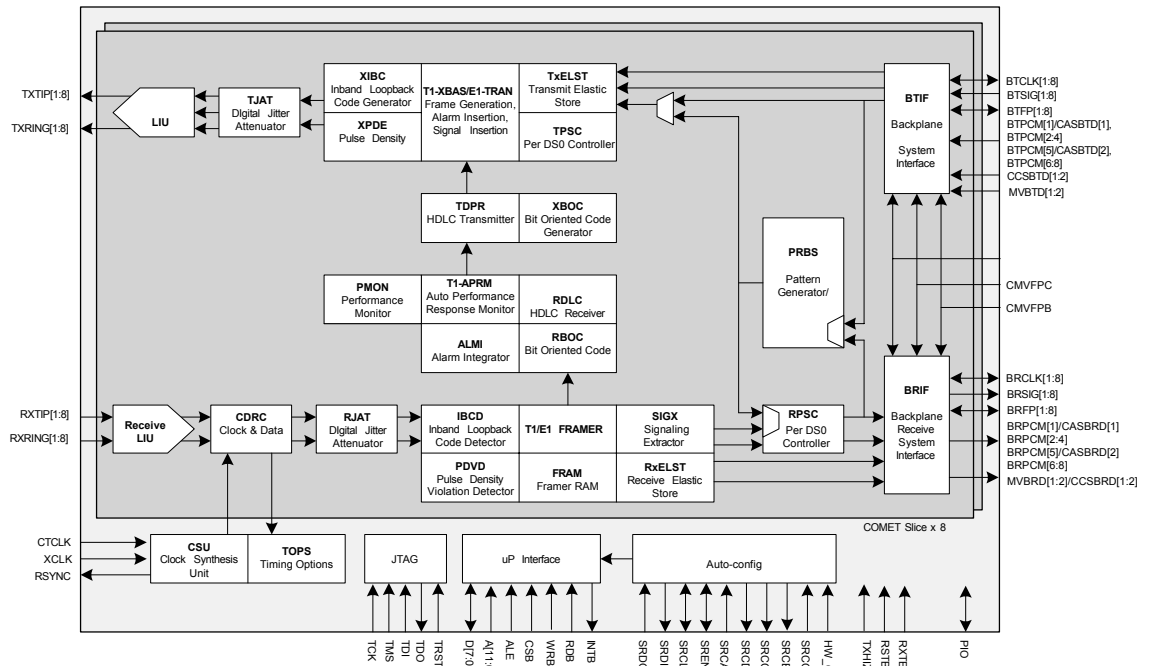

RECEIVER

- Typical signal recovery of up to -43 dB at 1024 kHz (E1) and up to -44 dB at 772 kHz (T1/J1).
- Guaranteed minimum signal recovery of -36 dB at 1024 kHz (E1) and -36 dB at 772 kHz (T1/J1) using PIC-22 gauge cable emulation.
- Frames to DSX/DS-1 signals in SF, and ESF formats.
- Frames to ITU-T G.704 basic and CRC-4 multiframe formatted E1 signals. The framing procedures are consistent with ITU-T G.706 specifications.
- Frames to TTC JT-G704 multiframe formatted J1 signals. Supports the alternate CRC-6 calculation for Japanese applications. Frames in the presence of and detects the Japanese yellow alarm.
- Tolerates more than 0.4 UI peak-to-peak, high frequency jitter as required by AT&T TR 62411 and Bellcore TR-TSY-000170.
- Provides programmable in-band loopback activate and deactivate code detection.
- Programmable internal termination.
- Provides diagnostic, line and per-DSO payload loopbacks.
- Extracts up to three HDLC links to an H-MVIP Bus to support the D-channel, for ISDN Primary Rate Interfaces, and the C-channels, for V5.1/V5.2 interfaces. Detects the V5.2 link identification signal.

TRANSMITTER


- Generates DSX-1 shorthaul and DS-1 longhaul pulses with programmable pulse shape compatible with AT&T, ANSI and ITU requirements.
- Generates E1 pulses compliant to G.703 recommendations.
- Supports line side protection or redundancy applications.

- Provides a digital phase locked loop for generation of a low jitter transmit clock complying with all jitter attenuation, jitter transfer and residual jitter specifications of AT&T TR 62411 and ETSI CTR 12 and CTR 13.
- Provides a FIFO buffer for jitter attenuation and rate conversion in the transmit path.
- Supports unframed mode and framing bit, CRC, or data link by-pass.
- Allows insertion of framed or unframed in-band loopback code sequences.
- Allows insertion of a data link in ESF mode. Optionally inserts a datalink in the E1 national use bits.
- Inserts, from an H-MVIP bus, up to three HDLC links to support the D-channel, for ISDN Primary Rate Interfaces, and the C-channels, for V5.1/V5.2 interfaces.
- Transmits TTC JT-G704 multiframe formatted J1 signals. Supports the alternate ESF CRC-6 calculation for Japanese applications.
- Supports transmission of the alarm indication signal (AIS) and the yellow alarm signal. Supports Japanese yellow alarm generation.
- Provides ESF bit-oriented code generation.


APPLICATIONS

- Wireless Base Transceiver Station and Digital Loop Carrier (DLCs).
- Enterprise Router.
- DSLAM.
- APON Optical Network Unit (ONU).
- Integrated Access Device (IAD).
- Voice Gateway.
- Channel and Data Service Units (CSU/DSU).
- Digital Private Branch Exchanges (PBX).
- Test Equipment.

WIRELESS BASESTATION TRANSCIVER

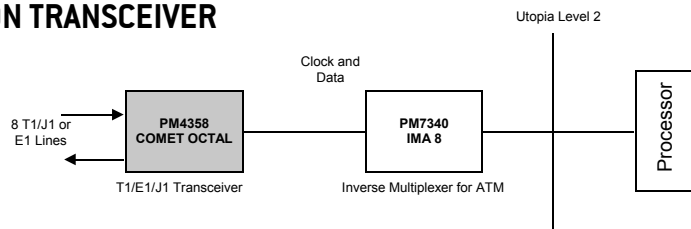

LEASED LINE CIRCUIT EMULATION

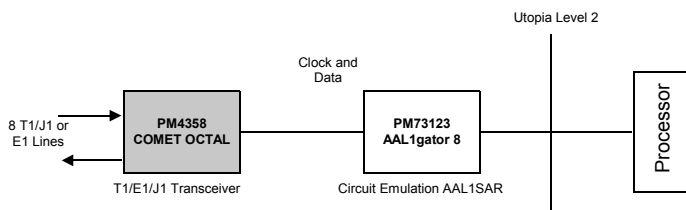

Corporate Head Office:
 PMC-Sierra, Inc.
 Mission Towers One
 3975 Freedom Circle
 Santa Clara, CA, 95054, U.S.A.
 Tel: 1.408.239.8000
 Fax: 1.408.492.1157

Operations Head Office:
 PMC-Sierra, Inc.
 100-2700 Production Way
 Burnaby, BC V5A 4X1 Canada
 Tel: 1.604.415.6000
 Fax: 1.604.415.6200

PMC-2050897 [R4] © Copyright PMC-Sierra, Inc. 2006. All rights reserved. For a complete list of PMC-Sierra's trademarks, visit www.pmc-sierra.com/legal/. Other product and company names mentioned herein may be the trademarks of their respective owners. For corporate information, send email to: info@pmc-sierra.com. All product documentation is available on our web site at: www.pmc-sierra.com.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Telecom Interface ICs](#) category:

Click to view products by [Microsemi](#) manufacturer:

Other Similar products are found below :

[MT8888CP1](#) [MT88E45BS1](#) [MT9174AN1](#) [MT88E39ASR1](#) [MT9074AL1](#) [MT9122AP1](#) [PEB4266TV12 S LL62](#) [DS3150TNC1+](#)
[DS26334GN+](#) [MT88E46AS1](#) [MT8963AE1](#) [DS26324GNA3+](#) [PM4351-RI](#) [PEF41068FV11 S LL8T](#) [PEF41068VV12 S LL8U](#)
[LE58QL022BVC](#) [LE58QL022BVCT](#) [LE88286DLC](#) [LE88276DLCT](#) [LE79252BTC](#) [RTL8019AS](#) [W7100A-S2E-100LQFP](#) [M100EVO-LITE](#)
[HE910NAR206T701](#) [XRT86VL38IB](#) [CMX631AD4](#) [XD8870](#) [82V2084PFG](#) [CPC5620A](#) [CPC5620ATR](#) [CPC5621A](#) [CPC5621ATR](#)
[CPC5622A](#) [CPC5622ATR](#) [DS21455+](#) [DS21348G+](#) [DS2148TN+](#) [CMX673E3](#) [LE88506DVC](#) [MT88E39AS1](#) [LE89810BSCT](#) [LE89810BSC](#)
[CMX673D4](#) [CMX683D4](#) [CMX602BD4](#) [MT8967AS1](#) [HC55185AIMZ](#) [MT8952BP1](#) [DS3150QN+](#) [DS2149Q+](#)