



# GPS click™ L10

## 1. Introduction



GPS Click - L10 is an accessory board in **mikroBus™** form factor. It's a compact solution for adding GPS functionality to your device. It features **Quectel® L10**, high performance MTK positioning engine. GPS Click - L10 communicates with target board through UART or I<sup>2</sup>C interface. Data can be acquired using PC application through USB connection. Board features connector compatible with active and passive antennas. It can operate on 3.3V power supply only.


## 2. Soldering the headers

Before using your click board, make sure to solder the provided 1x8 male headers to both sides of the board. Two 1x8 male headers are included with the board in the package.



1

2

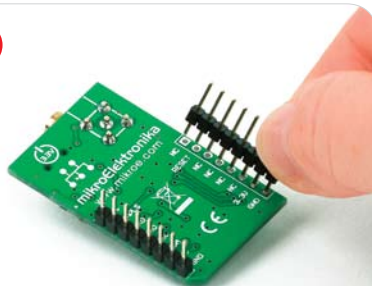

Turn the board upside down, so that bottom side is facing you upwards. Place shorter parts of the header pins in both soldering pad locations.

3



Turn the board upward again. Make sure to align the headers so that they are perpendicular to the board, then solder the pins carefully.



## 4. Features and applications

GPS Click - L10 board with its **Quectel® L10** module supports 210 PRN channels, with 66 search channels and 22 simultaneous tracking channels. It has low tracking power consumption of 38mA, 4Mbit flash memory, superior anti-jamming design, and up to 5Hz update rate. Its ease of integration results in fast time-to-market in a wide range of automotive, consumer and industrial applications.

## 3. Plugging the board in



Once you have soldered the headers your board is ready to be placed into desired mikroBUS™ socket. Make sure to align the cut in the lower-right part of the board with the markings on the silkscreen at the mikroBUS™ socket. If all of pins are aligned correctly, push the board all the way into the socket.

click™  
BOARD  
[www.mikroe.com](http://www.mikroe.com)



GPS click L10 Manual  
ver. 1.00



0 100000 019849

