

MIKROE

mikromedia   
for Kinetis CAPACITIVE

Thank you for choosing Mikroë!

We present you the ultimate multimedia solution for embedded development.

Elegant on the surface, yet extremely powerful on the inside, we have designed it to inspire outstanding achievements.

And now, it's all yours.

Enjoy premium.

**MIKROE**

Time-saving embedded tools







mikromedia 3 for Kinetis CAPACITIVE is a compact development board designed as a complete solution for the rapid development of multimedia and GUI-centric applications. By featuring a 3.5" capacitive touch screen driven by the powerful graphics controller that can display the 24-bit color palette [16.7 million colors], along with a DSP-powered embedded sound CODEC IC, represents a perfect solution for any type of multimedia application.

At its core, there is a powerful 32-bit MK64FN1M0VDC12 microcontroller [referred to as "host MCU" in the following text], produced by NXP, which provides sufficient processing power for the most demanding tasks, ensuring fluid graphical performance and glitch-free audio reproduction.

However, this development board is not limited to multimedia-based applications only: mikromedia 3 for Kinetis CAPACITIVE ["mikromedia 3" in the following text] features USB, digital motion sensor, battery charging

functionality, SD-Card reader, and much more, expanding its use beyond the multimedia. Two standardized 1x26 pin headers expose the available MCU pins to the user, adding another layer of expandability. By using mikromedia 3 shield, connectivity can be further expanded with several mikroBUS™ sockets, additional connectors, peripherals, and so on.

The usability of mikromedia 3 does not end with its ability to accelerate the prototyping and application development stages: it is designed as the complete solution which can be implemented directly into any project, with no additional hardware modifications required. Four mounting holes [2mm/0.080"] at all four corners allow simple installation with mounting screws. For most applications, a nice stylish casing is all that is needed to turn the mikromedia 3 development board into a fully functional, high-performance, feature-rich design.

# 1. Key microcontroller features

At its core, mikromedia 3 for Kinetis CAPACITIVE uses the **MK64FN1M0VDC12** MCU.

**MK64FN1M0VDC12** is the 32-bit ARM® Cortex®-M4 core [1].

This MCU is produced by NXP, featuring a floating-point unit (FPU), a complete set of DSP functions, and a memory protection unit (MPU) for elevated application security. Among many peripherals available on the host MCU, key features include:

- 1 MB of Flash memory
- 256 KB of SRAM
- Operating frequency up to 120 MHz

For the complete list of MCU features, please refer to the MK64FN1M0VDC12 [datasheet](#)

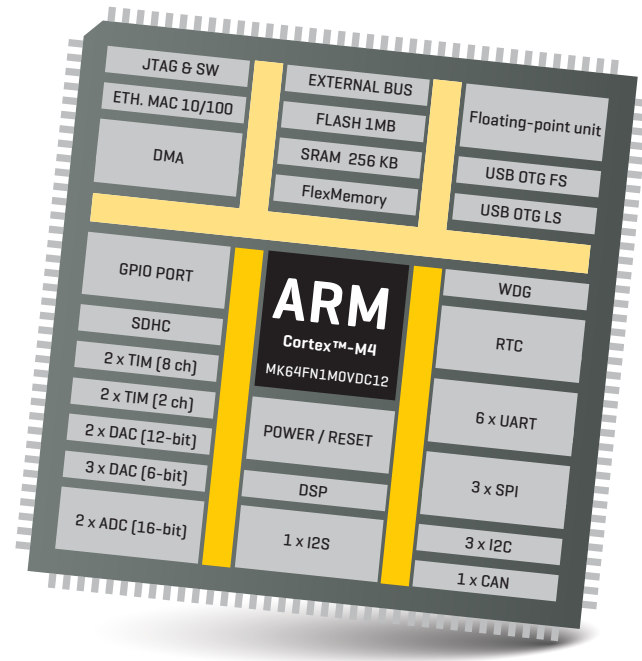


Figure 1: MK64FN1M0VDC12 MCU block schematic

## 1.1 Microcontroller programming/debugging

The host MCU can be programmed and debugged over the JTAG/SWD compatible 2x5 pin header **[2]**, labeled as PROG/DEBUG. This header allows an external programmer [e.g. CODEGRIP or mikroProg] to be used.

Programming the microcontroller can also be done by using the bootloader which is preprogrammed into the device by default. All the informations about the bootloader software can be found on the following page:

[www.mikroe.com/mikrobootloader](http://www.mikroe.com/mikrobootloader)

## 1.2 MCU reset

The board is equipped with the Reset button **[3]**, which is located on the front side of the board. It is used to generate a LOW logic level on the microcontroller reset pin. The reset pin of the host MCU is also routed to the pin 1 of the 1x26 pin header **[4]**, allowing an external signal to reset the device.


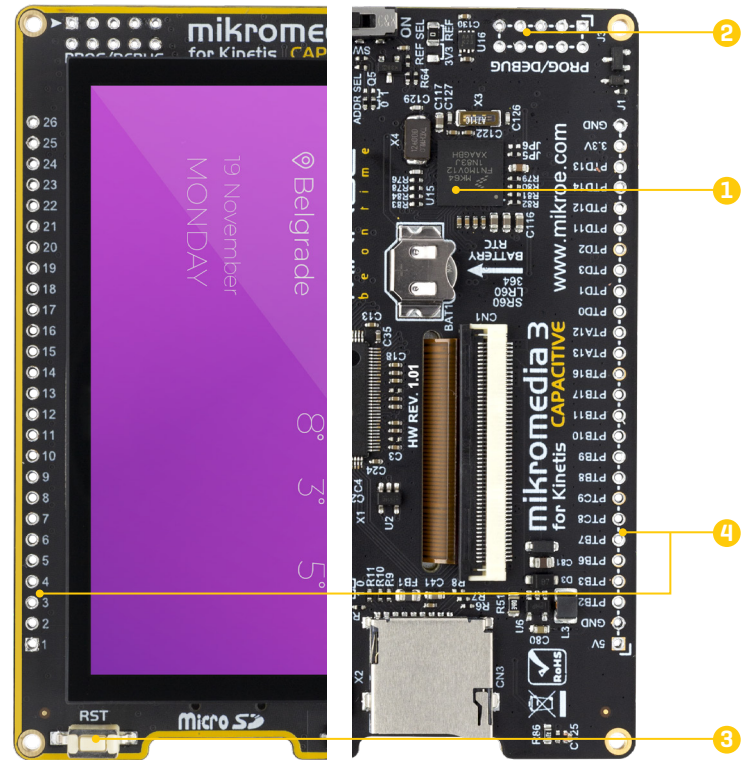


Figure 2: Front and back partial view



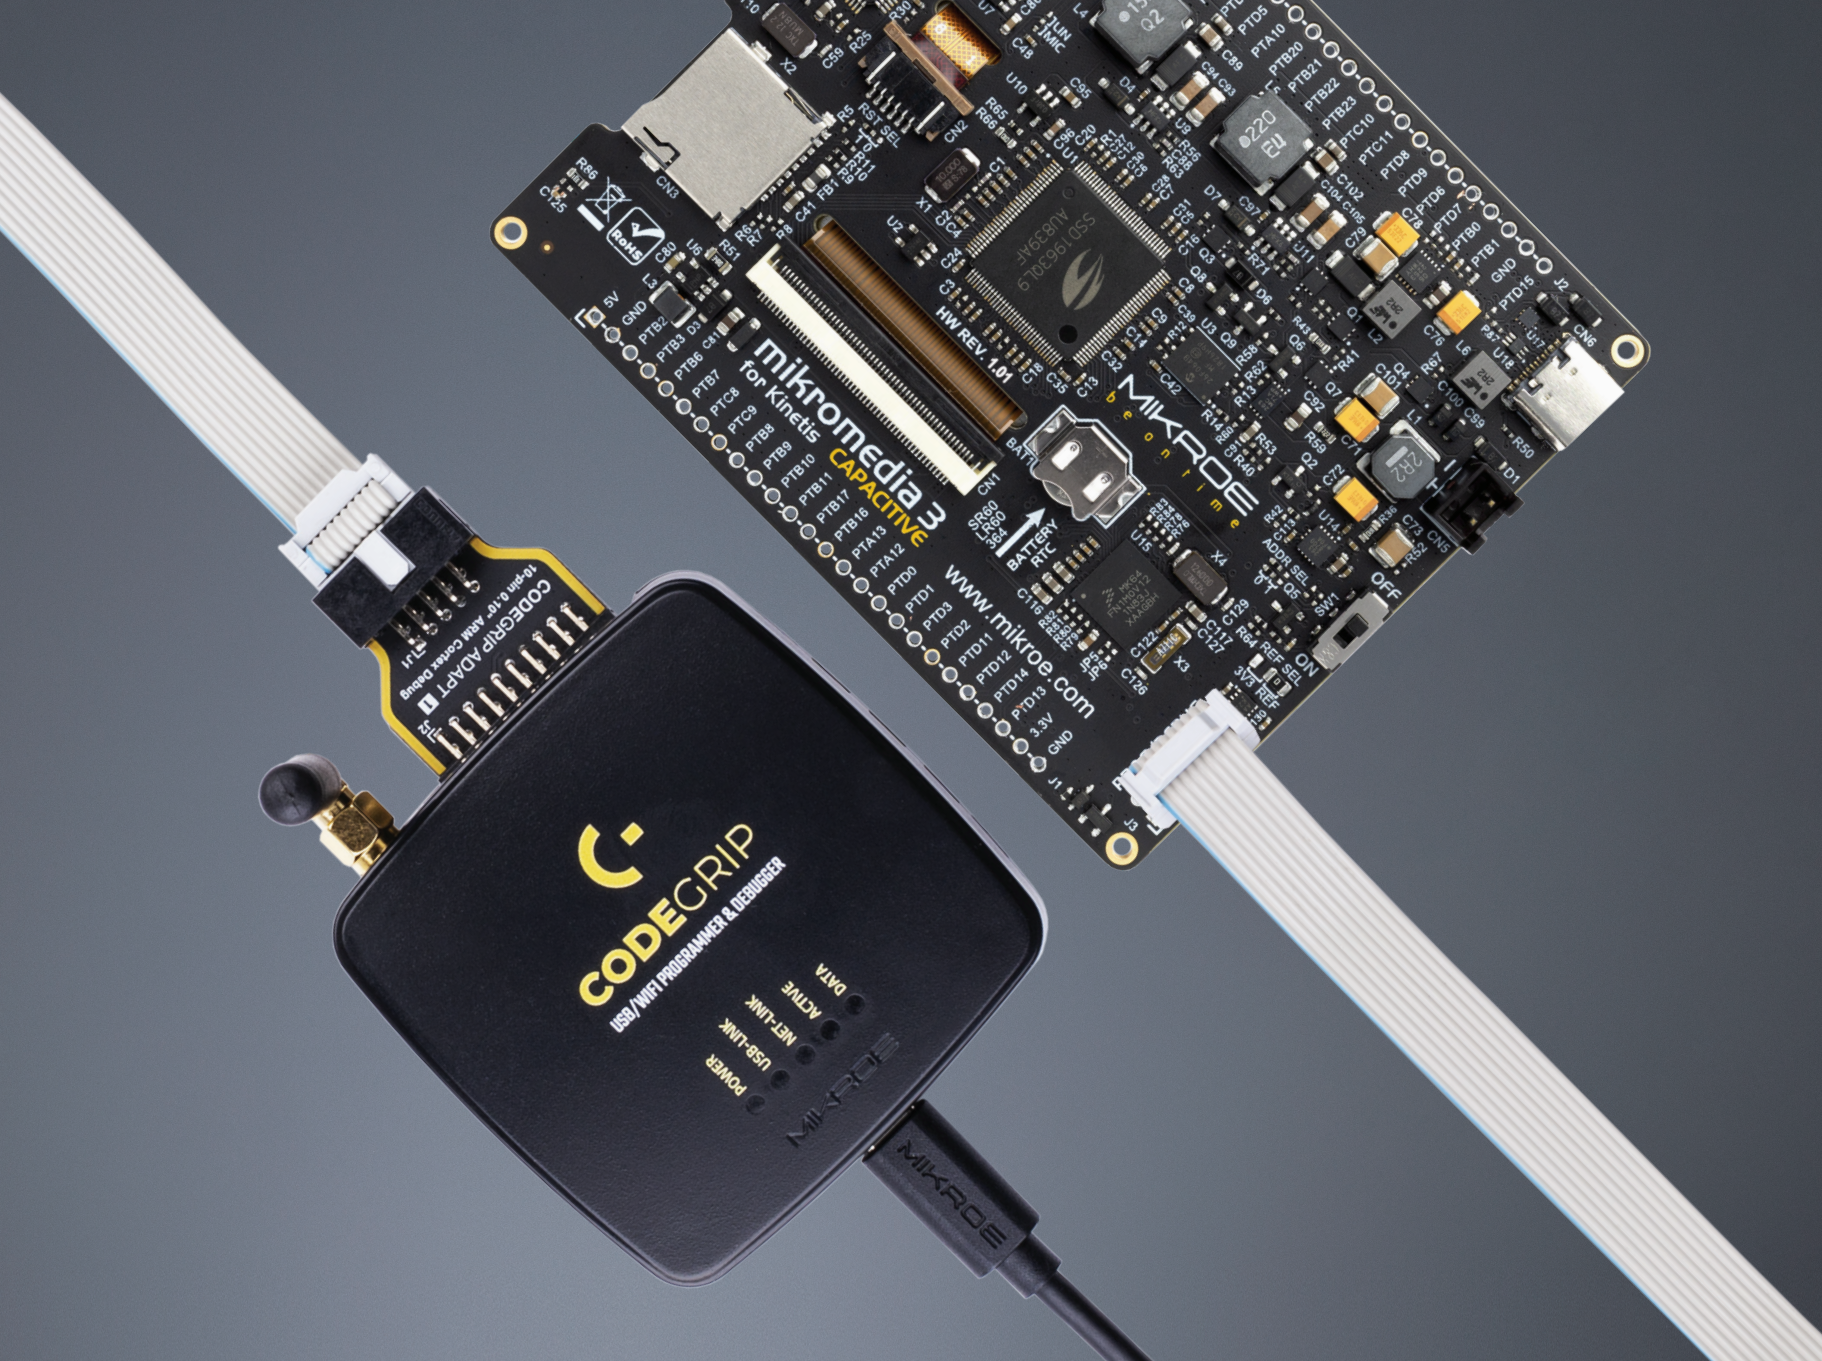

**CODEGRIP**  
USB / UART PROGRAMMER & DEBUGGER

POWER  
USB-LINK  
NET-LINK  
ACTIVE  
DATA

MIKROE

MIKROE

**mikromedia**  
for Kinetis  
**CAPACTIVE**

[www.mikroe.com](http://www.mikroe.com)

**MIKROE**

J16C80V  
6703961 DS

HW REV. 1.01

BATTERY

RTN

3.3V

GND

J1

J2

J3

J4

J5

J6

J7

J8

J9

J10

J11

J12

J13

J14

J15

J16

J17

J18

J19

J20

J21

J22

J23

J24

J25

J26

J27

J28

J29

J30

J31

J32

J33

J34

J35

J36

J37

J38

J39

J40

J41

J42

J43

J44

J45

J46

J47

J48

J49

J50

J51

J52

J53

J54

J55

J56

J57

J58

J59

J60

J61

J62

J63

J64

J65

J66

J67

J68

J69

J70

J71

J72

J73

J74

J75

J76

J77

J78

J79

J80

J81

J82

J83

J84

J85

J86

J87

J88

J89

J90

J91

J92

J93

J94

J95

J96

J97

J98

J99

J100

J101

J102

J103

J104

J105

J106

J107

J108

J109

J110

J111

J112

J113

J114

J115

J116

J117

J118

J119

J120

J121

J122

J123

J124

J125

J126

J127

J128

J129

J130

J131

J132

J133

J134

J135

J136

J137

J138

J139

J140

J141

J142

J143

J144

J145

J146

J147

J148

J149

J150

J151

J152

J153

J154

J155

J156

J157

J158

J159

J160

J161

J162

J163

J164

J165

J166

J167

J168

J169

J170

J171

J172

J173

J174

J175

J176

J177

J178

J179

J180

J181

J182

J183

J184

J185

J186

J187

J188

J189

J190

J191

J192

J193

J194

J195

J196

J197

J198

J199

J200

J201

J202

J203

J204

J205

J206

J207

J208

J209

J210

J211

J212

J213

J214

J215

J216

J217

J218

J219

J220

J221

J222

J223

J224

J225

J226

J227

J228

J229

J230

J231

J232

J233

J234

J235

J236

J237

J238

J239

J240

J241

J242

J243

J244

J245

J246

J247

J248

J249

J250

J251

J252

J253

J254

J255

J256

J257

J258

J259

J260

J261

J262

J263

J264

J265

J266

J267

J268

J269

J270

J271

J272

J273

J274

J275

J276

J277

J278

J279

J280

J281

J282

J283

J284

J285

J286

J287

J288

J289

J290

J291

J292

J293

J294

J295

J296

J297

J298

J299

J300

J301

J302

J303

J304

J305

J306

J307

J308



## 2. Power supply unit

The power supply unit (PSU) provides clean and regulated power, necessary for proper operation of the mikromedia 3 development board. The host MCU, along with the rest of the peripherals, demands regulated and noise-free power supply. Therefore, the PSU is carefully designed to regulate, filter, and distribute the power to all parts of mikromedia 3. It is equipped with two different power supply inputs, offering all the flexibility that mikromedia 3 needs, especially when used on the field or as an integrated element of a larger system. In the case when multiple power sources are used, an automatic power switching circuit with predefined priorities ensures that the most appropriate will be used.

The PSU also contains a reliable and safe battery charging circuit, which allows a single-cell Li-Po/Li-Ion battery to be charged. Power OR-ing option is also supported, providing an uninterrupted power supply (UPS) functionality when an USB power source is used in combination with the battery.



Figure 3: Power supply unit view



## 2.1 Detailed description

The PSU has a very demanding task of providing power for the host MCU and all the peripherals onboard, as well as for the externally connected peripherals. One of the key requirements is to provide enough current, avoiding the voltage drop at the output. Also, the PSU must be able to support multiple power sources with different nominal voltages, allowing switching between them by priority. The PSU design, based on a set of high-performance power switching ICs produced by Microchip, ensures a very good quality of the output voltage, high current rating, and reduced electromagnetic radiation.

At the input stage of the PSU, the MIC2253, a high-efficiency boost regulator IC with overvoltage protection ensures that the voltage input at the next stage is well-regulated and stable. It is used to boost the voltage of low-voltage power sources (a Li-Po/Li-Ion battery and USB), allowing the next stage to deliver well-regulated 3.3V and 5V to the development board. A set of discrete components are used to determine if the input power source requires a voltage boost. When multiple power sources are connected at once, this circuitry is also used to determine the input priority level: USB has priority over the Li-Ion/Li-Po battery. The transition between available power sources is designed to provide uninterrupted operation of the development board.

The next PSU stage uses two MCP16331, highly integrated, high-efficiency, fixed frequency, step-down DC-DC converters, capable of providing up to 1.2A. Each of the two buck regulators is used to supply power to the corresponding power supply rail (3.3V and 5V), throughout the entire development board and connected peripherals.

## 2.2 Voltage reference

The MCP1501, a high-precision buffered voltage reference from Microchip is used to provide a very precise voltage reference with no voltage drift. It can be used for various purposes: the most common uses include voltage references for A/D converters, D/A converters, and comparator peripherals on the host MCU. The MCP1501 can provide up to 20mA, limiting its use exclusively to voltage comparator applications with high input impedance. Depending on the specific application, either 3.3V from the power rail, or 2.048V from the MCP1501 can be selected. An onboard SMD jumper labeled as REF SEL offers two voltage reference choices:

- REF: 2.048V from the high-precision voltage reference IC
- 3V3: 3.3V from the main power supply rail

## 2.3 PSU connectors

As explained, the advanced design of the PSU allows two types of power sources to be used, offering unprecedented flexibility: when powered by a Li-Po/Li-ION battery, it offers an ultimate degree of autonomy. Power is not an issue even if it is powered over the USB cable. It can be powered over the USB-C connector, using power supply delivered by the USB HOST [i.e. personal computer], USB wall adapter, or a battery power bank.

There are two power supply connectors available, each with its unique purpose:

- CN6: USB-C connector **[1]**
- CN5: Standard 2.5mm pitch XH battery connector **[2]**



Figure 4: Power supply connectors view

## 2.3.1 USB-C connector

The USB-C connector (labeled as CN5 on) provides power from the USB host (typically PC), USB power bank, or USB wall adapter. When powered over the USB connector, the available power will depend on the source capabilities.

Maximum power ratings, along with the allowed input voltage range in the case when the USB power supply is used, are given in the table *Figure 5*:

USB Power Supply				
Input Voltage [V]		Output Voltage [V]	Max Current [A]	Max Power [W]
MIN	MAX	3.3	1.1	3.63
4.4	5.5	5	1.1	5.5
		3.3 & 5	0.7 & 0.7	5.81

*Figure 5: USB power supply table*

When using a PC as the power source, the maximum power can be obtained if the host PC supports the USB 3.2 interface, and is equipped with USB-C connectors. If the host PC uses the USB 2.0 interface, it will be able to provide the least power, since only up to 500 mA (2.5W at 5V) is available in that case. Note that when using longer USB cables or USB cables of low quality, the voltage may drop outside the rated operating voltage range, causing unpredictable behavior of the development board.

**NOTE** If the USB host is not equipped with the USB-C connector, a Type A to Type C USB adapter may be used (included in the package).

## 2.3.2 Li-Po/Li-Ion XH battery connector

Powering mikromedia 3 by a single-cell Li-Po/Li-Ion battery allows complete autonomy, allowing it to be used in some very specific situations: hazardous environments, agricultural applications, etc.

The battery connector is a standard 2.5mm pitch XH connector. It allows a range of single-cell Li-Po and Li-Ion batteries to be used. The PSU of mikromedia 3 offers the battery charging functionality, from the USB connector. The battery charging circuitry of the PSU manages the battery charging process, allowing the optimal charging conditions and longer battery life. The charging process is indicated by BATT LED indicator, located on the front of mikromedia 3.

The PSU module also includes the battery charger circuit. Depending on the operational status of the mikromedia 3 development board, the charging current can be either set to 100mA or 500mA. When the development board is powered OFF, the charger IC will allocate all available power for the battery charging purpose. This results in faster charging, with the charging current set to approximately 500mA. While powered ON, the available charging current will be set to approximately 100 mA, reducing the overall power consumption to a reasonable level.

Maximum power ratings along with the allowed input voltage range when the battery power supply is used, are given in the table *Figure 6*:

## 2.4 Power redundancy and uninterrupted power supply (UPS)

Battery Power Supply				
Input Voltage [V]		Output Voltage [V]	Max Current [A]	Max Power [W]
MIN	MAX	3.3	1.1	3.63
3.5	4.2	5	1	5
		3.3 & 5	0.6 & 0.6	4.98

Figure 6: Battery power supply table

**NOTE** Using low-quality USB hubs, and too long or low-quality USB cables, may cause a significant USB voltage drop, which can obstruct the battery charging process.

The PSU module supports power supply redundancy: it will automatically switch to the most appropriate power source if one of the power sources fails or becomes disconnected. The power supply redundancy also allows for an uninterrupted operation [i.e. UPS functionality, the battery will still provide power if the USB cable is removed, without resetting mikromedia 3 during the transition period].

## 2.5 Powering up the mikromedia 3 board

After a valid power supply source is connected in our case with a single-cell Li-Po/Li-Ion battery **[1]**, mikromedia 3 can be powered ON. This can be done by a small switch at the edge of the board, labeled as SW1 **[2]**. By switching it ON, the PSU module will be enabled, and the power will be distributed throughout the board. A LED indicator labeled as PWR indicates that the mikromedia 3 is powered ON.







# 3. Capacitive display

A high-quality 3.5" TFT true-color display with a capacitive touch panel is the most distinctive feature of the mikromedia 3. The display has a resolution of 320 by 240 pixels, and it can display up to 16.7M of colors [24-bit color depth]. The display of mikromedia 3 features a reasonably high contrast ratio of 500:1, thanks to 6 high-brightness LEDs used for the backlighting.

The display module is controlled by the SSD1963 [1] graphics driver IC from Solomon Systech. This is a powerful graphics coprocessor, equipped with 1215KB of frame buffer memory. It also includes some advanced features such as the hardware accelerated display rotation, display mirroring, hardware windowing, dynamic backlight control, programmable color and brightness control, and more.

The capacitive multi-touch panel allows the development of interactive applications, offering a touch-driven control interface. The touch panel controller uses the I2C interface for the communication with the host controller. This advanced

multi-touch panel controller supports gestures, including zoom and swipe in all four directions.

Equipped with high-quality 3.5" display [2] and the multi-touch controller that supports gestures, mikromedia 3 represents a very powerful hardware environment for building various GUI-centric Human Machine Interface [HMI] applications.





Figure 8: Display and SSD1963 view

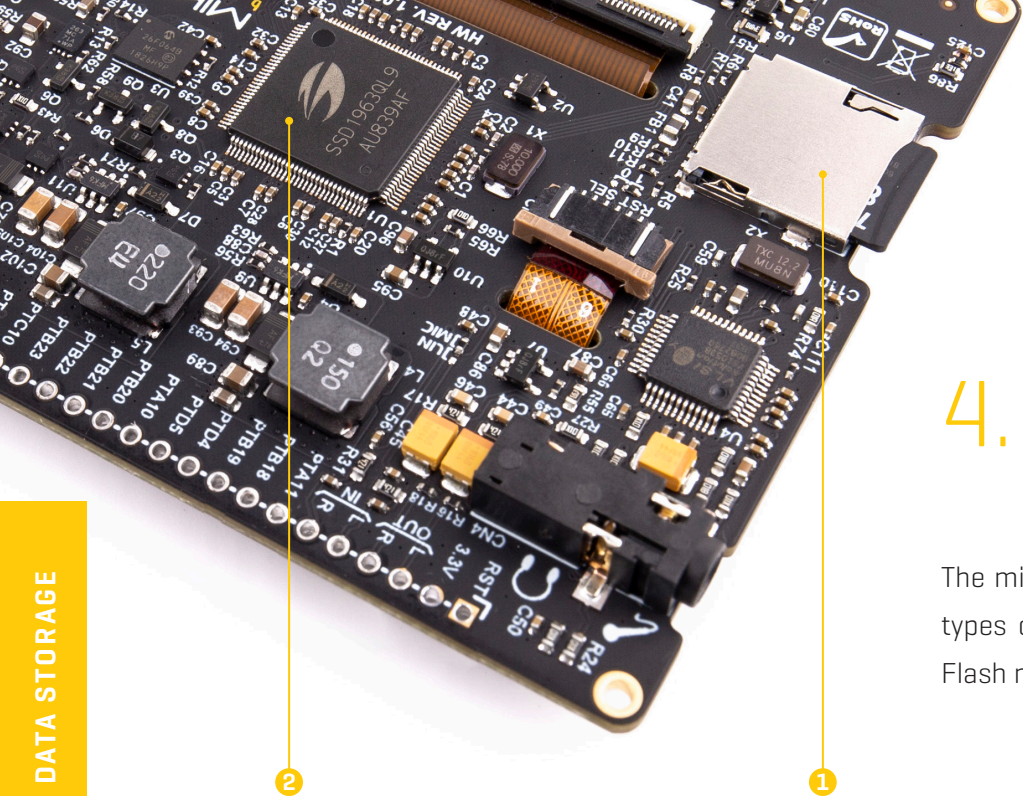


Figure 9: MicroSD card slot view

## 4. Data storage

The mikromedia 3 development board is equipped with two types of storage memory: with a microSD card slot and a Flash memory module.

### 4.1 microSD card slot

The microSD card slot **[1]** allows storing large amounts of data externally, on a microSD memory card. It uses the Secure digital input/output interface [SDIO] for communication with the MCU. The microSD card detection circuit is also provided on the board. The microSD card is the smallest SD Card version, measuring only 5 x 11 mm. Despite its small size, it allows tremendous amounts of data to be stored on it. In order to read and write to the SD Card, a proper software/firmware running on the host MCU is required.

### 4.2 External flash storage

mikromedia 3 is equipped with the SST26VF064B Flash memory **[2]**. The Flash memory module has a density of 64 Mbits. Its storage cells are arranged in 8-bit words, resulting in 8Mb of non-volatile memory in total, available for various applications. The most distinctive features of the SST26VF064B Flash module are its high speed, very high endurance, and very good data retention period. It can withstand up to 100,000 cycles, and it can preserve the stored information for more than 100 years. It also uses the SPI interface for the communication with the MCU.



# 5. Connectivity

mikromedia 3 includes support for USB[HOST/DEVICE]. Besides that, it also offers two 1x26 pin headers, which are used to directly access the MCU pins.

## 5.1 USB

The host MCU is equipped with the USB peripheral module, allowing simple USB connectivity. USB (Universal Serial Bus) is a very popular industry standard that defines cables, connectors, and protocols used for communication and power supply between computers and other devices. mikromedia 3 supports USB as HOST/DEVICE modes, allowing the development of a wide range of various USB-based applications. It is equipped with the USB-C connector, which offers many advantages, compared to earlier types of USB connectors [symmetrical design, higher current rating, compact size, etc].

The USB mode selection is done using a monolithic controller IC. This IC provides Configuration Channel [CC] detection and indication functions. To set up mikromedia 3 as the USB HOST, the USB\_PSW pin should be set to a LOW logic level [0] by the MCU. If set to a HIGH logic level [1], mikromedia 3 acts as a DEVICE. While in HOST mode, mikromedia 3 provides power over the USB-C connector **[1]** for the attached DEVICE. The USB\_PSW pin is driven by the host MCU, allowing the software to control the USB mode.

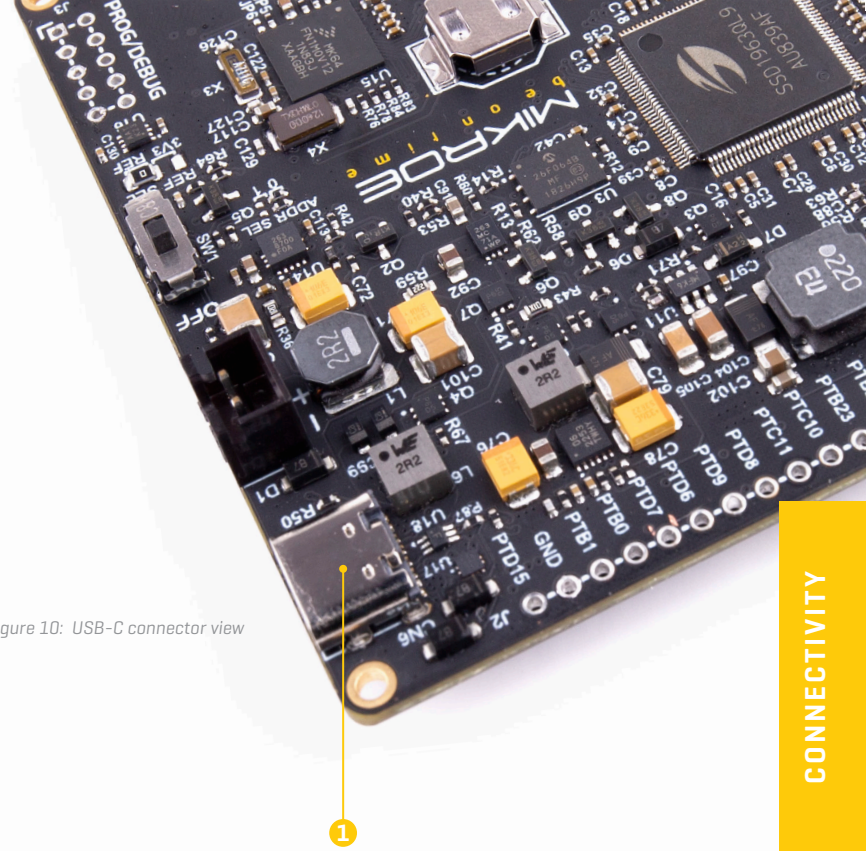


Figure 10: USB-C connector view

The USB ID pin is used to detect the type of the device attached to the USB port, according to the USB OTG specifications: the USB ID pin connected to GND indicates a HOST device, while the USB ID pin set to a high impedance state [HI-Z] indicates that the connected peripheral is a DEVICE.

When mikromedia 3 is working in USB HOST mode, it must not be mounted to another USB HOST [such as PC].

**NOTE**



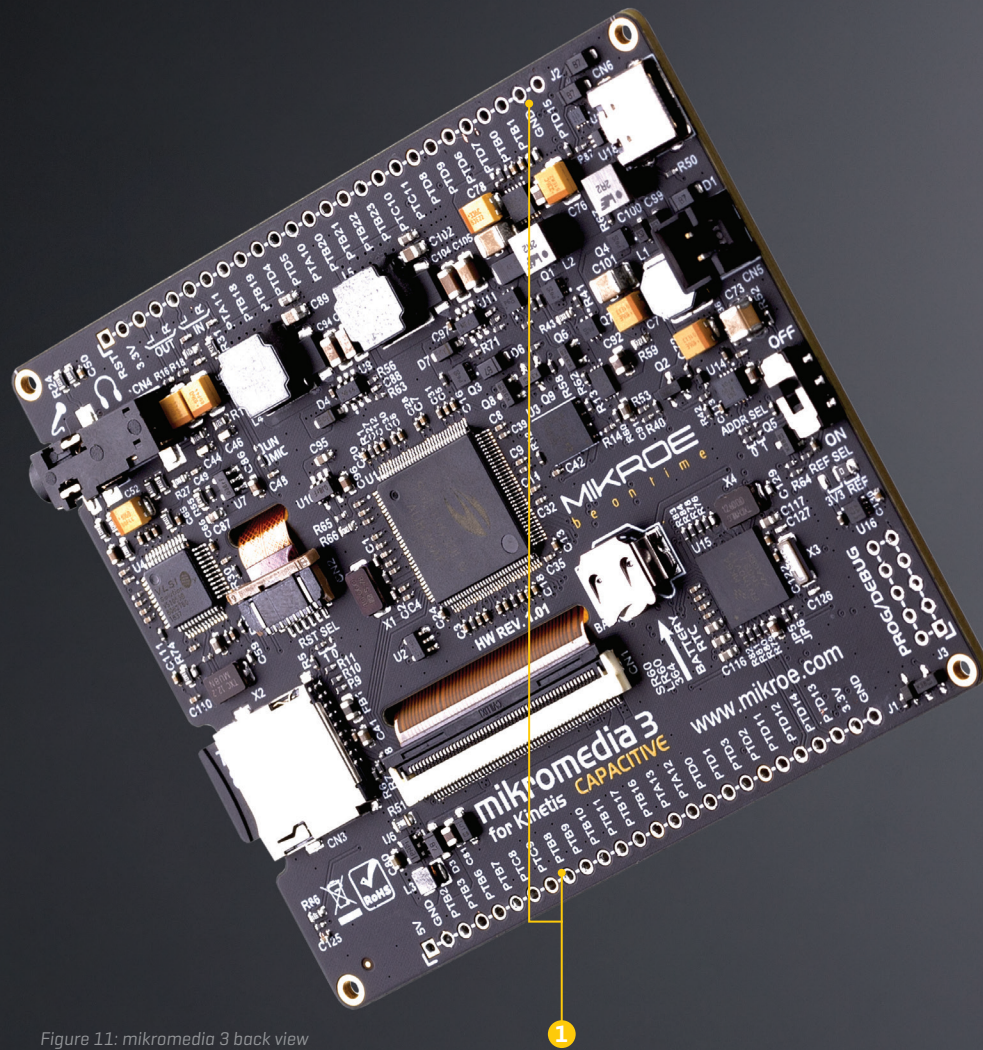


Figure 11: mikromedia 3 back view

1

## 5.2 1x26 pin headers

Most of the host MCU pins are routed to the two 1x26 pin headers (1), making them available for further connectivity. In addition to MCU pins, some additional peripheral pins are also routed to this header.

Besides the ability to connect various external devices and peripherals by using wire jumpers, these pins also allow using shields with the additional mikroBUS™ sockets. This allows mikromedia 3 to be interfaced with a huge base of different Click boards™ adding many different functionalities and options, including motor drivers, buck/boost converters, sensors, and much more. For the complete list of all the Click boards™ in our offer, please visit the following link: [www.mikroe.com/click](http://www.mikroe.com/click)

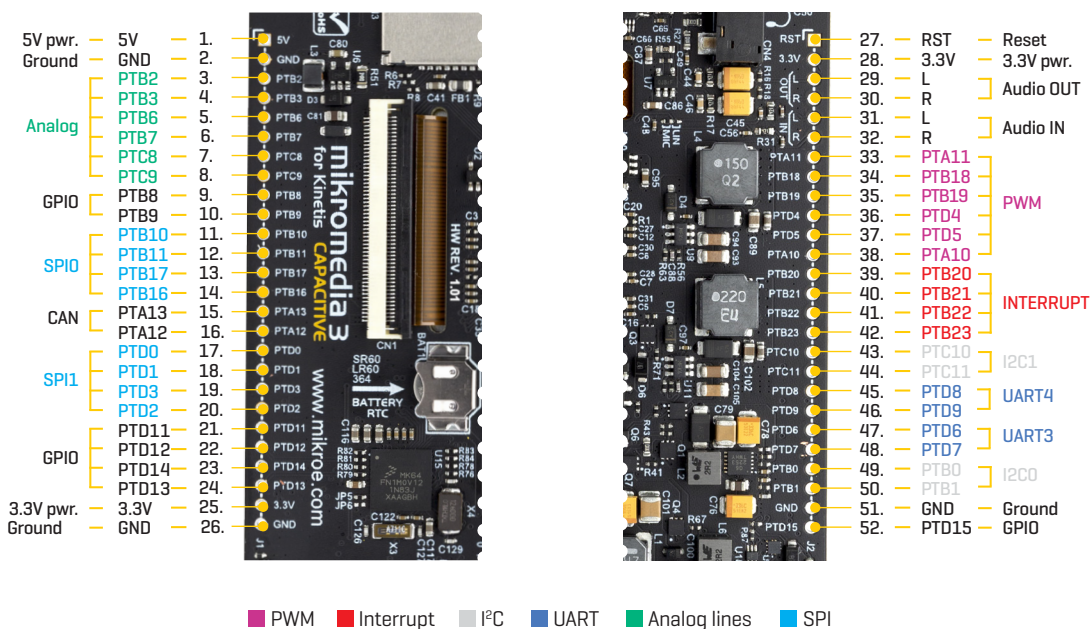


Figure 12: 1x26 pin header view




# 6. Sound-related peripherals

mikromedia 3 features powerful VS1053B IC. It is an Ogg Vorbis/MP3/AAC/WMA/FLAC/WAV/MIDI audio decoder, and a PCM/IMA ADPCM/Ogg Vorbis encoder, both on a single chip. It features a powerful DSP core, high-quality A/D and D/A converters, stereo headphones driver capable of driving a 30Ω load, zero-cross detection with the smooth volume change, bass and treble controls, and much more.

## 6.1 Audio CODEC

Resource-demanding and complex audio processing tasks can be offloaded from the host MCU by utilizing a dedicated audio CODEC IC, labeled as VS1053B **(1)**. This IC supports many different audio formats, commonly found on various digital audio devices. It can encode and decode audio streams independently while performing DSP-related tasks in parallel. The VS1053B has several key features that make this IC very popular choice when it comes to audio processing.

By offering high-quality hardware compression (encoding), the VS1053B allows the audio to be recorded taking up much less space compared to

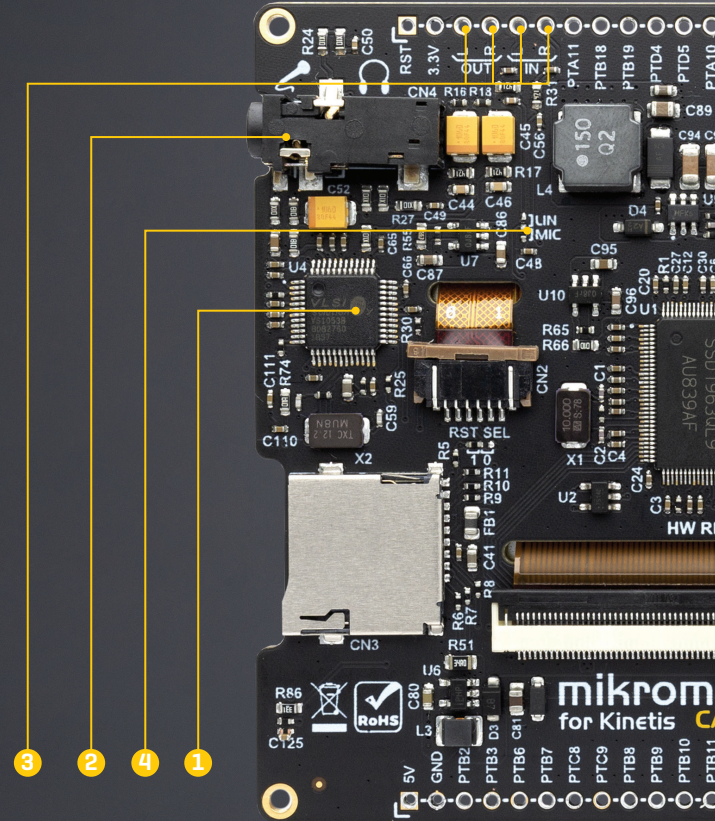



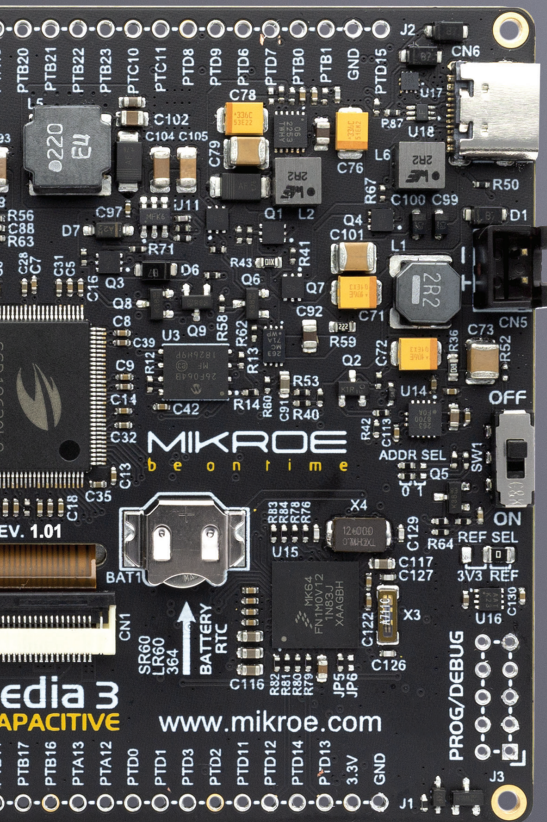


Figure 13: mikromedia 3 back view

the same audio information in its raw format. In combination with high-quality ADCs and DACs, headphones driver, integrated audio equalizer, volume control, and more, it represents an all-around solution for any type of audio application. Along with the powerful graphics processor, the VS1053B audio processor completely rounds-up the multimedia aspects of the mikromedia 3 development board.

## 6.2 Audio connectors

The mikromedia 3 board is equipped with the 3.5mm four-pole headphones jack **[2]**, allowing to connect a headset with a microphone. Two line-level audio outputs are also available over the 1x26 pin header **[3]**.

The microphone input from the 3.5mm four-pole headset jack is multiplexed with two line-level audio inputs. By using an SMD jumper **[4]** located near the headphone jack, it is possible to select which audio input will be used by the VS1053B. The choices are:

- LIN:** two line-level inputs form the 1x26 pin header
- MIC:** electret microphone, connected over the 3.5mm headphone jack

# 7. Sensors and other peripherals

A set of additional onboard sensors and devices adds yet another layer of usability to the mikromedia 3 development board.

## 7.1 Ambient light sensor

An ambient light sensor (ALS) [1] can be used for dimming the screen intensity in low-light conditions, allowing for the lower power consumption. It can also be used to detect the proximity and turn on the screen or increase its brightness when the user approaches. The ALS sensor on the mikromedia 7 can be utilized in many ways. The LTR-329ALS-01 sensor uses the I2C interface to communicate with the host MCU.

## 7.2 Digital motion sensor

The FXOS8700CQ, an advanced integrated 3-axis accelerometer and 3-axis magnetometer, can detect many different motion-related events, including the orientation event detection, freefall detection, shock detection, as well as tap, and double-tap event detection. These events can be reported to the host MCU over two dedicated interrupt pins, while the data transfer is performed over the I2C communication interface. The FXOS8700CQ sensor can be very useful for display orientation detection. It can also be used to turn mikromedia 3 into a complete 6-axis e-compass solution. The I2C slave address can be changed by using two SMD jumpers grouped under the ADDR SEL label [2].

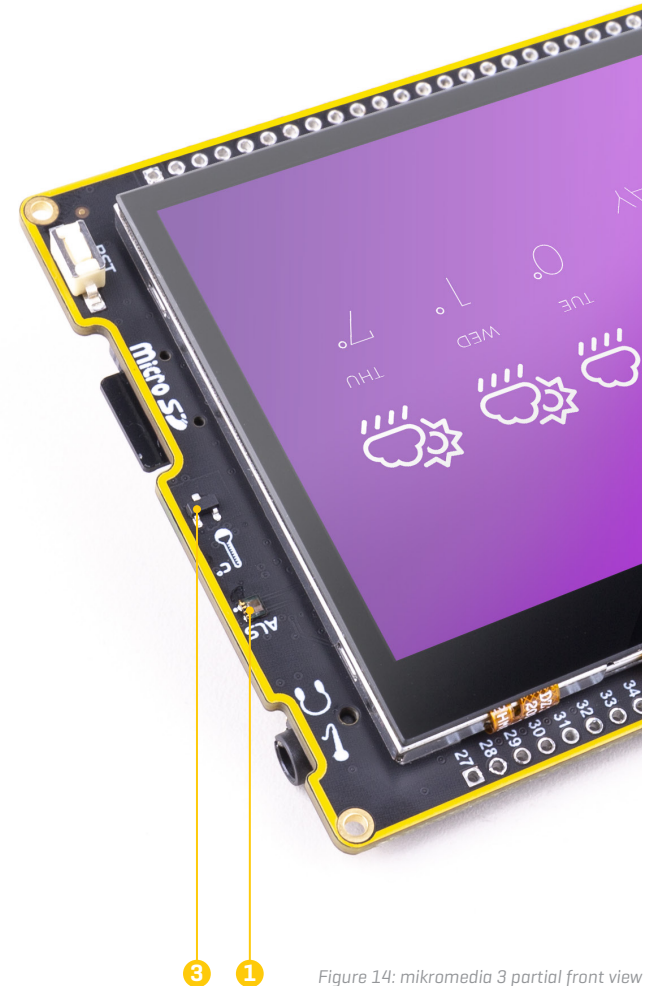


Figure 14: mikromedia 3 partial front view



## 7.3 Temperature sensor

The MCP9700A [\[3\]](#), an integrated low-power linear active thermistor allows measurement of the ambient temperature. This sensor provides an analog voltage which changes linearly with the applied temperature. This voltage can be sampled by the A/D converter on the host MCU, making it available for various user applications. The MCP9700A can measure the temperature within the range from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , but the actual measurement range is limited by the thermal endurance of the mikromedia 3 board itself. Nevertheless, having a thermal sensor on board is very useful, allowing the development of thermal monitoring applications, weather stations, and similar.

## 7.4 Real-time clock (RTC)

The host MCU contains a real-time clock peripheral module (RTC). The RTC peripheral uses a separate power supply source, typically a battery. To allow continuous tracking of time, mikromedia 3 is equipped with a button cell battery that maintains RTC functionality even if the main power supply is OFF. Extremely low power consumption of the RTC peripheral allows these batteries to last very long. The mikromedia 3 development board is equipped with the button cell battery holder, compatible with the R60, LR60, 364 button cell battery types, allowing it to include a real time clock within the applications.

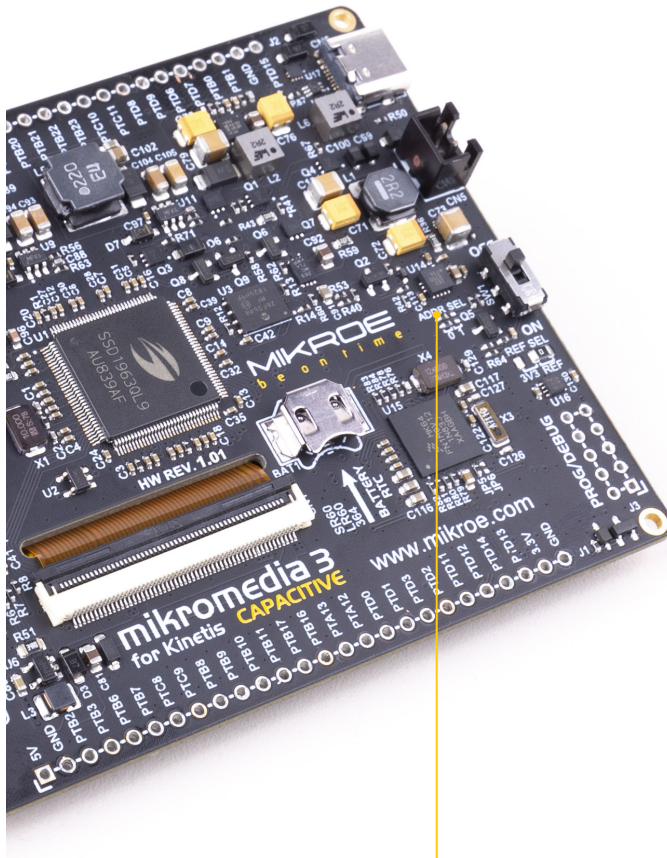


Figure 15: mikromedia 3 partial back view

RAPID DEVELOPMENT OF  
MULTIMEDIA AND GUI-CENTRIC  
APPLICATIONS





**mikromedia 3**  
for Kinetic CAPACTIVE

25  
24  
23  
22  
21  
20  
19  
18  
17  
16  
15  
14  
13  
12  
11  
10  
9  
8  
7  
6  
5  
4  
3  
2  
1

20  
19  
18  
17  
16  
15  
14  
13  
12  
11  
10  
9  
8  
7  
6  
5  
4  
3  
2  
1

7°

Belgrade

19 November  
MONDAY

TUE	WED	THU
0°	1°	7°

Micro SD


RST

ALS

USB

PWR





What makes you want to be an embedded developer? Is it the recognition of your skills, invention, or the development process? Whatever the reason is, we want to let you know that we are here for you every step of the way.

You can enjoy the process focused, yet relaxed – everything else is taken care of.

Enjoy premium.





# What's Next?

You have now completed the journey through each and every feature of mikromedia 3 for Kinetis CAPACITIVE development board. You got to know its modules and organization. Now you are ready to start using your new board. We are suggesting several steps which are probably the best way to begin.

## 1 COMPILERS

Easy programming, clean interface, powerful debugging, great support - our compilers come in three different flavors: mikroC PRO for ARM, mikroBASIC PRO for ARM and mikroPASCAL PRO for ARM, offering a complete rapid embedded development solution for these 3 major programming languages.

[www.mikroe.com/compilers/compilers-arm](http://www.mikroe.com/compilers/compilers-arm)

## 2 PROJECTS

Once you have chosen your compiler, and since you already got the board, you are ready to start writing your first projects. We have equipped our compilers with dozens of examples that demonstrate the use of each and every feature of the mikromedia 3 for Kinetis CAPACITIVE development board. This makes an excellent starting point for future custom projects. Just load the example, read well commented code, and see how it works on hardware.

## 3 COMMUNITY

We invite you to join thousands of users of Mikroe development tools. You will find useful projects and tutorials and get help from a large user community. If you want to download free projects and libraries, or share your own code, please visit the Libstock website. With user profiles, you can get to know other programmers, and subscribe to receive notifications on their code.

[www.libstock.mikroe.com](http://www.libstock.mikroe.com)

## 4 SUPPORT

Mikroe offers free Tech Support to the end of its life span, so if anything goes wrong, we are ready and willing to help. We know how important it is to be able to rely on someone in the moments when we are stuck with our projects for any reason, or facing a deadline. This is why our Support Department, as one of the pillars upon which our company is based, now also offers the Premium Technical Support to business users, ensuring even shorter time-frame for solutions. [www.mikroe.com/support](http://www.mikroe.com/support)



# DISCLAIMER

All the products owned by MikroElektronika are protected by copyright law and international copyright treaty. Therefore, this manual is to be treated as any other copyright material. No part of this manual, including product and software described herein, must be reproduced, stored in a retrieval system, translated or transmitted in any form or by any means, without the prior written permission of MikroElektronika. The manual PDF edition can be printed for private or local use, but not for distribution. Any modification of this manual is prohibited.

MikroElektronika provides this manual 'as is' without warranty of any kind, either expressed or implied, including, but not limited to, the implied warranties or conditions of merchantability or fitness for a particular purpose.

MikroElektronika shall assume no responsibility or liability for any errors, omissions and inaccuracies that may appear in this manual. In no event shall MikroElektronika, its directors, officers, employees or distributors be liable for any indirect, specific, incidental or consequential damages [including damages for loss of business profits and business information, business interruption or any other pecuniary loss] arising out of the use of this manual or product, even if MikroElektronika has been advised of the possibility of such damages. MikroElektronika reserves the right to change information contained in this manual at any time without prior notice, if necessary.

## HIGH RISK ACTIVITIES

The products of MikroElektronika are not fault – tolerant nor designed, manufactured or intended for use or resale as on – line control equipment in hazardous environments requiring fail – safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines or weapons systems in which the failure of Software could lead directly to death, personal injury or severe physical or environmental damage ['High Risk Activities']. MikroElektronika and its suppliers specifically disclaim any expressed or implied warranty of fitness for High Risk Activities.

## TRADEMARKS

The MikroElektronika name and logo, the MikroElektronika logo, mikroC, mikroBasic, mikroPascal, mikroProg, mikromedia, Fusion, Click boards™ and mikroBUS™ are trademarks of MikroElektronika. All other trademarks mentioned herein are property of their respective companies.

All other product and corporate names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies, and are only used for identification or explanation and to the owners' benefit, with no intent to infringe.

Copyright © MikroElektronika, 2019, All Rights Reserved.

**MIKROE**

Time-saving embedded tools

If you want to learn more about our products, please visit our website at [www.mikroe.com](http://www.mikroe.com)

If you are experiencing some problems with any of our products or just need additional information, please place your ticket at [www.mikroe.com/support](http://www.mikroe.com/support)

If you have any questions, comments or business proposals, do not hesitate to contact us at [office@mikroe.com](mailto:office@mikroe.com)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Display Modules](#) category:*

*Click to view products by [MikroElektronika](#) manufacturer:*

Other Similar products are found below :

[LCD-WVGA-7IN-1](#) [P6153-PR](#) [TDP0700T800480PCAP](#) [P6171DPR-DC-RS](#) [99-47-02033A](#) [P6171DPR-DC-U](#) [96LEDK-A215FH25NF5](#)  
[IDK-1121WR-30FHA1E](#) [IDK-104R-32SVI1](#) [WF70GTIAGDNT0#](#) [G1619W02BBW01](#) [MIKROMEDIA 4 FOR STM32F4 CAPACITIVE FPI](#)  
[MIKROMEDIA 3 FOR STM32F4 CAPACITIVE FPI](#) [PH320240T023-IHC09](#) [1148693](#) [1148689](#) [PIM537](#) [TN0216ANVNANN-GN00](#)  
[TN0104ANVAANN-GN00](#) [TN0181ANVNANN-GN00](#) [12121000](#) [MIKROMEDIA FOR DSPIC33](#) [MIKROMEDIA FOR PIC24](#)  
[MIKROMEDIA FOR PIC32](#) [MIKROMEDIA FOR STELLARIS M3](#) [MIKROMEDIA FOR XMEGA](#) [MIKROMEDIA HMI 3.5 RES](#)  
[MIKROMEDIA HMI 5](#) [MIKROMEDIA PLUS FOR FT90X](#) [MIKROMEDIA PLUS FOR PIC32MX7 SHIELD](#) [MIKROMEDIA PROTO](#)  
[SHIELD](#) [MIKROMEDIA 5 FOR TIVA](#) [MIKROMEDIA 5 FOR TIVA SHIELD](#) [MIKROMEDIA 7 FOR STM32F4](#) [MIKROMEDIA](#)  
[CONNECT SHIELD](#) [MIKROMEDIA FOR ARM](#) [MIKROMEDIA FOR DSPIC33EP](#) [MIKROMEDIA FOR PSOC5LP](#) [MIKROMEDIA](#)  
[GAMING SHIELD](#) [MIKROMEDIA HMI 4.3 USB](#) [MIKROMEDIA HMI 5 RES](#) [MIKROMEDIA HMI 5 USB](#) [MIKROMEDIA HMI 7](#)  
[MIKROMEDIA HMI BREAKOUT BOARD](#) [MIKROMEDIA PLUS FOR PIC32MX7](#) [MIKROMEDIA PLUS FOR STM32](#)  
[RVT28AEFNWN00](#) [RVT28UEFNWC01](#) [RVT28UEFNWC03](#) [RVT28UEFNWC05](#)