

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1203410150](#)
Status: **Active**
Overview: Brad Industrial Ethernet Solutions
Description: Micro-Change M12 CAT6A Back Panel-Mount Receptacle, 8 Poles, Female (Straight), 0.0185m (.728") Length

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Packaging Specification PK-120341-075-001 \(PDF\)](#)

General

Product Family	Industrial Receptacles
Series	120341
IP Rating	IP67
Overview	Brad Industrial Ethernet Solutions
Performance Category	6A
Product Name	Micro-Change (M12) Cat6A
Type	PCB Mount
UPC	884982937666

Physical

Coupling Type	Internal Thread
Gender	Female
Keyway	X-coded
Length	0.0185m
Material - Component	Nickel-plated Brass
Mounting Thread Size	M12 x 1.0
Net Weight	18.143/g
Orientation	Straight
Panel Mount	Back
Poles	8
Temperature Range - Operating	-40° to +85°C
Wire Size AWG	N/A
Wire/Cable Type	N/A

Electrical


Current - Maximum per Contact	0.5A
Voltage - Maximum	48V

Material Info

Engineering Number	ER2D2U703
--------------------	-----------

Reference - Drawing Numbers

Packaging Specification	PK-120341-075-001
Sales Drawing	1203410150-000

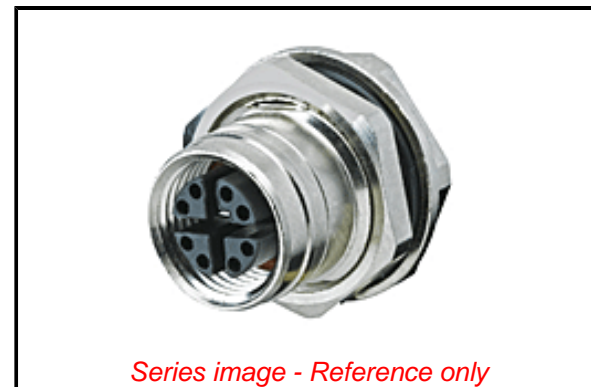

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant with Exemption 6(c)

REACH SVHC

Contained Per -
D(2020)9139-DC (19
Jan 2021)

Lead

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

50 Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[120341](#) Series

Mates With

[120341](#) Micro-Change CAT6A Cable Assemblies

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1604232](#)
[1R3006A20M005](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-00006](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01088](#) [43-01203](#) [41-](#)
[40013](#) [42-00008](#) [43-00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)
[8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-16213](#) [43-01338](#) [XS2RD4265](#)
[XS2R-D426-1](#)