


DUAL SINGLE-SUPPLY OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

NJM2119 is an ultra-low input offset voltage and bias current, low drift and single supply dual operational amplifier. NJM2119 is suitable for a high accurate instrumental amplifier and sensor amplifier.

■ PACKAGE OUTLINE




NJM2119D

NJM2119M

■ FEATURES

- Single Supply
- Operating Voltage (+4V~+36V)
- Low Input Offset Voltage (90µV typ.)
- Low Input Bias Current (18nA typ.)
- Low Input Offset Voltage Drift (4.0µV/°C typ.)
- Package Outline DIP8,DMP8
- Bipolar Technology

■ PIN CONFIGURATION

NJM2119D
NJM2119M

PIN FUNCTION

- 1.A OUTPUT
- 2.A -INPUT
- 3.A +INPUT
- 4.V
- 5.B +INPUT
- 6.B -INPUT
- 7.B OUTPUT
- 8.V⁺

NJM2119

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+(V^+/V^-)$	36 (± 18)	V
Input Voltage	V_{IC}	-0.3~+36	V
Differential Input Voltage	V_{ID}	± 36 (note)	V
Power Dissipation	P_D	(DIP8) 700 (DMP8) 300	mW
Operating Temperature Range	T_{opr}	-40~+85	°C
Storage Temperature Range	T_{stg}	-40~+125	°C







(note) For supply voltage less than ± 18 V, the absolute maximum input voltage is equal to the supply voltage.

■ ELECTRICAL CHARACTERISTICS

($V^+=5.0V, Ta=25\pm 2^\circ C$)





PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	$R_S \leq 50\Omega$	-	90	450	µV
V_{IO} Drift	$\Delta V_{IO}/\Delta T$	$T_a = -30 \sim +85^\circ C$	-	4.0	-	µV/°C
Input Offset Current	I_{IO}		-	0.3	7.0	nA
Input Bias Current	I_B		-	18	50	nA
Operating Current	I_{CC}	$R_L = \infty$	-	1.0	1.5	mA
Input Common Mode Voltage Range	V_{ICM}		0~3.5	-	-	V
Common Mode Rejection Ratio	CMR		85	100	-	dB
Supply Voltage Rejection Ratio	SVR		85	100	-	dB
Large Signal Voltage Gain	A_V	$R_L = 600\Omega$	90	105	-	dB
Maximum Output Voltage Swing 1	$+V_{OM1}$	$R_L = 600\Omega$	3.4	4.0	-	V
Maximum Output Voltage Swing 1	$-V_{OM1}$	$R_L = 600\Omega$	-	5.0	10.0	mV
Maximum Output Voltage Swing 2	$-V_{OM2}$	$I_{SINK} = 1mA$	-	220	350	mV
Slew Rate	SR	$A_V = 1$	-	0.3	-	V/µs
Gain Bandwidth Product	GB		-	1.0	-	MHz

■ TYPICAL CHARACTERISTICS

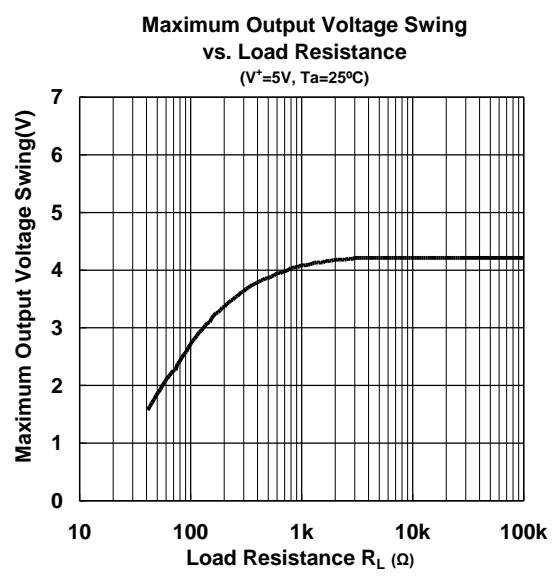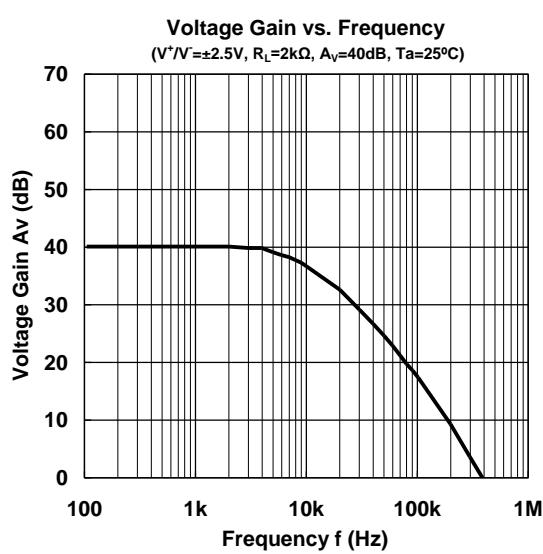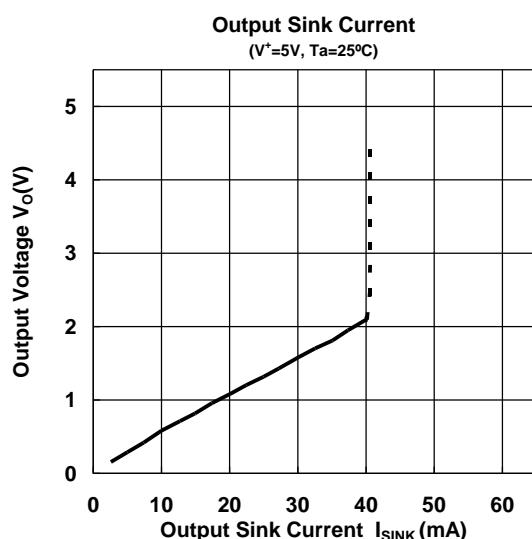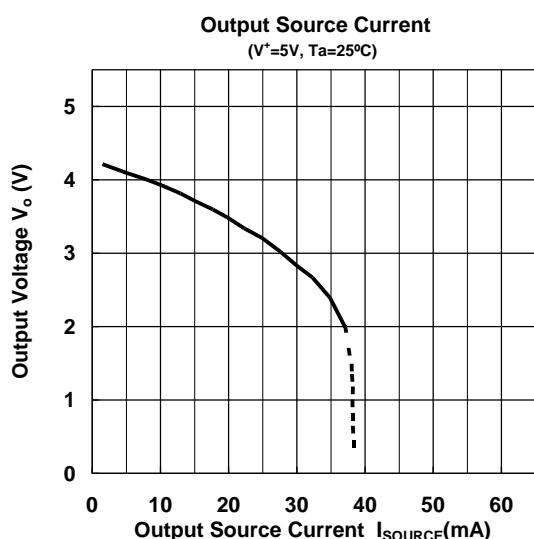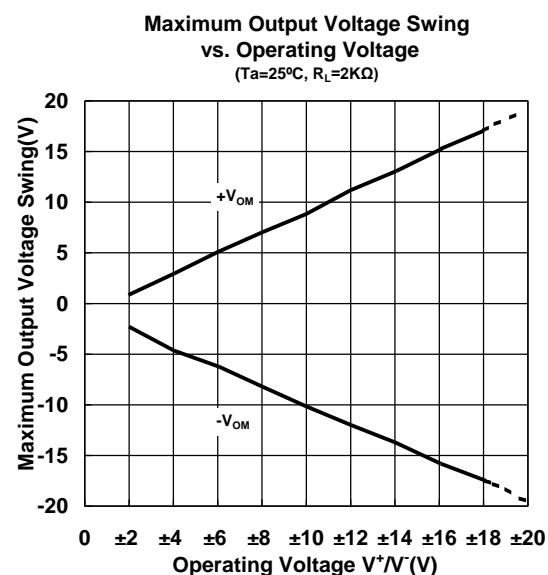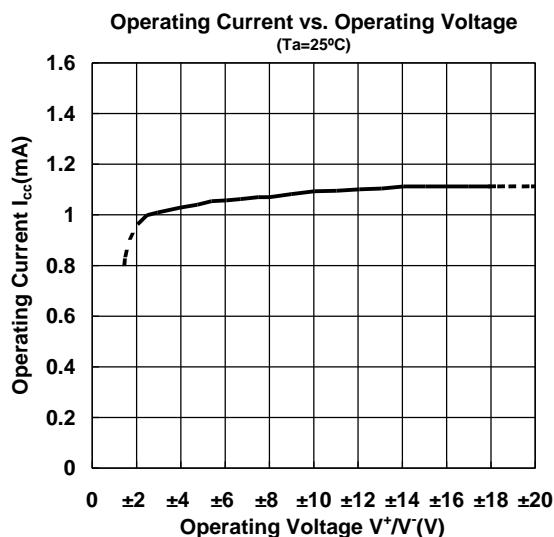

NJM2119

■ TYPICAL CHARACTERISTICS

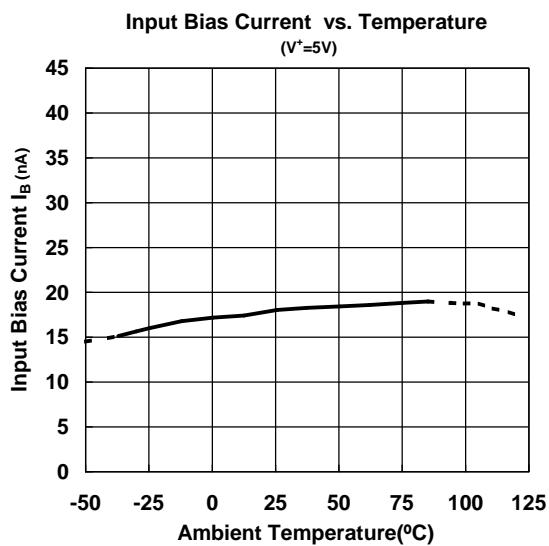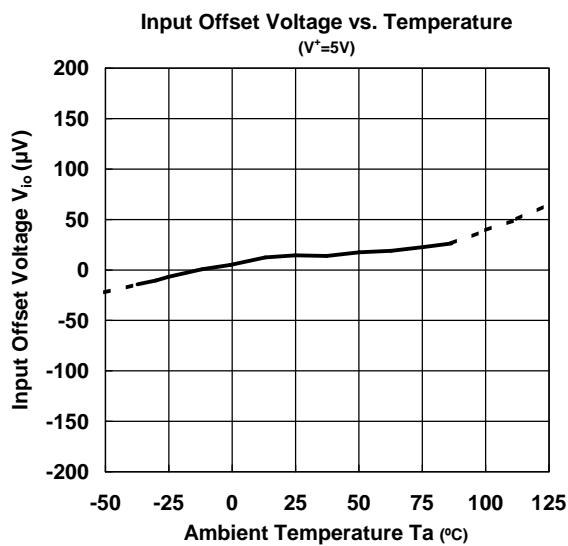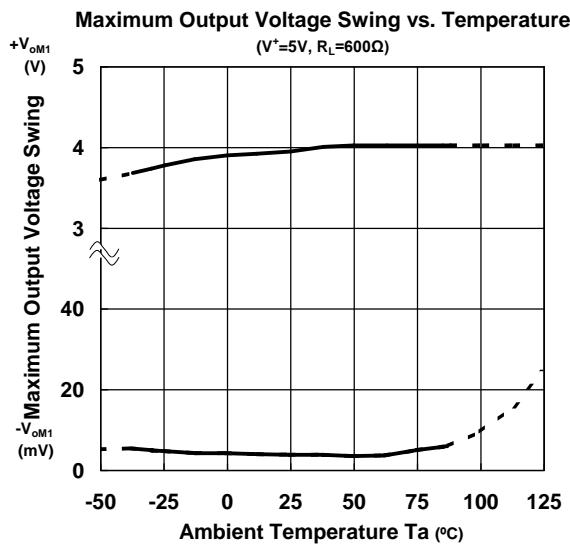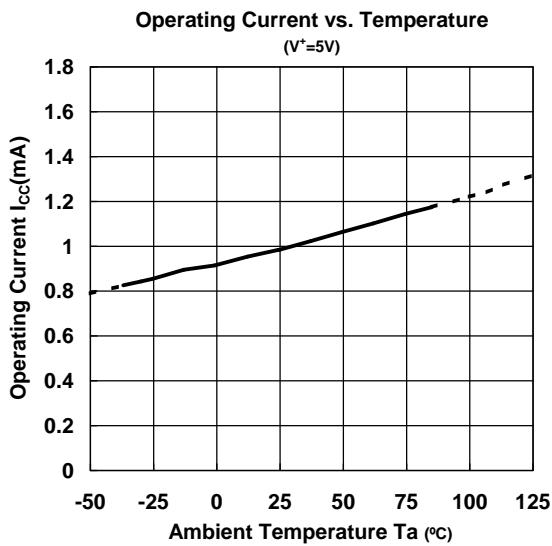

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Operational Amplifiers - Op Amps category:

Click to view products by Nissinbo manufacturer:

Other Similar products are found below :

[NCV33072ADR2G](#) [LM358SNG](#) [430227FB](#) [UPC824G2-A](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [UPC822G2-A](#) [UPC259G2-A](#) [UPC258G2-A](#)
[NCV33202DMR2G](#) [NTE925](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#) [HA1630S01LPEL-E](#) [SCY33178DR2G](#)
[NJU77806F3-TE1](#) [NCV5652MUTWG](#) [NCV20034DR2G](#) [LM324EDR2G](#) [LM2902EDR2G](#) [NTE7155](#) [NTE778S](#) [NTE871](#) [NTE924](#) [NTE937](#)
[MCP6V17T-E/MNY](#) [MCP6V19-E/ST](#) [MXD8011HF](#) [MCP6V17T-E/MS](#) [SCY6358ADR2G](#) [ADA4523-1BCPZ](#) [LTC2065HUD#PBF](#)
[ADA4523-1BCPZ-RL7](#) [NJM2904CRB1-TE1](#) [2SD965T-R](#) [RS6332PXK](#) [BDM8551](#) [BDM321](#) [MD1324](#) [COS8052SR](#) [COS8552SR](#)
[COS8554SR](#) [COS2177SR](#) [COS2353SR](#) [COS724TR](#) [ASOPD4580S-R](#) [RS321BKXF](#) [ADA4097-1HUJZ-RL7](#)