

ULTRA LOW NOISE DUAL OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJM2122 is an ultra low noise dual operational amplifier. The features of ultra low noise, low operating voltage, and low saturation voltage are suitable for microphone amplifier of digital audio items such as portable MD,DAT, and others.

■ FEATURES

- Operating Voltage ($\pm 2.0V \sim \pm 7.0V$)
- Ultra Low Noise Voltage ($1.5nV/\sqrt{Hz}$ typ. @ $f=1kHz$)
- Low Saturation Output Voltage (0.3V typ.)
- Bipolar Technology
- Package Outline DIP8,DMP8

■ PACKAGE OUTLINE




NJM2122D




NJM2122M

■ PIN CONFIGURATION

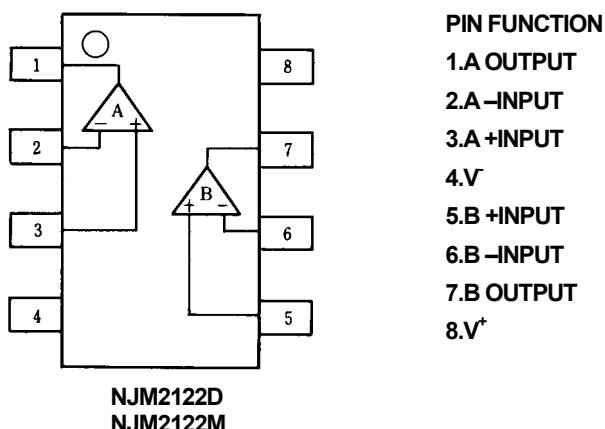

■ EQUIVALENT CIRCUIT (1/2 Shown)

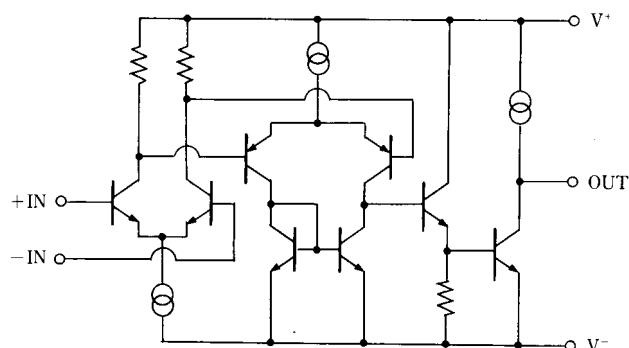

NJM2122

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+ /V	± 10	V
Differential Input Voltage	V_{ID}	± 0.5	V
Input Voltage	V_{IC}	± 10 (note)	V
Power Dissipation	P_D	(DIP8) 500 (DMP8) 300	mW
Operating Temperature Range	T_{opr}	-20~+75	°C
Storage Temperature Range	T_{stg}	-40~+125	°C

(note) When the supply voltage is less than ± 10 V, the absolute maximum input voltage is equal to the supply voltage.

■ ELECTRICAL CHARACTERISTICS

($V^+=5V, Ta=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage 1	V_{ope1}	DIP Package	± 2.0	-	± 10.0	V
Operating Voltage 2	V_{ope2}	DMP Package	± 2.0	-	± 7.0	V
Operating Current	I_{cc}	$V_{IN}=0V, R_L=\infty\Omega$	-	7.0	9.5	mA
Input Offset Voltage	V_{IO}	$R_S=500\Omega$	-	1.0	6.0	mV
Input Offset Current	I_{IO}		-	0.45	1.50	μA
Input Bias Current	I_B		-	3.6	8.0	μA
Large Signal Voltage Gain	A_V	$R_L \geq 10k\Omega$	80	100	-	dB
Input Common Mode Voltage Range	V_{ICM}		± 0.7	± 1.0	-	V
Common Mode Rejection Ratio	CMR		60	74	-	dB
Supply Voltage Rejection Ratio	SVR		60	80	-	dB
Maximum Output Voltage	V_{OM}	$R_L \geq 2.5k\Omega$	± 2.0	± 2.2	-	V
Slew Rate	SR	$G_V=20dB, V_{IN}=\pm 0.1V$	-	2.4	-	$V/\mu s$
Gain Bandwidth Product	GB		-	12	-	MHz
Equivalent Input Noise Voltage 1	e_{n1}	$R_S=10\Omega, f=1kHz$	-	1.5	-	nV/\sqrt{Hz}
Equivalent Input Noise Voltage 2	e_{n2}	*Figure1	-	0.56	0.75	μV_{rms}
Channel Separation	CS	$f=1kHz$	-	90	-	dB
Total Harmonic Distortion	THD	$V_O=1V_{rms}, f=1kHz$ $G_V=20dB, R_L=2.5k\Omega$	-	0.003	-	%


(note) Between 30 to 50dB voltage gain is recommended.

In case of voltage gain less than 30dB, phase compensation by external circuit is required.







The voltage follower circuit must not be used.

DMP package should be used in operating voltage less than $\pm 7V$, because of the P_D limitation.

Figure1






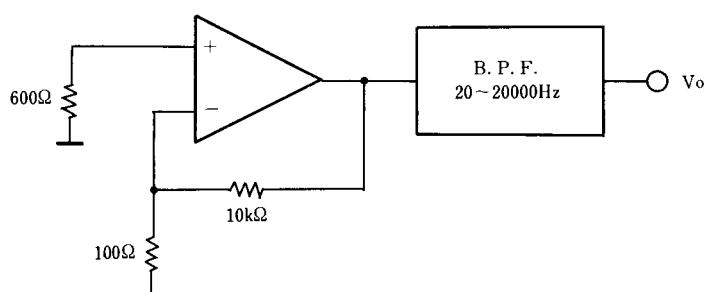


■ TYPICAL CHARACTERISTICS

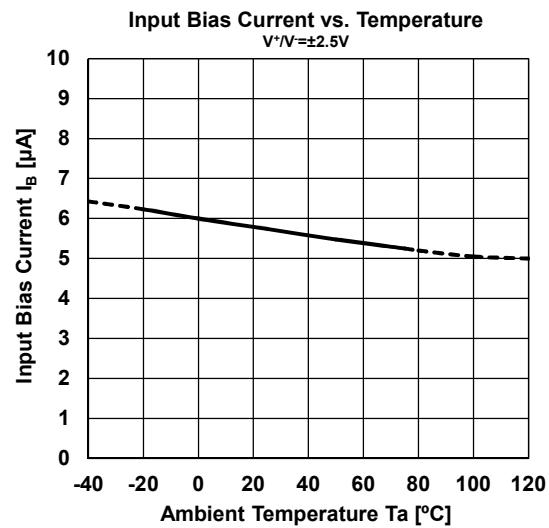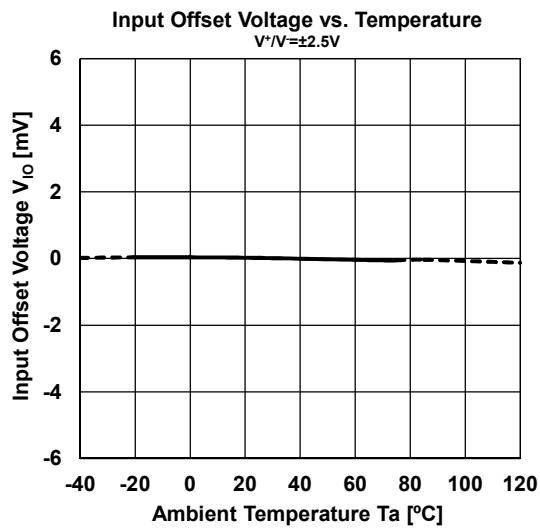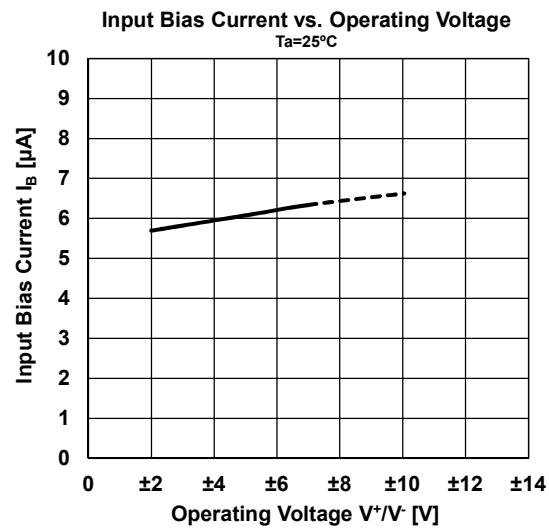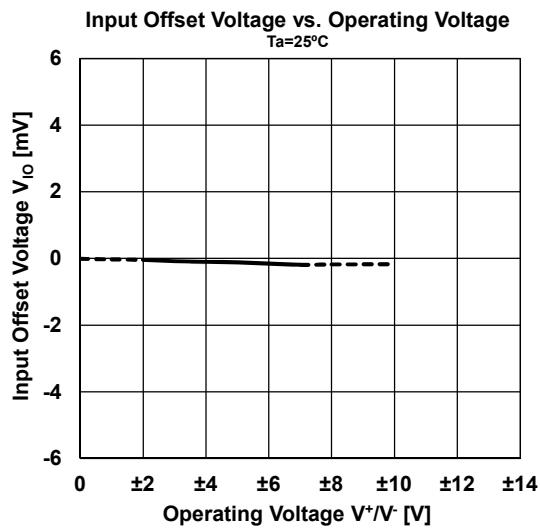
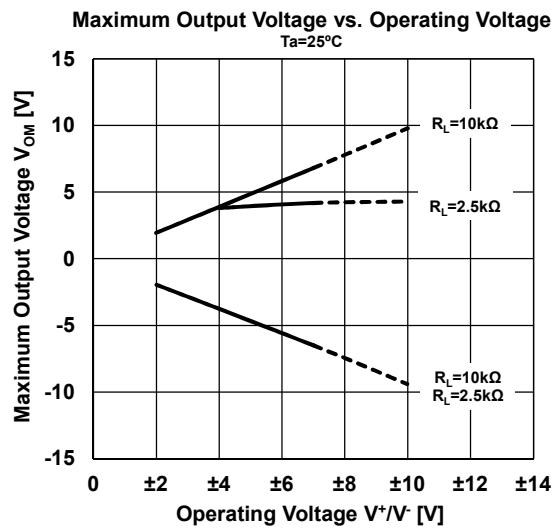
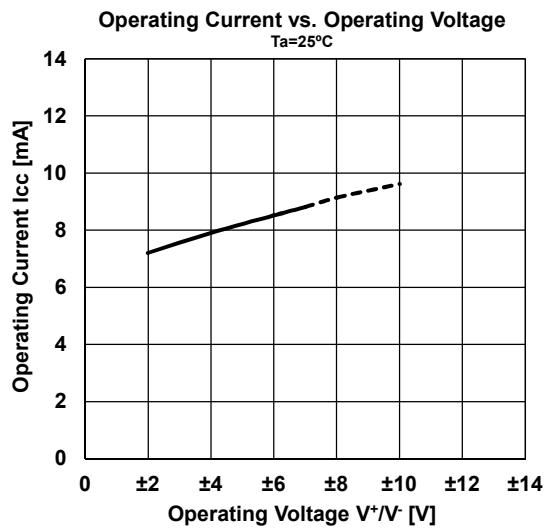


NJM2122

■ TYPICAL CHARACTERISTICS

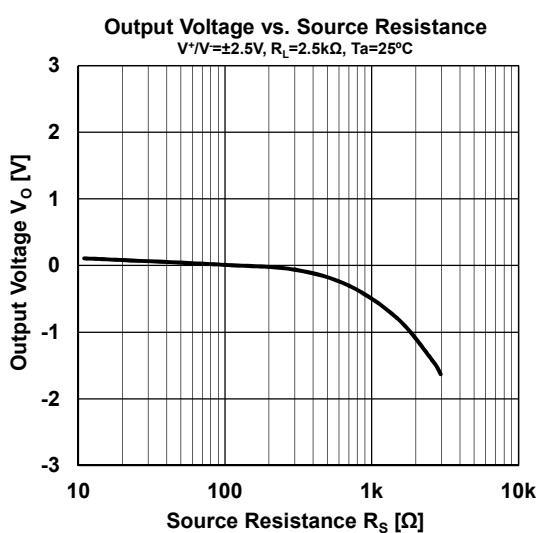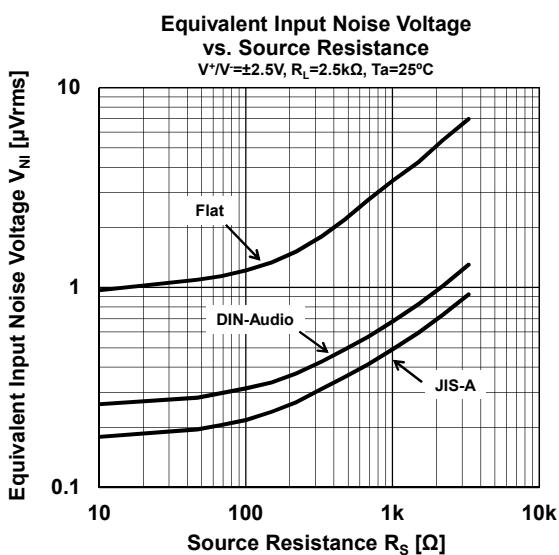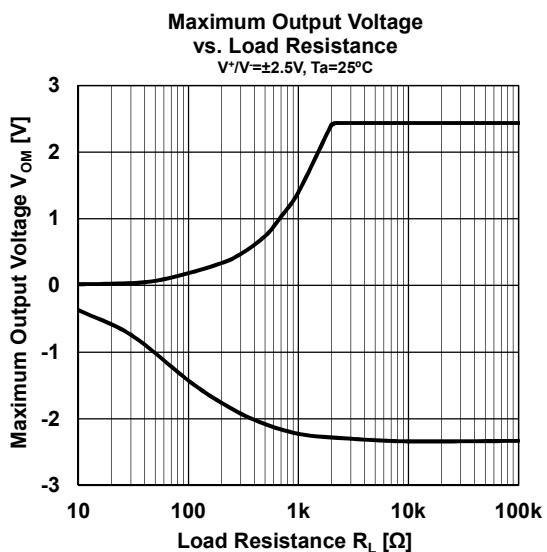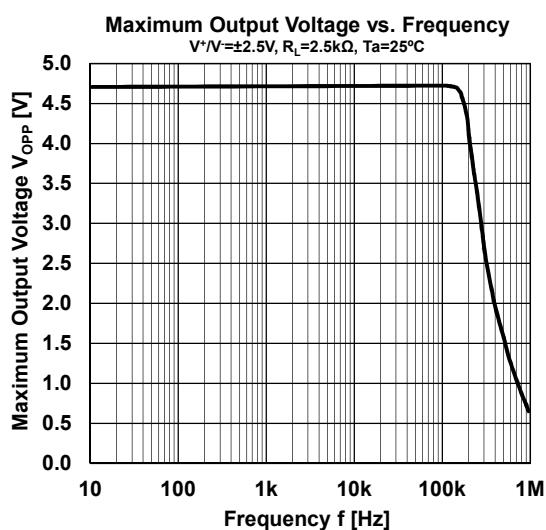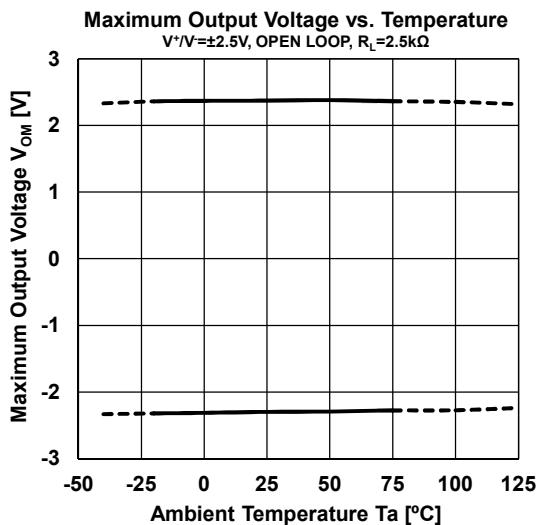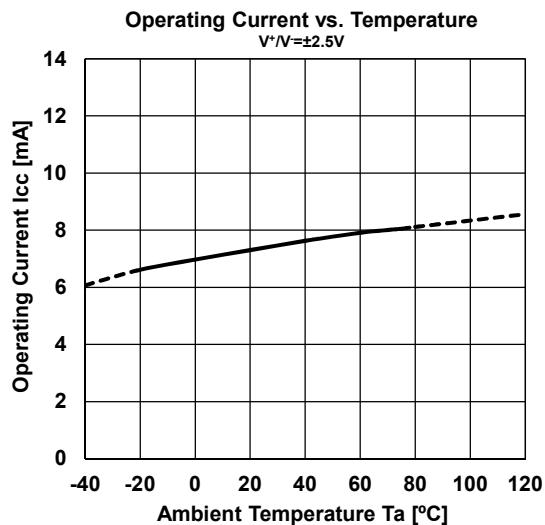

■ TYPICAL CHARACTERISTICS

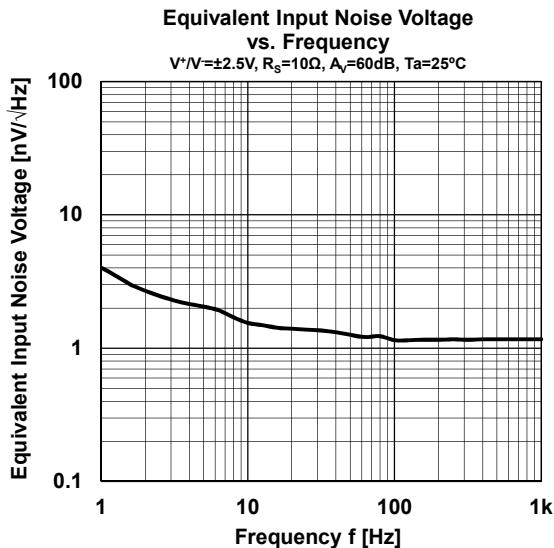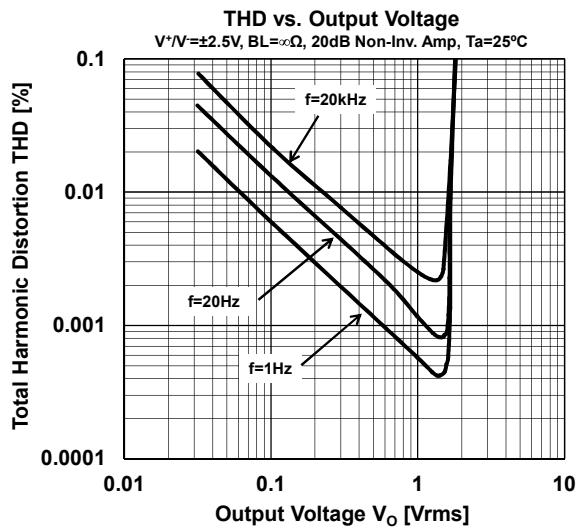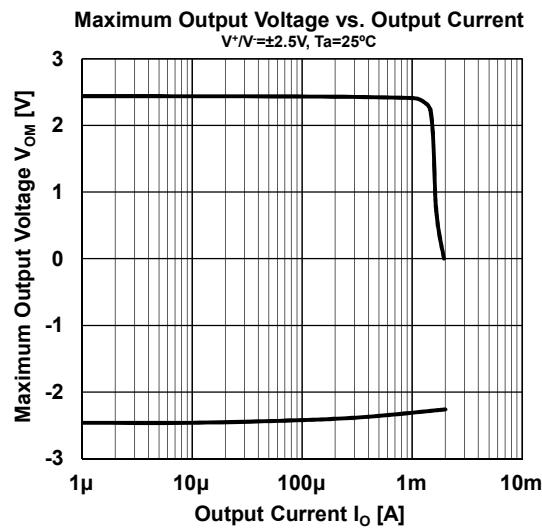

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Operational Amplifiers - Op Amps category:

Click to view products by Nissinbo manufacturer:

Other Similar products are found below :

[NCV33072ADR2G](#) [LM358SNG](#) [430227FB](#) [UPC824G2-A](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [UPC822G2-A](#) [UPC259G2-A](#) [UPC258G2-A](#)
[NCV33202DMR2G](#) [NTE925](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#) [HA1630S01LPEL-E](#) [SCY33178DR2G](#)
[NJU77806F3-TE1](#) [NCV5652MUTWG](#) [NCV20034DR2G](#) [LM324EDR2G](#) [LM2902EDR2G](#) [NTE7155](#) [NTE778S](#) [NTE871](#) [NTE924](#) [NTE937](#)
[MCP6V17T-E/MNY](#) [MCP6V19-E/ST](#) [MXD8011HF](#) [MCP6V17T-E/MS](#) [SCY6358ADR2G](#) [ADA4523-1BCPZ](#) [LTC2065HUD#PBF](#)
[ADA4523-1BCPZ-RL7](#) [NJM2904CRB1-TE1](#) [2SD965T-R](#) [RS6332PXK](#) [BDM8551](#) [BDM321](#) [MD1324](#) [COS8052SR](#) [COS8552SR](#)
[COS8554SR](#) [COS2177SR](#) [COS2353SR](#) [COS724TR](#) [ASOPD4580S-R](#) [RS321BKXF](#) [ADA4097-1HUJZ-RL7](#)