

## SERIES REGULATOR WITH RESET FUNCTION


### ■ GENERAL DESCRIPTION

The **NJM78LR05** is a series regulator with reset function.


In case of shut down or output voltage drop, the IC generates reset signal to a microcomputer.

That is suitable for items with microcomputer, such as TV sets, remote controller, refrigerator and others.

### ■ PACKAGE OUTLINE



**NJM78LR05BD / CD / DD NJM78LR05BM / CM / DM**



**NJM78LR05BL / CL / DL NJM78LR05BU / CU / DU**

### ■ FEATURES


- Output Current  $I_O = 150\text{mA}$  max.
- Reset Function Including
- Reset Delay Time can be Adjusted by an External Capacitance.
- Internal Over Current Protection
- Thermal Shut Down
- Bipolar Technology
- package Outline DIP8, DMP8, SIP8, SOT-89 (5Pin)

### ■ RESET THRESHOLD VOLTAGE LINE-UP

Reset Threshold Voltage	Version	Part Number
4.0V	D	NJM78LR05DX
4.2V	C	NJM78LR05CX
4.3V	B	NJM78LR05BX


"X" is package suffix.

### ■ BLOCK DIAGRAM

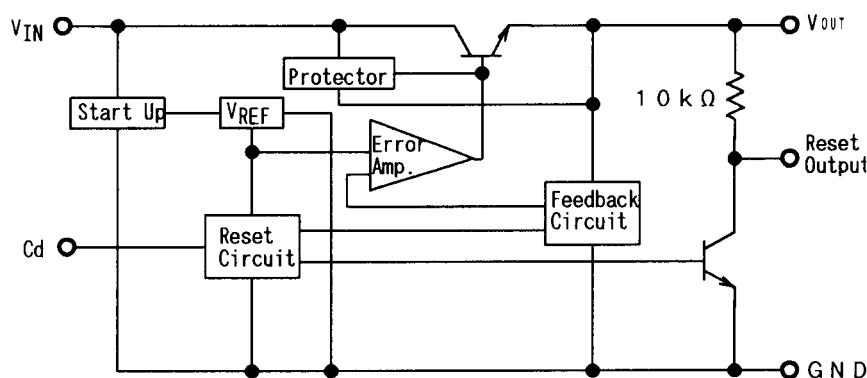


# NJM78LR05

## ■ PIN CONFIGURATION




NJM78LR05BD / CD / DD  
NJM78LR05BM / CM / DM

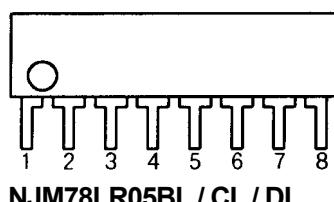

NJM78LR05BL / CL / DL

### PIN FUNCTION

1. INPUT
2. NC
3. Cd
4. NC
5. GND
6. RESET-OUTPUT
7. NC
8. OUTPUT



NJM78LR05BU / CU / DU

### PIN FUNCTION

1. Cd
2. GND
3. RESET-OUTPUT
4. OUTPUT
5. INPUT

## ■ ABSOLUTE MAXIMUM RATINGS

(T<sub>a</sub>=25°C)

PARAMETER	SYMBOL	MAXIMUM RATINGS	UNIT
Input Voltage	V <sub>IN</sub>	+20	V
Power Dissipation	P <sub>D</sub>	(DIP-8) 500 (DMP8) 500* (SIP8) 800 (SOT-89) 350	mW
Operating Temperature Range	T <sub>opr</sub>	-40 to +85	°C
Storage Temperature Range	T <sub>stg</sub>	-50 to +150	°C

\*At on PC board.

## ■ RECOMMENDED OPERATING CONDITIONS

(T<sub>a</sub>=25°C)

PARAMETER	SYMBOL	CONDITIONS	UNIT
Input Voltage	V <sub>IN</sub>	7.5 to 18	V
Output Current	I <sub>O</sub>	1 to 100	mA

**■ ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub>=10V, I<sub>O</sub>=40mA, C<sub>IN</sub>=1μF, C<sub>O</sub>=10μF, T<sub>a</sub>=25°C)

[Power Supply Block]


PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>O</sub>	I <sub>O</sub> =1mA	4.80	5.00	5.20	V
Quiescent Current	I <sub>Q</sub>	I <sub>O</sub> =100mA	-	1.40	3.40	mA
Output Short Current	I <sub>osc</sub>	OUTPUT-GND short	150	300	450	mA
Line Regulation 1	ΔV <sub>O</sub> / V <sub>IN</sub> 1	7V ≤ V <sub>IN</sub> ≤ 18V	-	6.0	65.0	mV
Line Regulation 2	ΔV <sub>O</sub> / V <sub>IN</sub> 2	8V ≤ V <sub>IN</sub> ≤ 18V	-	3.0	42.0	mV
Load Regulation 1	ΔV <sub>O</sub> / I <sub>O</sub> 1	I <sub>O</sub> =1 to 100mA	-	9.0	60.0	mV
Load Regulation 2	ΔV <sub>O</sub> / I <sub>O</sub> 2	I <sub>O</sub> =1 to 40mA	-	3.0	30.0	mV
Ripple Rejection	RR	f=120Hz, e <sub>in</sub> =1V <sub>P-P</sub> , V <sub>IN</sub> =8 to 18V	-	79	-	dB
Output Noise Voltage	V <sub>NO</sub>	10Hz ≤ f ≤ 100kHz, I <sub>O</sub> =1mA	-	80	-	μV
Dropout Voltage	ΔV <sub>I<sub>O</sub></sub>		-	1.5	2.2	V

[Reset Block]

(H) Reset Output Voltage	V <sub>ORH</sub>		4.80	5.00	5.20	V
(L) Reset Output Voltage	V <sub>ORL</sub>	V <sub>IN</sub> =3V, I <sub>O</sub> =1mA	-	10	200	mV
Reset Threshold Voltage	V <sub>RT</sub>	B Version	4.12	4.30	4.48	V
		C Version	4.03	4.20	4.37	
		D Version	3.84	4.00	4.16	
Reset Threshold Hysteresis Voltage	V <sub>RTH</sub>		50	100	200	mV
Reset Output Delay Time	td	Cd=0.1μF	7.50	10.0	12.5	ms

# NJM78LR05


## ■ APPLICATION CIRCUIT

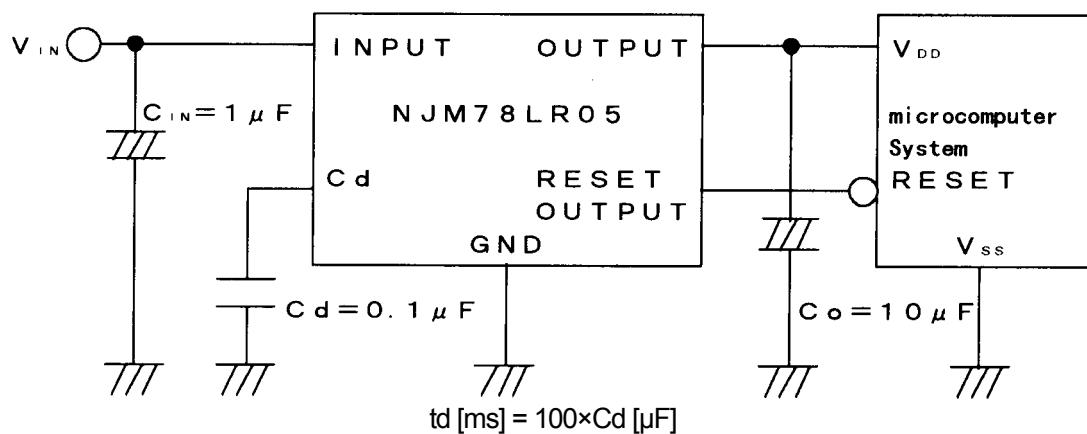


Note 1 : When the capacitance  $C_d$  is too large, the actual delay time is shorter than the calculated result because an electrical charge of  $C_d$  is discharged incompletely.

Solution of above problem :

- (1) Connect SBD between output terminal and  $C_d$  terminal. Please refer to the fallowing circuit.
- (2) Select larger capacitance,  $C_{IN}$  than  $C_d$ .

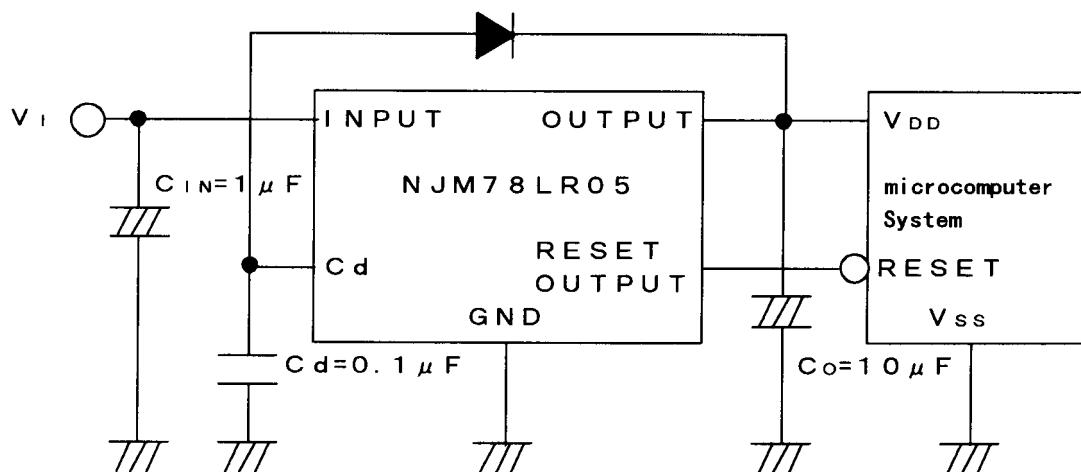

## ■ TIMING CHART

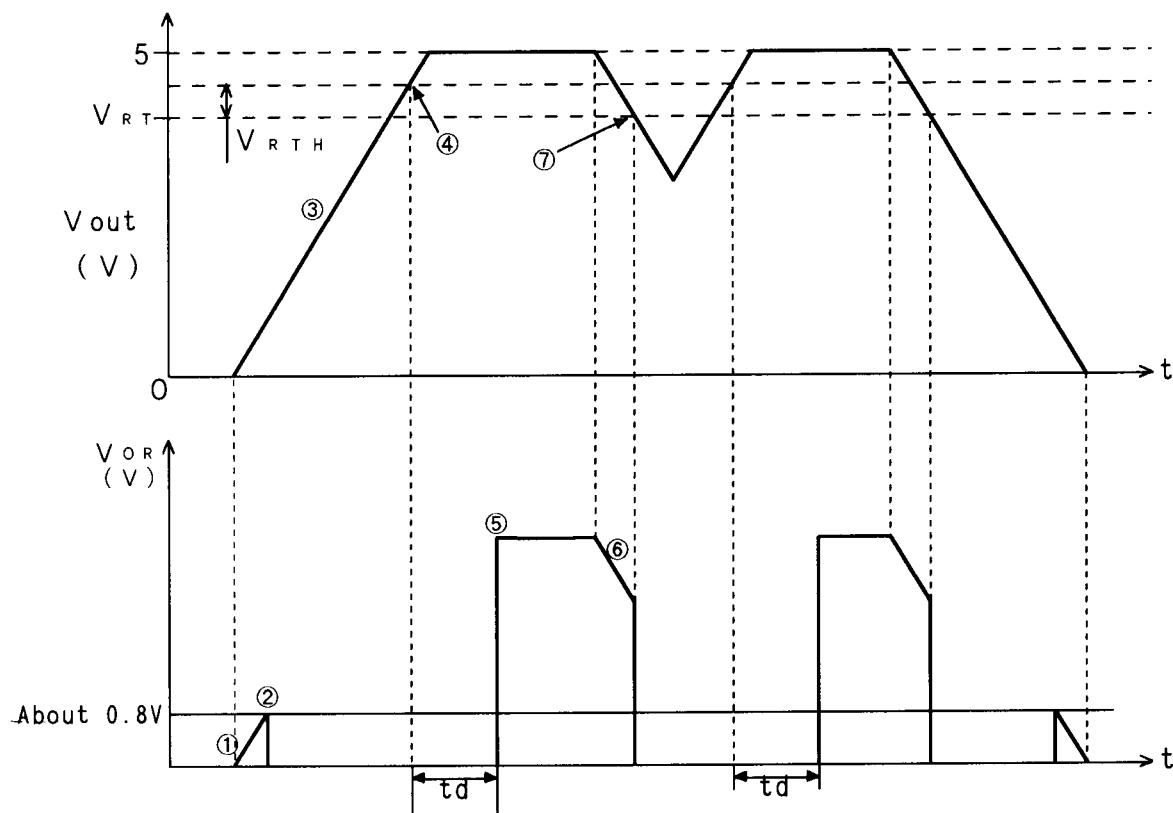

1 When the input voltage is up to about 0.8V, some voltage is outputted at the reset output because the NJM78LR05 operation is unstable.

2 When the input voltage goes over about 0.8V, the reset output becomes “L”.

3 The output voltage is rising up with the input voltage.

4 When the output voltage goes over ( $V_{RT}+V_{RTH}$ ), the delay circuit of reset output activates.

$V_{RT}$  : Reset Threshold Voltage

$V_{RTH}$  : Reset Threshold Hysterisis Voltage

5 After the reset output delay time  $t_d$  has passed, the reset output becomes “H”.


6 The output voltage is falling down with the input voltage.

7 When the output voltage is less than  $V_{RT}$ , the reset output becomes “L”.


# NJM78LR05

## ■ TYPICAL CHARACTERISTICS


**Reset Output Voltage vs. Output Voltage**  
( $I_O=40\text{mA}$ ,  $T_a=25^\circ\text{C}$ )

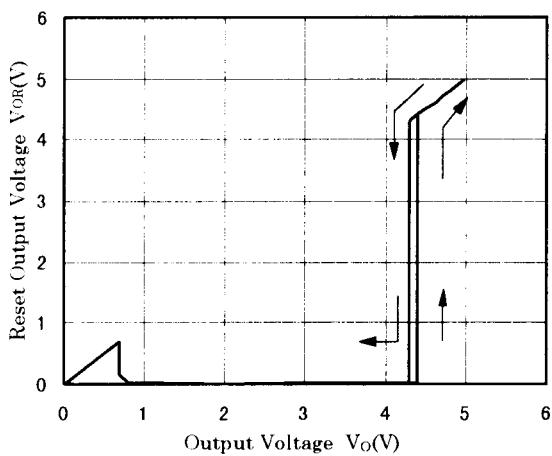


**Line Regulation**  
( $T_a=25^\circ\text{C}$ )

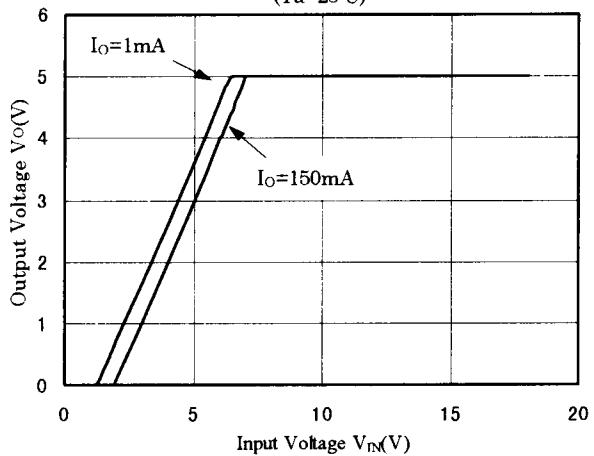


**Load Regulation**  
( $V_{IN}=10\text{V}$ ,  $T_a=25^\circ\text{C}$ )

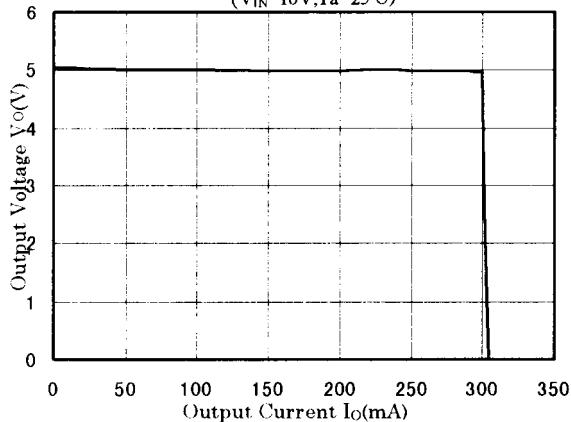


**Dropout Voltage**  
( $T_a=25^\circ\text{C}$ )


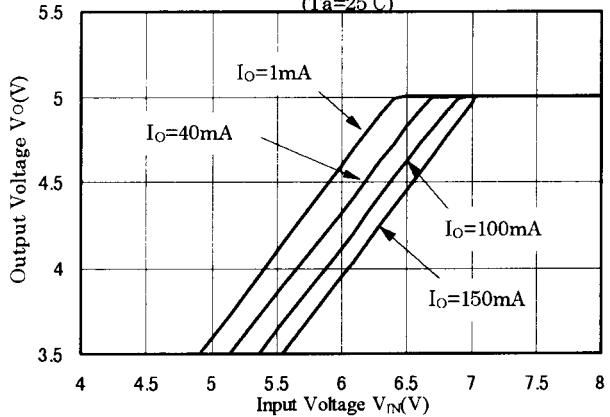


**Quiescent Current vs. Input Voltage**  
( $I_O=0\text{mA}$ ,  $T_a=25^\circ\text{C}$ )

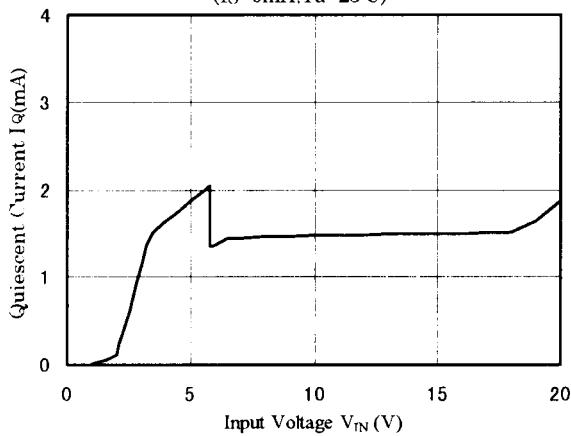

**Output Short Current vs. Input Voltage**

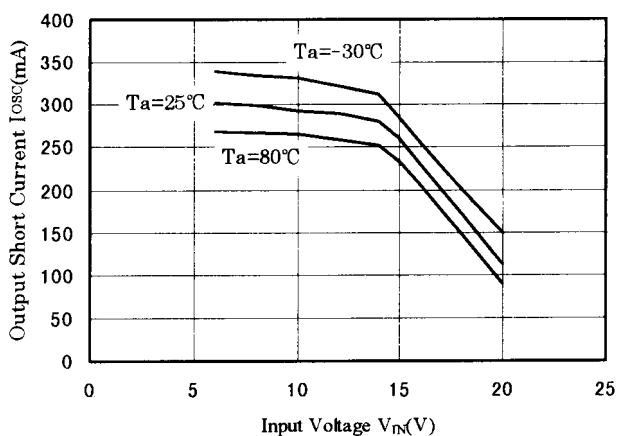


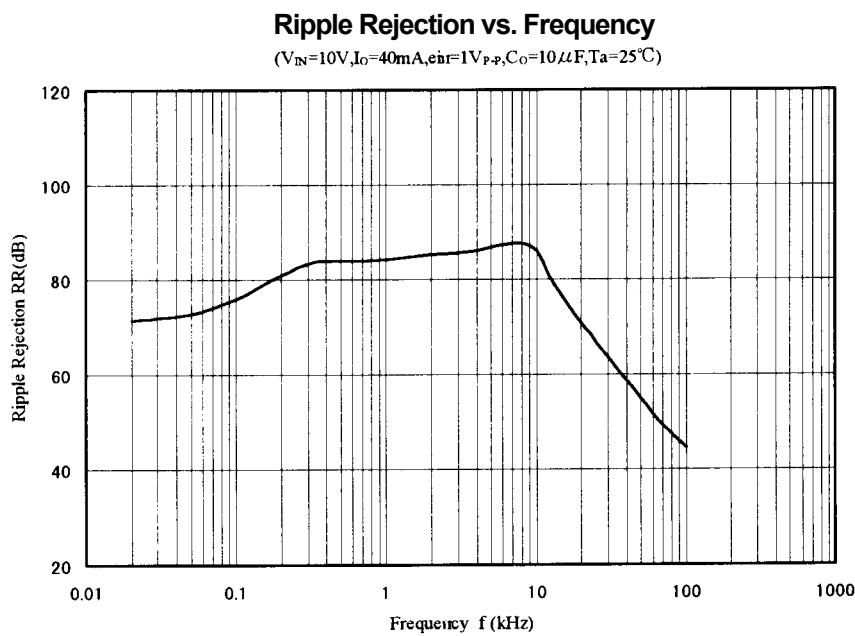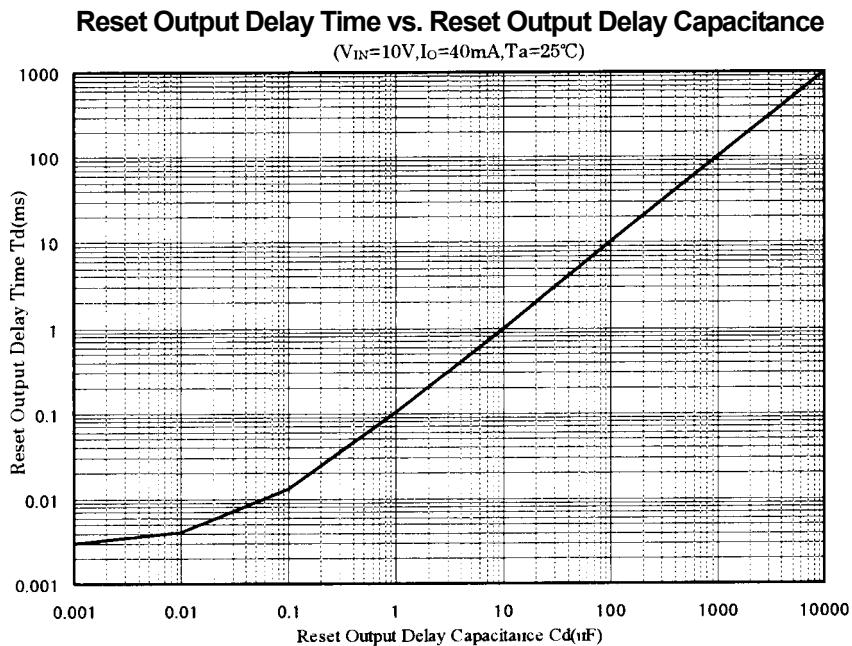**■ TYPICAL CHARACTERISTICS**


# NJM78LR05

## ■ TYPICAL CHARACTERISTICS

**Thermal Shutdown**  
( $V_{IN}=10V, I_o=0mA$ )

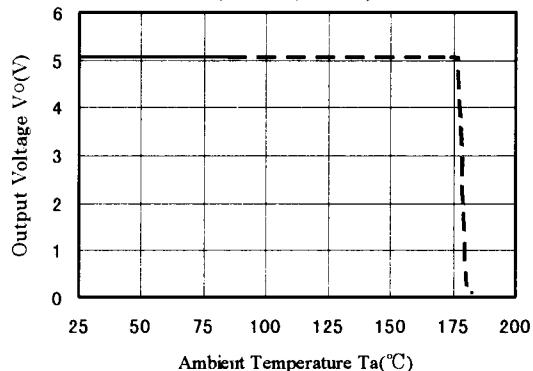


**Output Voltage vs. Ambient Temperature**  
( $V_{IN}=10V, I_o=10mA$ )

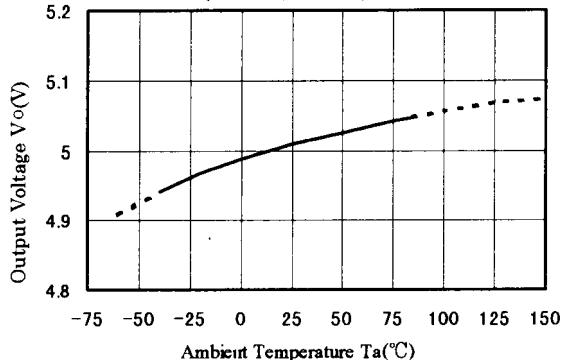

**Reset Output Voltage vs. Reset Sink Current**

( $V_{IN}=10V, I_o=5mA, T_a=25^{\circ}C$ )

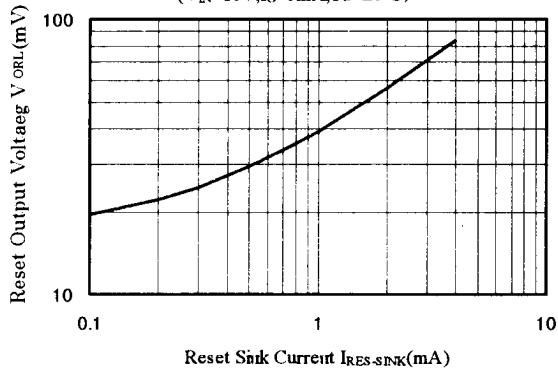

**[CAUTION]**  
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Linear Voltage Regulators](#) category:***

***Click to view products by [Nissinbo manufacturer:](#)***

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [LV56801P-E](#) [TCR3DF13,LM\(CT](#) [TCR3DF39,LM\(CT](#) [TLE42794G](#)  
[L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [LM317T](#) [636416C](#) [714954EB](#) [LV5680P-E](#) [L78M15CV-DG](#) [L79M05T-E](#) [TLS202A1MBVHTSA1](#)  
[L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [NCV78M09BDTRKG](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [ME6208A50M3G](#) [SL7533-8](#)  
[ME6231A50M3G](#) [ME6231A50PG](#) [ME6231C50M5G](#) [AMS1117S-3.3](#) [AMS1117-5.0](#) [AMS1117S-5.0](#) [AMS1117-3.3](#) [MD5118](#) [MD5121](#)  
[MD5127](#) [MD5128](#) [MD5130](#) [MD5144](#) [MD5150](#) [MD5115](#) [MD5125](#) [MD5133](#) [MD5136](#) [MD5140](#) [MD5110](#) [MD52E18WB6](#) [MD52E33WB6](#)  
[MD52E15QA3](#) [MD52E21QA3](#) [MD52E25QA3](#)