

## Low Noise, Rail-to-Rail Output Dual CMOS Operational Amplifier

### ■ GENERAL DESCRIPTION

The NJU7029 is a dual CMOS operational amplifier with a low noise of  $VNI=13nV/\sqrt{Hz}$  (typ. @ $f=1kHz$ ), Rail-to-Rail output and low operating voltage. It offers a single supply voltage operation from +2.2V to +5.5V, rail-to-rail output swing in both supply rails and input voltage range from ground. Further the NJU7029 has a low bias current of 1pA, which makes it well-suited for current sense amplifiers such as an acceleration sensor, shock sensor and photodiode amplifier. The NJU7029 is available in small surface mount packages of SSOP8, MSOP8 (TVSP8) and an ultra small lead-less package of ESON8 which allows high-density mounting.

### ■ FEATURES

#### Low Noise

- Voltage Noise       $13nV/\sqrt{Hz}$  (typ.) @ $f=1kHz$
- $3\mu V_{rms}$  (max.) @ $f=100Hz\sim20kHz$

#### Easy to Use

- Gain Bandwidth      3MHz
- Slew Rate       $1V/\mu s$  (typ.) @ $R_L=50k\Omega$
- I<sub>source</sub> / I<sub>sink</sub>       $200\mu A$
- Specified for +5V, +3V and +2.2V operation


#### CMOS Process

- Input Bias Current      1pA (typ.)
- Rail-to-Rail Output
- Offset Voltage      5mV (max.)
- Offset Voltage Drift       $2\mu V/{^\circ}C$  (typ.)
- Supply Range       $2.2V \sim 5.5V$
- Supply Current       $850\mu A/\text{all ch}$  (typ.) @ $V_{DD}=+5V$
- Package      SSOP8, ESON8  
MSOP8 (TVSP8) MEET JEDEC MO-187-DA / THIN TYPE

### ■ Application


- Shock sensors, Accelerometers
- Charge amplifiers
- Photodiode amplifiers
- Low noise signal processing applications
- Microphone amplifiers

### ■ PIN CONFIGURATION




NJU7029V

NJU7029RB1



About Exposed Pad




1. A OUTPUT
2. A-INPUT
3. A +INPUT
4. GND(V)
5. B +INPUT
6. B -INPUT
7. B OUTPUT
8. V<sub>DD</sub>

### ■ PACKAGE OUTLINE

NJU7029V  
(SSOP8)NJU7029RB1  
(MSOP8(TVSP8))NJU7029KU1  
(ESON8)

### ■ Typical Application Circuit



# NJU7029

## ■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sub>DD</sub>	+7	V
Common Mode Input Voltage Range	V <sub>ICM</sub>	-0.3~+7 (Note1)	V
Differential Input Voltage Range	V <sub>ID</sub>	±7 (Note1)	V
Power Dissipation	P <sub>D</sub>	SSOP8:330 (Note2) MSOP8(TVSP8):410 (Note2) ESON8:360 (Note2)	mW
Operating Temperature Range	T <sub>opr</sub>	-40~+85	°C
Storage Temperature Range	T <sub>stg</sub>	-55~+125	°C

(Note 1) For supply voltage less than 7V, the absolute maximum input voltage is equal to the supply voltage.

(Note 2) On the PCB "EIA/JEDEC (76.2x114.3x1.6mm, two layers FR-4)"

Refer to following Figure 1 for a permissible loss when ambient temperature (Ta) is Ta≥25°C.

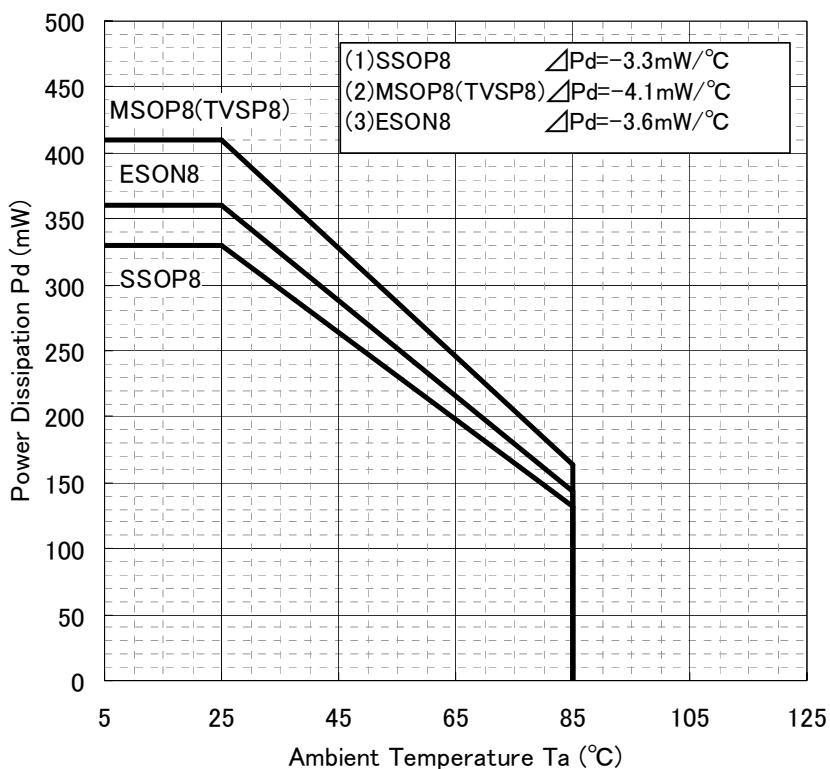


Figure 1 Power Dissipation vs. Ambient Temperature

## ■ OPERATING VOLTAGE (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V <sub>DD</sub>		2.2	-	5.5	V

## ■ +5V ELECTRICAL CHARACTERISTICS

● DC CHARACTERISTICS ( $V_{DD}=5V$ ,  $T_a=25^{\circ}C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	$I_{DD}$	No Signal	-	850	1150	$\mu A$
Input offset Voltage	$V_{IO}$		-	2	5	$mV$
Input Offset Voltage Drift	$\Delta V_{IO}/\Delta T$	$V_{IN}=V_{DD}/2$ , $T_a=40^{\circ}C \sim +85^{\circ}C$	-	2	-	$\mu V/^{\circ}C$
Input Bias Current	$I_B$		-	1	-	$pA$
Input Offset Current	$I_{IO}$		-	1	-	$pA$
Large Signal Voltage Gain	$A_V$	$R_L=50k\Omega$ to 2.5V, $V_o=2.5V \pm 2V$	65	80	-	$dB$
Common Mode Rejection Ratio	CMR	$V_{ICM}=0V \sim 4.1V$	65	80	-	$dB$
Supply Voltage Rejection Ratio	SVR	$2.2V \leq V_{DD} \leq 5.5V$	65	80	-	$dB$
Output Voltage1	$V_{OH1}$	$R_L=50k\Omega$ to 2.5V	4.9	-	-	V
	$V_{OL1}$	$R_L=50k\Omega$ to 2.5V	-	-	0.1	V
Output Voltage2	$V_{OH2}$	$I_{source}=200\mu A$	4.8	-	-	V
	$V_{OL2}$	$I_{sink}=200\mu A$	-	-	0.2	V
Input Common Mode Voltage Range	$V_{ICM}$	CMR $\geq 65dB$	0	-	4.1	V

● AC CHARACTERISTICS ( $V_{DD}=5V$ ,  $T_a=25^{\circ}C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Frequency	$f_T$	$Gv=40dB$ , $R_L=50k\Omega$ to 2.5V, $C_L=10pF$	-	3	-	MHz
Equivalent Input Noise Voltage	$V_{NI}$	$Gv=40dB$ , $R_L=50k\Omega$ to 2.5V, $f=1kHz$ ,	-	13	-	nV/ $\sqrt{Hz}$
	$V_{Nl rms}$	$Gv=40dB$ , $R_L=50k\Omega$ to 2.5V BPW=100Hz~20kHz	-	1.7	3	$\mu V_{rms}$
Total Harmonic Distortion	THD	$Gv=20dB$ , $R_L=50k\Omega$ to 2.5V, $f_{in}=1kHz$ , $V_{out}=3V_{pp}$ , BPW=400Hz~80kHz	-	0.01	-	%
Channel separation	CS	$f=1kHz$	-	130	-	dB

● TRANSIENT CHARACTERISTICS ( $V_{DD}=5V$ ,  $T_a=25^{\circ}C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	$Gv=0dB$ , $R_T=50\Omega$ to 2.5V, $R_L=50k\Omega$ to 2.5V, $C_L=15pF$	-	1	-	V/ $\mu s$

# NJU7029

## ■ +3V ELECTRICAL CHARACTERISTICS

### ● DC CHARACTERISTICS ( $V_{DD}=3V$ , $T_a=25^{\circ}C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	$I_{DD}$	No Signal	-	610	950	$\mu A$
Input offset Voltage	$V_{IO}$		-	2	5	mV
Input Offset Voltage Drift	$\Delta V_{IO}/\Delta T$	$V_{IN}=V_{DD}/2$ , $T_a=-40^{\circ}C \sim +85^{\circ}C$	-	2	-	$\mu V/\deg$
Input Bias Current	$I_B$		-	1	-	pA
Input Offset Current	$I_{IO}$		-	1	-	pA
Large Signal Voltage Gain	$A_V$	$R_L=50k\Omega$ to 1.5V, $V_o=1.5V \pm 1V$	65	80	-	dB
Common Mode Rejection Ratio	CMR	$V_{ICM}=0V \sim 2.1V$	65	80	-	dB
Supply Voltage Rejection Ratio	SVR	$2.2V \leq V_{DD} \leq 5.5V$	65	80	-	dB
Output Voltage1	$V_{OH1}$	$R_L=50k\Omega$ to 1.5V	2.9	-	-	V
	$V_{OL1}$	$R_L=50k\Omega$ to 1.5V	-	-	0.1	V
Output Voltage2	$V_{OH2}$	$I_{source}=200\mu A$	2.8	-	-	V
	$V_{OL2}$	$I_{sink}=200\mu A$	-	-	0.2	V
Input Common Mode Voltage Range	$V_{ICM}$	CMR $\geq 65dB$	0	-	2.1	V

### ● AC CHARACTERISTICS ( $V_{DD}=3V$ , $T_a=25^{\circ}C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Frequency	$f_T$	$Gv=40dB$ , $R_L=50k\Omega$ to 1.5V, $C_L=10pF$	-	3	-	MHz
Equivalent Input Noise Voltage	$V_{NI}$	$Gv=40dB$ , $R_L=50k\Omega$ to 1.5V, $f=1kHz$	-	13	-	nV/ $\sqrt{Hz}$
	$V_{Nl rms}$	$Gv=40dB$ , $R_L=50k\Omega$ to 1.5V, $BPW=100Hz \sim 20kHz$	-	1.7	3	$\mu V_{rms}$
Total Harmonic Distortion	THD	$Gv=20dB$ , $R_L=50k\Omega$ to 1.5V, $f_{in}=1kHz$ , $V_{out}=1V_{pp}$ , $BPW=400Hz \sim 80kHz$	-	0.02	-	%
Channel separation	CS	$f=1kHz$	-	120	-	dB

### ● TRANSIENT CHARACTERISTICS ( $V_{DD}=3V$ , $T_a=25^{\circ}C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	$Gv=0dB$ , $R_T=50\Omega$ to 1.5V, $R_L=50k\Omega$ to 1.5V, $C_L=15pF$	-	1	-	V/ $\mu s$

## ■ +2.2V ELECTRICAL CHARACTERISTICS

● DC CHARACTERISTICS ( $V_{DD}=2.2V$ ,  $T_a=25^{\circ}C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	$I_{DD}$	No Signal	-	550	890	$\mu A$
Input offset Voltage	$V_{IO}$		-	2	5	mV
Input Offset Voltage Drift	$\Delta V_{IO}/\Delta T$	$V_{IN}=V_{DD}/2$ , $T_a=-40^{\circ}C \sim +85^{\circ}C$	-	2	-	$\mu V/\text{deg}$
Input Bias Current	$I_B$		-	1	-	pA
Input Offset Current	$I_{IO}$		-	1	-	pA
Large Signal Voltage Gain	$A_V$	$R_L=50k\Omega$ to 1.5V, $V_o=1.1V \pm 0.5V$	60	80	-	dB
Common Mode Rejection Ratio	CMR	$V_{ICM}=0V \sim 1.3V$	60	80	-	dB
Supply Voltage Rejection Ratio	SVR	$2.2V \leq V_{DD} \leq 5.5V$	65	80	-	dB
Output Voltage1	$V_{OH1}$	$R_L=50k\Omega$ to 1.1V	2.1	-	-	V
	$V_{OL1}$	$R_L=50k\Omega$ to 1.1V	-	-	0.1	V
Output Voltage2	$V_{OH2}$	$I_{source}=200\mu A$	2.0	-	-	V
	$V_{OL2}$	$I_{sink}=200\mu A$	-	-	0.2	V
Input Common Mode Voltage Range	$V_{ICM}$	$CMR \geq 60dB$	0	-	1.3	V







● AC CHARACTERISTICS ( $V_{DD}=2.2V$ ,  $T_a=25^{\circ}C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Frequency	$f_T$	$Gv=40dB$ , $R_L=50k\Omega$ to 1.1V, $C_L=10pF$	-	3	-	MHz
Equivalent Input Noise Voltage	$V_{NI}$	$Gv=40dB$ , $R_i=50k\Omega$ to 1.1V, $f=1kHz$	-	13	-	nV/ $\sqrt{Hz}$
	$V_{Nl rms}$	$Gv=40dB$ , $R_L=50k\Omega$ to 1.1V, $BPW=100Hz \sim 20kHz$	-	1.7	3	$\mu V_{rms}$
Total Harmonic Distortion	THD	$Gv=20dB$ , $R_L=50k\Omega$ to 1.1V, $f_{in}=1kHz$ , $V_{out}=0.5V_{pp}$ , $BPW=400Hz \sim 80kHz$	-	0.02	-	%
Channel separation	CS	$f=1kHz$	-	115	-	dB

● TRANSIENT CHARACTERISTICS ( $V_{DD}=2.2V$ ,  $T_a=25^{\circ}C$ )


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	$Gv=0dB$ , $R_T=50\Omega$ to 1.1V, $R_L=50k\Omega$ to 1.5V, $C_L=15pF$	-	1	-	V/ $\mu s$

## TYPICAL CHARACTERISTICS

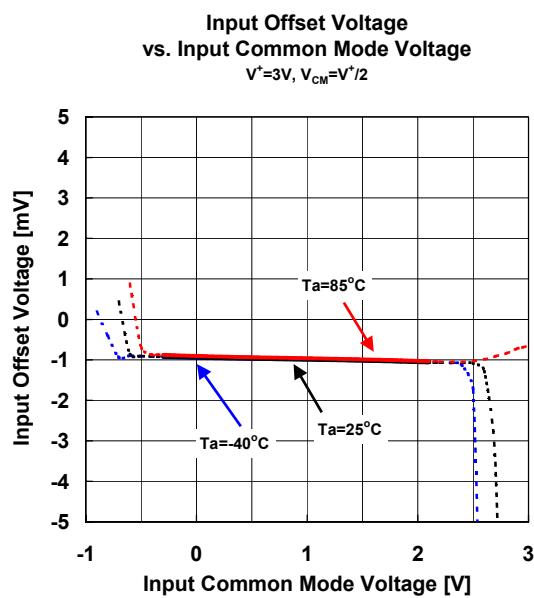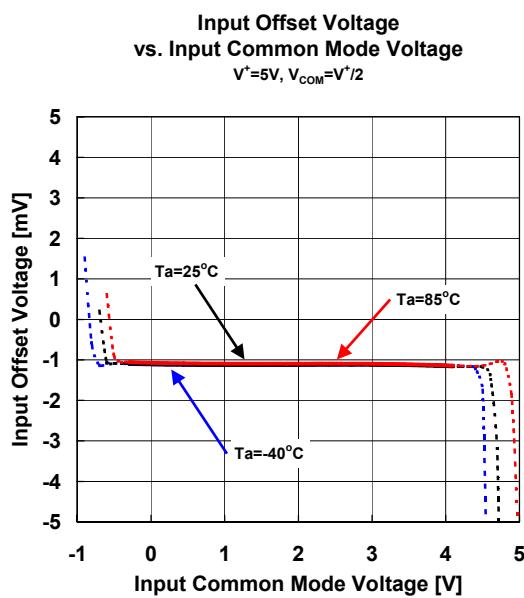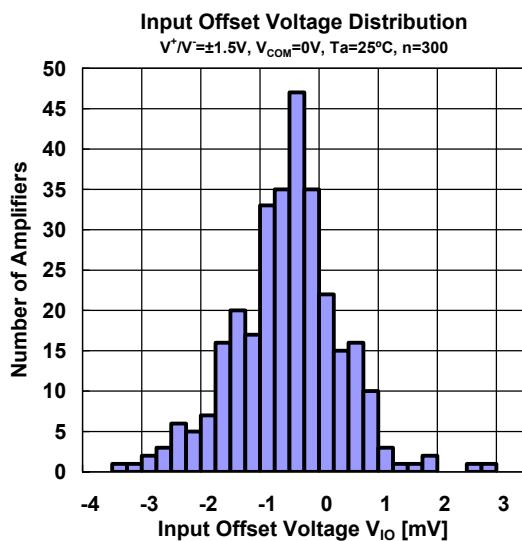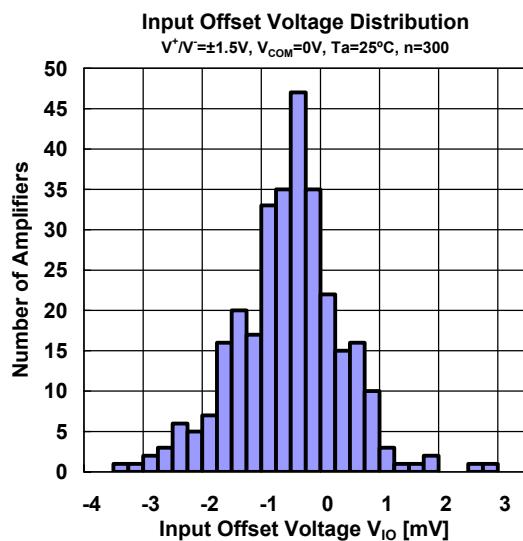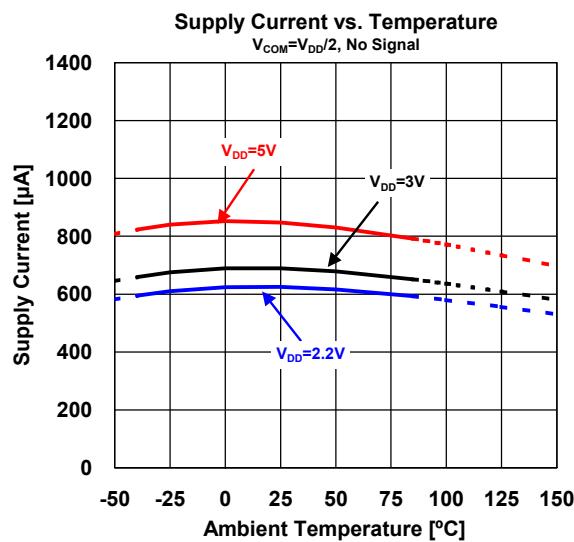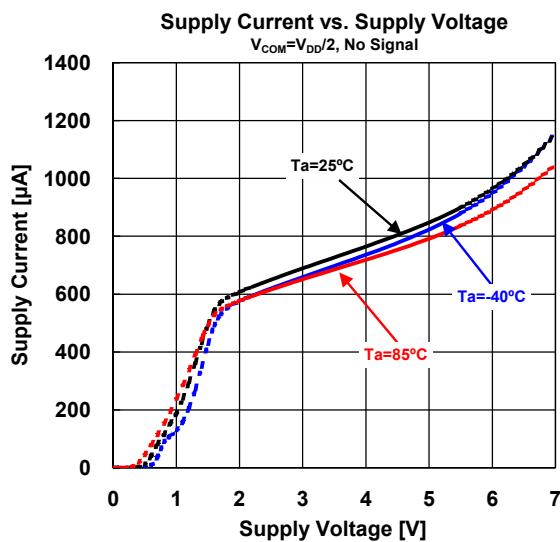


## ■ TYPICAL CHARACTERISTICS


**Input Offset Voltage  
vs. Input Common Mode Voltage**  
 $V^+=2.2V$ ,  $V_{COM}=V^+/2$

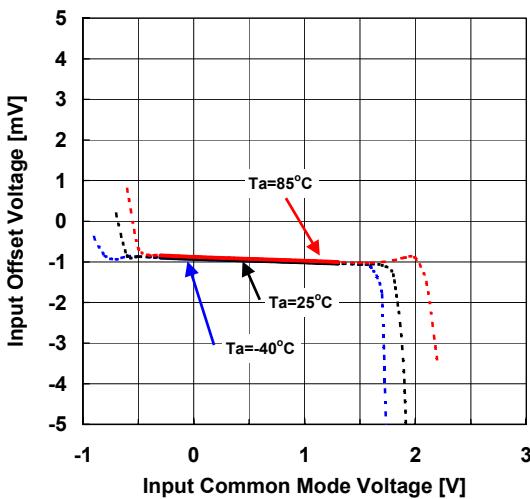


**Supply Voltage Rejection Ratio  
vs. Ambient Temperature**  
 $V^+=2.2V$  to  $5.5V$ ,  $V_{CM}=V^+/2$ ,  $V_{COM}=V^+/2$

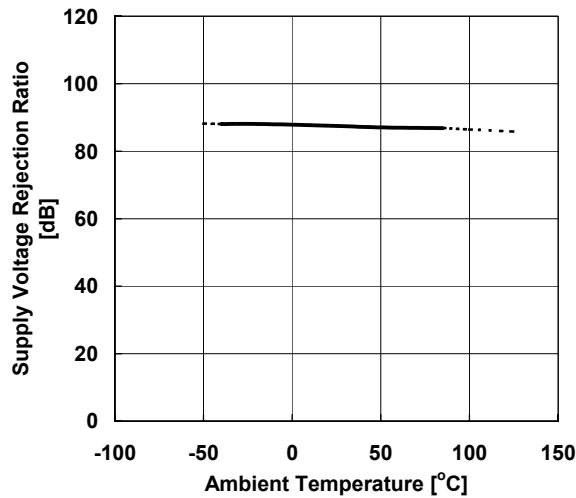


**Maximum Output Voltage vs. Ambient Temperature**  
 $R_L=50k\Omega$  to  $V_{COM}$

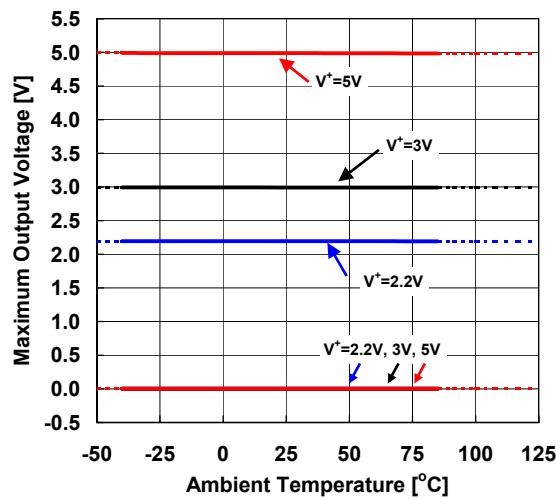


**Common Mode Rejection Ratio  
vs. Ambient Temperature**  
 $V_{CM}=0V$  to  $V^-=-0.9V$ ,  $V_{COM}=V^+/2$

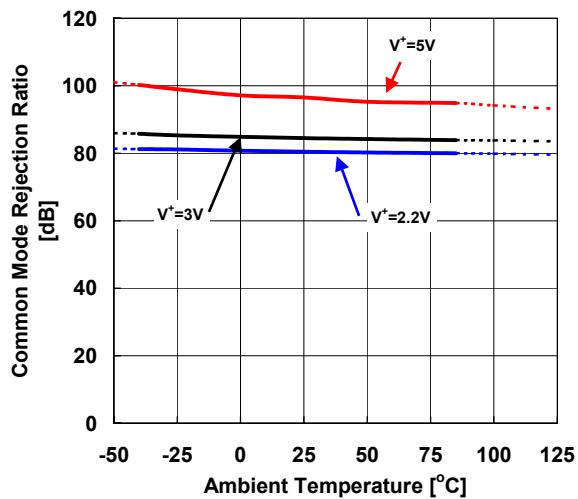

**Maximum Output Voltage vs. Supply Voltage**  
 $V_{IN}=\pm 0.5V$ ,  $V_{COM}=0V$ ,  $R_L=50k\Omega$

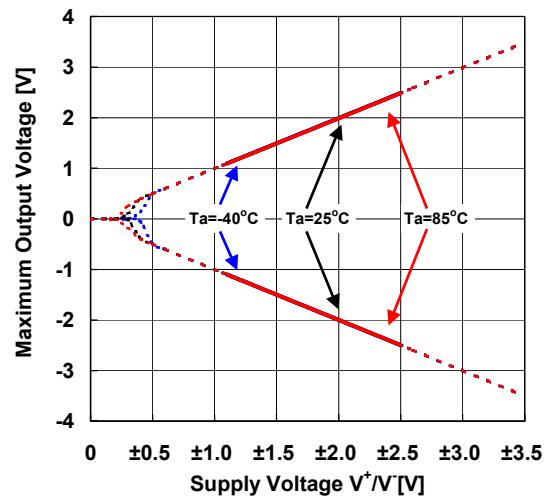


**Maximum Output Voltage vs. Ambient Temperature**  
 $R_L=10k\Omega$  to  $V_{COM}$

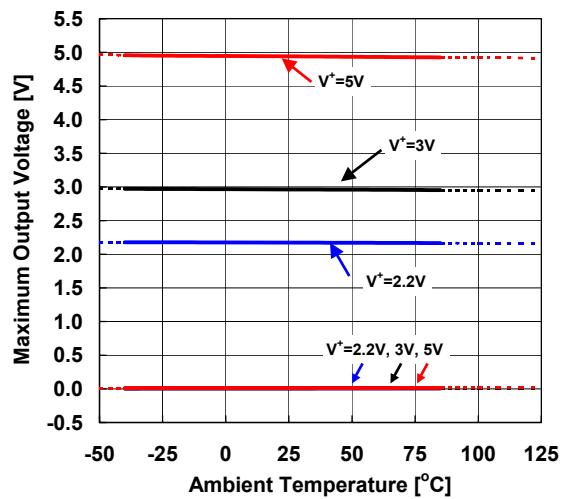


## ■ TYPICAL CHARACTERISTICS


**Maximum Output Voltage vs. Load Resistance**  
 $V^+/V^- = \pm 2.5V$ ,  $V_{IN}^+ = \pm 0.1V$ ,  $V_{IN}^- = 0V$ ,  $V_{COM} = 0V$

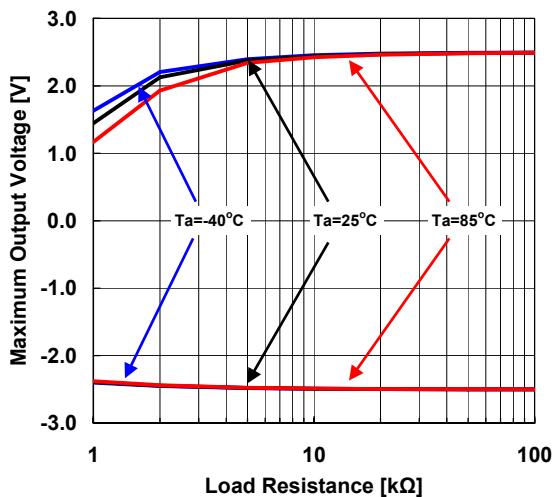


**Maximum Output Voltage vs. Load Resistance**  
 $V^+/V^- = \pm 1.5V$ ,  $V_{IN}^+ = \pm 0.1V$ ,  $V_{IN}^- = 0V$ ,  $V_{COM} = 0V$

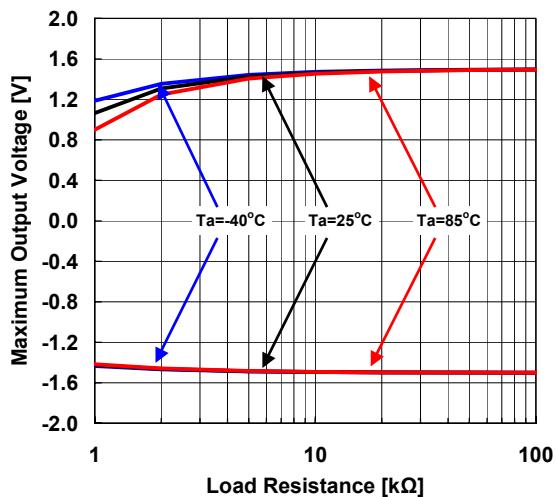


**Maximum Output Voltage vs. Load Resistance**  
 $V^+/V^- = \pm 1.1V$ ,  $V_{IN}^+ = \pm 0.1V$ ,  $V_{IN}^- = 0V$ ,  $V_{COM} = 0V$

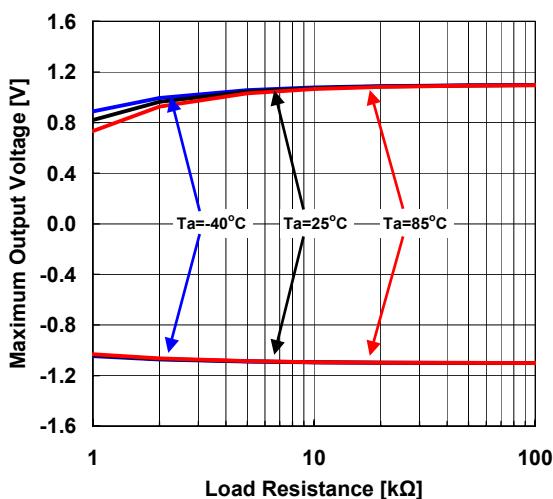


**Maximum Output Voltage vs. Output Current**  
 $V^+ = 5V$

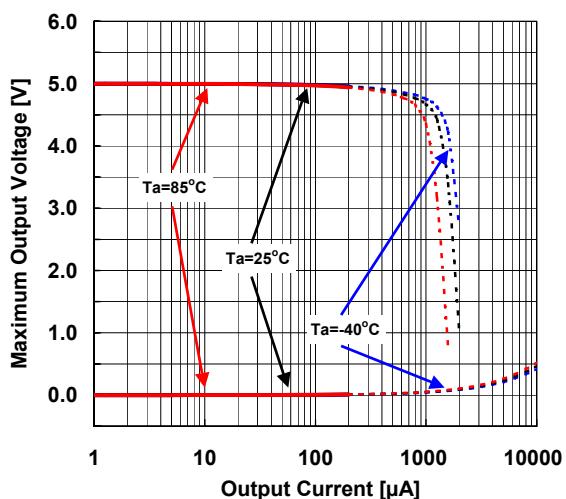







**Maximum Output Voltage vs. Output Current**  
 $V^+ = 3V$

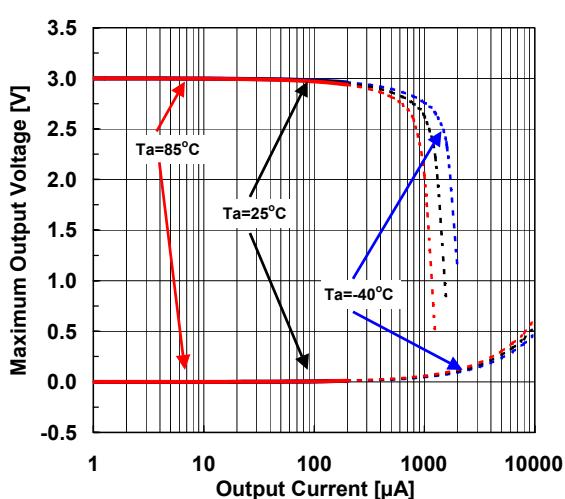





**Maximum Output Voltage vs. Output Current**  
 $V^+ = 2.2V$

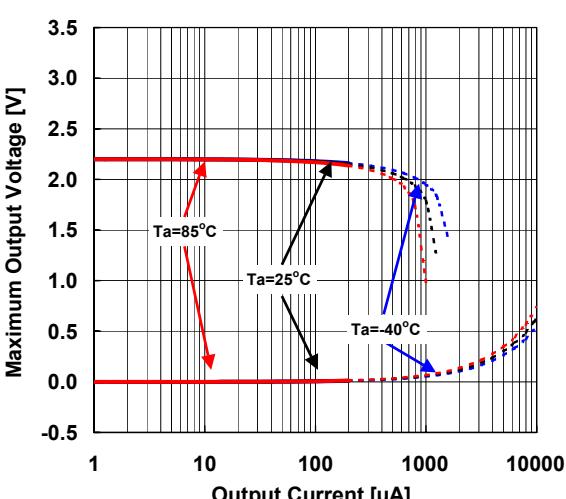

## ■ TYPICAL CHARACTERISTICS

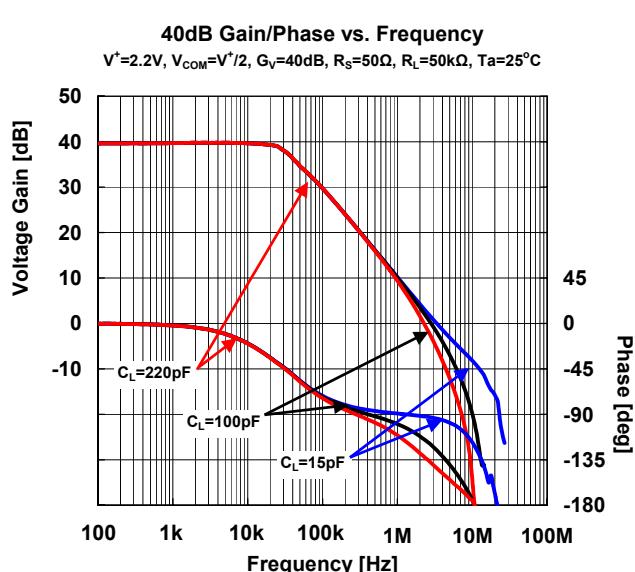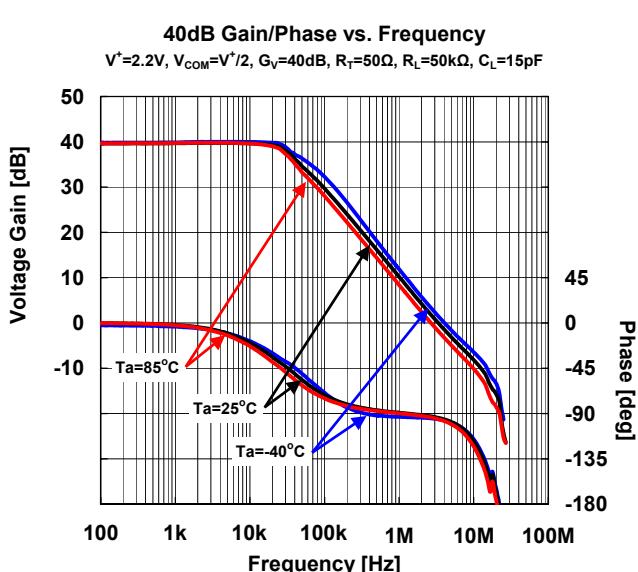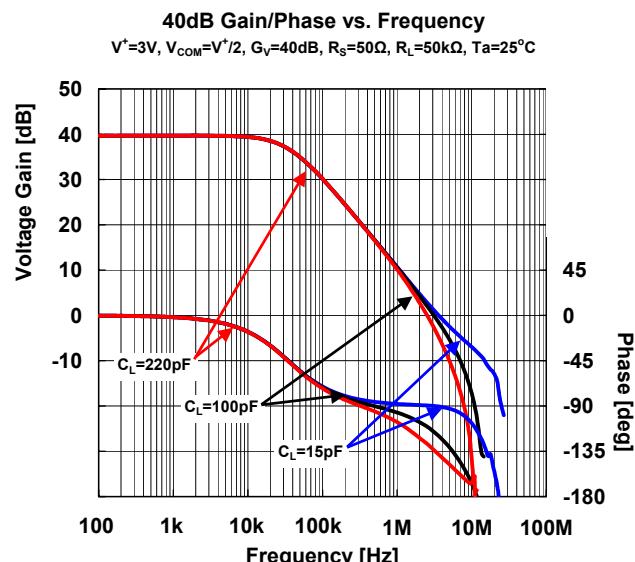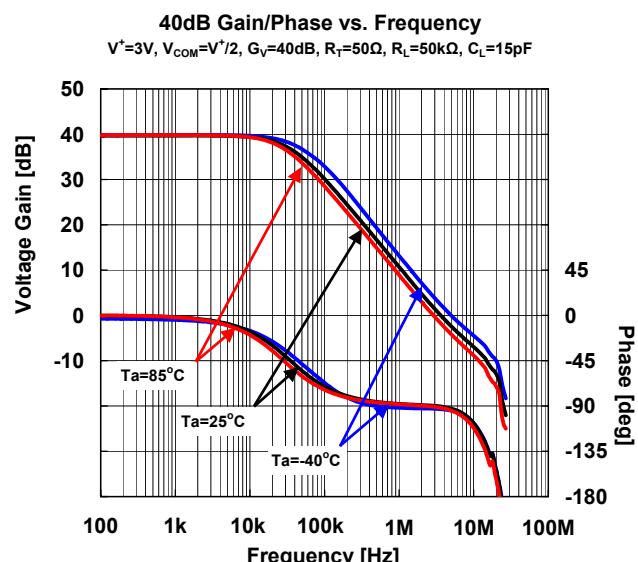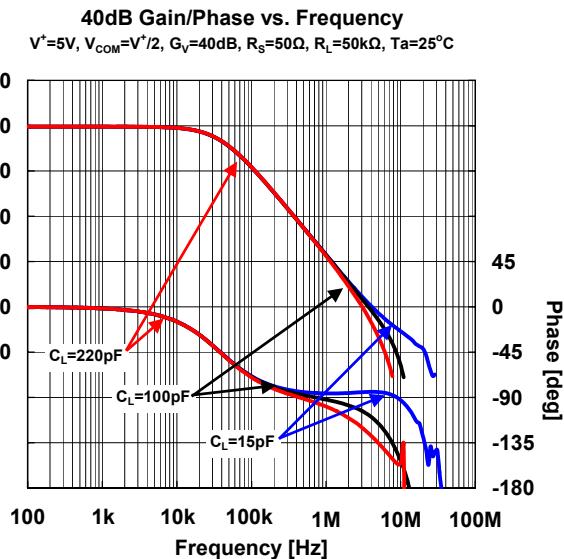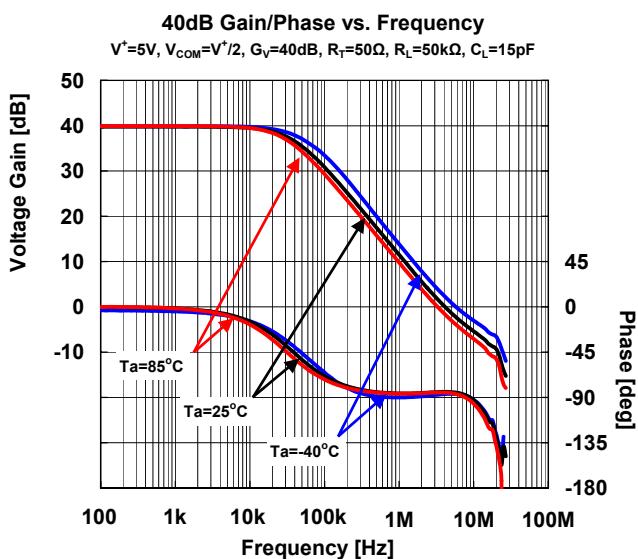


## ■ TYPICAL CHARACTERISTICS

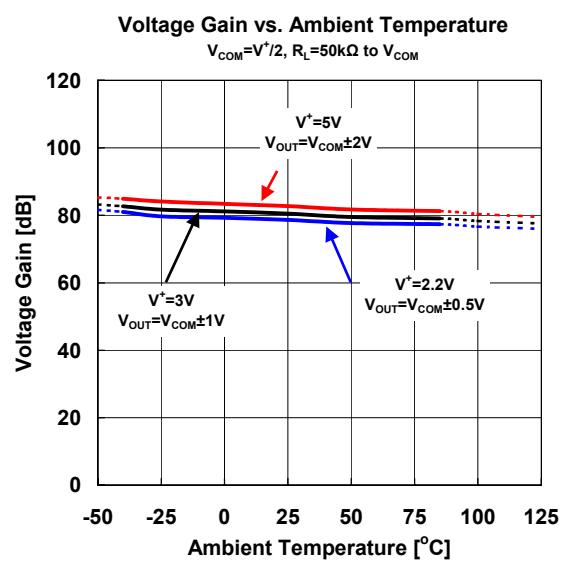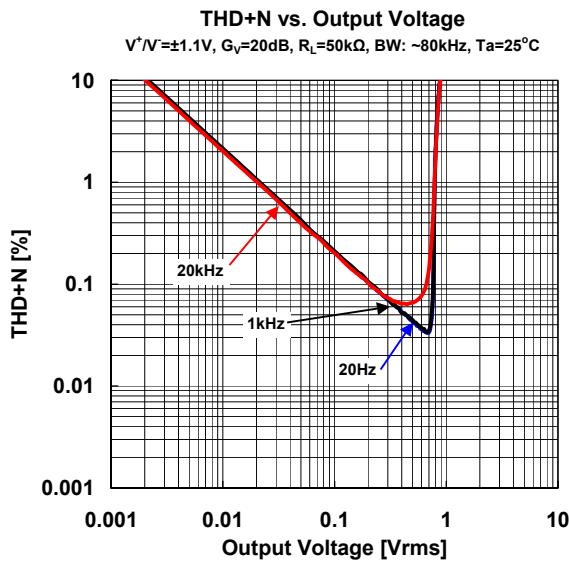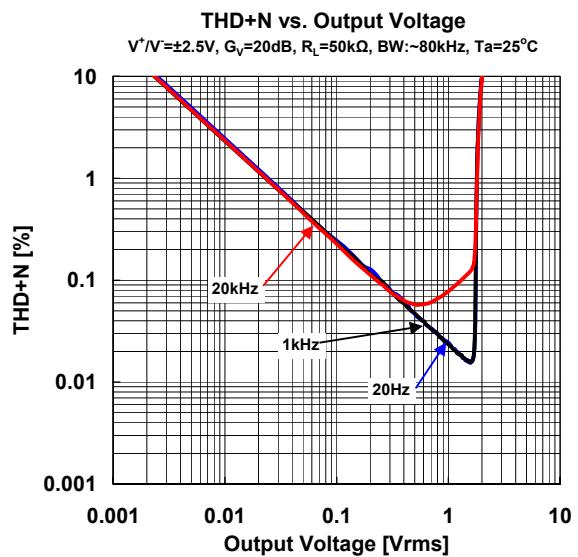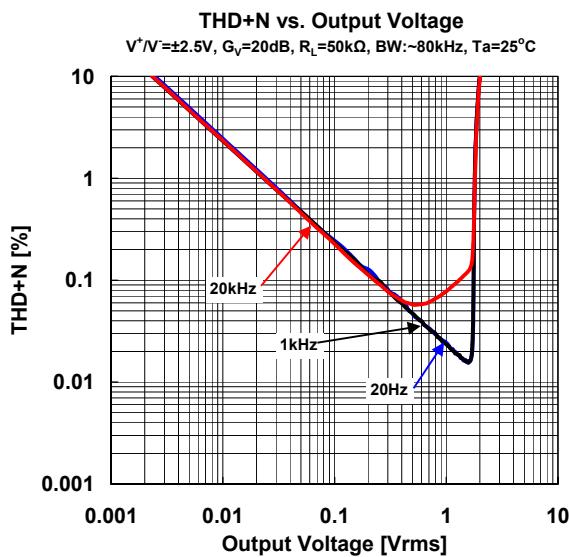

## ■ TYPICAL CHARACTERISTICS


### Pulse Response

$V^+=5V$ ,  $V_{COM}=V^+/2$ ,  $V_{IN}=4V_{PP}$ ,  $f_{IN}=100kHz$ ,  $C_L=15pF$ ,  $T_a=25^\circ C$

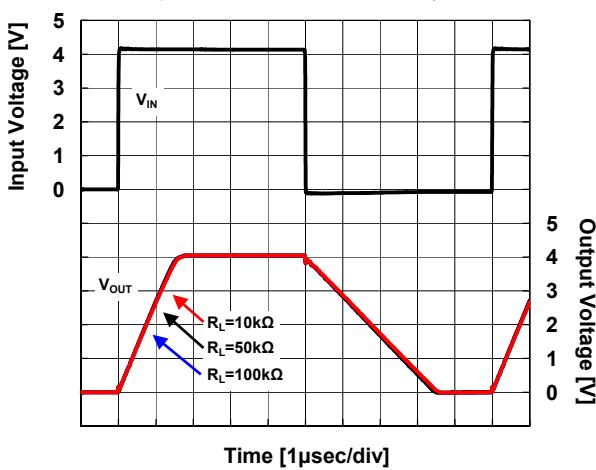


### Pulse Response

$V^+=5V$ ,  $V_{COM}=V^+/2$ ,  $V_{IN}=4V_{PP}$ ,  $f_{IN}=100kHz$ ,  $R_L=50k\Omega$ ,  $T_a=25^\circ C$

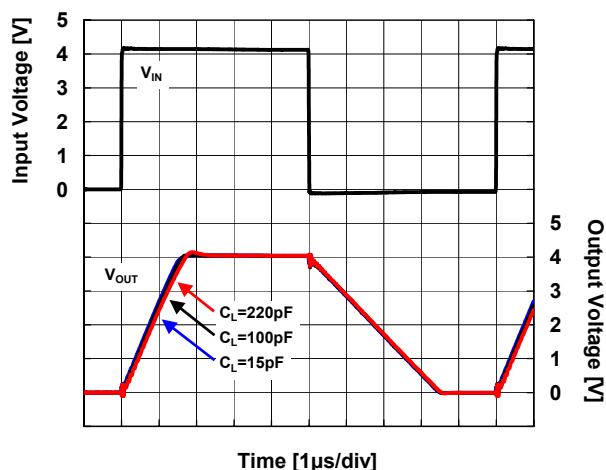


### Pulse Response

$V^+=5V$ ,  $V_{COM}=V^+/2$ ,  $V_{IN}=4V_{PP}$ ,  $f_{IN}=100kHz$ ,  $R_L=50k\Omega$ ,  $T_a=25^\circ C$

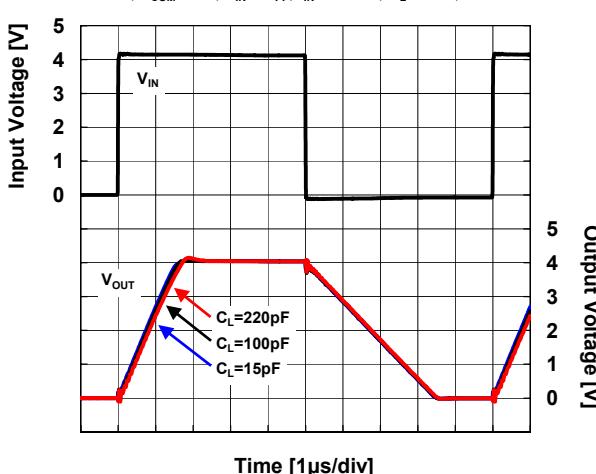


### Pulse Response

$V^+=3V$ ,  $V_{COM}=V^+/2$ ,  $V_{IN}=2V_{PP}$ ,  $f_{IN}=100kHz$ ,  $C_L=15pF$ ,  $T_a=25^\circ C$

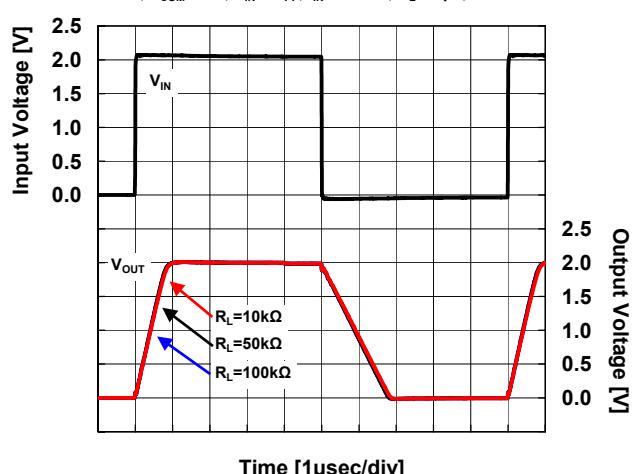


### Pulse Response

$V^+=3V$ ,  $V_{COM}=V^+/2$ ,  $V_{IN}=2V_{PP}$ ,  $f_{IN}=100kHz$ ,  $R_L=50k\Omega$ ,  $T_a=25^\circ C$






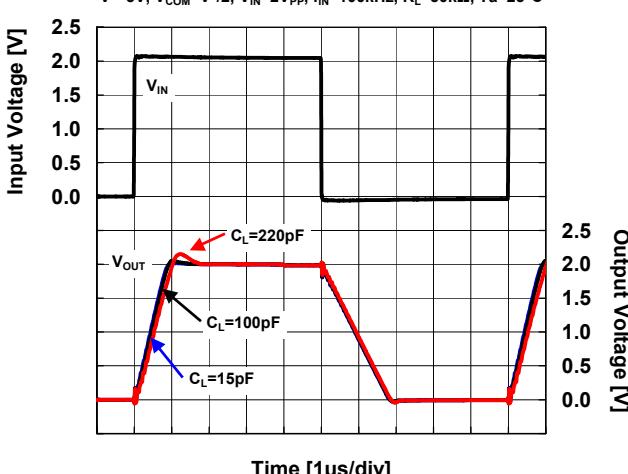


### Pulse Response





$V^+=3V$ ,  $V_{COM}=V^+/2$ ,  $V_{IN}=2V_{PP}$ ,  $f_{IN}=100kHz$ ,  $R_L=50k\Omega$ ,  $T_a=25^\circ C$

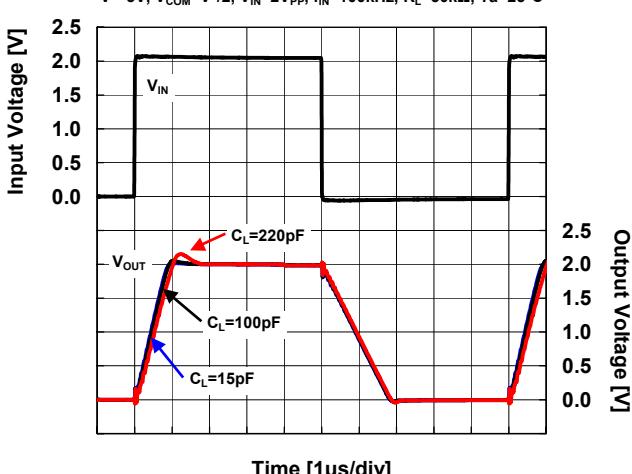

## ■ TYPICAL CHARACTERISTICS

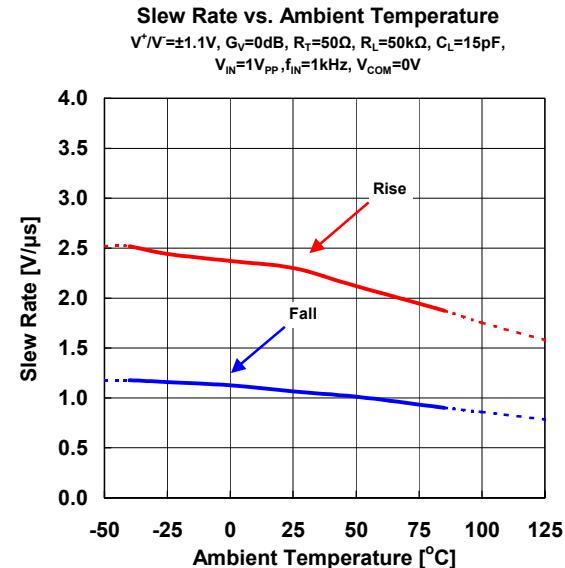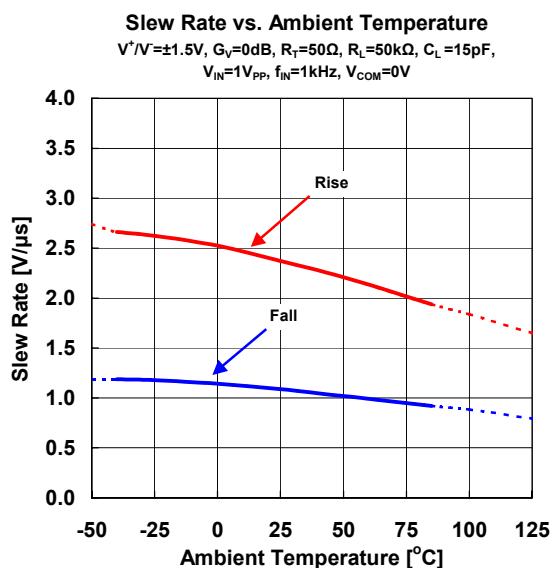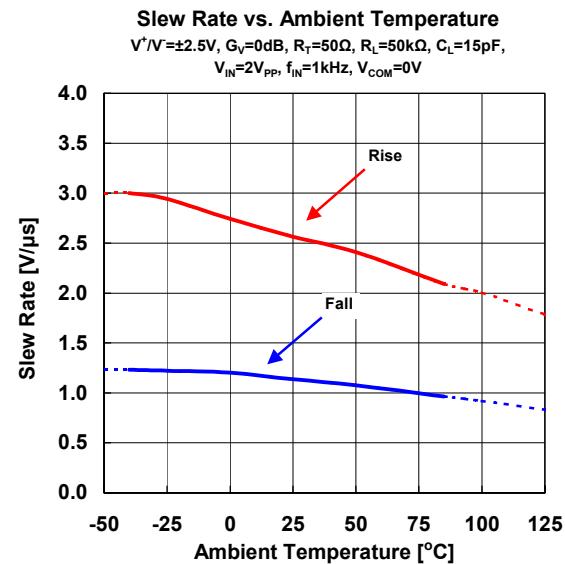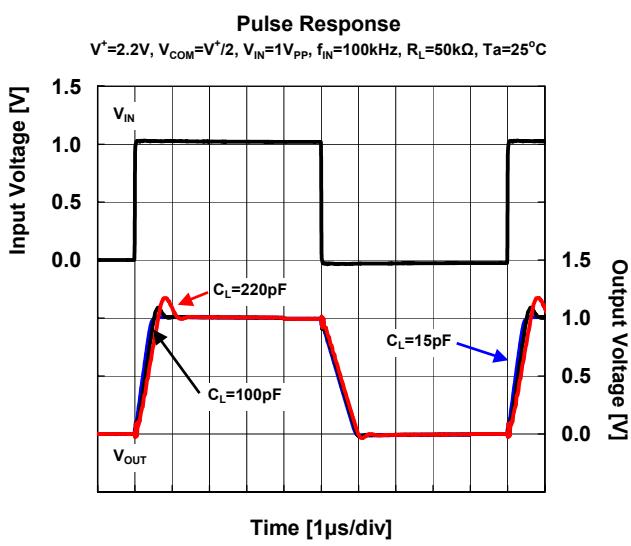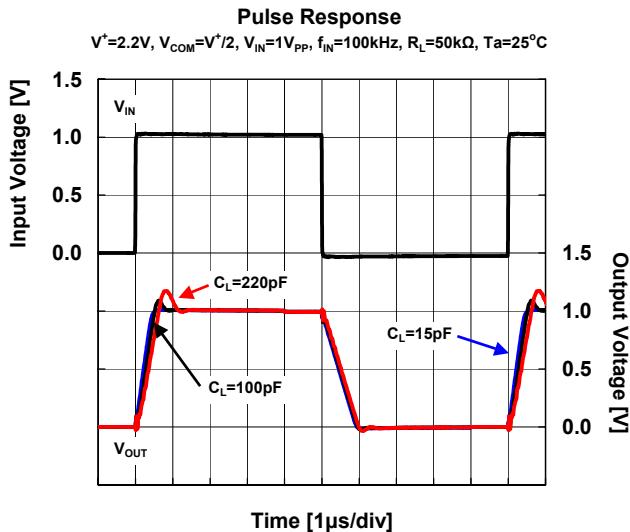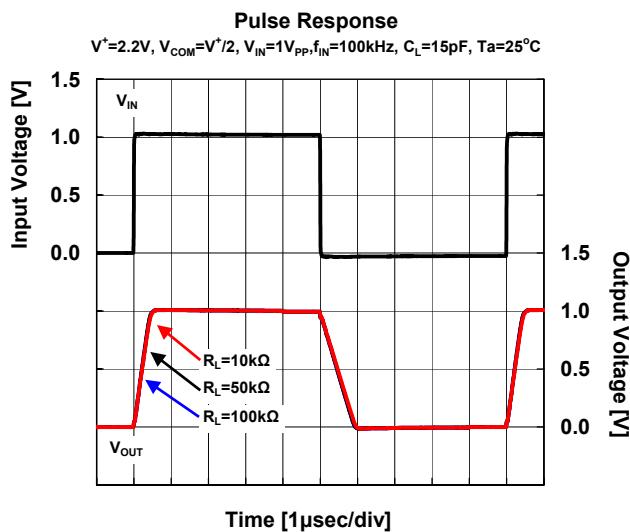

## ■ TYPICAL CHARACTERISTICS

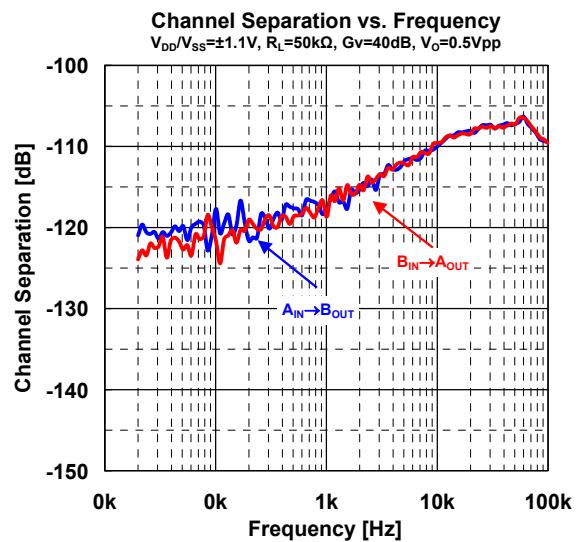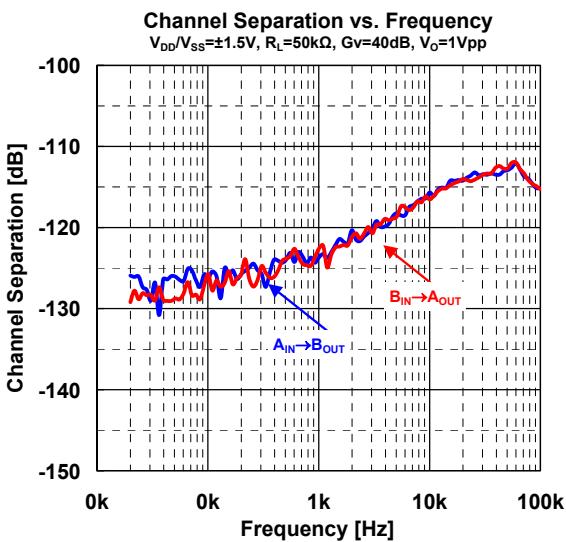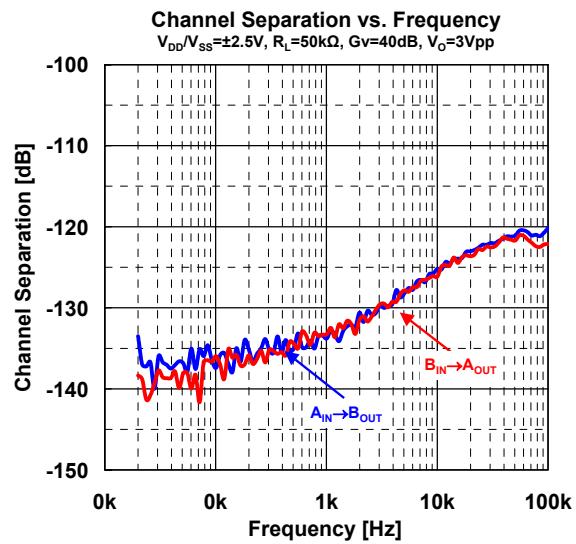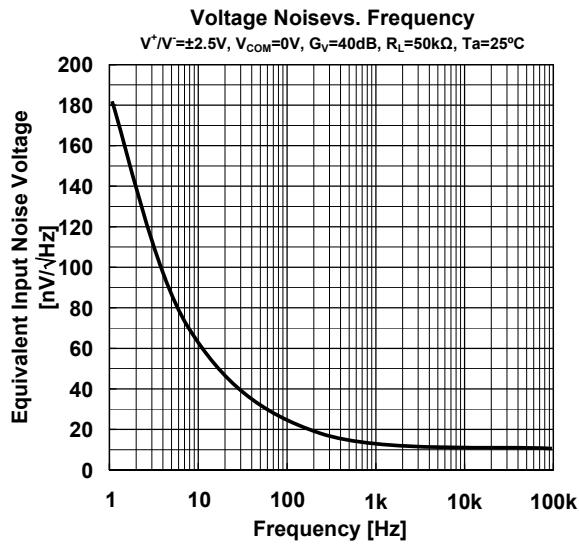

### [CAUTION]

The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Operational Amplifiers - Op Amps category:***

***Click to view products by Nissinbo manufacturer:***

Other Similar products are found below :

[NCV33072ADR2G](#) [LM358SNG](#) [430227FB](#) [UPC824G2-A](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [UPC822G2-A](#) [UPC259G2-A](#) [UPC258G2-A](#)  
[NTE925](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#) [HA1630S01LPEL-E](#) [SCY33178DR2G](#) [NJU77806F3-TE1](#)  
[NCV5652MUTWG](#) [NCV20034DR2G](#) [LM324EDR2G](#) [LM2902EDR2G](#) [NTE7155](#) [NTE778S](#) [NTE871](#) [NTE924](#) [NTE937](#) [MCP6V17T-E/MNY](#) [MCP6V19-E/ST](#) [MXD8011HF](#) [MCP6V17T-E/MS](#) [SCY6358ADR2G](#) [ADA4523-1BCPZ](#) [LTC2065HUD#PBF](#) [ADA4523-1BCPZ-RL7](#) [NJM2904CRB1-TE1](#) [2SD965T-R](#) [RS6332PXK](#) [BDM8551](#) [BDM321](#) [MD1324](#) [COS8052SR](#) [COS8552SR](#) [COS8554SR](#) [COS2177SR](#)  
[COS2353SR](#) [COS724TR](#) [ASOPD4580S-R](#) [RS321BKXF](#) [ADA4097-1Hujz-RL7](#) [NCS20282FCTTAG](#)