

SERIES 38BM AND 38BC


Sub-Miniature Surface Mount

FEATURES

- Surface Mount Process Compatible
- Sealed Construction
- SPST and SPDT, Momentary Contact
- Extended or Flush Plunger
- Drop-In Replacement for Industry Standard

SPECIFICATIONS

DIMENSIONS in inches (and millimeters)

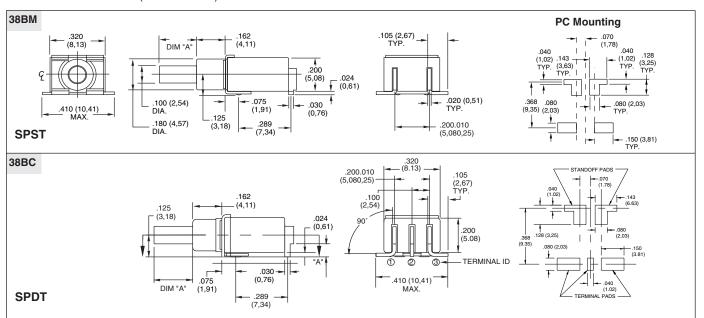

Rating Criteria

Operating Life: 80,000 make-and-break cycles at full load

Contact Rating (resistive load):

Gold Contacts: 0.4 VA maximum at 20 Vac or Vdc maximum

Silver Contacts: I.O. Amps maximum at 120 Vac or 28 Vdc

Contact Resistance: Below 20 milliohms typical initial at 2-4 Vdc, 100 mA

Insulation Resistance: 1000 megaohms min. Voltage Breakdown: 1000 Vrms minimum at sea level

Operating Temperature: -30°C to +85°C **Solderability:** Per MIL-STD-202F, Method 208D, or EIA RS-186E Method 9 (1 hour steam aging)

Materials and Finishes

Base and Cover: Thermoplastic (UL 94V-0) **Plunger:** Thermoplastic (UL 94V-0), with standard internal o-ring seal

Terminals: Copper alloy, gold plate over nickel plate


Spring: Plated Music Wire

Contact System: Copper alloy, gold or silver plate (as specified) over nickel plate **Switch Support:** Brass, tin-plated




SERIES 38BM AND 38BC

Sub-Miniature Surface Mount

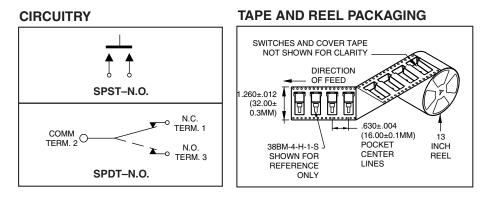

ORDERING INFORMATION

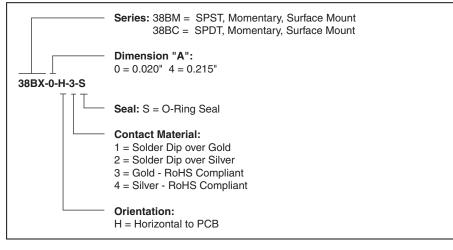

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by Grayhill manufacturer:

Other Similar products are found below :

LW1L-M1C10V-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M7E-HRN2 67021K512 67081K512X 701PB580 719-5504-000 MDPSSGLFS 810KSV30B MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8646AB6X718UL 8646ABUL FSDWH 9001KXRK 9001T8BK 9533CD4+U574+U4922 1203MRA A22EM01S A595 1202A6 12037A2ULCSA 1203A2UL ABD122N-B 1211390004 ABN111-Y ABN400-R 1211500044 1211580012 1212MRA 1232A6NF RA3CSH6A 1241.1183.7047 1241.2511 1241.3428 1223A2ULCSA 1223MRA 1232AX2119 1241.1183.8000 1241.1183.8029 1241.2506 1241.2606 12MA6 1301940184 RELBARF6X10(PLASTIC) 13435AG