

## 1-Cell Li-Ion Battery Protection IC

NO.EA-308-201211

### OUTLINE

The R5480x is a protection IC for over-charge of rechargeable Lithium-ion (Li+)/Lithium polymer battery. The R5480x can detect over-charge, over-discharge, excess-discharge current, and excess-charge current of one-cell Lithium-ion (Li+)/Lithium polymer battery. The external resistor of RSENSE pin allows a high-accuracy detection for excess current. The supply current after detecting over-discharge is suppressed as much as possible by stopping the internal circuit.

### FEATURES

- High Voltage Tolerant Process  
Absolute Maximum Ratings..... 30 V
- Low supply current  
Supply current (At normal mode) .....Typ. 4.0  $\mu$ A  
Standby current .....Max. 0.1  $\mu$ A
- High accuracy detector threshold  
Over-charge detector..... $\pm 20$  mV ( $\leq 4.5$  V) /  $\pm 25$  mV ( $> 4.5$  V)  
Over-discharge detector ..... $\pm 35$  mV  
Excess discharge-current detector..... $\pm 15\%$  ( $\geq 30$  mV) /  $\pm 4.5$  mV ( $< 30$  mV)  
Excess charge-current detector..... $\pm 15\%$
- Variety of detector threshold  
Over-charge detector threshold.....4.1 V to 4.7 V in step of 0.005 V  
Over-discharge detector threshold.....2.1 V to 3.0 V in step of 0.050 V  
Excess discharge-current threshold .....0.020 V to 0.050 V in step of 0.001 V  
Excess charge-current threshold .....-0.057 V to -0.020 V in step of 0.001 V
- Internal fixed Output delay time  
Over-charge detector Output Delay..... 1.0 s  
Over-discharge detector Output Delay ..... 20 ms / 132 ms  
Excess discharge-current detector Output Delay..... 12 ms  
Excess charge-current detector Output Delay..... 16 ms / 8 ms  
Short Circuit detector Output Delay ..... 250  $\mu$ s
- Output Delay Time Shortening Function  
When the V- level is set at -2.0 V (typ.) during the COUT pin of "High", the output delay time for the over-charge and the over-discharge detections can be reduced (Delay time for over-charge becomes about 1/100 that of the normal state).
- Conditions for release over-charge detector ..... Latch type
- Conditions for release over-discharge detector ..... Latch type
- 0 V-battery charge option ..... Unacceptable
- Small package.....DFN(PLP)1414-6

## APPLICATIONS

- Li+/Li Polymer protector of over-charge, over-discharge, excess-current for battery pack
- High precision protectors for smart-phones and any other gadgets using on board Li+/Li Polymer battery

## SELECTION GUIDE

The over-charge and the delay time are user-selectable options.

### Selection Guide

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
R5480Kxxx\$*-TR	DFN(PLP)1414-6	5,000 pcs	Yes	Yes

xxx: Set Voltage Code. Refer to "Product Code List" for details.

\$. Delay Time Code

Code	tvDET1 [s]	tvDET2 [ms]	tvDET3 [ms]	tvDET4 [ms]	tSHORT [μs]
C	1	20	12	16	250
U	1	132	12	8	250

\*: Function Code

Code	Return from Over-charge	Return from Over-discharge	0-V Charge	V <sub>DET3</sub> [mV]	V <sub>DET4</sub> [mV]	V <sub>SHORT</sub> [V]
G	Latch	Latch	NG	30 to 50	-30 to -20	0.500
L	Latch	Latch	NG	30 to 50	-30 to -20	0.180
M	Latch	Latch	NG	30 to 50	-30 to -20	0.140
N	Latch	Latch	NG	20 to 25	-30 to -20	0.140
P	Latch	Latch	NG	30 to 50	-57 to -30	0.250
Q	Latch	Latch	NG	30 to 50	-57 to -30	0.180
R	Latch	Latch	NG	25 to 30	-30 to -20	0.140


## R5480K Code List

Product Code	Set Output Voltage [V]							Delay Time					Function 0V Charge
	V <sub>DET1</sub>	V <sub>REL1</sub>	V <sub>DET2</sub>	V <sub>REL2</sub>	V <sub>DET3</sub>	V <sub>DET4</sub>	V <sub>SHORT</sub>	t <sub>VDET1</sub> [s]	t <sub>VDET2</sub> [ms]	t <sub>VDET3</sub> [ms]	t <sub>VDET4</sub> [ms]	t <sub>SHORT</sub> [μs]	
R5480K228CG	4.405	-	2.400	-	0.032	-0.020	0.500	1	20	12	16	250	NG
R5480K240CG	4.280	-	2.800	-	0.032	-0.020	0.500	1	20	12	16	250	NG
R5480K241CG	4.405	-	2.400	-	0.042	-0.020	0.500	1	20	12	16	250	NG
R5480K247CG	4.425	-	2.400	-	0.032	-0.020	0.500	1	20	12	16	250	NG
R5480K257CL	4.425	-	2.400	-	0.034	-0.022	0.180	1	20	12	16	250	NG
R5480K260CL	4.280	-	2.400	-	0.032	-0.030	0.180	1	20	12	16	250	NG
R5480K261CL	4.280	-	2.700	-	0.040	-0.030	0.180	1	20	12	16	250	NG
R5480K262CL	4.405	-	2.400	-	0.040	-0.030	0.180	1	20	12	16	250	NG
R5480K266CL	4.475	-	2.800	-	0.040	-0.030	0.180	1	20	12	16	250	NG
R5480K267CL	4.475	-	2.400	-	0.034	-0.022	0.180	1	20	12	16	250	NG
R5480K228CL	4.405	-	2.400	-	0.032	-0.020	0.180	1	20	12	16	250	NG
R5480K275CL	4.230	-	2.800	-	0.048	-0.030	0.180	1	20	12	16	250	NG
R5480K277CL	4.425	-	2.800	-	0.040	-0.030	0.180	1	20	12	16	250	NG
R5480K278CL	4.425	-	2.800	-	0.034	-0.022	0.180	1	20	12	16	250	NG
R5480K283CL	4.280	-	2.800	-	0.030	-0.020	0.180	1	20	12	16	250	NG
R5480K284CL	4.425	-	2.400	-	0.040	-0.030	0.180	1	20	12	16	250	NG
R5480K285CL	4.280	-	2.400	-	0.040	-0.030	0.180	1	20	12	16	250	NG
R5480K286CL	4.405	-	2.800	-	0.040	-0.030	0.180	1	20	12	16	250	NG
R5480K287CL	4.280	-	2.600	-	0.048	-0.030	0.180	1	20	12	16	250	NG
R5480K324CL	4.425	-	2.500	-	0.030	-0.030	0.180	1	20	12	16	250	NG
R5480K326CL	4.280	-	2.800	-	0.048	-0.030	0.180	1	20	12	16	250	NG
R5480K348CL	4.475	-	2.600	-	0.040	-0.030	0.180	1	20	12	16	250	NG
R5480K342UM	4.425	-	2.800	-	0.030	-0.023	0.140	1	132	12	8	250	NG
R5480K349CL	4.475	-	2.600	-	0.048	-0.030	0.180	1	20	12	16	250	NG
R5480K354CL	4.425		2.400		0.030	-0.029	0.180	1	20	12	16	250	NG
R5480K355CL	4.500		2.600		0.040	-0.030	0.180	1	20	12	16	250	NG


## R5480K Code List (Continued)

Product Code	Set Output Voltage [V]							Delay Time					Function
	V <sub>DET1</sub>	V <sub>REL1</sub>	V <sub>DET2</sub>	V <sub>REL2</sub>	V <sub>DET3</sub>	V <sub>DET4</sub>	V <sub>SHORT</sub>	t <sub>VDET1</sub> [s]	t <sub>VDET2</sub> [ms]	t <sub>VDET3</sub> [ms]	t <sub>VDET4</sub> [ms]	t <sub>SHORT</sub> [μs]	
R5480K601CN	4.500	-	2.900	-	0.020	-0.023	0.140	1	20	12	16	250	NG
R5480K602CQ	4.550	-	2.600	-	0.040	-0.040	0.180	1	20	12	16	250	NG
R5480K603CP	4.600	-	2.500	-	0.050	-0.057	0.250	1	20	12	16	250	NG
R5480K604CR	4.420	-	2.500	-	0.028	-0.020	0.140	1	20	12	16	250	NG

**BLOCK DIAGRAM**

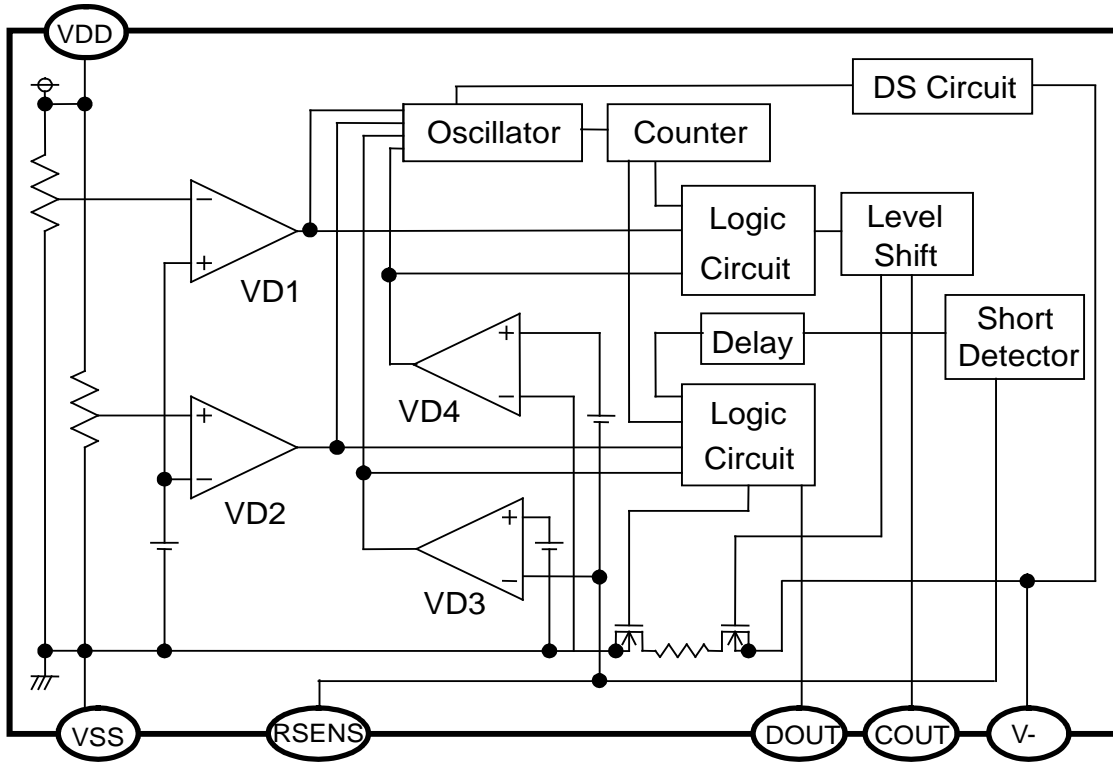

R5480K Block Diagram

**PIN DESCRIPTION****R5480K (DFN(PLP)1414-6) Pin Configuration****R5480K Pin Description**

Pin No.	Symbol	Description
1	VSS	VSS pin. Ground pin for the IC
2	VDD	Power supply pin, the substrate voltage level of the IC
3	RSENSE	Input of overcurrent detection
4	V-	Pin for charger negative input
5	COUT	Output of over-charge detection, CMOS output
6	DOUT	Output of over-discharge detection, CMOS output

## ABSOLUTE MAXIMUM RATINGS

### Absolute Maximum Ratings

(Ta = 25°C, V<sub>SS</sub> = 0 V)

Symbol	Item	Rating	Unit
V <sub>DD</sub>	Supply Voltage	-0.3 to 12.0	V
V <sub>-</sub>	V- Pin Voltage	V <sub>DD</sub> - 30 to V <sub>DD</sub> + 0.3	V
R <sub>SENSE</sub>	RSENSE Pin Voltage	V <sub>SS</sub> - 0.3 to V <sub>DD</sub> + 0.3	V
V <sub>COUT</sub>	COUT Pin Voltage	V <sub>DD</sub> - 30 to V <sub>DD</sub> + 0.3	V
V <sub>DOUT</sub>	DOUT Pin Voltage	V <sub>SS</sub> - 0.3 to V <sub>DD</sub> + 0.3	V
P <sub>D</sub>	Power Dissipation (Standard Land Pattern)	150	mW
T <sub>j</sub>	Junction Temperature Range	-40 to 125	°C
T <sub>stg</sub>	Storage Temperature Range	-55 to 125	°C

### ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause permanent damage and may degrade the lifetime and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings is not assured.

## RECOMMENDED OPERATING CONDITIONS

### Recommended Operating Conditions

Symbol	Item	Rating	Unit
V <sub>DD</sub>	Operating Input Voltage	-0.3 to 5.0	V
T <sub>a</sub>	Operating Temperature Range	-40 to 85	°C

### RECOMMENDED OPERATING CONDITIONS

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

## ELECTRICAL CHARACTERISTICS

## R5480K Electrical Characteristics

(Unless otherwise specified, Ta = 25°C)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	Circuit (1)
V <sub>DD1</sub>	Operating Input Voltage	V <sub>DD</sub> - V <sub>SS</sub>	1.5		5.0	V	A
V <sub>NOCHG</sub>	Maximum Operating Voltage for Inhibition of Charger	Voltage Defined as V <sub>DD</sub> - V <sub>SS</sub> , V <sub>DD</sub> - V <sub>-</sub> = 4 V	0.4	0.7	1.0	V	A
V <sub>DET1</sub>	Over-charge Threshold Voltage	R1 = 330 Ω	≤ 4.5V	V <sub>DET1</sub>	V <sub>DET1</sub> +0.020	V	B
			> 4.5V		V <sub>DET1</sub> -0.025		
t <sub>VDET1</sub>	Output Delay of Over-charge	V <sub>DD</sub> = 3.6 V → V <sub>DET1</sub> +0.05V	0.7	1.0	1.3	s	B
t <sub>VREL1</sub>	Release Delay for VD1	V <sub>DD</sub> = 4V, V <sub>-</sub> = 0V → 1V	11	16	21	ms	C
V <sub>DET2</sub>	Over-discharge Threshold	Detect falling edge of supply voltage	V <sub>DET2</sub> -0.035	V <sub>DET2</sub>	V <sub>DET2</sub> +0.035	V	D
t <sub>VDET2</sub>	Output Delay of Over-discharge (R5480KxxxCG/CL/CN/CP/CQ/CR)	V <sub>DD</sub> = 3.6 V → 2.0 V	14	20	26	ms	D
	Output Delay of Over-discharge (R5480KxxxUM)		92	132	172		
t <sub>VREL2</sub>	Release Delay for VD2	V <sub>DD</sub> = 3V, V <sub>-</sub> = 3V → 0V	0.7	1.2	1.7	ms	E
V <sub>DET3</sub>	Excess discharge-current threshold	Detect rising edge of V <sub>RSENSE</sub> , V <sub>-</sub> = V <sub>RSENSE</sub>	≥ 30 mV	V <sub>DET3</sub>	V <sub>DET3</sub> x0.85	V	F
			< 30 mV		V <sub>DET3</sub> -0.0045		
t <sub>VDET3</sub>	Output delay of excess discharge-current (R5480KxxxCG/CL/CN/CP/CQ/CR)	V <sub>DD</sub> = 3.0 V, V <sub>RSENSE</sub> = 0 V → 0.12 V, V <sub>-</sub> = V <sub>RSENSE</sub>	8	12	16	ms	F
	Output delay of excess discharge-current (R5480KxxxUM)		9	12	16		
t <sub>VREL3</sub>	Output delay of release from excess discharge-current	V <sub>DD</sub> = 3.0V, V <sub>-</sub> = 3V → 0V, V <sub>-</sub> = V <sub>RSENSE</sub>	0.7	1.2	1.7	ms	F
V <sub>SHORT</sub>	Short protection voltage (R5480KxxxCG)	V <sub>DD</sub> = 3.0 V, V <sub>RSENSE</sub> = V <sub>-</sub>	0.41	0.50	0.59	V	F
	Short protection voltage (R5480KxxxCL/CQ)		0.135	0.18	0.225		
	Short protection voltage (R5480KxxxUM/CN/CR)		0.095	0.14	0.185		
	Short protection voltage (R5480KxxxCP)		0.205	0.250	0.295		
t <sub>SHORT</sub>	Output Delay of Short protection	V <sub>DD</sub> = 3.0 V, V <sub>RSENSE</sub> = 0 V → 3 V, V <sub>-</sub> = V <sub>RSENSE</sub>	180	250	425	μs	F
R <sub>SHORT</sub>	Reset resistance for excess discharge-current protection	V <sub>DD</sub> = 3.6 V, V <sub>-</sub> = 1.0 V	20	45	70	kΩ	F

(1) Refer to Test Circuits for details.



## R5480K Electrical Characteristics (Continued)

(Unless otherwise specified, Ta = 25°C)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	Circuit (1)
V <sub>DET4</sub>	Excess charge-current threshold	Detect falling edge of V <sub>RSENSE</sub> , V <sub>-</sub> = V <sub>RSENSE</sub>	V <sub>DET4</sub> x1.15	V <sub>DET4</sub>	V <sub>DET4</sub> x0.85	V	G
t <sub>VDET4</sub>	Output delay of excess charge-current (R5480KxxxCG/CL/CN/CP/CQ/CR)	V <sub>DD</sub> = 3.0 V, V <sub>RSENSE</sub> = 0 V → -0.3 V, V <sub>-</sub> = V <sub>RSENSE</sub>	11	16	21	ms	G
	Output delay of excess charge-current (R5480KxxxUM)		5	8	11		
t <sub>VREL4</sub>	Output delay of release from excess charge-current	V <sub>DD</sub> = 3.0 V, V <sub>-</sub> = -1 V → 0 V, V <sub>-</sub> = V <sub>RSENSE</sub>	0.7	1.2	1.7	ms	G
V <sub>DS</sub>	Delay Time Shortening Mode Voltage	V <sub>DD</sub> = 3.6 V	-2.6	-2.0	-1.4	V	G
V <sub>OL1</sub>	Nch ON-Voltage of C <sub>OUT</sub>	I <sub>OL</sub> = 50 μA, V <sub>DD</sub> = 4.5 V		0.4	0.5	V	H
V <sub>OH1</sub>	Pch ON-Voltage of C <sub>OUT</sub>	I <sub>OH</sub> = -50 μA, V <sub>DD</sub> = 3.9 V	3.4	3.7		V	I
V <sub>OL2</sub>	Nch ON-Voltage of D <sub>OUT</sub>	I <sub>OL</sub> = 50 μA, V <sub>DD</sub> = 2.0 V		0.2	0.5	V	J
V <sub>OH2</sub>	Pch ON-Voltage of D <sub>OUT</sub>	I <sub>OH</sub> = -50 μA, V <sub>DD</sub> = 3.9 V	3.4	3.7		V	K
I <sub>DD</sub>	Supply Current	V <sub>DD</sub> = 3.9 V, V <sub>-</sub> = 0 V		4.0	8.0	μA	L
I <sub>STANDBY</sub>	Standby Current	V <sub>DD</sub> = 2.0 V			0.1	μA	L

(1) Refer to *Test Circuits* for details.

## R5480K Electrical Characteristics (Continued)

(-20°C ≤ Ta ≤ 60°C)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	Circuit (1)
V <sub>DD1</sub>	Operating Input Voltage	V <sub>DD</sub> - V <sub>SS</sub>	1.5		5.0	V	A
V <sub>NOCHG</sub>	Maximum Operating Voltage for Inhibition of Charger	Voltage Defined as V <sub>DD</sub> - V <sub>SS</sub> , V <sub>DD</sub> - V <sub>-</sub> = 4 V	0.27	0.7	1.1	V	A
V <sub>DET1</sub>	Over-charge Threshold Voltage	R1 = 330 Ω	≤ 4.5V -0.025 > 4.5V -0.030	V <sub>DET1</sub> V <sub>DET1</sub>	V <sub>DET1</sub> +0.025 V <sub>DET1</sub> +0.030	V	B
t <sub>VDET1</sub>	Output Delay of Over-charge	V <sub>DD</sub> =3.6V → V <sub>DET1</sub> +0.05V	0.67	1.0	1.55	s	B
t <sub>VREL1</sub>	Release Delay for VD1	V <sub>DD</sub> = 4 V, V <sub>-</sub> = 0V → 1V	10.7	16	24.8	ms	C
V <sub>DET2</sub>	Over-discharge Threshold	Detect falling edge of supply voltage	V <sub>DET2</sub> -0.040	V <sub>DET2</sub>	V <sub>DET2</sub> +0.040	V	D
t <sub>VDET2</sub>	Output Delay of Over-discharge (R5480KxxxCG/CL/CN/CP/CQ/CR)	V <sub>DD</sub> = 3.6 V → 2.0 V	13.4	20	31	ms	D
	Output Delay of Over-discharge (R5480KxxxUM)		88.4	132	204.6		
t <sub>VREL2</sub>	Release Delay for VD2	V <sub>DD</sub> = 3 V, V <sub>-</sub> = 3V → 0V	0.65	1.2	1.86	ms	E
V <sub>DET3</sub>	Excess discharge-current threshold	Detect rising edge of V <sub>RSENSE</sub> , V <sub>-</sub> = V <sub>RSENSE</sub>	≥ 30mV x0.83 < 30mV V <sub>DET3</sub> -0.0052	V <sub>DET3</sub> V <sub>DET3</sub>	V <sub>DET3</sub> x1.17 V <sub>DET3</sub> +0.0052	V	F
t <sub>VDET3</sub>	Output delay of excess discharge-current (R5480KxxxCG/CL/CN/CP/CQ/CR)	V <sub>DD</sub> = 3.0 V, V <sub>RSENSE</sub> = 0 V → 0.12 V, V <sub>-</sub> = V <sub>RSENSE</sub>	7.5	12	18.6	ms	F
	Output delay of excess discharge-current (R5480KxxxUM)		8.5				
t <sub>VREL3</sub>	Output delay of release from excess discharge-current	V <sub>DD</sub> = 3.0V, V <sub>-</sub> = 3V → 0V V <sub>-</sub> = V <sub>RSENSE</sub>	0.65	1.2	1.86	ms	F
V <sub>SHORT</sub>	Short protection voltage (R5480KxxxCG)	V <sub>DD</sub> = 3.0 V, V <sub>RSENSE</sub> = V <sub>-</sub>	0.400	0.500	0.600	V	F
	Short protection voltage (R5480KxxxCL/CQ)		0.125	0.180	0.235		
	Short protection voltage (R5480KxxxUM/CN/CR)		0.085	0.140	0.195		
	Short protection voltage (R5480KxxxCP)		0.195	0.250	0.305		
t <sub>SHORT</sub>	Output Delay of Short protection	V <sub>DD</sub> = 3.0 V, V <sub>RSENSE</sub> = 0 V → 3 V, V <sub>-</sub> = V <sub>RSENSE</sub>	160	250	490	μs	F
R <sub>SHORT</sub>	Reset resistance for excess discharge-current protection	V <sub>DD</sub> = 3.6 V, V <sub>-</sub> = 1.0 V	17.3	45	73.3	kΩ	F

(1) Refer to *Test Circuits* for details.

## R5480K Electrical Characteristics (Continued)

(-20°C ≤ Ta ≤ 60°C)


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	Circuit (1)
V <sub>DET4</sub>	Excess charge-current threshold	Detect falling edge of V <sub>RSENSE</sub> , V <sub>-</sub> = V <sub>RSENSE</sub>	V <sub>DET4</sub> x1.17	V <sub>DET4</sub>	V <sub>DET4</sub> x0.83	V	G
t <sub>VDET4</sub>	Output delay of excess charge-current (R5480KxxxCG/CL/CN/CP/CQ/CR)	V <sub>DD</sub> = 3.0 V, V <sub>RSENSE</sub> = 0 V → -0.3 V, V <sub>-</sub> = V <sub>RSENSE</sub>	10.7	16	24.8	ms	G
	Output delay of excess charge-current (R5480KxxxUM)		4.8	8	12.4		
t <sub>VREL4</sub>	Output delay of release from excess charge-current	V <sub>DD</sub> = 3.0 V, V <sub>-</sub> = -1 V → 0 V V <sub>-</sub> = V <sub>RSENSE</sub>	0.65	1.2	1.86	ms	G
V <sub>DS</sub>	Delay Time Shortening Mode Voltage	V <sub>DD</sub> = 3.6 V	-2.7	-2.0	-1.2	V	G
V <sub>OL1</sub>	Nch ON-Voltage of C <sub>OUT</sub>	I <sub>OL</sub> = 50 μA, V <sub>DD</sub> = 4.5 V		0.4	0.5	V	H
V <sub>OH1</sub>	Pch ON-Voltage of C <sub>OUT</sub>	I <sub>OH</sub> = -50 μA, V <sub>DD</sub> = 3.9 V	3.4	3.7		V	I
V <sub>OL2</sub>	Nch ON-Voltage of D <sub>OUT</sub>	I <sub>OL</sub> = 50 μA, V <sub>DD</sub> = 2.0 V		0.2	0.5	V	J
V <sub>OH2</sub>	Pch ON-Voltage of D <sub>OUT</sub>	I <sub>OH</sub> = -50 μA, V <sub>DD</sub> = 3.9 V	3.4	3.7		V	K
I <sub>DD</sub>	Supply Current	V <sub>DD</sub> = 3.9 V, V <sub>-</sub> = 0 V		4.0	8.7	μA	L
I <sub>STANDBY</sub>	Standby Current	V <sub>DD</sub> = 2.0 V			0.12	μA	L

All of these specifications are guaranteed by design, not tested in mass production.


(1) Refer to *Test Circuits* for details.

Test Circuits


A

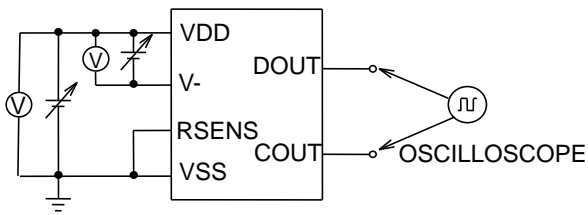


B

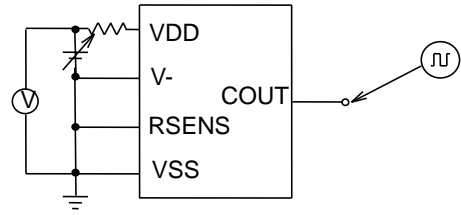


C

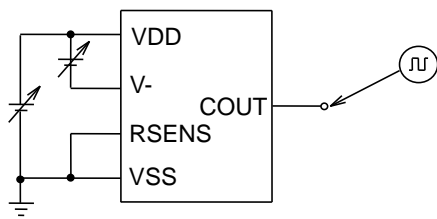


D

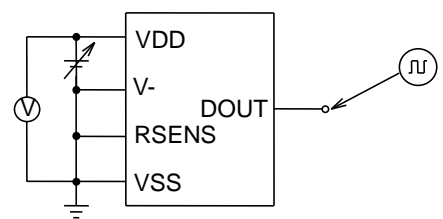


E

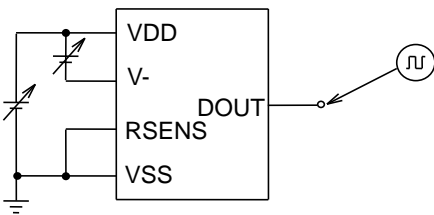


F

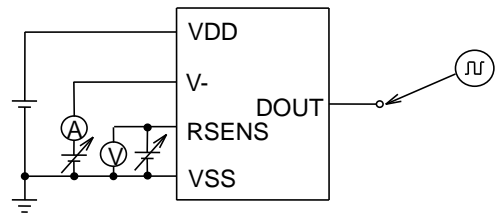


G

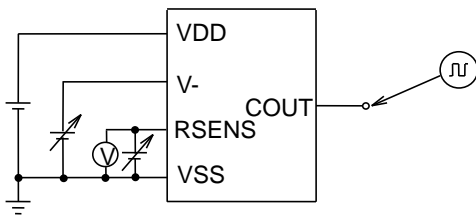


H




I




J



K




L



## APPLICATION INFORMATION

### Typical Application Circuit

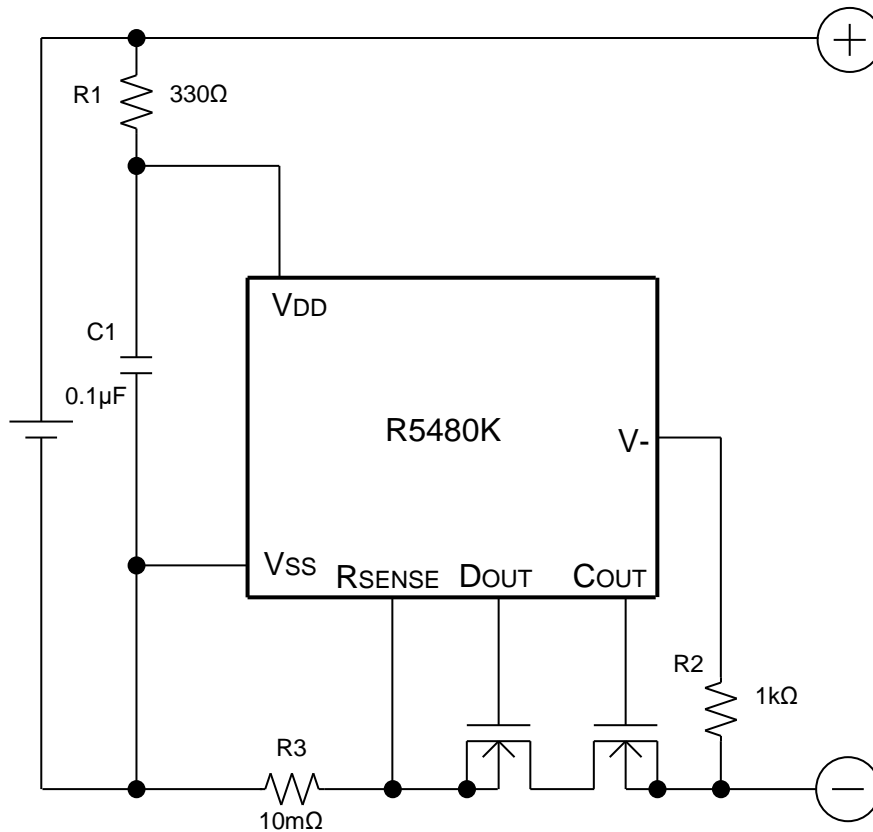

### Guidelines for Component Selection

R1 and C1 stabilize a supply voltage to the R5480. A recommended R1 value is equal or less than 1kΩ. A large value of R1 makes detection voltage shift higher because of the conduction current flowed in the R5480x. Further, to stabilize the operation of R5480K, use the C1 with the value of 0.01μF or more.

R1 and R2 can operate also as parts for current limit circuit against reverse charge or applying a charger with excess charging voltage to the R5480K, battery pack. While small value of R1 and R2 may cause over power dissipation rating of the R5480K, therefore a total of "R1+R2" should be 1kΩ or more. Besides, if a large value of R2 is set, release from over-discharge by connecting a charger might not be possible. Recommended R2 value is equal or less than 10kΩ.

R3 is a resistor for sensing an excess current. If the resistance value is too large, power loss becomes also large. By the excess current, if the R3 is not appropriate, the power loss may be beyond the power dissipation of R3. Choose an appropriate R3 according to the cell specification.

The typical application circuit diagram is just an example. This circuit performance largely depends on the PCB layout and external components. In the actual application, fully evaluation is necessary.

Over-voltage and the over current beyond the absolute maximum rating should not be forced to the protection IC and external components. Although the short protection circuit is built in the IC, if the positive terminal and the negative terminal of the battery pack are short, during the delay time of short limit detector, large current flows through the FET. Select an appropriate FET with large enough current capacity to prevent the IC from burning damage.

### Sense Resistance and On-resistance of the MOSFET Selection Guideline

Short mode is detected by the current base or the relation between VDD at short and total on-resistance of external MOSFETs for COUT and DOUT.

If short must be detected by the current base determined by V<sub>SHORT</sub> and R3, the next formula must be true, otherwise, the short current limit becomes (VDD - 0.9)/(R3 + R<sub>SS(on)</sub>)

$$\frac{V_{DD} - 0.9}{R3 + R_{SS(on)}} \geq \frac{V_{SHORT}}{R3}$$

V<sub>SHORT</sub>: Short protection voltage, refer to “*Electrical Characteristics*” for set voltages.

R3: External current sense resistance [Ω]

R<sub>SS(on)</sub>: external MOSFETs' total on-resistance [Ω]

V<sub>DD</sub>: V<sub>DD</sub> level at short mode. If V<sub>DD</sub> goes down by the short current, the lowest level is V<sub>DD</sub>.


#### Ex. 1

As the R<sub>SENSE</sub>, in case that the 10 mΩ is selected as R3 and if the V<sub>DD</sub> becomes 3.0 V, to detect short at 50 A with V<sub>SHORT</sub> = 0.5 V, the R<sub>SS(on)</sub> must be 32 mΩ or lower.

#### Ex. 2

As the R<sub>SENSE</sub>, in case the 20 mΩ is selected as R3 and if the V<sub>DD</sub> becomes 3.0 V, to detect short at 25 A with V<sub>SHORT</sub> = 0.5 V, the R<sub>SS(on)</sub> must be 64 mΩ or lower.

If the R<sub>SS(on)</sub> value is higher than the value calculated by this formula, the short current limit will be less than the desired value.

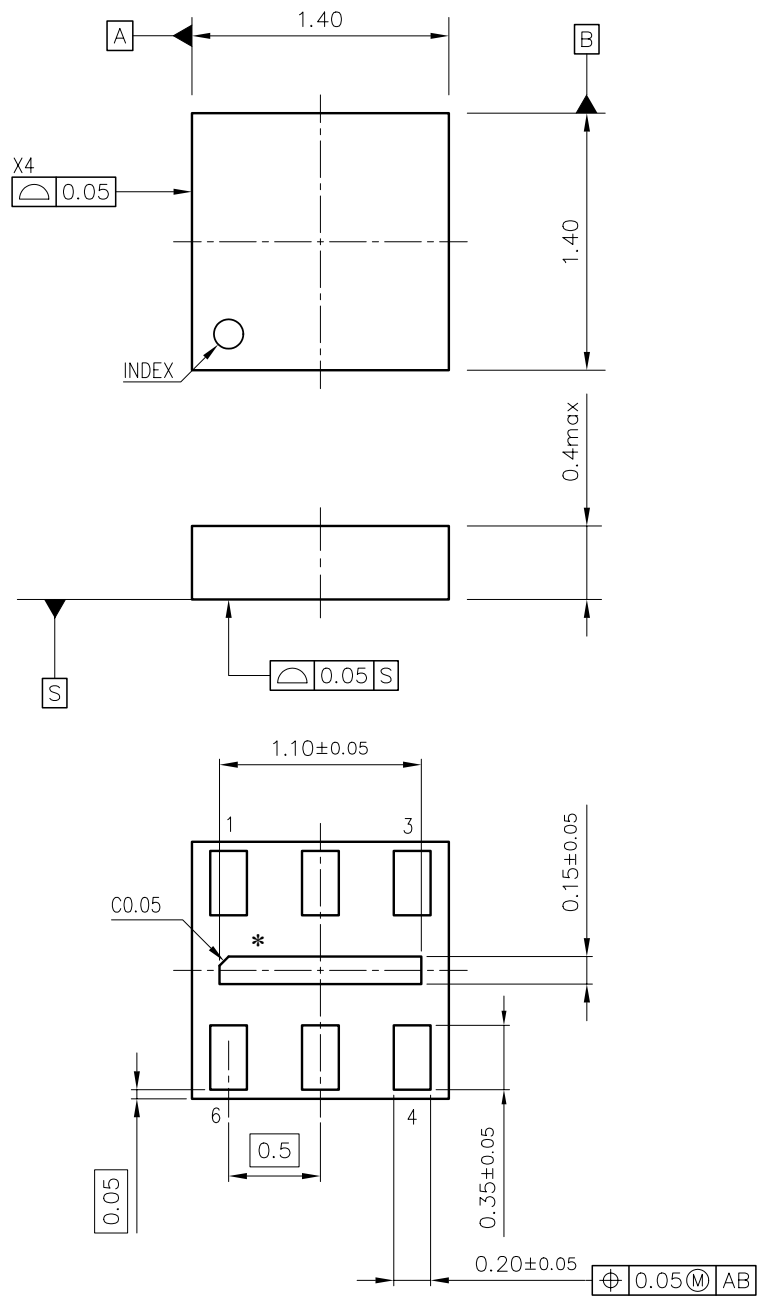

UNIT: mm

DFN(PLP)1414-6 Package Dimensions

H.IMAI

\* The tab on the bottom of the package shown by blue circle is No Connection.



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
9. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
10. There can be variation in the marking when different AOI (Automated Optical Inspection) equipment is used. In the case of recognizing the marking characteristic with AOI, please contact Ricoh sales or our distributor before attempting to use AOI.
11. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



**Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.**

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.


**RICOH** RICOH ELECTRONIC DEVICES CO., LTD.

**Official website**

<https://www.n-redc.co.jp/en/>

**Contact us**

<https://www.n-redc.co.jp/en/buy/>





## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Battery Management](#) category:*

*Click to view products by [Nisshinbo](#) manufacturer:*

Other Similar products are found below :

[MP26121DQ-LF-P](#) [NCP1855FCCT1G](#) [FAN54063UCX](#) [LC05132C01NMTTTG](#) [SN2040DSQR](#) [ME4075AM5G](#) [AP5054HTCER](#) [TC2120-NB](#) [XPD977B](#) [XPD977B18](#) [4056H](#) [DW01](#) [DW06](#) [CM1002-UD](#) [CM1002-W](#) [CM1002-X](#) [CM1002-Y](#) [CM1006-B](#) [CM1006-Q](#) [CM1006-WB](#) [CM1006-LCD](#) [CM1006-LBD](#) [CM1006-WF](#) [CM1006-LF](#) [CM1006-WG](#) [CM1006-WH](#) [CM1006-LG](#) [CM1003-S02BD](#) [CM1003-S09EA](#) [CM1003-S10ED](#) [CM1003-S11ED](#) [CM1003-S12BC](#) [CM1003-S13CC](#) [CM1003-S24BC](#) [CM1003-S26BC](#) [CM1003-WAD](#) [CM1003-BBD](#) [CM1003-BFD](#) [CM1003-BND](#) [CM1003-BLD](#) [CM1003-DAD](#) [CM1003-BMD](#) [CM1003-BPD](#) [CM1003-BKD](#) [CM1003-BAE](#) [CM1003-BHE](#) [CM1102B-FF](#) [CM1102B-FD](#) [CM1102B-GD](#) [CM1112-DAE](#)