



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE159MCP
Silicon Matched Complementary Transistors
(Contains NTE123AP (NPN) and NTE159 (PNP))
Audio Amplifier, Switch
TO-92 Type Package

Absolute Maximum Ratings:

Collector-Emitter Voltage, V_{CEO}	
NTE123AP	40V
NTE159	80V
Collector-Base Voltage, V_{CBO}	
NTE123AP	60V
NTE159	80V
Emitter-Base Voltage, V_{EBO}	
NTE123AP	6V
NTE159	5V
Continuous Collector Current, I_C	
NTE123AP	600mA
NTE159	800mA
Total Device Dissipation ($T_A = +25^\circ\text{C}$), P_D	625mW
Derate Above 25°C	5.0mW/ $^\circ\text{C}$
Total Device Dissipation ($T_C = +25^\circ\text{C}$), P_D	1.5W
Derate Above 25°C	12mW/ $^\circ\text{C}$
Operating Junction Temperature Range, T_J	-55° to $+150^\circ\text{C}$
Storage Temperature Range, T_{stg}	-55° to $+150^\circ\text{C}$
Thermal Resistance, Junction to Case, R_{thJC}	83.3 $^\circ\text{C}/\text{W}$
Thermal Resistance, Junction to Ambient, R_{thJA}	200 $^\circ\text{C}/\text{W}$

Note 1. Matched complementary pairs have their gain specification (h_{FE}) matched to within 10% of each other.


Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
OFF Characteristics							
Collector–Emitter Breakdown Voltage NTE123AP	$V_{(BR)CEO}$	$I_C = 1\text{mA}, I_B = 0$, Note 2	40	–	–	V	
NTE159		$I_C = 10\mu\text{A}, I_B = 0$, Note 2	80	–	–	V	
Collector–Base Breakdown Voltage NTE123AP	$V_{(BR)CBO}$	$I_C = 0.1\text{mA}, I_E = 0$	60	–	–	V	
NTE159		$I_C = 10\mu\text{A}, I_E = 0$	80	–	–	V	
Emitter–Base Breakdown Voltage NTE123AP	$V_{(BR)EBO}$	$I_E = 0.1\text{mA}, I_C = 0$	6	–	–	V	
NTE159		$I_E = 10\mu\text{A}, I_C = 0$	5	–	–	V	
Collector Cutoff Current NTE123AP	I_{CEV}	$V_{CE} = 35\text{V}, V_{EB(off)} = 0.4\text{V}$	–	–	0.1	μA	
NTE159	I_{CBO}	$V_{CB} = 50\text{V}, I_E = 0$	–	–	50	nA	
		$V_{CB} = 50\text{V}, I_E = 0, T_A = +75^\circ\text{C}$	–	–	5	μA	
Base Cutoff Current NTE123AP ONLY	I_{BEV}	$V_{CE} = 35\text{V}, V_{EB(off)} = 0.4\text{V}$	–	–	0.1	μA	
Emitter Cutoff Current NTE159 ONLY	I_{EBO}		–	–	100	nA	
ON Characteristics (Note 2)							
DC Current Gain NTE123AP	h_{FE}	$V_{CE} = 1\text{V}, I_C = 0.1\text{mA}$	20	–	–		
		$V_{CE} = 1\text{V}, I_C = 1\text{mA}$	40	–	–		
		$V_{CE} = 1\text{V}, I_C = 10\text{mA}$	80	–	–		
		$V_{CE} = 1\text{V}, I_C = 150\text{mA}$	100	–	300		
		$V_{CE} = 1\text{V}, I_C = 500\text{mA}$	40	–	–		
		NTE159	$V_{CE} = 10\text{V}, I_C = 100\mu\text{A}$	25	–	–	
			$V_{CE} = 10\text{V}, I_C = 1\text{mA}$	40	–	–	
			$V_{CE} = 10\text{V}, I_C = 10\text{mA}$	50	–	250	
			$V_{CE} = 10\text{V}, I_C = 100\text{mA}$	40	–	–	
			$V_{CE} = 10\text{V}, I_C = 500\text{mA}$	30	–	–	
Collector–Emitter Saturation Voltage NTE123AP	$V_{CE(sat)}$	$I_C = 150\text{mA}, I_B = 15\text{mA}$	–	–	0.4	V	
NTE159			–	–	0.15	V	
NTE123AP		$I_C = 500\text{mA}, I_B = 50\text{mA}$	–	–	0.75	V	
NTE159			–	–	0.5	V	
Base–Emitter Saturation Voltage NTE123AP	$V_{BE(sat)}$	$I_C = 150\text{mA}, I_B = 15\text{mA}$	0.75	–	0.95	V	
NTE159			–	–	0.9	V	
NTE123AP		$I_C = 500\text{mA}, I_B = 50\text{mA}$	–	–	1.2	V	
NTE159			–	–	1.1	V	

Note 2. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

Electrical Characteristics (Cont'd): ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Small-Signal Characteristics (NTE123AP)						
Current Gain-Bandwidth Product	f_T	$I_C = 20\text{mA}, V_{CE} = 10\text{V}, f = 100\text{MHz}$	250	-	-	MHz
Collector-Base Capacitance	C_{cb}	$V_{CB} = 5\text{V}, I_E = 0, f = 100\text{kHz}$	-	-	6.5	pF
Emitter-Base Capacitance	C_{eb}	$V_{CB} = 0.5\text{V}, I_C = 0, f = 100\text{kHz}$	-	-	30	pF
Input Impedance	h_{ie}	$I_C = 1\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	1.0	-	15	$\text{k}\Omega$
Voltage Feedback Ratio	h_{re}	$I_C = 1\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	0.1	-	8.0	$\times 10^{-6}$
Small-Signal Current Gain	h_{fe}	$I_C = 1\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	40	-	500	
Small-Signal Characteristics (NTE159)						
Output Capacitance	C_{ob}	$V_{CB} = 20\text{V}, I_E = 0, f = 1\text{MHz}$	-	-	30	pF
Input Capacitance	C_{ib}	$V_{CB} = 500\text{mV}, f = 1\text{MHz}$	-	-	110	pF
Small-Signal Current Gain	h_{fe}	$I_C = 500\text{mA}, V_{CE} = 10\text{V}, f = 100\text{MHz}$	1	-	5	
Noise Figure	NF	$I_C = 100\text{mA}, V_{CE} = 10\text{V}, R_S = 1\text{k}\Omega, f = 1\text{kHz}, B_W = 1\text{Hz}$	-	-	3	dB
Switching Characteristics (NTE123AP)						
Delay Time	t_d	$V_{CC} = 30\text{V}, V_{EB(\text{off})} = 2\text{V}, I_C = 150\text{mA}, I_{B1} = 15\text{mA}$	-	-	15	ns
Rise Time	t_r		-	-	20	ns
Storage Time	t_s	$V_{CC} = 30\text{V}, I_C = 150\text{mA}, I_{B1} = I_{B2} = 15\text{mA}$	-	-	225	ns
Fall Time	t_f		-	-	30	ns
Switching Characteristics (NTE159)						
Turn-On Time	t_{on}	$V_{CC} = 30\text{V}, I_C = 500\text{mA}, I_{B1} = I_{B2} = 15\text{mA}$	-	-	100	ns
Turn-Off Time	t_{off}		-	-	400	ns

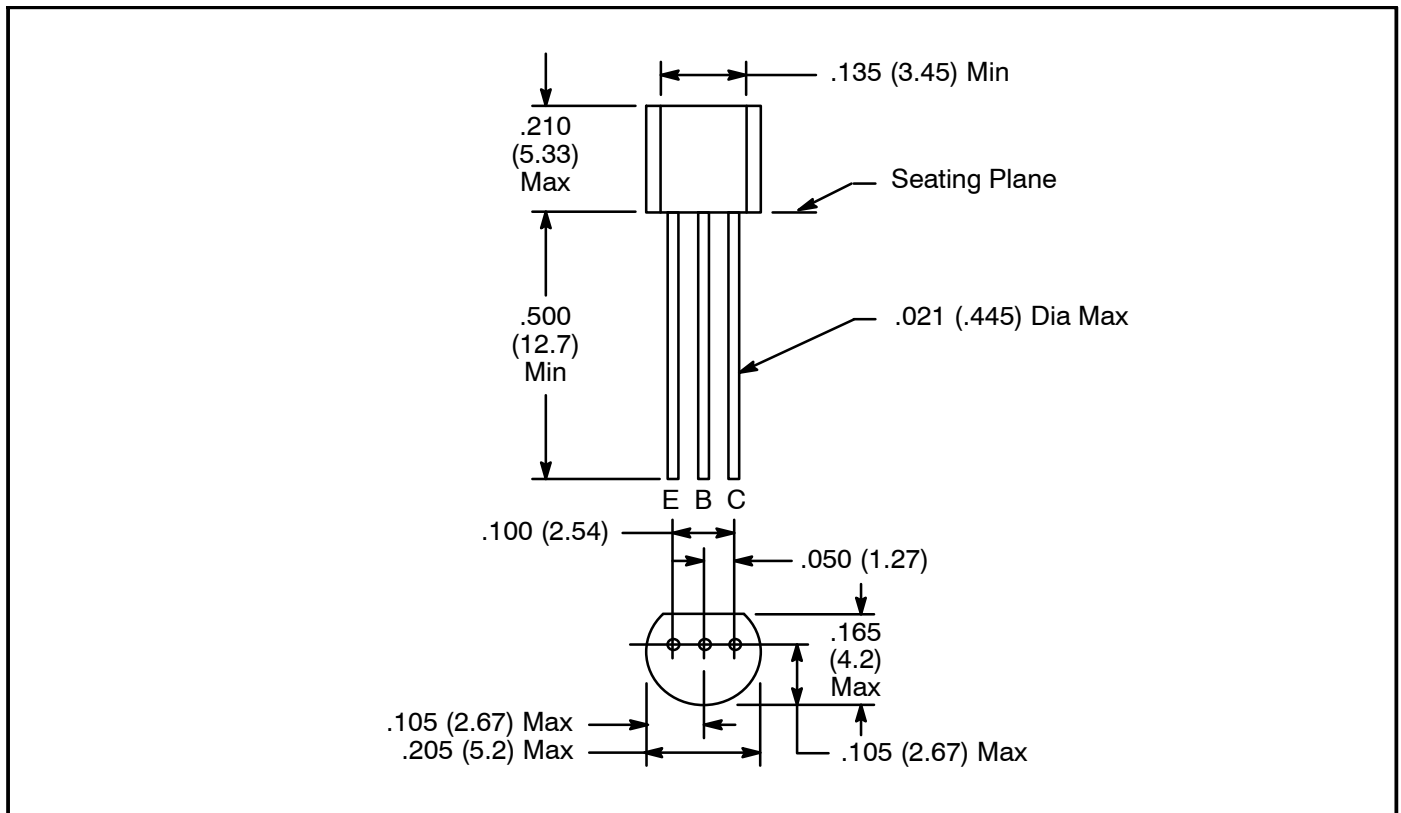

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [NTE manufacturer](#):

Other Similar products are found below :

[5W127](#) [5W5D0](#) [5WD10](#) [747](#) [797](#) [868](#) [R04-11A30-24](#) [RIM-IAC5](#) [1724](#) [NEH100M6.3BA](#) [NEH1.0M63AA](#) [NEH.33M100AA](#)
[NEH3.3M100BA](#) [NEH.47M100AA](#) [NEH680M100GF](#) [NEHH1.0M450CB](#) [NEHH4.7M160BB](#) [NEV.33M100AA](#) [NEVH1.0M160AA](#)
[NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#) [NTE131](#) [NTE1389](#) [NTE1396](#) [NTE1416](#) [NTE1728](#) [NTE1751](#) [NTE1759](#)
[NTE1780](#) [NTE1813](#) [NTE1837](#) [NTE1845](#) [NTE1863](#) [NTE1872](#) [NTE187A](#) [NTE1897](#) [NTE1915](#) [NTE1964](#) [NTE2085](#) [NTE226](#) [NTE2323](#)
[NTE233](#) [NTE2409](#) [NTE2540](#) [NTE369](#) [NTE48](#) [NTE5156A](#) [NTE526A](#) [NTE5524](#)