



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE188 (NPN) & NTE189 (PNP) Silicon Complementary Transistors High Voltage Amplifier & Driver

Description:

The NTE188 (NPN) and NTE189 (PNP) are complementary silicon transistors in a TO202N type package designed for general purpose, high voltage amplifier and driver applications.

Features:

- High Collector–Emitter Breakdown Voltage: $V_{(BR)CEO} = 80V @ I_C = 1mA$
- High Power Dissipation: $P_D = 10W @ T_C = +25^\circ C$

Absolute Maximum Ratings:

Collector–Emitter Voltage, V_{CEO}	80V
Collector–Base Voltage, V_{CB}	80V
Emitter–Base Voltage, V_{EB}	4V
Continuous Collector Current, I_C	2A
Total Power Dissipation ($T_A = +25^\circ C$), P_D	1W
Derate Above $25^\circ C$	8mW/ $^\circ C$
Total Power Dissipation ($T_C = +25^\circ C$), P_D	10W
Derate Above $25^\circ C$	80mW/ $^\circ C$
Operating Junction Temperature Range, T_J	-55° to $+150^\circ C$
Storage Temperature Range, T_{stg}	-55° to $+150^\circ C$
Thermal Resistance, Junction–to–Ambient (Note 2), R_{thJA}	125 $^\circ C/W$
Thermal Resistance, Junction–to–Case, R_{thJC}	12.5 $^\circ C/W$

Note 1. NTE188 is a **discontinued** device and is **no longer available**.

Note 2. R_{thJA} is measured with the device soldered into a typical printed circuit board.

Electrical Characteristics: ($T_A = +25^\circ C$ unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics						
Collector–Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1mA, I_B = 0$, Note 3	80	–	–	V
Emitter–Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 100\mu A, I_C = 0$	4	–	–	V
Collector Cutoff Current	I_{CBO}	$V_{CB} = 80V, I_E = 0$	–	–	100	nA
NTE188			–	–	100	nA
NTE189		$V_{CB} = 60V, I_E = 0$	–	–	100	nA

Note 3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.

Electrical Characteristics (Cont'd): ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics (Note 3)						
DC Current Gain NTE188 NTE189	h_{FE}	$I_C = 50\text{mA}, V_{CE} = 1\text{V}$	60	110	-	
		$I_C = 250\text{mA}, V_{CE} = 1\text{V}$	30	65	-	
		$I_C = 50\text{mA}, V_{CE} = 1\text{V}$	-	33	-	
		$I_C = 50\text{mA}, V_{CE} = 1\text{V}$	80	160	-	
		$I_C = 250\text{mA}, V_{CE} = 1\text{V}$	50	130	-	
		$I_C = 50\text{mA}, V_{CE} = 1\text{V}$	-	8	-	
Collector-Emitter Saturation Voltage NTE188 NTE189	$V_{CE(sat)}$	$I_C = 250\text{mA}, I_B = 10\text{mA}$	-	0.18	0.4	V
		$I_C = 250\text{mA}, I_B = 25\text{mA}$	-	0.1	-	V
		$I_C = 250\text{mA}, I_B = 10\text{mA}$	-	0.22	0.5	V
		$I_C = 250\text{mA}, I_B = 25\text{mA}$	-	0.15	-	V
Base-Emitter ON Voltage NTE188 NTE189	$V_{BE(on)}$	$I_C = 250\text{mA}, V_{CE} = 5\text{V}$	-	0.76	1.2	V
			-	0.78	1.2	V
Small-Signal Characteristics						
Current Gain-Bandwidth Product NTE188 NTE189	f_T	$I_C = 250\text{mA}, V_{CE} = 5\text{V}, f = 100\text{MHz},$ Note 2	50	150	-	MHz
			50	100	-	MHz
Output Capacitance NTE188 NTE189	C_{ob}	$V_{CB} = 10\text{V}, I_E = 0, f = 100\text{MHz}$	-	6	12	pF
			-	10	15	pF

Note 3. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

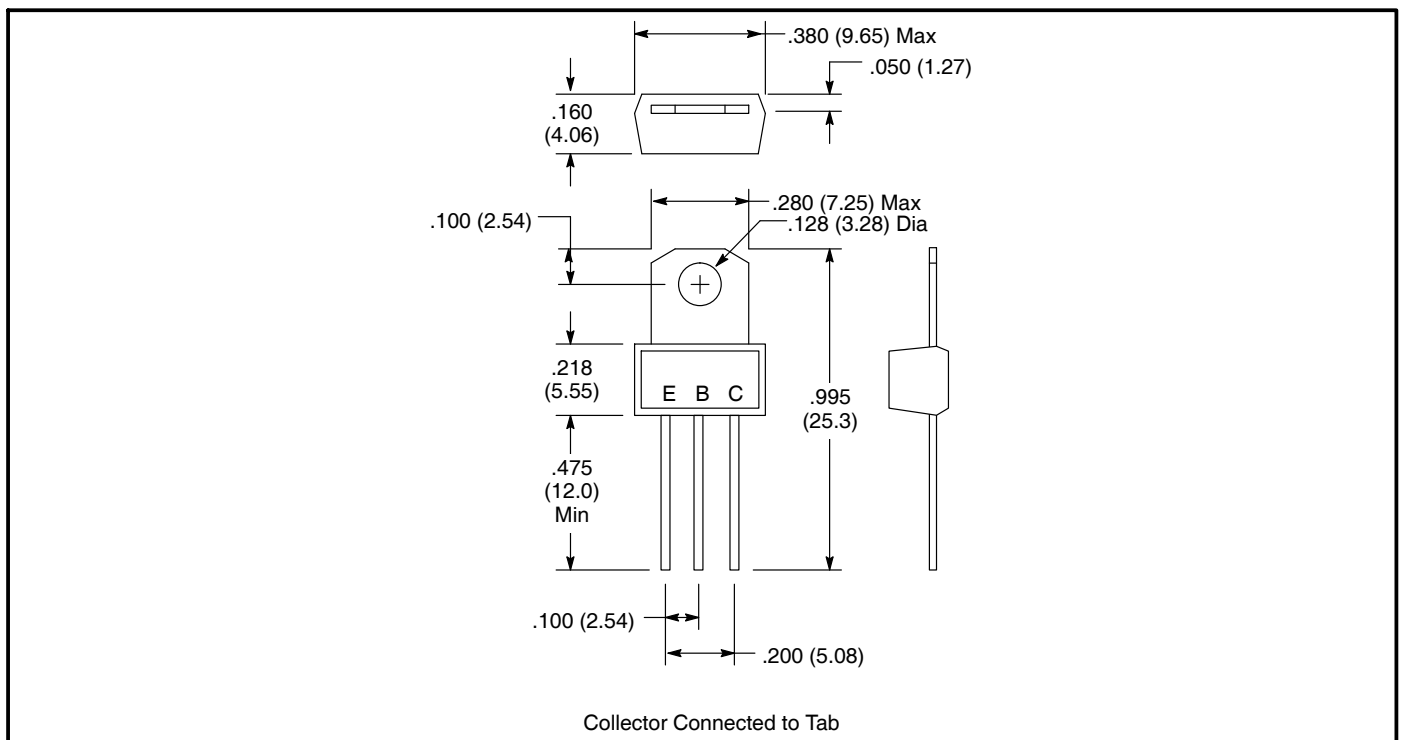

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)