



44 FARRAND STREET  
BLOOMFIELD, NJ 07003  
(973) 748-5089

## NTE26

### Silicon NPN Transistor

### Low Noise Audio Amplifier

#### **Features:**


- $V_{CEO} = 120V$  (Min)
- Low Noise: = 1dB (Typ), 10dB (Max)

**Absolute Maximum Ratings:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Collector–Base Voltage, $V_{CBO}$ .....	120V
Collector–Emitter Voltage, $V_{CEO}$ .....	120V
Emitter–Base Voltage, $V_{EBO}$ .....	5V
Collector Current, $I_C$ .....	100mA
Emitter Current, $I_E$ .....	-100mA
Collector Dissipation, $P_C$ .....	200mW
Operating Junction Temperature, $T_J$ .....	+125°C
Storage Temperature Range, $T_{stg}$ .....	-55° to +125°C

**Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cutoff Current	$I_{CBO}$	$V_{CB} = 120V$ , $I_E = 0$	—	—	0.1	$\mu\text{A}$
Emitter Cutoff Current	$I_{EBO}$	$V_{EB} = 5V$ , $I_C = 0$	—	—	0.1	$\mu\text{A}$
DC Current Gain	$h_{FE}$	$V_{CE} = 6V$ , $I_C = 2\text{mA}$	350	—	700	
Collector–Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 10\text{mA}$ , $I_B = 1\text{mA}$	—	—	0.3	V
Current Gain–Bandwidth Product	$f_T$	$V_{CE} = 6V$ , $I_C = 1\text{mA}$	—	100	—	MHz
Output Capacitance	$C_{ob}$	$V_{CB} = 10V$ , $I_E = 0$ , $f = 1\text{MHz}$	—	3.0	—	pF
Noise	NF	$V_{CE} = 6V$ , $I_C = 0.1\text{mA}$ , $f = 1\text{kHz}$ , $r_g = 10\text{k}\Omega$	—	1.0	10	dB

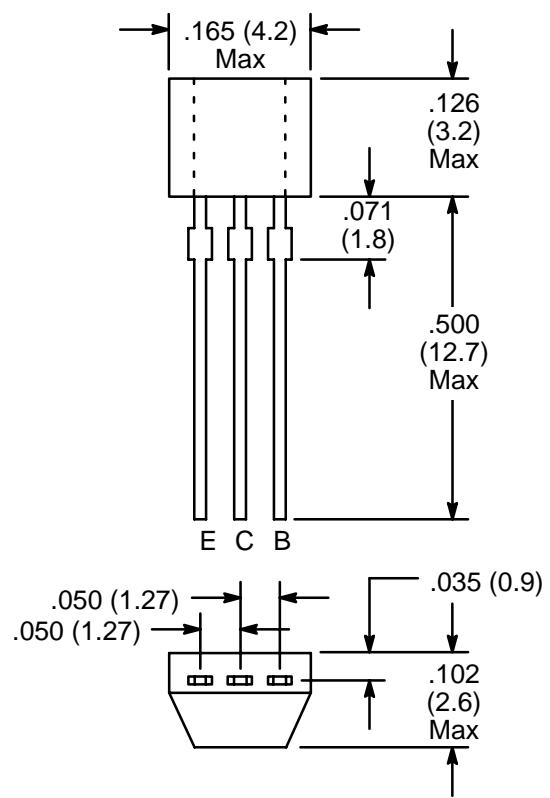

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by NTE manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)  
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)