

NTE291 (NPN) & NTE292 (PNP) Silicon Complementary Transistors Medium Power Amp, Switch

Description:

The NTE291 (NPN) and NTE292 (PNP) are General-Purpose Medium-Power silicon complementary transistors in a TO220 type package designed for switching and amplifier applications. They are especially designed for series and shunt regulators and as a driver and output stage of high-fidelity amplifiers.

Features:

- Low Saturation Voltage

Absolute Maximum Ratings:

Collector-to-Base Voltage, V_{CBO}	130V
Collector-to-Emitter Voltage ($R_{BB} = 100\Omega$, $V_{BB} = 0$), V_{CEX}	130V
Collector-to-Emitter Voltage, V_{CEO}	120V
Emitter-to-Base Voltage, V_{EBO}	5V
Continuous Collector Current ($T_C \leq +106^\circ\text{C}$), I_C	4A
Continuous Base Current ($T_C \leq +130^\circ\text{C}$), I_B	2A
Power Dissipation, P_D	
$T_C = +100^\circ\text{C}$	16W
Derate Linearly Above $T_C = +100^\circ\text{C}$	0.32W/ $^\circ\text{C}$
$T_C = +25^\circ\text{C}$	40W
Derate Linearly Above $T_C = +25^\circ\text{C}$	0.32W/ $^\circ\text{C}$
$T_A = +25^\circ\text{C}$	1.8W
Derate Linearly Above $T_A = +25^\circ\text{C}$	0.0144W/ $^\circ\text{C}$
Operating Temperature Range, T_{opr}	-65° to +150°C
Storage Temperature Range, T_{stg}	-65° to +150°C
Lead Temperature (During Soldering), T_L	
At distance $\geq 1/8$ in. (3.17mm) from case for 10s Max	+235°C
Thermal Resistance, Junction-to-Case, R_{thJC}	3.125°C/W
Thermal Resistance, Junction-to-Ambient, R_{thJA}	70°C/W


Note 1. NTE292MCP is a matched complementary pair containing 1 each of NTE291 (NPN) and NTE292 (PNP).

Electrical Characteristics: ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CEO}	$V_{CE} = 60\text{V}, I_B = 0$	–	–	1	mA
Collector Cutoff Current	I_{CER}	$R_{BE} = 100\Omega, V_{CE} = 120\text{V}$	–	–	0.1	mA
		$R_{BE} = 100\Omega, V_{CE} = 120\text{V}, T_C = +100^\circ\text{C}$	–	–	2	mA
Collector Cutoff Current	I_{CEX}	$V_{CE} = 120\text{V}, V_{BE} = -1.5\text{V}$	–	–	0.1	mA
		$V_{CE} = 120\text{V}, V_{BE} = -1.5\text{V}, T_C = +100^\circ\text{C}$	–	–	2	mA
Emitter Cutoff Current	I_{EBO}	$V_{BE} = -5\text{V}, I_C = 0$	–	–	1	mA
Collector-to-Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 0.1\text{A}, I_B = 0, \text{Note 1}$	120	–	–	V
Collector-to-Emitter Sustaining Voltage	$V_{CER(sus)}$	$R_{BE} = 100\Omega, I_C = 0.1\text{A}, \text{Note 2}$	130	–	–	V
DC Forward Current	h_{FE}	$V_{CE} = 4\text{V}, I_C = 1.5\text{A}, \text{Note 1}$	15	–	150	
		$V_{CE} = 2.5\text{V}, I_C = 4\text{A}, \text{Note 1}$	2	–	–	
Base-to-Emitter Voltage	V_{BE}	$V_{CE} = 4\text{V}, I_C = 1.5\text{A}, \text{Note 1}$	–	–	2	V
		$V_{CE} = 2.5\text{V}, I_C = 4\text{A}, \text{Note 1}$	–	–	3.5	V
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 1.5\text{A}, I_B = 0.15\text{A}, \text{Note 1}$	–	–	1.2	V
		$I_C = 4\text{A}, I_B = 2\text{A}, \text{Note 1}$	–	–	2.5	V
Small Signal Forward Current Transfer Ratio	h_{fe}	$V_{CE} = 4\text{V}, I_C = 0.5\text{A}, f = 50\text{kHz}$	20	–	–	
Gain Bandwidth Product	f_T	$V_{CE} = 4\text{V}, I_C = 0.5\text{A}$	4	–	–	MHz
Small Signal Forward Current Transfer Ratio	$ h_{fe} $	$V_{CE} = 4\text{V}, I_C = 0.5\text{A}, f = 50\text{kHz}$	4	–	–	
Collector-to-Base Capacitance	C_{obo}	$V_{CB} = 10\text{V}, I_C = 0, f = 1\text{MHz}$	–	–	250	pF

Note 1. Pulsed: Pulse Duration = 300 μs , Duty Factor = 0.018.

Note 2. **CAUTION:** The sustaining voltage ($V_{CER(sus)}$) **MUST NOT** be measured on a curve tracer.

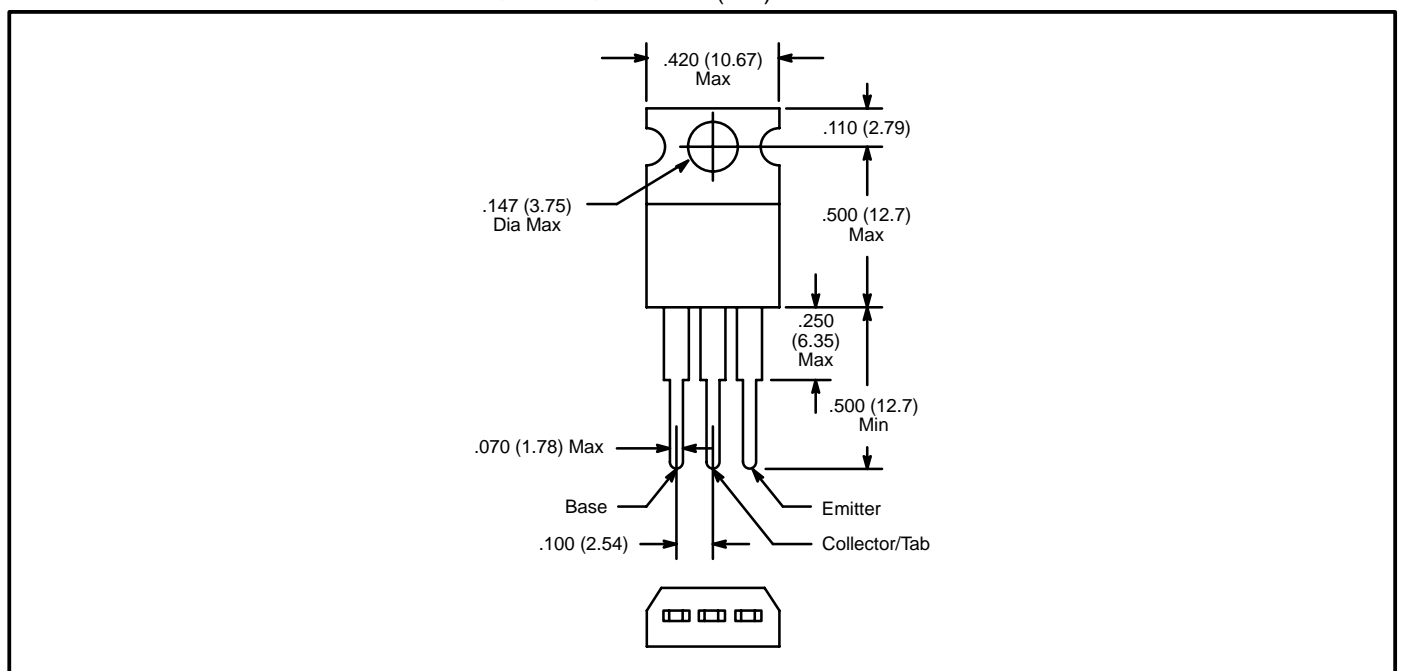

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NTE158](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE63](#) [C4460](#)
[2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [2SD2150T100R](#) [SP000011176](#) [2N2369ADCSM](#)
[2N5769](#) [2SC2412KT146S](#) [2SC5490A-TL-H](#) [2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[US6T6TR](#) [NJL0281DG](#) [732314D](#) [CMXT3906 TR](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJL0302DG](#) [TTA1452B,S4X\(S](#) [2N3583](#) [NTE103](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE101](#) [NTE13](#) [NTE15](#) [NTE16001](#) [NTE16006](#)
[NTE26](#)