



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE7227 Integrated Circuit Fixed Multi-Output Positive Voltage Regulator 10-Lead SIP

Description:

The NTE7227 is a multi-output positive voltage regulator in a 10-Lead SIP type package designed to provide fixed precision output voltages of 3.3V & 8V at current up to 0.5A and 5.1V at current up to 1A with an external PNP transistor. An internal reset circuit generates a reset pulse when Output 1 decreases below the regulated value. Output 2 and Output 3 can be disabled by TTL input. Protection features include over voltage protection, short circuit protection and thermal shutdown.

Features:

- Output Currents up to 0.5A (Output 1 & Output 2)
- Output Current up to 1A with External Transistor (Output 3)
- Fixed Precision Output 1 Voltage 3.3V ±2%
- Fixed Precision Output 2 Voltage 8V ±2%
- Control Signal Generator for Output 3 Voltage (5.1V ±2%)
- Reset Facility for Output Voltage 1
- Output 2 and Output 3 with Disable by TTL Input
- Current Limit Protection at Each Output
- Thermal Shutdown

Absolute Maximum Ratings:

DC Input Voltage, V_{IN}	20V
Disable Input Voltage, V_C	20V
Output Current, I_O	0.5A
Power Dissipation (No Heatsink), P_D	1.5W
Junction Temperature, T_J	+150°C
Operating Temperature Range, T_{opr}	0° to +125°C



Electrical Characteristics: ($V_{IN1} = 6V$, $V_{IN2} = 10.5V$, $T_J = +25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Output Voltage 1	V_{O1}	$6V < V_{IN1} < 14V$	$I_{O1} = 10mA$	3.22	3.3	3.38	V
			$5mA < I_{O1} < 500mA$	3.14	3.3	3.46	V
Output Voltage 2	V_{O2}	$10.5V < V_{IN2} < 18V$	$I_{O2} = 10mA$	7.84	8.0	8.16	V
			$5mA < I_{O2} < 500mA$	7.7	8.0	8.3	V
Dropout Output Voltage	V_{D1}	$I_{O1} = 500mA$	-	-	2.5	V	
	V_{D2}	$I_{O2} = 500mA$	-	-	2.5	V	
Line Regulation	ΔV_{O1}	$I_{O1} = I_{O2} = 200mA$	$6V < V_{IN1} < 14V$	-	-	40	mV
	ΔV_{O2}		$10.5V < V_{IN2} < 18V$	-	-	80	mV
Load Regulation	ΔV_{O1}	$5mA < I_{O1} < 500mA$	-	-	70	mV	
	ΔV_{O2}	$5mA < I_{O1} < 500mA$	-	-	160	mV	
Output Voltage 3	V_{O3}	$V_{SYS} = 7V$, $I_{O3} = 100mA$	4.97	5.1	5.23	V	
Line Regulation	ΔV_{O3}	$13V < V_{IN2} < 18V$, $I_{O3} = 100mA$	-	-	50	mV	
Load Regulation	ΔV_{O3}	$5mA < I_{O3} < 1A$	-	-	110	mV	
Reset Pulse Delay	T_{rd}	$C_D = 100nF$, Note 1	-	25	-	ms	
Saturation Voltage in Reset Condition	V_{rL}	$I_6 = 5mA$	-	-	0.4	V	
Leakage Current at Pin6	I_{rH}	$V_6 = 10V$	-	-	10	μA	
Output Voltage Thermal Drift	ST_t	$0^\circ < T_J < +125^\circ C$, Note 2	-	100	-	ppm/ $^\circ C$	
Short Circuit Output Current	I_{SC1}	$V_{IN1} = 6V$	-	-	1.6	A	
	I_{SC2}	$V_{IN2} = 10.5V$	-	-	1.6	A	
Disable Voltage, High	V_{disH}	Output 2 Active	2	-	-	V	
Disable Voltage, Low	V_{disL}	Output 2 Disabled	-	-	0.8	V	
Disable Bias Current	I_{dis}	$0V < V_{dis} < 7V$	-100	-	2	μA	
Junction Temperature for TSD	T_{tsd}	Note 2	-	145	-	$^\circ C$	
Quiescent Current	I_q	$I_{O1} = 10mA$, Output 2 Disabled	-	-	2	mA	
Reset Threshold Voltage	V_r	$K = V_{O1}$	K-0.4	K-0.25	K-0.1	V	
Reset Threshold Hysteresis	V_{rth}	Note 1	20	50	100	mA	

Note 1. To check the reset circuit, the reset output is low to discharge the delay capacitor ($= C_D$). If it's less than $V_{O1} - 0.25V$. And the reset output is high when the delay capacitor voltage linearly increased by the internal current source ($10\mu A$) if it's more than $V_{O1} - 0.2V$. The equations of delay time is the same as below. $T_{rd} = (C_D \times 2.5) / 10\mu A$.

Note 2. These parameters, although guaranteed, are not 100% tested in production.

Pin Connection Diagram
(Front View)

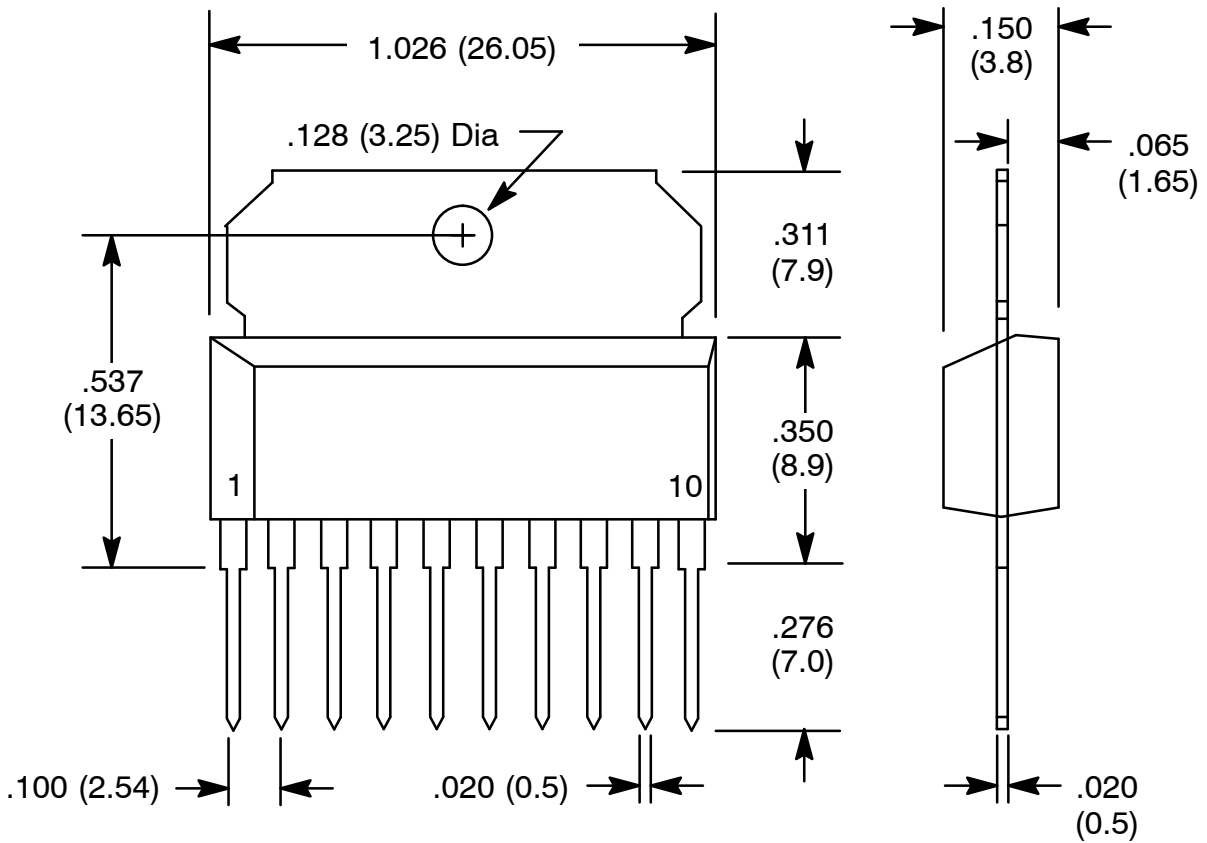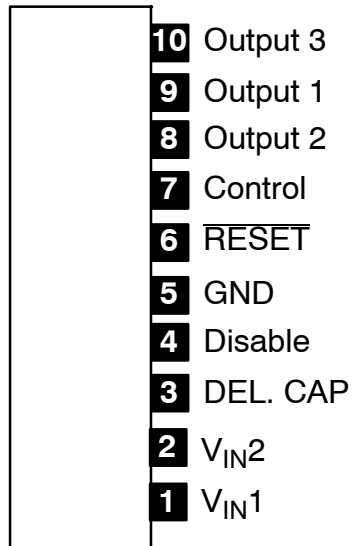

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [L78LR05DL-MA-E](#) [636416C](#) [714954EB](#)
[ZMR500QFTA](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L78M15CV-DG](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#) [ZTS6538SE](#) [MC78L06BP-AP](#)
[TA78L12F\(TE12L,F\)](#) [TC47BR5003ECT](#) [TCR2LN12,LF\(S](#) [TCR2LN28,LF\(S](#) [TCR2LN30,LF\(S](#) [TCR3DF295,LM\(CT](#) [TCR3DF40,LM\(CT](#)
[MC7812BD2TG](#) [TPS549B22RVFT](#) [BA178M20CP-E2](#) [L78M05TL-TL-E](#) [L78M05T-TR-E](#) [L78M12ABDT](#) [LM7812SX/NOPB](#) [LR645N3-G-P003](#) [LR645N3-G-P013](#) [ZXTR2005P5-13](#) [SCD7812BTG](#) [TCR3DF335,LM\(CT](#) [ZXTR2012K-13](#) [TLE42994E V33](#) [ZXTR2012Z-13](#)
[ZXTR2012P5-13](#) [ZXTR2008K-13](#) [ZXTR2005K-13](#)