

# RF Power LDMOS Transistor

## High Ruggedness N-Channel Enhancement-Mode Lateral MOSFET

Designed for handheld two-way radio applications with frequencies from 136 to 941 MHz. The high gain, ruggedness and wideband performance of this device make it ideal for large-signal, common-source amplifier applications in handheld radio equipment.

### Narrowband Performance (7.5 Vdc, T<sub>A</sub> = 25°C, CW)

| Frequency (MHz)    | G <sub>ps</sub> (dB) | η <sub>D</sub> (%) | P <sub>out</sub> (W) |
|--------------------|----------------------|--------------------|----------------------|
| 520 <sup>(1)</sup> | 20.9                 | 74.9               | 4.9                  |

### Wideband Performance (7.5 Vdc, T<sub>A</sub> = 25°C, CW)

| Frequency (MHz)        | P <sub>in</sub> (W) | G <sub>ps</sub> (dB) | η <sub>D</sub> (%) | P <sub>out</sub> (W) |
|------------------------|---------------------|----------------------|--------------------|----------------------|
| 136–174 <sup>(2)</sup> | 0.10                | 17.8                 | 61.8               | 6.1                  |
| 350–520 <sup>(3)</sup> | 0.12                | 15.4                 | 49.4               | 4.2                  |

### Load Mismatch/Ruggedness

| Frequency (MHz)    | Signal Type | VSWR                       | P <sub>in</sub> (W)   | Test Voltage | Result                |
|--------------------|-------------|----------------------------|-----------------------|--------------|-----------------------|
| 435 <sup>(3)</sup> | CW          | > 65:1 at all Phase Angles | 0.24 (3 dB Overdrive) | 9.0          | No Device Degradation |

1. Measured in 520 MHz narrowband test circuit.
2. Measured in 136–174 MHz VHF broadband reference circuit.
3. Measured in 350–520 MHz UHF broadband reference circuit.

### Features

- Characterized for Operation from 136 to 941 MHz
- Unmatched Input and Output Allowing Wide Frequency Range Utilization
- Integrated ESD Protection
- Integrated Stability Enhancements
- Wideband — Full Power Across the Band
- Exceptional Thermal Performance
- Extreme Ruggedness
- In Tape and Reel. T1 Suffix = 1,000 Units, 12 mm Tape Width, 7-inch Reel.

### Typical Applications

- Output Stage VHF Band Handheld Radio
- Output Stage UHF Band Handheld Radio
- Output Stage for 700–800 MHz Handheld Radio
- Driver for 10–1000 MHz Applications

AFT05MS004NT1

136–941 MHz, 4 W, 7.5 V  
WIDEBAND  
RF POWER LDMOS TRANSISTOR



SOT-89




Figure 1. Pin Connections

**Table 1. Maximum Ratings**

| Rating   | Symbol    | Value       | Unit      |
|--|-----------|-------------|-----------|
| Drain-Source Voltage   | $V_{DS}$  | -0.5, +30   | Vdc       |
| Gate-Source Voltage  | $V_{GS}$  | -6.0, +12   | Vdc       |
| Operating Voltage  | $V_{DD}$  | 12.5, +0    | Vdc       |
| Storage Temperature Range  | $T_{stg}$ | -65 to +150 | °C        |
| Case Operating Temperature Range   | $T_C$     | -40 to +150 | °C        |
| Operating Junction Temperature Range (1,2)                               | $T_J$     | -40 to +150 | °C        |
| Total Device Dissipation @ $T_C = 25^\circ\text{C}$<br>Derate above 25°C | $P_D$     | 28<br>0.23  | W<br>W/°C |

**Table 2. Thermal Characteristics**

| Characteristic   | Symbol          | Value (2,3) | Unit |
|--|-----------------|-------------|------|
| Thermal Resistance, Junction to Case<br>Case Temperature 79°C, 4.0 W CW, 7.5 Vdc, $I_{DQ} = 100$ mA, 520 MHz | $R_{\theta JC}$ | 4.4         | °C/W |

**Table 3. ESD Protection Characteristics**

| Test Methodology                      | Class             |
|---------------------------------------|-------------------|
| Human Body Model (per JESD22-A114)    | 1C, passes 1000 V |
| Machine Model (per EIA/JESD22-A115)   | A, passes 100 V   |
| Charge Device Model (per JESD22-C101) | IV, passes 2000 V |

**Table 4. Moisture Sensitivity Level**

| Test Methodology                     | Rating | Package Peak Temperature | Unit |
|--------------------------------------|--------|--------------------------|------|
| Per JESD22-A113, IPC/JEDEC J-STD-020 | 1      | 260                      | °C   |

**Table 5. Electrical Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

**Off Characteristics**

|  |           |   |   |     |                 |
|--|-----------|---|---|-----|-----------------|
| Zero Gate Voltage Drain Leakage Current<br>( $V_{DS} = 30$ Vdc, $V_{GS} = 0$ Vdc)  | $I_{DSS}$ | — | — | 2   | $\mu\text{Adc}$ |
| Zero Gate Voltage Drain Leakage Current<br>( $V_{DS} = 7.5$ Vdc, $V_{GS} = 0$ Vdc) | $I_{DSS}$ | — | — | 1   | $\mu\text{Adc}$ |
| Gate-Source Leakage Current<br>( $V_{GS} = 5$ Vdc, $V_{DS} = 0$ Vdc)               | $I_{GSS}$ | — | — | 500 | nAdc            |

**On Characteristics**

|   |              |     |     |     |     |
|---|--------------|-----|-----|-----|-----|
| Gate Threshold Voltage<br>( $V_{DS} = 10$ Vdc, $I_D = 67$ $\mu\text{Adc}$ ) | $V_{GS(th)}$ | 1.7 | 2.2 | 2.5 | Vdc |
| Drain-Source On-Voltage<br>( $V_{GS} = 10$ Vdc, $I_D = 700$ mAdc)           | $V_{DS(on)}$ | —   | .22 | —   | Vdc |
| Forward Transconductance<br>( $V_{DS} = 7.5$ Vdc, $I_D = 4.0$ Adc)          | $g_{fs}$     | —   | 4.0 | —   | S   |

**Dynamic Characteristics**

|  |           |   |      |   |    |
|--|-----------|---|------|---|----|
| Reverse Transfer Capacitance<br>( $V_{DS} = 7.5$ Vdc $\pm 30$ mV(rms)ac @ 1 MHz, $V_{GS} = 0$ Vdc) | $C_{rss}$ | — | 1.63 | — | pF |
| Output Capacitance<br>( $V_{DS} = 7.5$ Vdc $\pm 30$ mV(rms)ac @ 1 MHz, $V_{GS} = 0$ Vdc)           | $C_{oss}$ | — | 34.8 | — | pF |
| Input Capacitance<br>( $V_{DS} = 7.5$ Vdc, $V_{GS} = 0$ Vdc $\pm 30$ mV(rms)ac @ 1 MHz)            | $C_{iss}$ | — | 57.6 | — | pF |


1. Continuous use at maximum temperature will affect MTTF.
2. MTTF calculator available at <http://www.freescale.com/rf>. Select Software & Tools/Development Tools/Calculators to access MTTF calculators by product.
3. Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.freescale.com/rf>. Select Documentation/Application Notes - AN1955.

(continued)


**Table 5. Electrical Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise noted) **(continued)**

| Characteristic   | Symbol    | Min | Typ  | Max | Unit |
|--|-----------|-----|------|-----|------|
| <b>Functional Tests</b> (In Freescale Narrowband Test Fixture, 50 ohm system) $V_{DD} = 7.5\text{ Vdc}$ , $I_{DQ} = 100\text{ mA}$ , $P_{in} = 16\text{ dBm}$ , $f = 520\text{ MHz}$ |           |     |      |     |      |
| Common-Source Amplifier Output Power   | $P_{out}$ | —   | 4.9  | —   | W    |
| Drain Efficiency   | $\eta_D$  | —   | 74.9 | —   | %    |

### TYPICAL CHARACTERISTICS

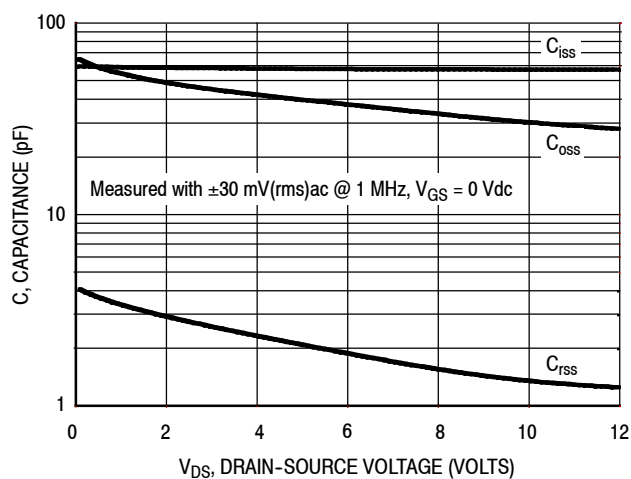

**Figure 2. Capacitance versus Drain-Source Voltage**

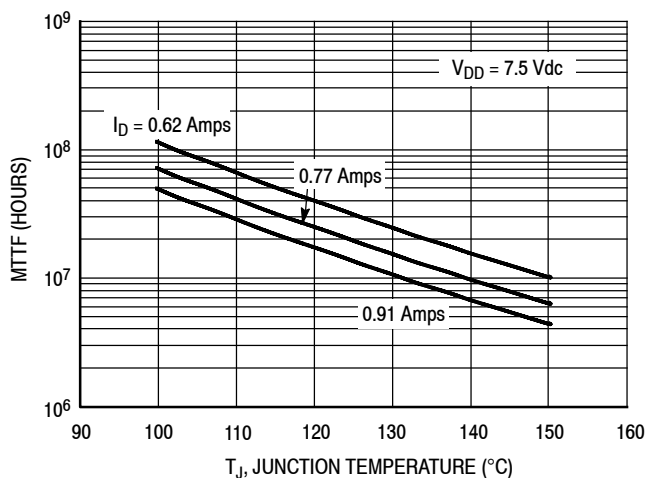


**Note:** MTTF value represents the total cumulative operating time under indicated test conditions.

MTTF calculator available at <http://www.freescale.com/rf>. Select Software & Tools/Development Tools/Calculators to access MTTF calculators by product.

**Figure 3. MTTF versus Junction Temperature — CW**

## 520 MHz NARROWBAND PRODUCTION TEST FIXTURE

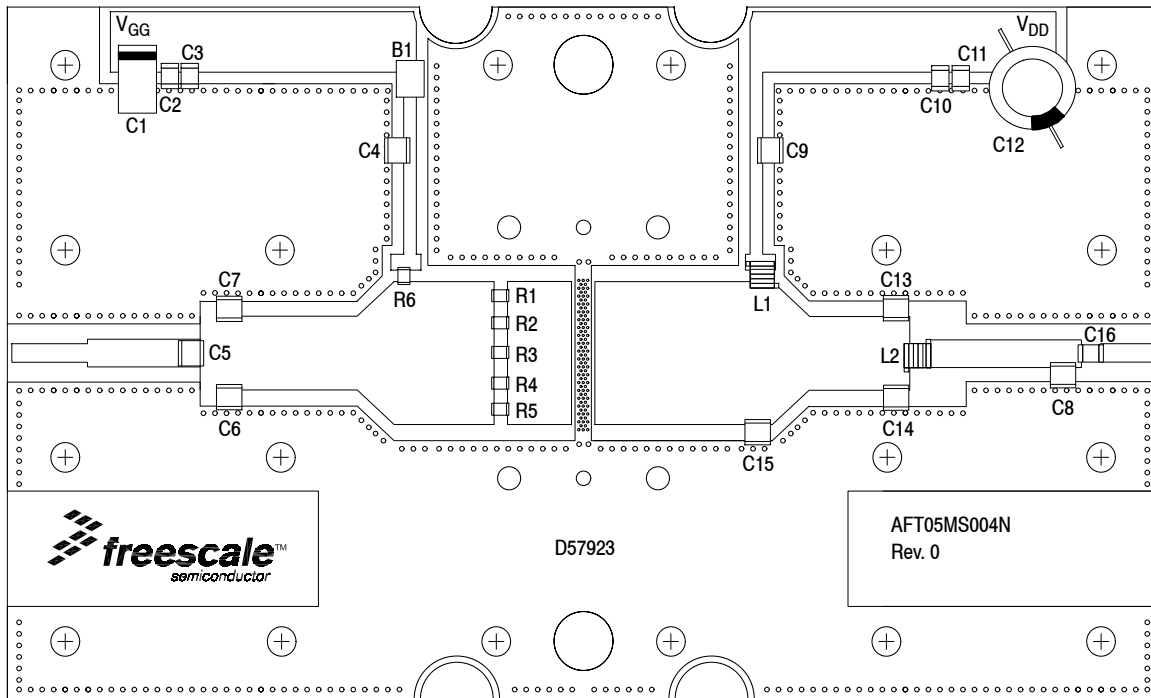

**Figure 4. AFT05MS004NT1 Narrowband Test Circuit Component Layout — 520 MHz**

**Table 6. AFT05MS004NT1 Narrowband Test Circuit Component Designations and Values — 520 MHz**

| Part               | Description                                | Part Number          | Manufacturer |
|--------------------|--|----------------------|--------------|
| B1                 | RF Bead, Short                             | 2743019447           | Fair-Rite    |
| C1                 | 22 $\mu$ F, 35 V Tantalum Capacitor        | T491X226K035AT       | Kemet        |
| C2, C11            | 0.1 $\mu$ F Chip Capacitors                | CDR33BX104AKWS       | AVX          |
| C3, C10            | 0.01 $\mu$ F Chip Capacitors               | C0805C103K5RAC       | Kemet        |
| C4, C9             | 180 pF Chip Capacitors                     | ATC100B181JT300XT    | ATC          |
| C5                 | 11 pF Chip Capacitor                       | ATC100B110JT500XT    | ATC          |
| C6, C7             | 13 pF Chip Capacitors                      | ATC100B130JT500XT    | ATC          |
| C8, C15            | 2.2 pF Chip Capacitors                     | ATC100B2R2JT500XT    | ATC          |
| C12                | 330 $\mu$ F, 35 V Electrolytic Capacitor   | MCGPR35V337M10X16-RH | Multicomp    |
| C13, C14           | 16 pF Chip Capacitors                      | ATC100B160JT500XT    | ATC          |
| C16                | 9.1 pF Chip Capacitor                      | ATC100B9R1CT500XT    | ATC          |
| L1                 | 8.0 nH, 3 Turn Inductor                    | A03TKLC              | Coilcraft    |
| L2                 | 5 nH, 2 Turn Inductor                      | A02TKLC              | Coilcraft    |
| R1, R2, R3, R4, R5 | 1.5 $\Omega$ , 1/4 W Chip Resistors        | RC1206FR-071R5L      | Yageo        |
| R6                 | 27 $\Omega$ , 1/4 W Chip Resistor          | CRCW120627R0FKEA     | Vishay       |
| PCB                | Rogers RO4350, 0.030", $\epsilon_r = 3.66$ | D57923               | MTL          |


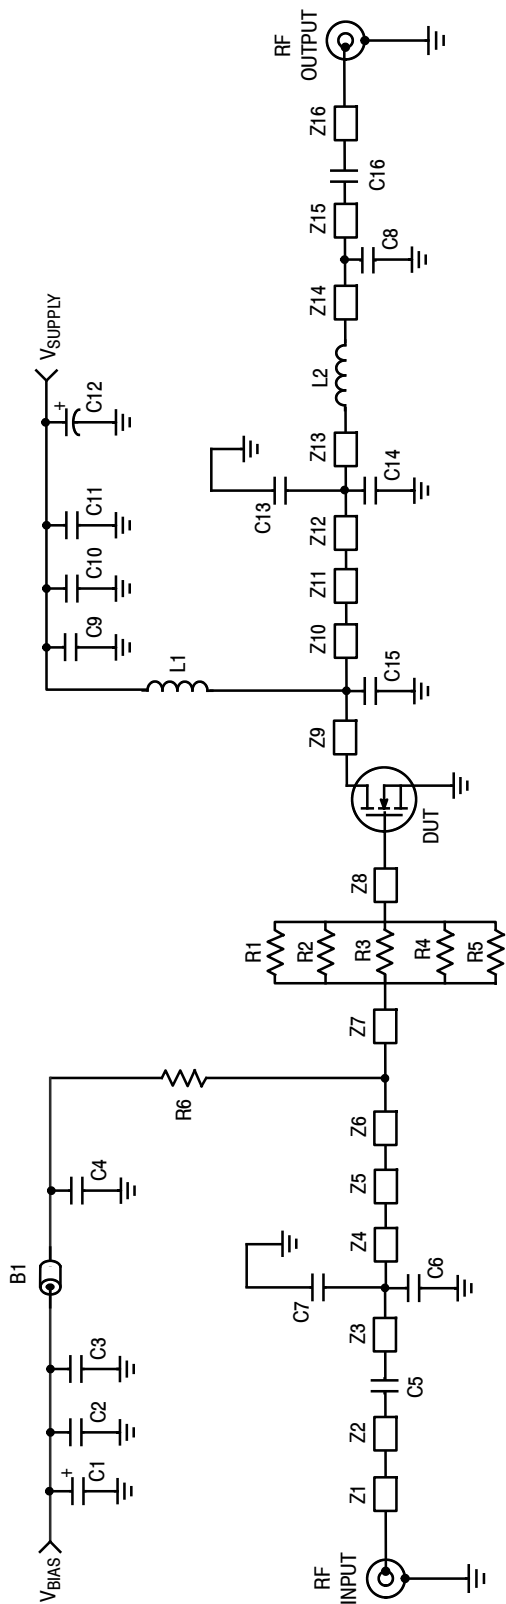


Figure 5. AFT05MS004NT1 Narrowband Test Circuit Schematic — 520 MHz


Table 7. AFT05MS004NT1 Narrowband Test Circuit Microstrips — 520 MHz

| Microstrip | Description                               |
|------------|---|
| Z1         | 0.328" x 0.080" Microstrip                |
| Z2         | 0.490" x 0.120" Microstrip                |
| Z3         | 0.055" x 0.320" Microstrip                |
| Z4         | 0.555" x 0.320" Microstrip                |
| Z5         | 0.160" x 0.320" x 0.620" Taper Microstrip |
| Z6         | 0.045" x 0.620" Microstrip                |
| Z7         | 0.387" x 0.620" Microstrip                |
| Z8         | 0.273" x 0.620" Microstrip                |
| Z9         | 0.708" x 0.620" Microstrip                |
| Z10        | 0.062" x 0.620" Microstrip                |
| Z11        | 0.162" x 0.620" x 0.320" Taper Microstrip |
| Z12        | 0.377" x 0.320" Microstrip                |
| Z13        | 0.055" x 0.320" Microstrip                |
| Z14        | 0.587" x 0.120" Microstrip                |
| Z15        | 0.078" x 0.120" Microstrip                |
| Z16        | 0.238" x 0.080" Microstrip                |

## TYPICAL CHARACTERISTICS — 520 MHz NARROWBAND REFERENCE CIRCUIT

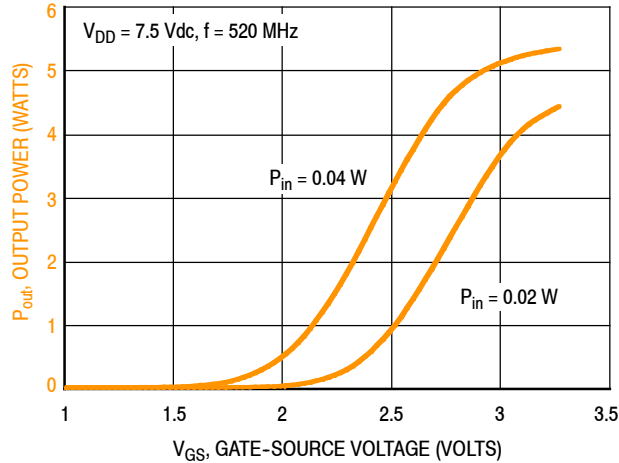

**Figure 6. Output Power versus Gate-Source Voltage**

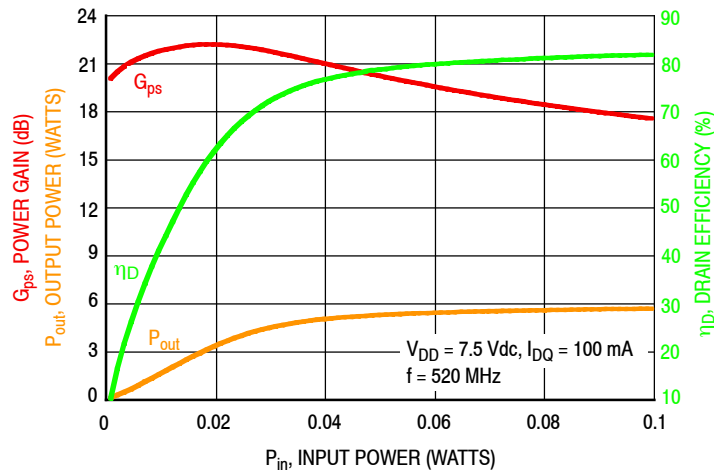


**Figure 7. Power Gain, Drain Efficiency and Output Power versus Input Power**

$V_{DD} = 7.5 \text{ Vdc}, I_{DQ} = 100 \text{ mA}, P_{out} = 4 \text{ W}$

| $f$<br>MHz | $Z_{source}$<br>$\Omega$ | $Z_{load}$<br>$\Omega$ |
|------------|--------------------------|------------------------|
| 520        | $1.35 + j2.15$           | $2.10 + j1.70$         |

$Z_{source}$  = Test circuit impedance as measured from gate to ground.

$Z_{load}$  = Test circuit impedance as measured from drain to ground.

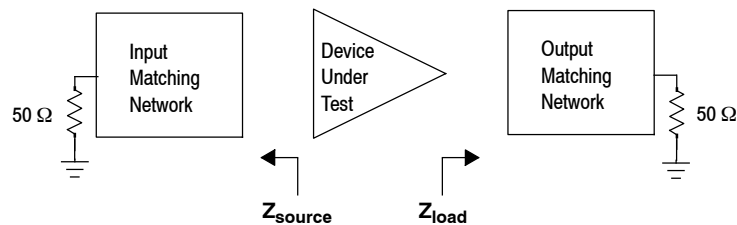

**Figure 8. Narrowband Series Equivalent Source and Load Impedance — 520 MHz**

## 136–174 MHz VHF BROADBAND REFERENCE CIRCUIT

**Table 8. 136–174 MHz VHF Broadband Performance** (In Freescale Reference Circuit, 50 ohm system)

$V_{DD} = 7.5$  Volts,  $I_{DQ} = 100$  mA,  $T_A = 25^\circ\text{C}$ , CW


| Frequency (MHz) | $P_{in}$ (W) | $G_{ps}$ (dB) | $\eta_D$ (%) | $P_{out}$ (W) |
|-----------------|--------------|---------------|--------------|---------------|
| 135             | 0.10         | 17.8          | 62.3         | 6.0           |
| 155             | 0.06         | 20.2          | 69.1         | 6.0           |
| 175             | 0.10         | 17.9          | 61.8         | 6.0           |

**Table 9. Load Mismatch/Ruggedness** (In Freescale Reference Circuit)

| Frequency (MHz) | Signal Type | VSWR                       | $P_{in}$ (W)            | Test Voltage, $V_{DD}$ | Result                |
|-----------------|-------------|----------------------------|-------------------------|------------------------|-----------------------|
| 155             | CW          | > 65:1 at all Phase Angles | 0.2<br>(3 dB Overdrive) | 9.0                    | No Device Degradation |



## 136–174 MHz VHF BROADBAND REFERENCE CIRCUIT

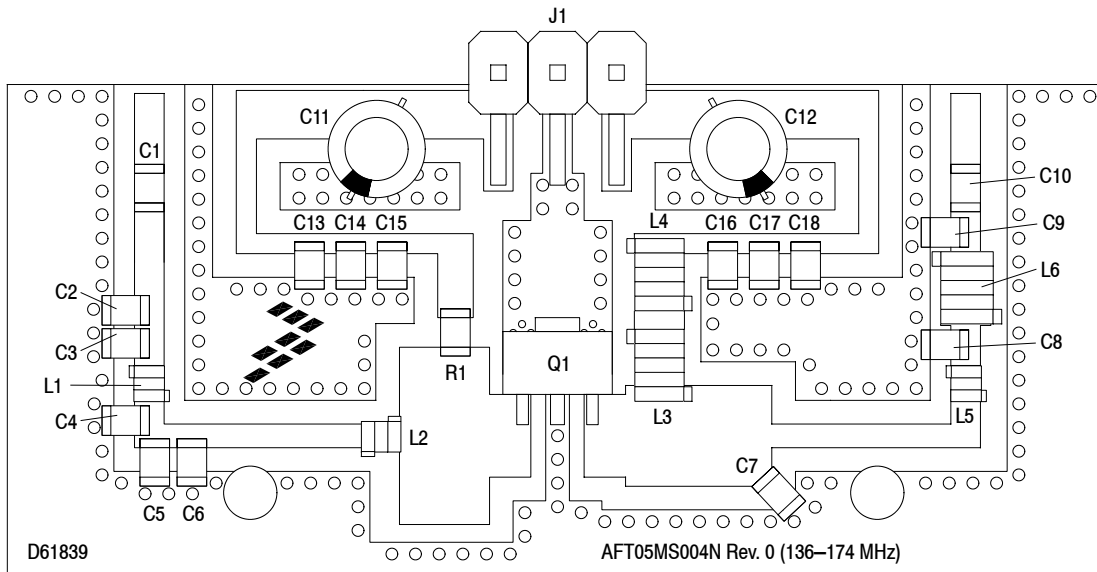

**Figure 9. AFT05MS004NT1 VHF Broadband Reference Circuit Component Layout — 136–174 MHz**

**Table 10. AFT05MS004NT1 VHF Broadband Reference Circuit Component Designations and Values — 136–174 MHz**

| Part              | Description                               | Part Number        | Manufacturer |
|-------------------|---|--------------------|--------------|
| C1, C10, C14, C17 | 1 nF Chip Capacitors                      | 2012X7R2E102M      | TDK          |
| C2                | 39 pF Chip Capacitor                      | ATC600F390JT250XT  | ATC          |
| C3, C8            | 56 pF Chip Capacitors                     | ATC600F560JT250XT  | ATC          |
| C4, C5            | 68 pF Chip Capacitors                     | ATC600F680JT250XT  | ATC          |
| C6, C15, C16      | 100 pF Chip Capacitors                    | ATC600F101JT250XT  | ATC          |
| C7                | 150 pF Chip Capacitor                     | ATC600F151JT250XT  | ATC          |
| C9                | 8.2 pF Chip Capacitor                     | ATC600F8R2BT250XT  | ATC          |
| C11, C12          | 10 $\mu$ F, 50 V Electrolytic Capacitors  | UVR1H100MDD        | Nichicon     |
| C13, C18          | 1 $\mu$ F Chip Capacitors                 | GRM21BR71H105KA12L | Murata       |
| J1                | Breakaway Header, Right-Angle 3 Pins      | 22-28-8360         | Molex        |
| L1                | 13.7 nH Inductor                          | 0807SQ14N          | Coilcraft    |
| L2                | 12.3 nH Inductor                          | 0806SQ12N          | Coilcraft    |
| L3, L4            | 25.0 nH Inductors                         | 0908SQ25N          | Coilcraft    |
| L5                | 15.7 nH Inductor                          | 0806SQ16N          | Coilcraft    |
| L6                | 27.3 nH Inductor                          | 0908SQ27N          | Coilcraft    |
| Q1                | RF Power LDMOS Transistor                 | AFT05MS004NT1      | Freescale    |
| R1                | 33 $\Omega$ , 1/10 W Chip Resistor        | CRCW080533R0JNEA   | Vishay       |
| PCB               | 0.020", $\epsilon_r = 4.8$ , FR4 (S-1000) | D61839             | MTL          |

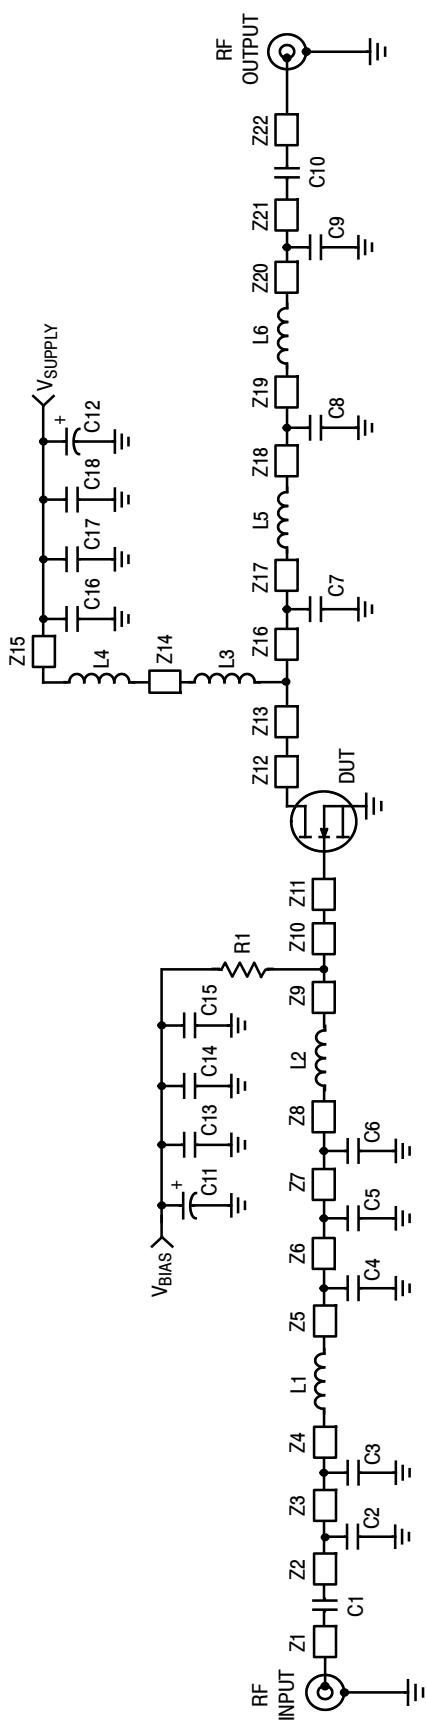



Figure 10. AFT05MS004NT1 VHF Broadband Reference Circuit Schematic — 136–174 MHz

Table 11. AFT05MS004NT1 VHF Broadband Reference Circuit Microstrips — 136–174 MHz


| Microstrip | Description                | Microstrip | Description                |
|------------|----------------------------|------------|----------------------------|
| Z1         | 0.120" x 0.050" Microstrip | Z9         | 0.070" x 0.300" Microstrip |
| Z2         | 0.142" x 0.050" Microstrip | Z10        | 0.032" x 0.300" Microstrip |
| Z3         | 0.010" x 0.050" Microstrip | Z11        | 0.070" x 0.140" Microstrip |
| Z4         | 0.012" x 0.050" Microstrip | Z12        | 0.070" x 0.140" Microstrip |
| Z5         | 0.010" x 0.050" Microstrip | Z13        | 0.015" x 0.170" Microstrip |
| Z6*        | 0.010" x 0.050" Microstrip | Z14        | 0.030" x 0.084" Microstrip |
| Z7         | 0.012" x 0.040" Microstrip | Z15        | 0.040" x 0.040" Microstrip |
| Z8         | 0.265" x 0.040" Microstrip | Z16        | 0.015" x 0.170" Microstrip |
|            |                            | Z17*       | 0.357" x 0.050" Microstrip |
|            |                            | Z18        | 0.010" x 0.050" Microstrip |
|            |                            | Z19        | 0.010" x 0.050" Microstrip |
|            |                            | Z20        | 0.010" x 0.050" Microstrip |
|            |                            | Z21        | 0.010" x 0.050" Microstrip |
|            |                            | Z22        | 0.120" x 0.050" Microstrip |

\* Line length includes microstrip bends


## TYPICAL CHARACTERISTICS — 136–174 MHz VHF BROADBAND REFERENCE CIRCUIT

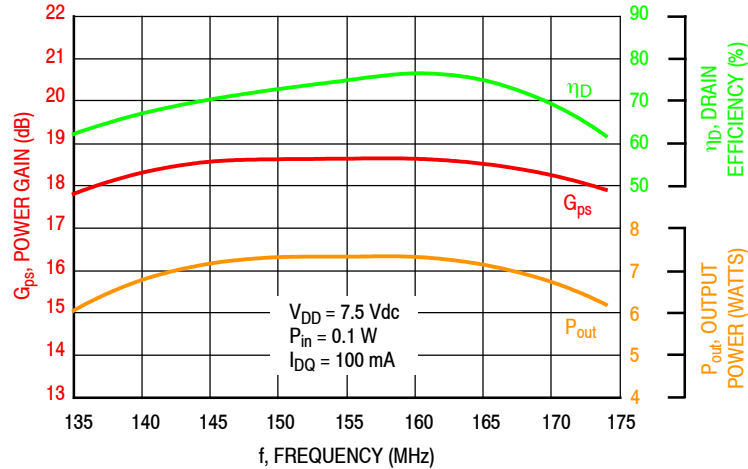

**Figure 11. Power Gain, Drain Efficiency and Output Power versus Frequency at a Constant  $P_{in}$**

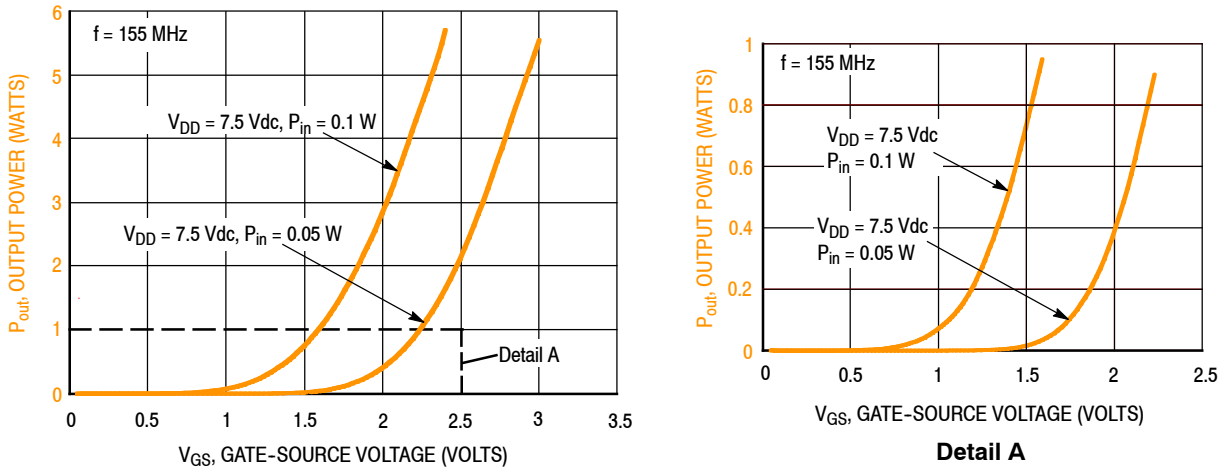


**Figure 12. Output Power versus Gate-Source Voltage**

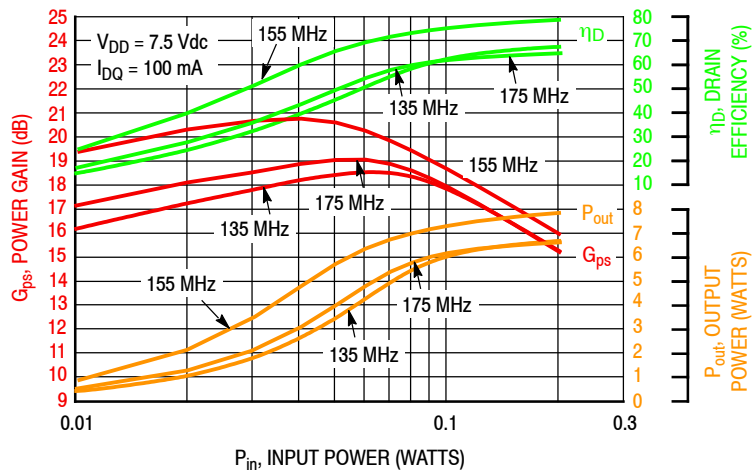

**Figure 13. Power Gain, Drain Efficiency and Output Power versus Input Power and Frequency**

### 136–174 MHz VHF BROADBAND REFERENCE CIRCUIT

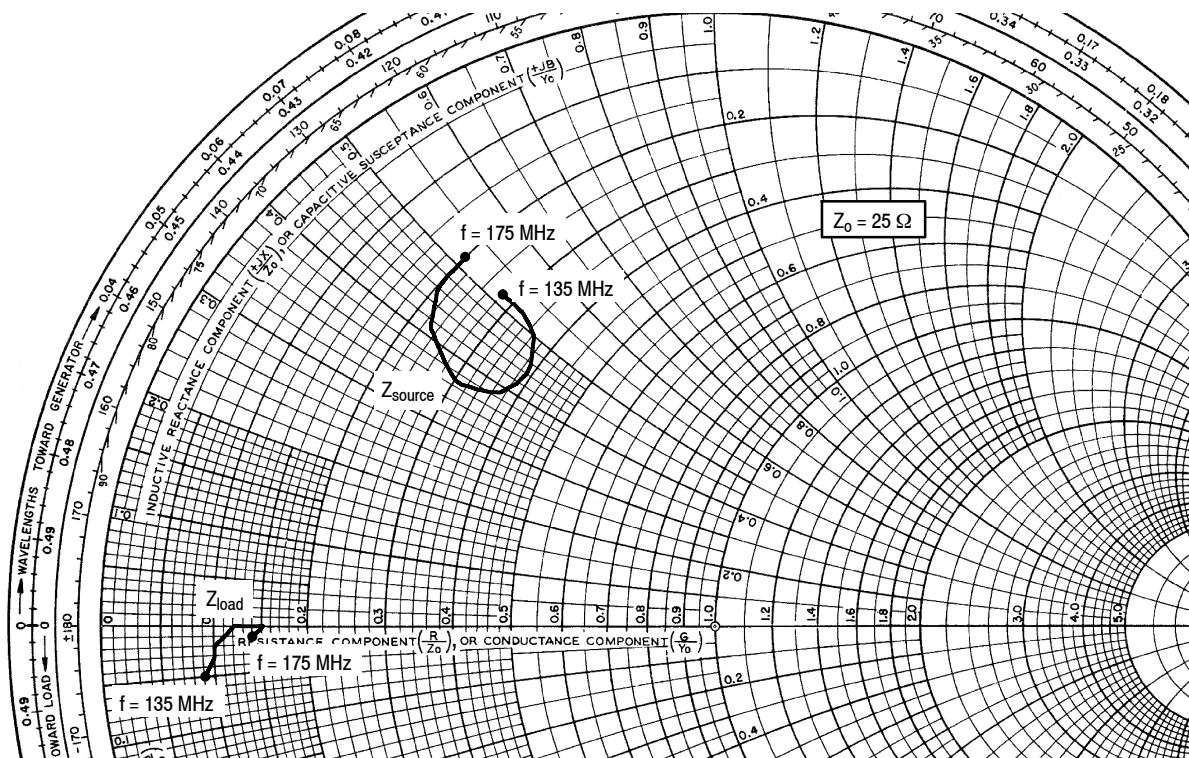

$V_{DD} = 7.5 \text{ Vdc}$ ,  $I_{DQ} = 100 \text{ mA}$ ,  $P_{out} = 4 \text{ W}$

| f MHz | $Z_{source} \Omega$ | $Z_{load} \Omega$ |
|-------|---------------------|-------------------|
| 135   | $7.02 + j13.05$     | $2.24 - j1.21$    |
| 140   | $8.07 + j13.00$     | $2.42 - j0.87$    |
| 145   | $9.05 + j12.43$     | $2.56 - j0.54$    |
| 150   | $9.68 + j11.26$     | $2.79 - j0.24$    |
| 155   | $9.16 + j9.82$      | $3.08 - j0.07$    |
| 160   | $7.39 + j9.21$      | $3.23 - j0.03$    |
| 165   | $5.83 + j10.15$     | $3.52 - j0.09$    |
| 170   | $5.09 + j11.62$     | $3.77 - j0.01$    |
| 175   | $5.06 + j12.97$     | $3.40 - j0.27$    |

$Z_{source}$  = Test circuit impedance as measured from gate to ground.

$Z_{load}$  = Test circuit impedance as measured from drain to ground.

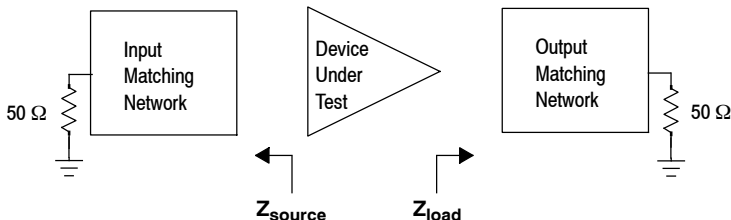


Figure 14. VHF Broadband Series Equivalent Source and Load Impedance — 136–174 MHz

## 350–520 MHz UHF BROADBAND REFERENCE CIRCUIT

**Table 12. 350–520 MHz UHF Broadband Performance** (In Freescale Reference Circuit, 50 ohm system)

$V_{DD} = 7.5$  Volts,  $I_{DQ} = 50$  mA,  $T_A = 25^\circ\text{C}$ , CW

| Frequency (MHz) | $P_{in}$ (W) | $G_{ps}$ (dB) | $\eta_D$ (%) | $P_{out}$ (W) |
|-----------------|--------------|---------------|--------------|---------------|
| 350             | 0.11         | 15.5          | 48.7         | 4.0           |
| 470             | 0.04         | 19.8          | 67.7         | 4.0           |
| 520             | 0.09         | 16.3          | 71.1         | 4.0           |

**Table 13. Load Mismatch/Ruggedness** (In Freescale Reference Circuit)

| Frequency (MHz) | Signal Type | VSWR                       | $P_{in}$ (W)             | Test Voltage, $V_{DD}$ | Result                |
|-----------------|-------------|----------------------------|--------------------------|------------------------|-----------------------|
| 435             | CW          | > 65:1 at all Phase Angles | 0.24<br>(3 dB Overdrive) | 9.0                    | No Device Degradation |

### 350–520 MHz UHF BROADBAND REFERENCE CIRCUIT

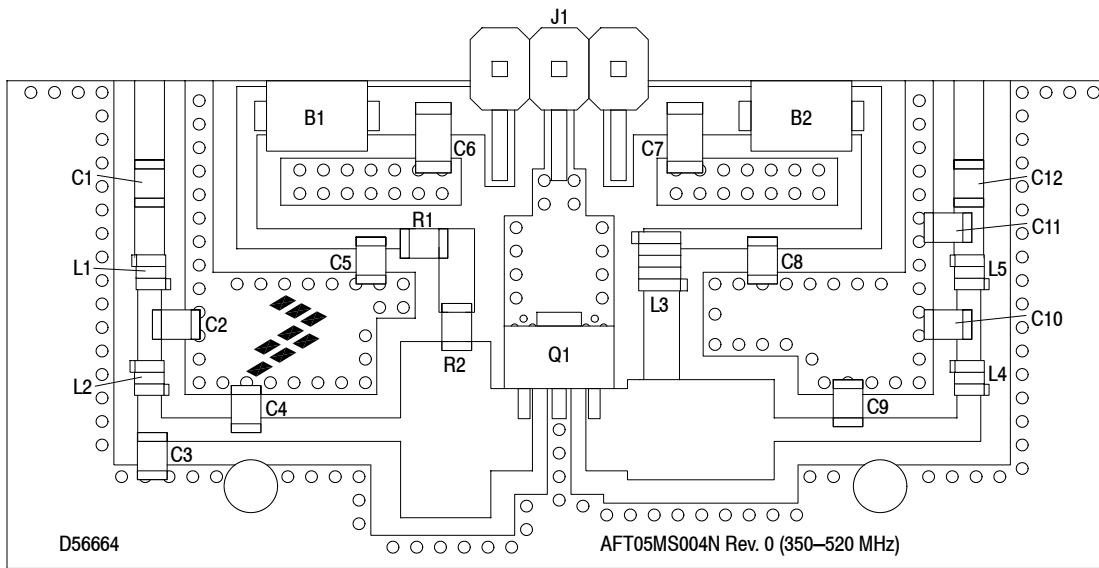


Figure 15. AFT05MS004NT1 UHF Broadband Reference Circuit Component Layout — 350–520 MHz

Table 14. AFT05MS004NT1 UHF Broadband Reference Circuit Component Designations and Values — 350–520 MHz

| Part        | Description                               | Part Number        | Manufacturer |
|-------------|---|--------------------|--------------|
| B1, B2      | RF Beads                                  | 2743019447         | Fair-Rite    |
| C1, C10     | 18 pF Chip Capacitors                     | GQM2195C2E180FB12D | Murata       |
| C5, C8, C12 | 100 pF Chip Capacitors                    | GQM2195C2E101GB12D | Murata       |
| C2, C3      | 15 pF Chip Capacitors                     | GQM2195C2E150FB12D | Murata       |
| C4          | 56 pF Chip Capacitor                      | GQM2195C2E560GB12D | Murata       |
| C6          | 1 $\mu$ F Chip Capacitor                  | GRM31CR72A105KA01L | Murata       |
| C7          | 10 $\mu$ F Chip Capacitor                 | GRM31CR61H106KA12L | Murata       |
| C9          | 39 pF Chip Capacitor                      | GQM2195C2E390GB12D | Murata       |
| C11         | 5.1 pF Chip Capacitor                     | GQM2195C2E5R1BB12D | Murata       |
| J1          | Breakaway Header, Right-Angle 3 Pins      | 22-28-8360         | Molex        |
| L1, L2      | 5.5 nH Inductors                          | 0806SQ5N5          | Coilcraft    |
| L3          | 16.6 nH Inductor                          | 0908SQ17N          | Coilcraft    |
| L4          | 2.55 nH Inductor                          | 0906-3JLC          | Coilcraft    |
| L5          | 8.1 nH Inductor                           | 0908SQ8N1          | Coilcraft    |
| Q1          | RF Power LDMOS Transistor                 | AFT05MS004NT1      | Freescale    |
| R1, R2      | 22 $\Omega$ , 1/10 W Chip Resistors       | RR1220Q-220-D      | Susumu       |
| PCB         | 0.020", $\epsilon_r = 4.8$ , FR4 (S-1000) | D56664             | MTL          |

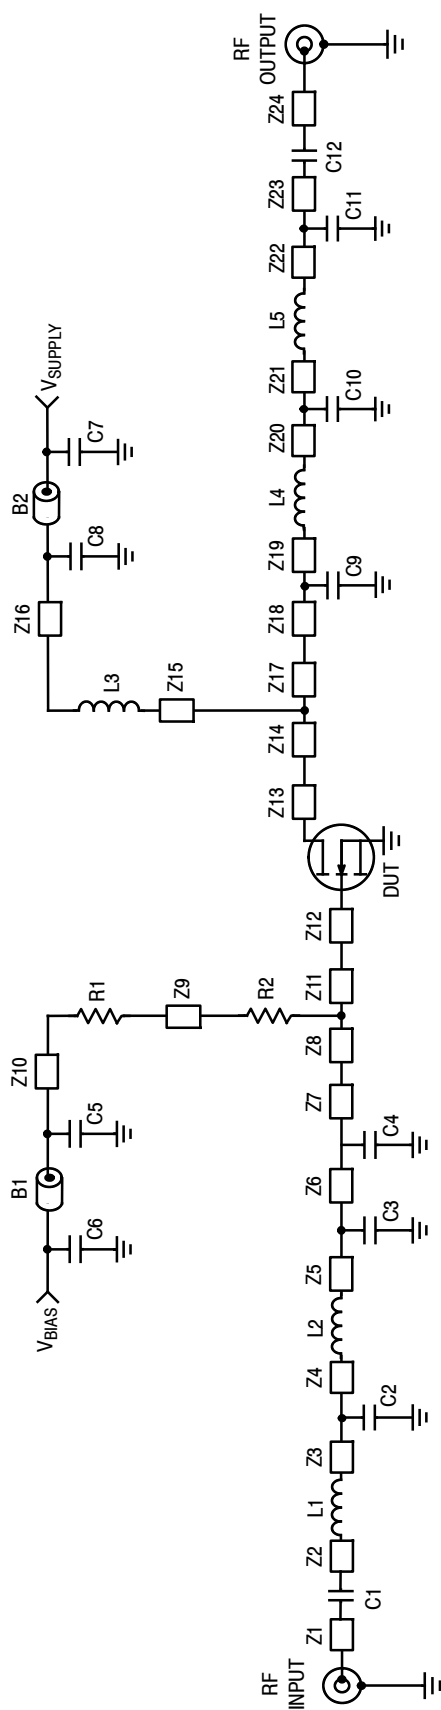



Figure 16. AFT05MS004NT1 UHF Broadband Reference Circuit Schematic — 350–520 MHz

Table 15. AFT05MS004NT1 UHF Broadband Reference Circuit Microstrips — 350–520 MHz


| Microstrip | Description                | Microstrip | Description                |
|------------|----------------------------|------------|----------------------------|
| Z1         | 0.150" x 0.050" Microstrip | Z9         | 0.140" x 0.060" Microstrip |
| Z2         | 0.090" x 0.050" Microstrip | Z10        | 0.065" x 0.034" Microstrip |
| Z3         | 0.070" x 0.050" Microstrip | Z11        | 0.057" x 0.300" Microstrip |
| Z4         | 0.070" x 0.050" Microstrip | Z12        | 0.070" x 0.140" Microstrip |
| Z5*        | 0.090" x 0.050" Microstrip | Z13        | 0.070" x 0.140" Microstrip |
| Z6*        | 0.160" x 0.050" Microstrip | Z14        | 0.057" x 0.170" Microstrip |
| Z7         | 0.260" x 0.050" Microstrip | Z15        | 0.140" x 0.060" Microstrip |
| Z8         | 0.095" x 0.300" Microstrip | Z16        | 0.200" x 0.034" Microstrip |
| Z17        | 0.190" x 0.170" Microstrip |            |                            |
| Z18        | 0.150" x 0.050" Microstrip |            |                            |
| Z19*       | 0.270" x 0.050" Microstrip |            |                            |
| Z20        | 0.070" x 0.050" Microstrip |            |                            |
| Z21        | 0.070" x 0.050" Microstrip |            |                            |
| Z22        | 0.050" x 0.050" Microstrip |            |                            |
| Z23        | 0.050" x 0.050" Microstrip |            |                            |
| Z24        | 0.150" x 0.050" Microstrip |            |                            |

\* Line length includes microstrip bends


## TYPICAL CHARACTERISTICS — 350–520 MHz UHF BROADBAND REFERENCE CIRCUIT

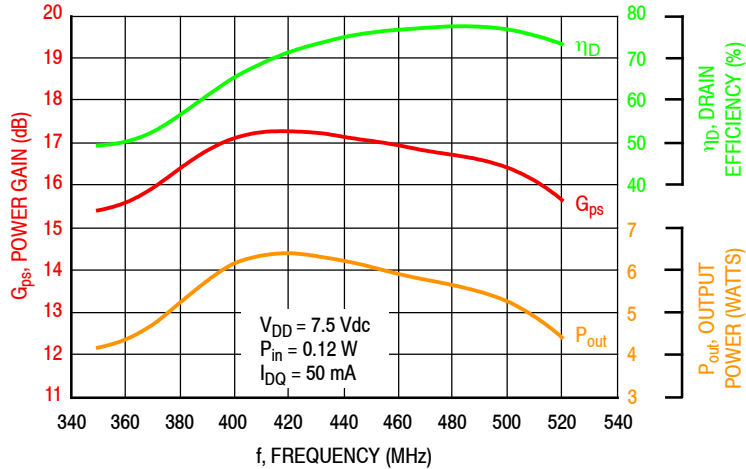

**Figure 17. Power Gain, Drain Efficiency and Output Power versus Frequency at a Constant  $P_{in}$**

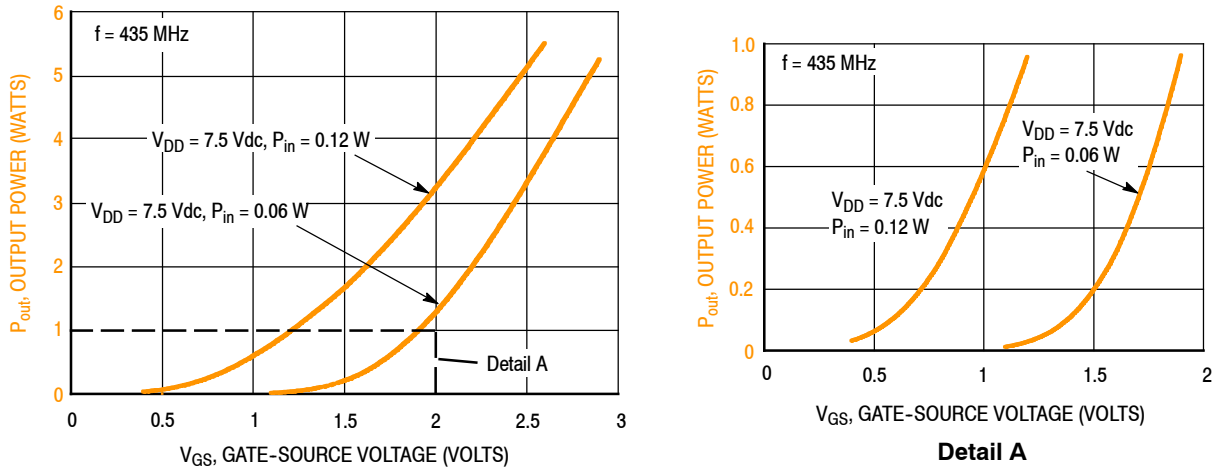


**Figure 18. Output Power versus Gate-Source Voltage**

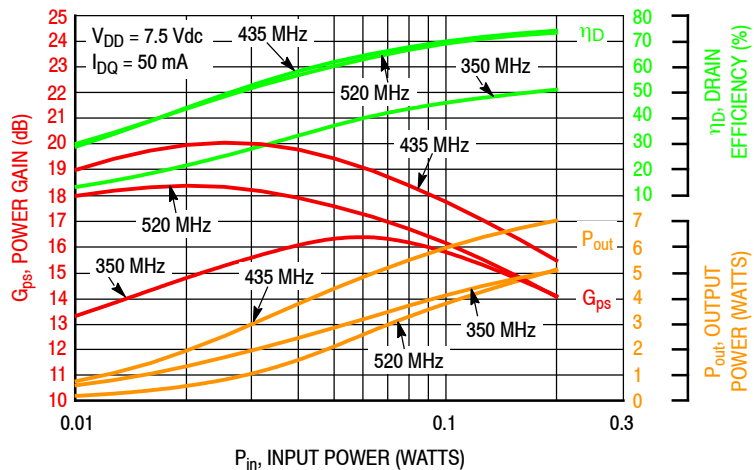

**Figure 19. Power Gain, Drain Efficiency and Output Power versus Input Power and Frequency**



### 350–520 MHz UHF BROADBAND REFERENCE CIRCUIT

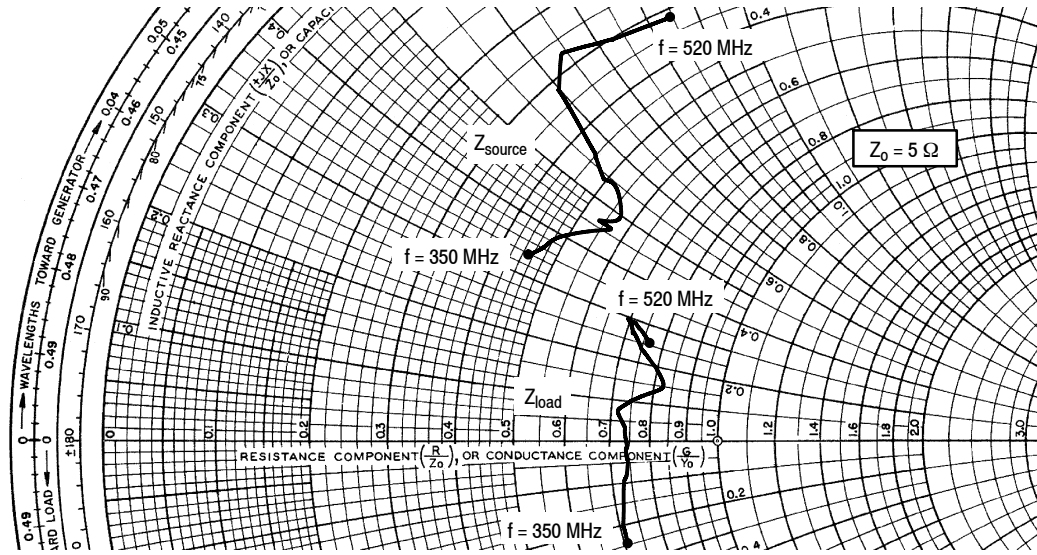

$V_{DD} = 7.5 \text{ Vdc}$ ,  $I_{DQ} = 50 \text{ mA}$ ,  $P_{out} = 4 \text{ W}$

| f<br>MHz | $Z_{source}$<br>$\Omega$ | $Z_{load}$<br>$\Omega$ |
|----------|--------------------------|------------------------|
| 350      | 2.27 - j1.72             | 3.55 + j1.20           |
| 360      | 2.41 - j1.91             | 3.61 + j0.92           |
| 370      | 2.55 - j2.11             | 3.66 + j0.64           |
| 380      | 2.68 - j2.31             | 3.71 + j0.36           |
| 390      | 2.74 - j2.38             | 3.71 + j0.15           |
| 400      | 2.76 - j2.36             | 3.69 + j0.02           |
| 410      | 2.77 - j2.35             | 3.66 + j0.18           |
| 420      | 2.78 - j2.35             | 3.67 + j0.34           |
| 430      | 2.78 - j2.43             | 3.82 + j0.48           |
| 440      | 2.79 - j2.50             | 3.97 + j0.62           |
| 450      | 2.79 - j2.57             | 4.13 + j0.76           |
| 460      | 2.44 - j2.70             | 4.00 + j0.95           |
| 470      | 2.02 - j2.84             | 3.80 + j1.15           |
| 480      | 1.59 - j2.98             | 3.61 + j1.36           |
| 490      | 1.37 - j3.20             | 3.53 + j1.46           |
| 500      | 1.45 - j3.53             | 3.62 + j1.41           |
| 510      | 1.52 - j3.86             | 3.71 + j1.36           |
| 520      | 1.60 - j4.19             | 3.80 + j1.31           |

$Z_{source}$  = Test circuit impedance as measured from gate to ground.

$Z_{load}$  = Test circuit impedance as measured from drain to ground.

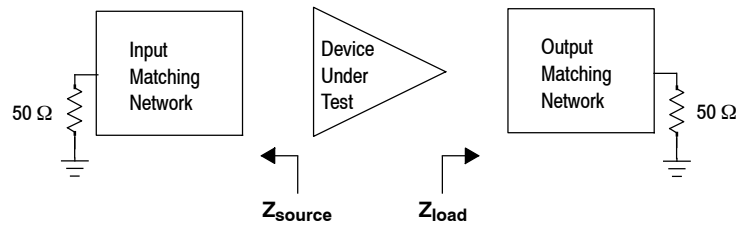


Figure 20. UHF Broadband Series Equivalent Source and Load Impedance — 350–520 MHz

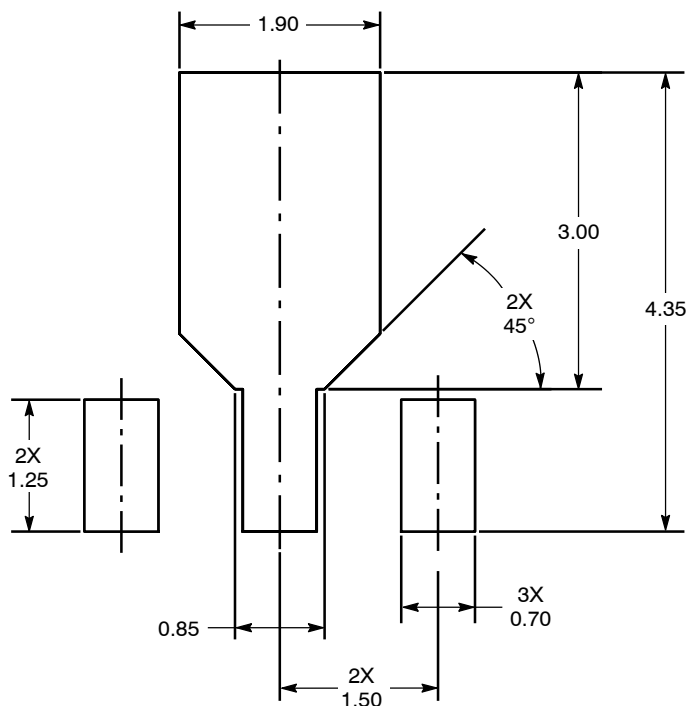
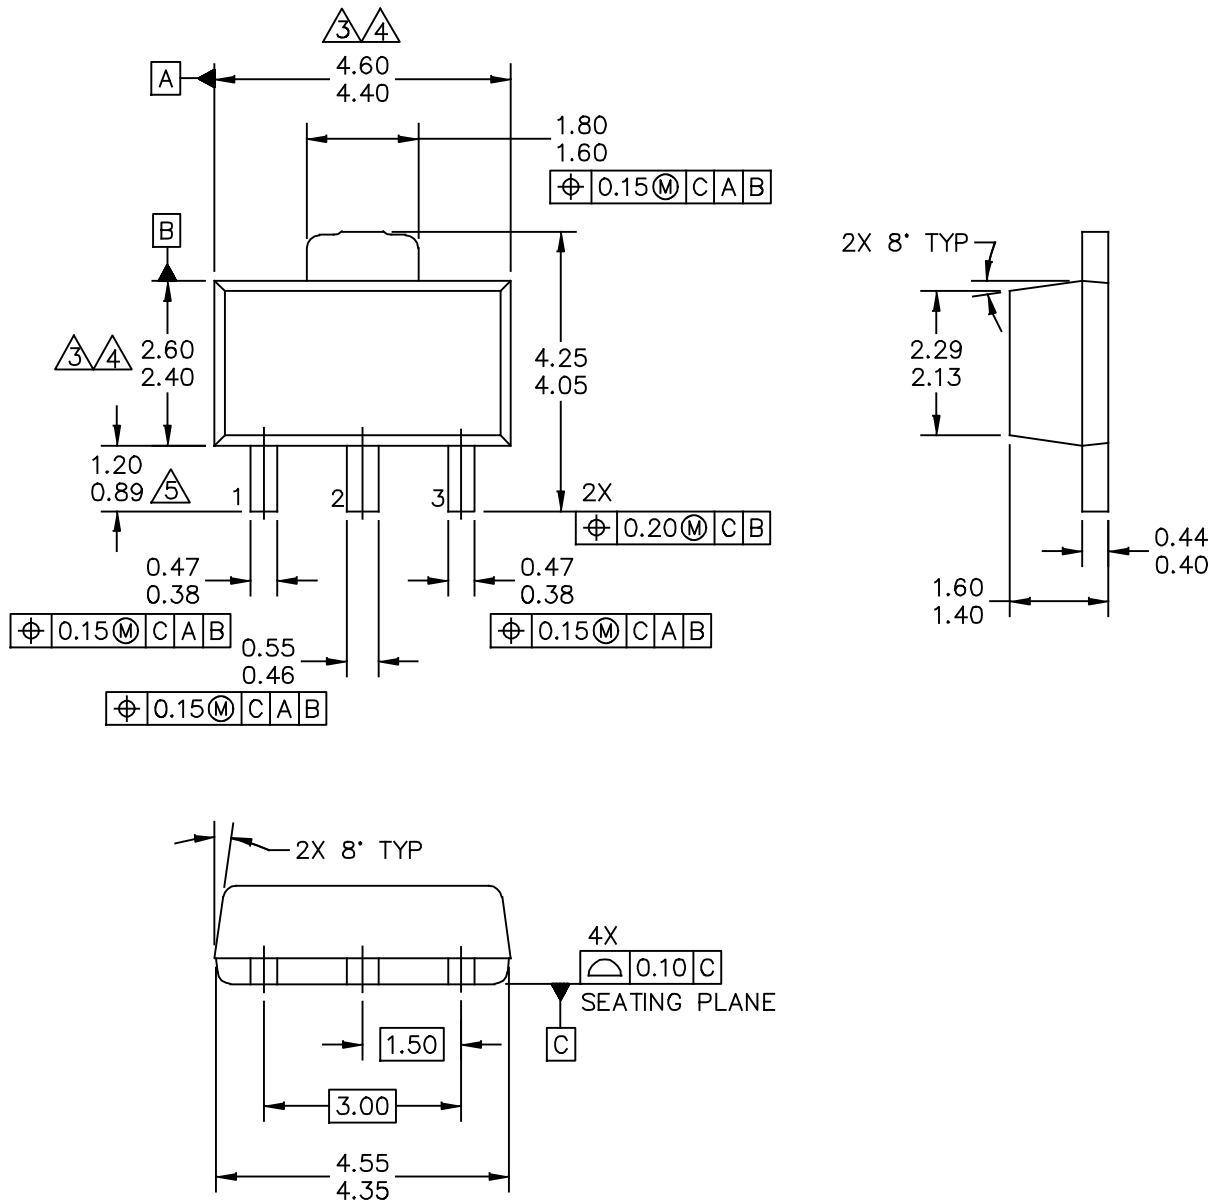


Figure 21. PCB Pad Layout for SOT-89A

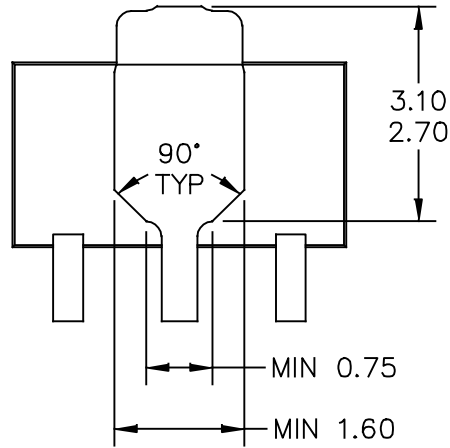


Figure 22. Product Marking

PACKAGE DIMENSIONS



|   |                          |                            |  |
|---|--------------------------|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED.   | MECHANICAL OUTLINE       | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br>SOT-89A, 3 LEAD,<br>4.5 X 2.5 PKG, 1.5 MM PITCH | DOCUMENT NO: 98ASA00241D | REV: 0                     |  |
|   | CASE NUMBER: 2142-01     | 15 JUL 2010                |  |
|   | STANDARD: NON-JEDEC      |                            |  |



BOTTOM VIEW

|   |                    |                            |             |
|---|--------------------|----------------------------|-------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED.   | MECHANICAL OUTLINE | PRINT VERSION NOT TO SCALE |             |
| TITLE:<br>SOT-89A, 3 LEAD,<br>4.5 X 2.5 PKG, 1.5 MM PITCH |                    | DOCUMENT NO: 98ASA00241D   | REV: 0      |
|   |                    | CASE NUMBER: 2142-01       | 15 JUL 2010 |
|   |                    | STANDARD: NON-JEDEC        |             |

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M – 1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS.

3. DIMENSIONS DOES NOT INCLUDE MOLD FLASH. PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.5 MM PER END. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.5 MM PER SIDE.

4. DIMENSION ARE DETERMINED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.

5. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.

|   |                    |                            |             |
|---|--------------------|----------------------------|-------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED.   | MECHANICAL OUTLINE | PRINT VERSION NOT TO SCALE |             |
| TITLE:<br>SOT-89A, 3 LEAD,<br>4.5 X 2.5 PKG, 1.5 MM PITCH |                    | DOCUMENT NO: 98ASA00241D   | REV: 0      |
|   |                    | CASE NUMBER: 2142-01       | 15 JUL 2010 |
|   |                    | STANDARD: NON-JEDEC        |             |

## PRODUCT DOCUMENTATION, SOFTWARE AND TOOLS

Refer to the following documents, software and tools to aid your design process.

### Application Notes

- AN1955: Thermal Measurement Methodology of RF Power Amplifiers

### Engineering Bulletins

- EB212: Using Data Sheet Impedances for RF LDMOS Devices

### Software

- Electromigration MTTF Calculator
- RF High Power Model
- .s2p File

### Development Tools

- Printed Circuit Boards

For Software and Tools, do a Part Number search at <http://www.freescale.com>, and select the “Part Number” link. Go to the Software & Tools tab on the part’s Product Summary page to download the respective tool.

## REVISION HISTORY

The following table summarizes revisions to this document.

| Revision | Date      | Description                     |
|----------|-----------|---------------------------------|
| 0        | July 2014 | • Initial Release of Data Sheet |

### ***How to Reach Us:***

**Home Page:**  
[freescale.com](http://freescale.com)

**Web Support:**  
[freescale.com/support](http://freescale.com/support)

Information in this document is provided solely to enable system and software implementers to use Freescale products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits based on the information in this document.

Freescale reserves the right to make changes without further notice to any products herein. Freescale makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale data sheets and/or specifications can and do vary in different applications, and actual performance may vary over time. All operating parameters, including "typicals," must be validated for each customer application by customer's technical experts. Freescale does not convey any license under its patent rights nor the rights of others. Freescale sells products pursuant to standard terms and conditions of sale, which can be found at the following address: [freescale.com/SalesTermsandConditions](http://freescale.com/SalesTermsandConditions).

Freescale and the Freescale logo are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. Airfast is a trademark of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.

© 2014 Freescale Semiconductor, Inc.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF MOSFET Transistors](#) category:*

*Click to view products by [NXP](#) manufacturer:*

Other Similar products are found below :

[MRF492](#) [MRFE8VP8600HR5](#) [ARF1511](#) [ARF465BG](#) [BF 2030 E6814](#) [BLF861A](#) [DU1215S](#) [DU28200M](#) [UF28100M](#) [DU2820S](#)  
[MHT1008NT1](#) [MMRF1014NT1](#) [MRF426](#) [ARF468AG](#) [ARF468BG](#) [MAPHST0045](#) [MRFE6VP61K25NR6](#) [DU2860U](#) [MRFE6VP5300NR1](#)  
[BF2040E6814HTSA1](#) [MRFE6VP5150GNR1](#) [LET9060S](#) [MRF136Y](#) [BF999E6327HTSA1](#) [SD2931-12MR](#) [BF998E6327HTSA1](#)  
[AFV10700HR5](#) [MRF141](#) [MRF171](#) [MRF172](#) [MRF174](#) [QPD1020SR](#) [BF 1005S E6327](#) [MRF134](#) [MRF136](#) [MRF137](#) [MRF141G](#) [MRF151A](#)  
[MRF151G](#) [MRF157](#) [MRF158](#) [MRF160](#) [MRF171A](#) [MRF177](#) [UF2840G](#) [TGF3021-SM](#) [ARF1510](#) [ARF448BG](#) [ARF449AG](#) [ARF466BG](#)