



## Quick Start Guide MPC5777C-DEVB

NXP automotive system solution with the highly integrated SPC5777C MCU as well as the advanced MC33FS6520LAE system basis chip and the TJA1100 and TJA1145T/FD Ethernet and CAN FD Physical interface chips

FREEDOM DEVELOPMENT PLATFORM



## Quick Start Guide

### GET TO KNOW THE MPC5777C-DEVB BOARD

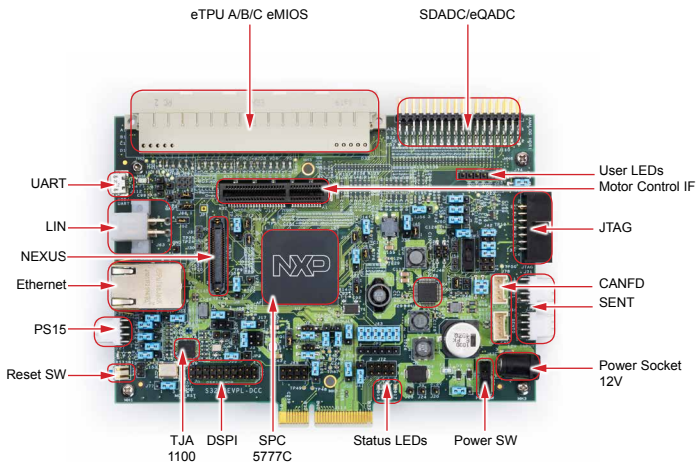


Figure 1: Top elevation of MPC5777C Development Board

## MPC5777C-DEVB FEATURES

The standalone development board provides the following features:

- NXP MPC5777C Microcontroller (516 MAPBGA soldered)
- 40MHz onboard clock oscillator circuit for MCU Clocking
- User reset switch with reset status LEDs
- Power switch with Power Indication LEDs
- 4 user LEDs, freely connectable
- Standard 14-pin JTAG debug connector and 50-pin SAMTEC Nexus connector
- Micro USB / UART FDTI transceiver to interface with MCU
- NXP FS65xx Power SBC for standalone operation of MCU
- Single 12 V external power supply input to on-board Power SBC providing all of the necessary MCU voltages; power supplied to the DEVB via a 2.1mm barrel style power jack
- 1 CAN and 1 LIN connector supported by Power SBC
- 1 CAN supported via NXP CANFD transceiver TJA1145
- 1 Automotive Ethernet supported via NXP Ethernet physical interface TJA1100
- Analog/eTPU/eMIOS/DSPI/SENT/PSI5 signals available via on board connectors
- Motor Control Interface to connect with power stage board of MTRCKTSPS5744P Development Kit

### MPC5777C-DEVB HARDWARE

The development board includes a complete NXP system solution. Following table describes the NXP components used in the DEVB.

#### **Microcontroller**

The SPC5777C offers 264MHz lockstep cores to support ASIL-D, 8 MB of Flash, 512 KB SRAM, CAN-FD, Ethernet, advanced complex timers and a CSE hardware security module.

#### **System Basis Chip**

The MC33FS6520LAE is providing robust, scalable power management to the SPC5777C MCU with Fail Silent safety monitoring measures that fit for ASIL D.

#### **Ethernet PHY**

The TJA1100 is a 100BASE-T1 compliant Ethernet PHY optimized for automotive use cases. The device provides 100 Mbit/s transmit and receive capability over a single Unshielded Twisted Pair cable.

#### **CANFD PHY**

The TJA1145T/FD Automotive 2Mbps CANFD physical layer interface chip

### MPC5777C-DEVB PACKAGE

- NXP MPC5777C Automotive Microcontroller board
- 12V Power Supply
- Micro USB Cable
- Universal Power Adapter

## STEP-BY-STEP INSTRUCTIONS

This section covers software download, development kit setup, and application control.

### 1 Download Software



Download installation software and documentation at [nxp.com/MPC5777C-DEVB](http://nxp.com/MPC5777C-DEVB).

### 2 Download Necessary Drivers

Install the FT230x virtual COM port driver. Visit [ftdichip.com/drivers/vcp.htm](http://ftdichip.com/drivers/vcp.htm) to download the correct driver. Select the virtual COM port (VCP) driver based on your operating system and processor architecture.

### 3 Install FTDI Driver

Go to the Device Manager and right-click the COM port detected and select Update Driver Software.

Select Browse my computer for driver software and select the FTDI driver that has been downloaded.

Restart your machine.

### 4 Connect the power supply

Connect power supply to power socket and micro USB cable to micro USB port on the Development board. Turn on the Power Switch. Make sure the status LEDs D14, D15 and D16 for voltage levels 3.3V, 5V and 1.25V respectively are glowing on the board.


### STEP-BY-STEP INSTRUCTIONS CONTINUED

## 5 Setup Tera Term Console

Open Tera Term on Windows PC. Select the serial port to which the micro USB of the Development board is connected and click OK. Go to Setup>Serial Port and select 19200 as the baud rate.

## 6 Reset the Board

Press the Reset button on the Development board. Welcome message will be printed in the Tera Term window as shown below.

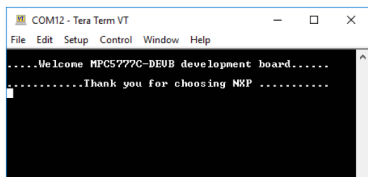

## MPC5777C-DEVB REFERENCES

- [MPC5777C Reference Manual](#)
- [MPC5777C Data sheet](#)
- [MPC5777C Errata](#)
- [MPC5777C Hardware Requirements/Example Circuits](#)

## SUPPORT

Visit [www.nxp.com/support](http://www.nxp.com/support) for a list of phone numbers within your region.

## WARRANTY

Visit [www.nxp.com/warranty](http://www.nxp.com/warranty) for complete warranty information.

## AUTOMOTIVE COMMUNITY:

<https://community.nxp.com/community/s32>

## MPC57XXX COMMUNITIES:

<https://community.nxp.com/community/s32/mpc5xxx>



## Get Started

Download installation software and documentation at [nxp.com/MPC5777C-DEVB](http://nxp.com/MPC5777C-DEVB).

[www.nxp.com](http://www.nxp.com)

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. © 2019 NXP B.V.

Document Number: MPC5777CDEVBQSG REV 0



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Development Boards & Kits - Other Processors](#) category:*

*Click to view products by [NXP](#) manufacturer:*

Other Similar products are found below :

[EVB-MEC1418MECC](#) [20-101-1252](#) [C29XPCIE-RDB](#) [CC-ACC-18M433](#) [STM8S/32-D/RAIS](#) [MAX1464EVKIT](#) [RTK0EN0001D01001BZ](#)  
[MAXQ622-KIT#](#) [YR0K50571MS000BE](#) [QB-R5F104PJ-TB](#) [CC-ACC-ETHMX](#) [OV-7604-C7-EVALUATION-BOARD](#) [SK-AD02-](#)  
[D62Q1747TB](#) [SK-BS01-D62Q1577TB](#) [ST7MDT1-EMU2](#) [GROVE BASE KIT FOR RASPBERRY PI](#) [CY8CKIT-143A](#) [EK-MPC5744P](#)  
[KITAURIXTC234TFTTOBO1](#) [ENW89854AXKF](#) [ENWF9201AVEF](#) [QB-R5F104LE-TB](#) [LV18F V6 64-80-PIN TQFP MCU CARD EMPTY](#)  
[LV-24-33 V6 44-PIN TQFP MCU CARD EMPTY](#) [LV-24-33 V6 64-PIN TQFP MCU CARD EMPTY](#) [LV-24-33 V6 80-PIN TQFP 1 MCU](#)  
[CARD EMPTY](#) [32X32 RGB LED MATRIX PANEL - 6MM PITCH](#) [3.3 - 5 VTRANSLATOR](#) [READY FOR XMEGA CASING \(WHITE\)](#)  
[RELAY4 BOARD](#) [ETHERNET CONNECTOR](#) [RFID CARD 125KHZ - TAG](#) [RFID READER](#) [RFM12B-DEMO](#) [MAROON](#) [3G CLICK](#)  
[\(FOR EUROPE AND AUSTRALIA\)](#) [MAX232](#) [MAX3232 BOARD](#) [ARTY S7-50](#) [TINKERKIT HALL SENSOR](#) [TOUCHPANEL](#)  
[TOUCHPANEL CONTROLLER](#) [MIKROBOARD FOR AVR WITH ATMEGA128](#) [MIKROBOARD FOR PSOC WITH CY8C27643](#)  
[MIKROBUS CAPE](#) [MIKRODRIVE](#) [MIKROETH 100 BOARD](#) [MIKROLAB FOR 8051 L](#) [MIKROPROG TO ST-LINK V2 ADAPTER](#)  
[BANANA PI GPIO EXTEND MODULE](#)