


DIMENSIONS

All dimensions in mm [inches]

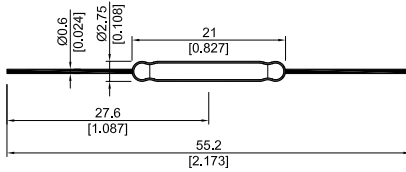

CHARACTERISTICS

- Glass length of 21 mm and diameter of 2.75 mm
- Normally open 1 Form A contact
- High breakdown voltage of 600 VDC

CONTACT DATA

All Data at 20 °C	Switch Model → Contact Form →	KSK-1A52-... Form A			
Contact Ratings	Conditions	Min.	Typ.	Max.	Units
Switching Power*	Any DC combination of V and A not to exceed their individual max.'s			50 70	W VA
Switching Voltage	DC or peak AC			250	V
Switching Current	DC or peak AC			0.5	A
Carry Current	DC or peak AC			2.5	A
Static Contact Resistance	at 0.5 V & 10 mA			150	mΩ
Dynamic Contact Resistance	measured w/ 0.5 V & 50 mA, 1.5 ms after closure			200	mΩ
Insulation Resistance cross Contacts	100 Volts applied	10 ¹⁰			Ω
Breakdown Voltage	> 60 sec.	600			VDC
Operate Time incl. Bounce	100 % overdrive			1.0	ms
Release Time	measured with/ no coil suppression			0.1	ms
Capacitance	at 10 kHz across contact		0.2		pF
Test Coil		KMS-01			
Standard AT range		20		65	AT
Environmental Data					
Shock Resistance	1/2 sine wave for 11 ms			50	g
Vibration Resistance	10 - 2000 Hz			20	g
Ambient Temperature	max. 10 °C / minute allowance	-20		130	°C
Stock Temperature	max. 10 °C / minute allowance	-55		130	°C
Soldering Temperature	5 sec. dwell			260	°C
Note: The indicated electric data are maximum values can vary downwards when using a more sensitive switch. * For life expectancy, please see the "Life Requirements" section.					

ORDER INFORMATION

Series	Contact Form	Switch Model	AT Range (between)
KSK -	1A	52 -	xxxx
Options			20 -65

Part Number Example - KSK - 1A52 - 2025

2025 is the AT range (Any AT can be ordered between 20 & 65 in a minimum range of 5 AT)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Proximity Sensors](#) category:

Click to view products by [MEDER](#) manufacturer:

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [9221350022](#) [980659-1](#) [QT-12](#)
[E2EX10D1NN](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2E-X3D1-N](#) [10M](#) [E2E-X4MD1-G](#) [E2FMX1R5D12M](#) [E2K-F10MC1](#) [5M](#)
[EI1204TBOSL-6](#) [EI5515NPAP](#) [BSA-08-25-08](#) [IC08ANC15PO-K](#) [IMM2582C](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#) [25.352.0753.0](#)
[25.523.3253.0](#) [9151710023](#) [922FS1.5C-A4P-Z774](#) [SC606ABV0S30](#) [SM952A126100LE](#) [SM956A132600](#) [A1220EUA-T](#) [F3S-A162-U](#) [CL18](#)
[QT-08L](#) [34.110.0010.0](#) [TL-C2MF1-M3-E4](#) [IA08BLF15NOM5](#) [IA08BSF15NOM5](#) [IA12ASF04DOM1](#) [IMM32188C](#) [IS2](#) [IS31SE5000-](#)
[UTLS2-TR](#) [34.110.0021.0](#) [34.110.0022.0](#) [CA150-120VACDC](#) [VM18VA3000Q](#) [XS508BSCBL2](#)