

**OMRON EUROPE B.V.**

Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. Tel: +31 (0) 23 568 13 00 Fax: +31 (0) 23 568 13 88 www.eu.omron.com

**UNITED KINGDOM**

**Omron Electronics Ltd**  
1 Apsley Way, Staples Corner, London, NW2 7HF, UK  
Tel: +44 (0) 870 752 0861  
Tel: +44 (0) 870 752 0862  
www.omron.co.uk

**Austria**

Tel: +43 (0) 1 80 19 00  
www.omron.at

**Belgium**

Tel: +32 (0) 2 466 24 80  
www.omron.be

**Czech Republic**

Tel: +420 (0) 267 31 12 54  
www.omron.cz

**Denmark**

Tel: +45 43 44 00 11  
www.omron.dk

**Finland**

Tel: +358 (0) 9 549 58 00  
www.omron.fi

**France**

Tel: +33 (0) 1 49 74 70 00  
www.omron.fr

**Germany**

Tel: +49 (0) 2173 680 00  
www.omron.de

**Hungary**

Tel: +36 (0) 1 399 30 50  
www.omron.hu

**Italy**

Tel: +39 02 32 681  
www.omron.it

**Netherlands**

Tel: +31 (0) 23 568 11 00  
www.omron.nl

**Norway**

Tel: +47 (0) 22 65 75 00  
www.omron.no

**Poland**

Tel: +48 (0) 22 645 78 60  
www.omron.com.pl

**Portugal**

Tel: +351 21 942 94 00  
www.omron.pt

**Russia**

Tel: +7 095 745 26 64  
www.russia.omron.com

**Spain**

Tel: +34 913 777 900  
www.omron.es

**Sweden**

Tel: +46 (0) 8 632 35 00  
www.omron.se

**Switzerland**

Tel: +41 (0) 41 748 13 13  
www.omron.ch

**Turkey**

Tel: +90 (0) 216 326 29 80  
www.omron.com.tr

Authorised Distributor:

Empty box for distributor information.

For the Middle East, Africa and other countries in Eastern Europe, Tel: +31 (0) 23 568 13 22 www.eu.omron.com


Cat. No. J510-E2-01

Note: Specifications subject to change without notice.  
Cat. No. J510-E2-02A

OMRON

OMRON

Low Voltage Switch Gear

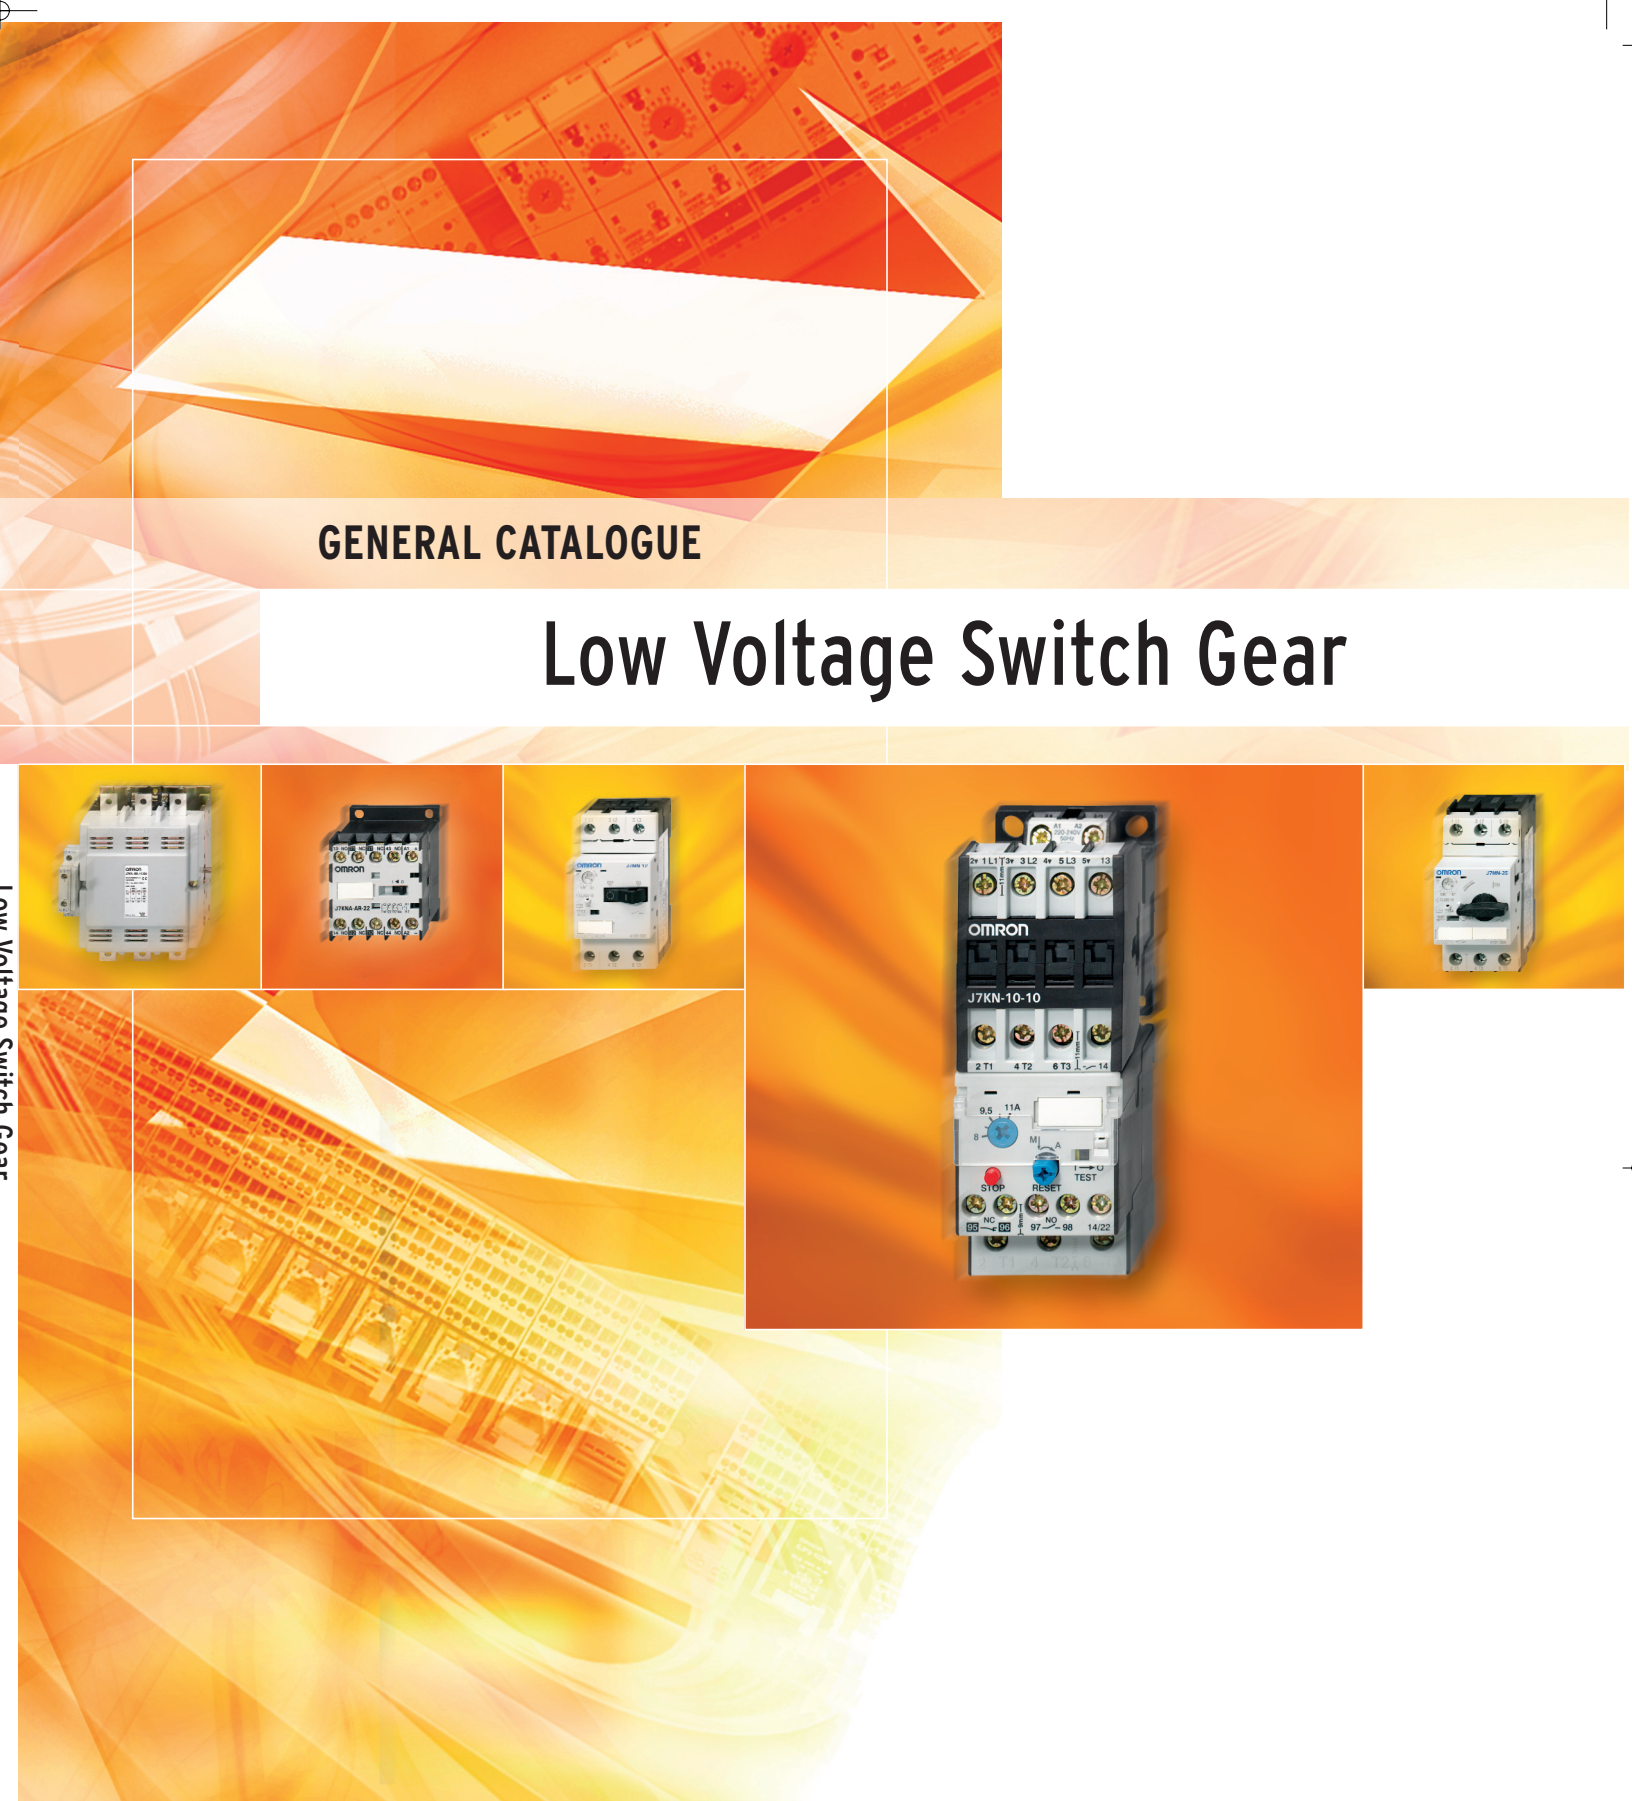

GENERAL CATALOGUE

Low Voltage Switch Gear






## Table of Contents

# Low Voltage Switch Gear





<b>Selection Guide</b>		<b>H-2</b>
<b>J7KNA-AR</b>	Mini Contactor Relays 4-pole	<b>H-7</b>
<b>J7KNA</b>	Mini Motor Contactor	<b>H-15</b>
<b>J7KN</b>	Motor Contactor	<b>H-27</b>
<b>J7TKN</b>	Thermal Overload Relay	<b>H-57</b>
<b>J7MN</b>	Motor Protection Circuit Breaker (MPCB)	<b>H-69</b>
<b>Appendix</b>		<b>H-83</b>

## Selection Guide

# Low Voltage Switch Gear

Classification	Mini Contactor Relays		Mini Motor Contactors	
Model	J7KNA - AR	J7KNA	J7KNA-4	
	4-pole	3-pole	4-pole	
Appearance				
Remarks	AC and DC operated 4-, 6- and 8-contacts in different configurations Positively guided contacts Screw fixing and snap fitting (DIN rail)	AC and DC operated 3 main poles 1 auxiliary contact integrated (1NO or 1NC)	AC operated 4 main poles	
Accessoires	Auxiliar contact modules	Auxiliar contact modules Suppressors Link module MPCB - contactor	Auxiliar contact modules Suppressors Link module MPCB - contactor	
Maximum power (AC3-380/415V)	No	4 kW; 5,5 kW	4 kW	
Rated current (AC3-380/415V)	10 A (I th2)	9/12 A	9 A	
AC operated	Yes	Yes	Yes	
DC operated	Yes	Yes	No	
4 - pole version	Yes	No	Yes	
Auxiliary contacts included	No	1NO or 1NC	No	
Auxiliary contacts front mounting	1NO/1NC 0NO/2NC 2NO/2NC 4NO/0NC	1NO/1NC 0NO/2NC 2NO/2NC	1NO/1NC 0NO/2NC 2NO/2NC	
Auxiliary contacts side mounting	No	No	No	
Mechanical life span (AC operated)	5 Mio.	5 Mio.	5 Mio.	
Mechanical life span (DC operated)	15 Mio.	15 Mio.	15 Mio.	
Setting range (in A)	No	No	No	
Page No.	H-7	H-15	H-15	




**Motor Contactors**





<b>J7KN 10..KN 22</b>	<b>J7KN 24..KN 40</b>	<b>J7KN 50..KN 74</b>	<b>J7KN 85..KN 110</b>
3-pole	3-pole	3-pole	3-pole
			
AC and DC operate 3 main poles 1 auxiliary contact integrated (1NO or 1NC) max 4 auxiliary contacts front mounted	AC and DC operate 3 main poles max 4 auxiliary contacts front mounted 2 auxiliary contacts side mounted (1NO or 1NC)	AC and DC operate 3 main poles max 4 auxiliary contacts front mounted 2 auxiliary contacts side mounted (1NO or 1NC)	AC and DC operate 3 main poles 4 auxiliary contacts integrated (1NO/1NC)
Auxiliar contact modules Mechanical interlock Suppressors Link module MPCB-contactor Pneumatic timers	Auxiliar contact modules Mechanical interlock Suppressors Link module MPCB-contactor Pneumatic timers	Auxiliar contact modules Mechanical interlock Suppressors Pneumatic timers	Mechanical interlock Suppressors
4 kW; 5,5 kW; 7,5 kW; 11 kW	11 kW; 15 kW; 18,5 kW	22 kW; 30kW; 37 kW	45 kW; 55 kW
10/14/18/22 A	24/32/40 A	50/62/74 A	85/110 A
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
No	No	No	No
1NO or 1NC	No	No	2NO + 2NC
max 4 NO/NC	max 4 NO/NC	max 4 NO/NC	No
No	1NO + 1NC	1NO + 1NC	1NO + 1NC
10 Mio.	10 Mio.	10 Mio.	5 Mio.
10 Mio.	10 Mio.	10 Mio.	5 Mio.
No	No	No	No
H-27	H-27	H-27	H-27

LVSG

## Selection Guide



# Low Voltage Switch Gear

Classification	Motor Contactors		Thermal Overload Relays
Model	J7KN 150..KN 175	J7KN 200	J7TKN-A
	3-pole	3-pole	
Appearance			
Remarks	AC and DC operate 3 main poles 2 auxiliary contacts integrated (1NO/ 1NC)	AC and DC operate 3 main poles 4 auxiliary contacts integrated (1NO/ 1NC)	Direct mounting 1 auxiliary contact (change over)
Accessoires	No	No	No
Maximum power (AC3-380/415V)	75 kW; 90 kW	110 kW	
Rated current (AC3-380/415V)	150/175 A	210 A	
AC operated	Yes	Yes	
DC operated	No	No	
4 - pole version	No	No	
Auxiliary contacts included	1NO + 1NC	2NO + 2NC	1NO + 1NC
Auxiliary contacts front mounting	No	No	
Auxiliary contacts side mounting	1NO + 1NC	2NO + 2NC	
Mechanical life span (AC operated)	10 Mio.	10 Mio.	
Mechanical life span (DC operated)	10 Mio.	10 Mio.	
Setting range (in A)	No	No	0,12..30 A
Page No.	H-27	H-27	H-57

Thermal Overload Relays		Motor Protection Circuit Breakers (MPCB)	
J7TKN-B..TKN-D	J7TKN-E..TKN-F	J7MN12	J7MN25
			
Direct mounting Auto, -manual, -reset button 2 auxiliary contacts (1NO/1NC)	Separate mounting 2 auxiliary contacts (1NO/1NC)	Rocker operating switch Short circuit release Over load release I <sub>cu</sub> = 100 kA (0,16..6,3 A)	Rotary operating switch Short circuit release Over load release I <sub>cu</sub> = 100 kA (0,16..12,5 A)
Sets for single mounting Busbar sets	Sets for single mounting Busbar sets	Trip indicating contact Plastic enclosures 2 contacts side mounted 2 contacts front mounted Bus bar system	Trip indicating contact Plastic enclosures 3 contacts side mounted 2 contacts front mounted Bus bar system
1NO + 1NC	1NO + 1NC	1NO + 1NC	1NO + 1NC
		1NO + 1NC	1NO + 1NC
		100000	100000
0,12..74 A	60..220 A	0,11..12 A	0,11..25 A
H-57	H-57	H-69	H-69

LVSG

# Low Voltage Switch Gear

Classification	Motor Protection Circuit Breakers (MPCB)	
Model	J7MN50	J7MN100
Appearance		
Remarks	Rotary operating switch Short circuit release Over load release I <sub>cu</sub> = 50 kA	Rotary operating switch Short circuit release Over load release I <sub>cu</sub> = 50 kA
Accessoires	Trip indicating contact Plastic enclosures 2 contacts side mounted 3 contacts front mounted Bus bar system	Trip indicating contact Plastic enclosures 2 contacts side mounted 3 contacts front mounted Bus bar system
Maximum power (AC3-380/415V)		
Rated current (AC3-380/415V)		
AC operated		
DC operated		
4 - pole version		
Auxiliary contacts included		
Auxiliary contacts front mounting	1NO + 1NC	1NO + 1NC
Auxiliary contacts side mounting	1NO + 1NC	1NO + 1NC
Mechanical life span (AC operated)	50000	50000
Mechanical life span (DC operated)		
Setting range (in A)	22..50 A	45..100 A
Page No.	H-69	H-69

# Mini Contactor Relays 4-pole J7KNA-AR

## Main contactor

- AC & DC operated
- 4-, 6- and 8-pole versions in different configurations
- Positively guided contacts
- Screw fixing and snap fitting (35 mm DIN rail)
- Rated current = 10A ( $I_{th}$ )
- Suitable for electronic devices (DIN 19240)
- Finger proof (VBG 4)



## Accessories

- 2- and 4-pole additional auxiliary contacts in different configurations

## Approved Standards

Standard	Guide No (US,C)
UL	NKCR, NKCR7
ICE 947-5-1	
VDE 0660	
EN 60947-5-1	

## Ordering Information

### Model Number Legend

#### 1. Mini Contactor Relays

J7KNA-□□-□□-□□□□

1    2    3    4

- |                                       |                            |
|---------------------------------------|----------------------------|
| 1) Mini Contactor                     | Coil voltage (DC operated) |
| 2) AR: Contactor Relay                | 24D: DC24V                 |
| 3) Combination of NO / NC contacts    | 48D: DC48V                 |
| 22: 2 NO 2 NC                         | 60D: DC60V                 |
| 31: 3 NO 1 NC                         | 110D: DC110V               |
| 40: 4 NO 0 NC                         | 125D: DC125V               |
| 4) Coil voltage (AC operated)         | 24VS: DC24V with diode     |
| 24: AC24V 50/60Hz                     | 48VS: DC48V with diode     |
| 48: AC48V 50Hz                        | 110VS: DC110V with diode   |
| 110: AC110-115V 50Hz, AC120-125V 60Hz |                            |
| 230: AC220-230V 50Hz, AC240V 60Hz     |                            |
| 240: AC230V-240V 50Hz                 |                            |
| 400: AC380-400V 50Hz, AC440V 60Hz     |                            |
| 415: AC400-415V 50Hz                  |                            |
| 550: AC525-550V 50Hz, AC600V 60Hz     |                            |

#### 2. Aux. Contact Modules for Mini Contactor Relays

J73KN-□□-□□-□

1    2    3    4

- Auxiliary Contact Modules
- A: for mini contactor relay
- Combination of NO/NC contacts
  - 11: 1 NO 1 NC
  - 02: 0 NO 2 NC
  - 22: 2 NO 2 NC
  - 40: 4 NO 0 NC


LVSG



■ System overview


Mini Contactor Relays 4-pole

AC Operated

	Contacts		Distinc. Number acc. to DIN EN 50011	Ratings		Thermal Rated Current I <sub>n</sub> A	Type	Pack	Weight
	NO	NC		AC15 230V A	400V A				
							Coil voltage <sup>1)</sup> 24 24V 50/60Hz 230 220-230V 50Hz	pcs.	kg/pc.
	4-pole, With Screw Terminals								
	4	-	40E	3	2	10	J7KNA-AR-40 24	10	0,16
							J7KNA-AR-40 230		
	3	1	31E	3	2	10	J7KNA-AR-31 24	10	0,16
							J7KNA-AR-31 230		
	2	2	22E	3	2	10	J7KNA-AR-22 24	10	0,16
							J7KNA-AR-22 230		


1) Other coil voltages see page 10

DC Solenoid Operated

	Contacts		Distinc. Number acc. to DIN EN 50011	Ratings		Thermal Rated Current I <sub>n</sub> A	Type	Pack	Weight
	NO	NC		AC15 230V A	400V A				
							Coil voltage 24V DC 2,5W	pcs.	kg/pc.
	4-pole, With Screw Terminals								
	4	-	40E	3	2	10	J7KNA-AR-40 24D (-VS) <sup>1)</sup>	10	0,19
	3	1	31E	3	2	10	J7KNA-AR-31 24D (-VS) <sup>1)</sup>	10	0,19
	2	2	22E	3	2	10	J7KNA-AR-22 24D (-VS) <sup>1)</sup>	10	0,19

1) VS = with diode

Auxiliary Contact Blocks for Contactor Relays J7KNA-AR

	Contacts		Ratings	Thermal Rated Current I <sub>n</sub> A	Type	Pack	Weight
	NO	NC					
	1	1	3	2	10	J73KN-A-11	10 0,04
	-	2	3	2	10	J73KN-A-02	10 0,04
	4	-	3	2	10	J73KN-A-40	10 0,04
	2	2	3	2	10	J73KN-A-22	10 0,04

■ System overview

Mini Contactor Relays 4-pole

AC Operated

Wiring Diagrams	Distinc. Number acc. to DIN EN 50011	Auxiliary Contact Blocks	Contactor Relay with Auxiliary Contact			Contacts suitable for Electronic Circuits according to DIN 19240 for rated voltage 24V DC (test ratings 17V DC, 5mA) Positively guided contacts
		Type	NO	NC	Block Distinc. Number according to DIN EN 50011	
4-pole, With Screw Terminals						
	40E	J73KN-A-11	1	1	51E	Preferable combinations with distinctive letter „E“ according to DIN EN 50011
		J73KN-A-02	0	2	42E	
		J73KN-A-40	4	0	80E	
		J73KN-A-22	2	2	62E	
	31E	J73KN-A-11	1	1	42Y	
		J73KN-A-02	0	2	33Y	
		J73KN-A-40	4	0	71Y	
		J73KN-A-22	2	2	53Y	
	22E	J73KN-A-11	1	1	33Y	
		J73KN-A-02	0	2	24Y	
		J73KN-A-40	4	0	62Y	
		J73KN-A-22	2	2	44Y	

DC Solenoid Operated

Wiring Diagrams	Distinc. Number acc. to DIN EN 50011	Auxiliary Contact Blocks	Contactor Relay with Auxiliary Contact			
		Type	NO	NC	Block Distinc. Number according to DIN EN 50011	
4-pole, With Screw Terminals						
	40E	J73KN-A-11	1	1	51E	Preferable combinations with distinctive letter „E“ according to DIN EN 50011
		J73KN-A-02	0	2	42E	
		J73KN-A-40	4	0	80E	
		J73KN-A-22	2	2	62E	
	31E	J73KN-A-11	1	1	42Y	
		J73KN-A-02	0	2	33Y	
		J73KN-A-40	4	0	71Y	
		J73KN-A-22	2	2	53Y	
	22E	J73KN-A-11	1	1	33Y	
		J73KN-A-02	0	2	24Y	
		J73KN-A-40	4	0	62Y	
		J73KN-A-22	2	2	44Y	

LVSG

Auxiliary Contact Blocks for Contactor Relays J7KNA-AR

Wiring diagrams				Contacts suitable for Electronic Circuits according to DIN 19240 for rated voltage 24V DC (test ratings 17V DC, 5mA) Positively guided contacts
J73KN-A-11	J73KN-A-02	J73KN-A-40	J73KN-A-22	

## Specifications

### ■ Coil Voltages

Suffix to contactor type e.g. <b>J7KNA-09-10-24</b>	Voltage Marking at the coil		Rated Control Voltage U <sub>s</sub> range for			
	for 50Hz V	for 60Hz V	50Hz		60Hz	
			min V.	max V.	min V.	max V.
12	12	12	11	12	12	12
<b>24</b>	<b>24</b>	<b>24</b>	<b>22</b>	<b>24</b>	<b>24</b>	<b>24</b>
42	42	42	38.5	42	42	42
48	48-50	48	48	50	48	50
60	60	60	52	66	54	60
90	90-95	100-105	90	95	100	105
95	95-100	105-110	95	100	105	110
100	100	110-115	100	105	110	115
105	105-110	115-120	105	110	115	120
110	110-115	120-125	110	115	120	125
200	200	210-220	195	205	210	220

Suffix to contactor type e.g. <b>J7KNA-09-10- 230</b>	Voltage Marking at the coil		Rated Control Voltage U <sub>s</sub> range for			
	for 50Hz V	for 60Hz V	50Hz		60Hz	
			min V.	max V.	min V.	max V.
210	205-215	220-230	205	215	220	230
220	210-220	230-240	210	220	230	240
<b>230</b>	<b>220-230</b>	<b>240</b>	<b>220</b>	<b>230</b>	<b>240</b>	<b>250</b>
240	230-240		230	240	250	260
400	380-400	440	380	400	415	440
500	475-500	520-545	475	500	520	545
550	525-550	600	525	550	570	600

Standard voltages in bold type letters. Coil not exchangeable

■ Engineering data and Characteristics

Mini Contactor Relays

Data according to IEC 947-5-1, VDE 0660, EN 60947-5-1

Auxiliary Contacts		Type	J7KNA-AR...	J7KNA-AR...D	J7KNA-AR...VS	J73KN-A...
Rated insulation voltage $U_i$		V AC	690 <sup>1</sup>	690 <sup>1</sup>	690 <sup>1</sup>	690 <sup>1</sup>
Thermal rated current $I_{th}$ to 690V						
Ambient temperature	40°C	A	10	10	10	10
	60°C	A	6	6	6	6
Power loss per pole at $I_{th}$		W	0.5	0.5	0.5	0.5
Utilization category AC15						
Rated operational current $I_e$	220-240V	A	3	3	3	3
	380-415V	A	2	2	2	2
	440V	A	1.6	1.6	1.6	1.6
	500V	A	1.2	1.2	1.2	1.2
	660-690V	A	0.6	0.6	0.6	0.6
Utilization category DC13						
Rated operational current $I_e$	60V	A	2	2	2	2
	110V	A	0.4	0.4	0.4	0.4
	220V	A	0.1	0.1	0.1	0.1
Maximum ambient temperature						
Operation	open	°C	-40 to +60 (+90) <sup>2</sup>			
	enclosed	°C	-40 to +40			
Storage		°C	-40 to +90			
Short circuit protection short-circuit current 1kA, contact welding not accepted						
max. fuse size	gL (gG)	A	20	20	20	20
Power consumption of coils						
AC operated	inrush	VA	25	-	-	-
	sealed	VA	4 - 5	-	-	-
		W	1.2	-	-	-
DC operated	inrush	W	-	2.5	2.5	-
	sealed	W	-	2.5	2.5	-
Operation range of coils in multiples of control voltage $U_c$			0.85 - 1.1	0.8 - 1.1	0.8 - 1.1	-
Switching time at control voltage $U_c \pm 10\%$ <sup>3,4</sup>						
AC operated	make time	ms	15 - 25	-	-	-
	release time	ms	8 - 25	-	-	-
	arc duration	ms	10 - 15	-	-	-
DC operated	make time	ms	-	15 - 19	-	-
	release time	ms	-	8 - 25	-	-
	arc duration	ms	-	10 - 15	-	-

LVSG

**Mini Contactor Relays**

Data according to IEC 947-5-1, VDE 0660, EN 60947-5-1

Auxiliary Contacts		Type	J7KNA-AR...	J7KNA-AR...D	J7KNA-AR...VS	J73KN-A...
<b>Cable cross-section</b>						
all connectors	solid	mm <sup>2</sup>	0.75 - 2.5	0.75 - 2.5	0.75 - 2.5	0.75 - 2.5
	flexible	mm <sup>2</sup>	0.75 - 2.5	0.75 - 2.5	0.75 - 2.5	0.75 - 2.5
	flexible with multicore cable end	mm <sup>2</sup>	0.5 - 1.5	0.5 - 1.5	0.5 - 1.5	0.5 - 2.5
Clamps per pole			2	2	2	2
	solid or stranded	AWG	18 - 14	18 - 14	18 - 14	18 - 14

\*1) Suitable at 690V for: earthed-neutral systems, overvoltage category I to IV, pollution degree 3 (standard-industry): U<sub>imp</sub> = 8kV.  
Data for other conditions on request.

\*2) With reduced control voltage range 0.9 up to 1.0 x U<sub>s</sub> and with reduced thermal rated current I<sub>m</sub> to I<sub>g</sub>/AC15

\*3) Summary switching time = release time + arc duration

\*4) Release time of NC make time of NO increase when suppressor units for voltage peak protection are used (Varistor, RC-units, Diode units).

**Mini Contactor Relays for North America**

Data according to UL508


Main Contacts (cULus)		Type	J7KNA-AR...	J73KN-A...
Rated operational current "General Use"		A	10	10
Rated operational power of three-phase motors at 60Hz (3ph)	115V	hp	-	-
	200V	hp	-	-
	230V	hp	-	-
	460V	hp	-	-
	575V	hp	-	-
Rated operational power of of AC motors at 60Hz (1ph)	115V	hp	-	-
	200V	hp	-	-
	230V	hp	-	-
Fuses		A	-	-
Suitable for use on a capability of delivering not more than rms		A	-	-
		V	-	-
Rated voltage		V AC	600	600
<b>Auxiliary Contacts (cULus)</b>				
	heavy pilot duty	AC	A600	A600
	standard pilot duty	DC	Q600	Q600

■ Dimensions


AC and DC operated  
with screw terminals

Auxiliary Contact Blocks

J7KNA-AR...

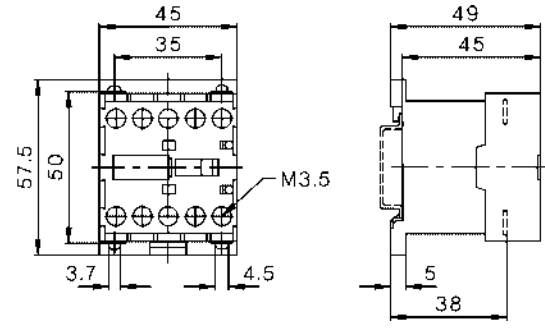

J73KN-A...

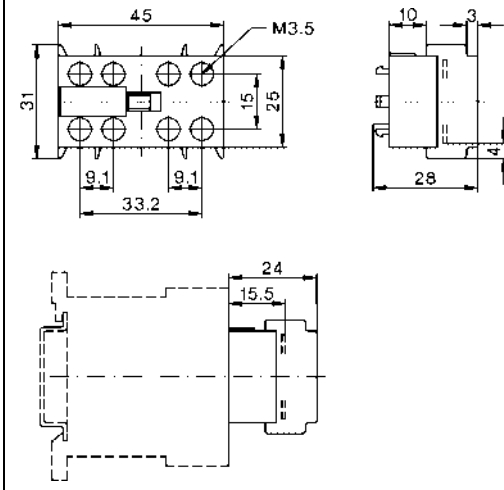

LVSG

OMRON

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

Cat. No. J507-E2-02

In the interest of product improvement, specifications are subject to change without notice.

# Mini Motor Contactor J7KNA

## Main contactor

- AC & DC operated
- Integrated auxiliary contacts
- Screw fixing and snap fitting (35 mm DIN rail)
- Range from 4 to 5.5 kW (AC 3, 380/415V)
- 4 -main pole version (4 kW AC and DC coil)
- Auxiliary contacts suitable for electronic devices (DIN 19240)
- Finger proof (VBG 4)



## Accessories

- 2 and 4 pole additional auxiliary contacts in different configurations
- Mechanical interlock (in reversing contactor combination only)
- RC Suppressors

## Approved Standards

Standard	Guide No (US,C)
UL	NLDX, NLDX7
ICE 947-5-1	
VDE 0660	
EN 60947-5-1	

## Ordering Information

### Model Number Legend

#### 1. Mini Motor Contactors

J7KNA-□□-□□-□□□□□□

1 2 3 4 5

- 1) Mini Contactor
- 2) Rated Motor Current (AC3 400V)
  - 09: 9A
  - 12: 12A
- 3) Integrated auxiliary contact
  - 10: 1 NO 0 NC
  - 01: 0 NO 1 NC
  - 4: 4 main pole type (no aux contact)
- 4) W: Reversing Contactor
- 5) Coil voltage (AC operated)<sup>1)</sup>
  - 24: AC24V 50/60Hz
  - 48: AC48V 50Hz
  - 60: AC60V 50Hz
  - 110: AC110-115V 50Hz, AC120-125V 60Hz
  - 230: AC220-230V 50Hz, AC240V 60Hz
  - 240: AC230V-240V 50Hz

- 400: AC380-400V 50Hz, AC440V 60Hz
- 415: AC400-415V 50Hz

- Coil voltage (DC operated)
- 24D: DC24V
  - 48D: DC48V
  - 60D: DC60V
  - 110D: DC110V
  - 24VS: DC24V with diode
  - 48VS: DC48V with diode
  - 110VS: DC110V with diode

#### 2. Aux. Contact Modules for Mini Motor Contactors

J73KN-□□-□□□□

1 2 3 4

- 1) Auxiliary Contact Modules
- 2) AM: for mini motor contactor
- 3) Combination of NO/NC contacts
  - 11: 1 NO 1 NC
  - 02: 0 NO 2 NC
  - 22: 2 NO 2 NC
  - 40: 4 NO 0 NC
- 4) for Reversing Contactors
  - v: left side
  - x: right side


LVSG

<sup>1)</sup> RC-suppressor unit go to page H-29, section 6 or page H-35, suppressor units




■ System overview

Mini Motor Contactors  
AC Operated

	Ratings			Rated Current		Aux. Contacts		Type	Pack	Weight	
	AC2, AC3			AC3	AC1	NO	NC				
	380V 400V 415V kW	500V kW	660V 690V kW	400V A	690V A	1	-	Accept Overload Relay see page H-58	Coil Voltage*1 24 24V 50/60Hz 230 220-230V 50Hz	pcs.	kg/pc.
	<b>3-pole, With Screw Terminals</b>										
	4	4	4	9	20	1	-	J7TKN-A	J7KNA-09-10-□□□□□	10	0.16
	5.5	5.5	5.5	12	20	1	-	J7TKN-A	J7KNA-12-10-□□□□□	10	0.16
	4	4	4	9	20	-	1	J7TKN-A	J7KNA-09-01-□□□□□	10	0.16
	5.5	5.5	5.5	12	20	-	1	J7TKN-A	J7KNA-12-01-□□□□□	10	0.16
	<b>4-pole, With Screw Terminals</b>										
	4	4	4	9	20	-	-	J7TKN-A	J7KNA-09-4-□□□□□	10	0.19

\*1) Other coil voltages see page H-20


DC Solenoid Operated

	Ratings			Rated Current		Aux. Contacts		Type	Pack	Weight	
	AC2, AC3			AC3	AC1	NO	NC				
	380V 400V 415V kW	500V kW	660V 690V kW	400V A	690V A	1	-	Accept Overload Relay see page H-58	DC Coil Voltage 24D 24V DC 2,5 W 24VS*1 24V DC 2,5 W w. diode*2	pcs.	kg/pc.
	<b>3-pole, With Screw Terminals</b>										
	4	4	4	9	20	1	-	J7TKN-A	J7KNA-09-10-□□□□D(-VS)	10	0.19
	5.5	5.5	5.5	12	20	1	-	J7TKN-A	J7KNA-12-10-□□□□D(-VS)	10	0.19
	4	4	4	9	20	-	1	J7TKN-A	J7KNA-09-01-□□□□D(-VS)	10	0.19
	5.5	5.5	5.5	12	20	-	1	J7TKN-A	J7KNA-12-01-□□□□D(-VS)	10	0.19

\*1) with built-in coil suppressor (varistor)

\*2) with built-in coil suppressor (zener diode)

Auxiliary contact blocks with screw terminals for contactors J7KNA-09... and J7KNA-12...

	Contacts		Rated Current		Thermal Rated Current	Type	Pack	Weight
	NO	NC	AC15 230V A	400V A				
	1	1	3	2	10	J73KN-AM-11	10	0.04
	-	2	3	2	10	J73KN-AM-02	10	0.04
	2	2	3	2	10	J73KN-AM-22	10	0.04

■ System overview

Mini Motor Contactors  
AC Operated

Wiring Diagrams	Distinc. Number according to DIN EN 50012	Auxiliary Contact Blocks			Contactor with Auxiliary Contact Block			Contacts suitable for Electronic Circuits according to DIN 19240 for rated voltage 24V DC (test ratings 17V DC, 5mA) Positively guided contacts
		Type	NO	NC	Distinc. Number according to DIN EN 50012	NO	NC	
<b>3-pole, With Screw Terminals</b>								
	10	J73KN-AM-11	1	1	21	2	1	Preferred combinations according to DIN EN 50012
		J73KN-AM-02	0	2	12	1	2	
		J73KN-AM-22	2	2	32	3	2	
	01	J73KN-A-11	1	1	-	1	2	Contacts according to DIN EN 50005
		J73KN-A-02	0	2	-	0	3	
		J73KN-A-40	4	0	-	4	1	
		J73KN-A-22	2	2	-	2	3	
<b>4-pole, With Screw Terminals</b>								
	00	J73KN-A-11	1	1	-	1	1	Contacts according to DIN EN 50005
		J73KN-A-02	0	2	-	0	2	
		J73KN-A-40	4	0	-	4	0	
		J73KN-A-22	2	2	-	2	2	

DC Solenoid Operated

Wiring Diagrams	Distinc. Number according to DIN EN 50012	Auxiliary Contact Blocks			Contactor with Auxiliary Contact Block			Contacts suitable for Electronic Circuits according to DIN 19240 for rated voltage 24V DC (test ratings 17V DC, 5mA) Positively guided contacts
		Type	NO	NC	Distinc. Number according to DIN EN 50012	NO	NC	
<b>3-pole, With Screw Terminals</b>								
	10	J73KN-AM-11	1	1	21	2	1	Preferred combinations according to DIN EN 50012
		J73KN-AM-02	0	2	12	1	2	
		J73KN-AM-22	2	2	32	3	2	
	01	J73KN-A-11	1	1	-	1	2	Contacts according to DIN EN 50005
		J73KN-A-02	0	2	-	0	3	
		J73KN-A-40	4	0	-	4	1	
		J73KN-A-22	2	2	-	2	3	


LVSG

Auxiliary contact blocks with screw terminals for contactors J7KNA-09... and J7KNA-12...

Wiring Diagrams							Contacts suitable for Electronic Circuits according to DIN 19240 for rated voltage 24V DC (test ratings 17V DC, 5mA) Positively guided contacts
J73KN-AM-11	J73KN-AM-02	J73KN-AM-22	J73KN-A-11	J73KN-A-02	J73KN-A-40	J73KN-A-22	


■ System overview

Mini Reversing Contactors, Mechanical Interlocked  
AC Operated

	Ratings			Rated Current		Aux. Contacts		Type	Pack	Weight	
	AC2, AC3			AC3	AC1	NO	NC				
	380V							Accept Overload Relay see page H-58	pcs.	kg/pc.	
	400V		660V	400V	690V						
	415V	500V	690V	400V	690V						
	kW	kW	kW	A	A			Coil Voltage*1 24 24V 50/60Hz 230 220-230V 50Hz			
	<b>3-pole, With Screw Terminals</b>										
	4	4	4	9	20	-	1	J7TKN-A	J7KNA-09-01-W-□□□□□	1	0.32
	5.5	5.5	5.5	12	20	-	1	J7TKN-A	J7KNA-12-01-W-□□□□□	1	0.32

\*1) Other coil voltages see page H-20


DC Solenoid Operated

	Ratings			Rated Current		Aux. Contacts		Type	Pack	Weight	
	AC2, AC3			AC3	AC1	NO	NC				
	380V							Accept Overload Relay see page H-58	pcs.	kg/pc.	
	400V		660V	400V	690V						
	415V	500V	690V	400V	690V						
	kW	kW	kW	A	A			DC Coil Voltage 24D 24V DC 2,5 W 24VS*1 24V DC 2,5 W w. diode*2			
	<b>3-pole, With Screw Terminals</b>										
	4	4	4	9	20	-	1	J7TKN-A	J7KNA-09-01-W-□□□D	1	0.38
	5.5	5.5	5.5	12	20	-	1	J7TKN-A	J7KNA-12-01-W-□□□D	1	0.38

\*1) with built-in coil suppressor (varistor)

\*2) with built-in coil suppressor (zener diode)






Auxiliary contact blocks with screw terminals for contactors J7KNA-09-01-W...(D) and J7KNA-12-01-W...(D)

	Contacts		Rated Current		Thermal Rated Current	Type	Pack	Weight
	NO	NC	AC15 230V A	400V A				
	1	1	3	2	10	J73KN-AM-11V	10	0.04
	1	1	3	2	10	J73KN-AM-11X	10	0.04
								






■ System overview

Mini Motor Contactors



AC Operated

Wiring Diagrams	Distinc. Number according to DIN EN 50012	Auxiliary Contact Blocks suitable for						Contacts suitable for Electronic Circuits according to DIN 19240 for rated voltage 24V DC (test ratings 17V DC, 5mA) Positively guided contacts
		left hand side Contactor K1			right hand side Contactor K2			
3-pole, With Screw Terminals								
	01	J73KN-AM-11V	1	1	J73KN-AM-11X	1	1	

DC Solenoid Operated

Wiring Diagrams	Distinc. Number according to DIN EN 50012	Auxiliary Contact Blocks suitable for						Contacts suitable for Electronic Circuits according to DIN 19240 for rated voltage 24V DC (test ratings 17V DC, 5mA) Positively guided contacts
		left hand side Contactor K1			right hand side Contactor K2			
3-pole, With Screw Terminals								
	01	J73KN-AM-11V	1	1	J73KN-AM-11X	1	1	

Auxiliary contact blocks with screw terminals for contactors J7KNA-09-01-W...(D) and J7KNA-12-01-W...(D)

Wiring Diagrams		Contacts suitable for Electronic Circuits according to DIN 19240 for rated voltage 24V DC (test ratings 17V DC, 5mA) Positively guided contacts					
J73KN-AM-11V	J73KN-AM-11X						
							

LVSG

## Specifications

### ■ Coil Voltages

Suffix to contactor type e.g. <b>J7KNA-09-10-24</b>	Voltage Marking at the coil		Rated Control Voltage U <sub>s</sub> range for			
	for 50Hz V	for 60Hz V	50Hz		60Hz	
			min V.	max V.	min V.	max V.
12	12	12	11	12	12	12
<b>24</b>	<b>24</b>	<b>24</b>	<b>22</b>	<b>24</b>	<b>24</b>	<b>24</b>
48	48-50	48	48	50	48	50
60	60	60	52	66	54	60
90	90-95	100-105	90	95	100	105
95	95-100	105-110	95	100	105	110
100	100	110-115	100	105	110	115
105	105-110	115-120	105	110	115	120
110	110-115	120-125	110	115	120	125
200	200	210-220	195	205	210	220

Suffix to contactor type e.g. <b>J7KNA-09-10-230</b>	Voltage Marking at the coil		Rated Control Voltage U <sub>s</sub> range for			
	for 50Hz V	for 60Hz V	50Hz		60Hz	
			min V.	max V.	min V.	max V.
210	205-215	220-230	205	215	220	230
220	210-220	230-240	210	220	230	240
<b>230</b>	<b>220-230</b>	<b>240</b>	<b>220</b>	<b>230</b>	<b>240</b>	<b>250</b>
240	230-240		230	240	250	260
400	380-400	440	380	400	415	440
500	475-500	520-545	475	500	520	545
550	525-550	600	525	550	570	600

Standard voltages in bold type letters. Coil not exchangeable

■ Engineering data and Characteristics

Mini Motor Contactors

Data according to IEC 947-4-1, VDE 0660, EN 60947-4-1

Main Contacts	Type	J7KNA-09-...	J7KNA-12-...	
Rated insulation voltage $U_i$	V AC	690 <sup>1)</sup>	690 <sup>1)</sup>	
Making capacity $I_{eff}$ at $U_e = 690V$ AC	A	165	165	
Breaking capacity $I_{eff}$ $\cos\phi = 0,65$	400V AC	100	100	
	500V AC	90	90	
	690V AC	80	80	
<b>Utilization category AC1</b>				
<b>Switching of resistive load</b>				
Rated operational current $I_e (=I_{th})$ at 40°C, open	A	20	20	
Rated operational power of three-phase resistive loads 50-60Hz, $\cos\phi = 1$	230V	kW 7.9	7.9	
	240V	kW 8.3	8.3	
	400V	kW 13.8	13.8	
	415V	kW 14.3	14.3	
Rated operational current $I_e (=I_{th})$ at 60°C, enclosed	A	16	16	
	Rated operational power of three-phase resistive loads 50-60Hz, $\cos\phi = 1$	230V	kW 6.3	6.3
		240V	kW 6.7	6.7
		400V	kW 11	11
415V		kW 11.5	11.5	
Minimum cross-section of conductor at load with $I_e (=I_{th})$	mm <sup>2</sup>	2.5	2.5	
<b>Utilization category AC2 and AC3</b>				
<b>Switching of three-phase motors</b>				
Rated operational current $I_e$ open and enclosed	220V	A 12	15	
	230V	A 11.5	14.5	
	240V	A 11	14	
	380-400V	A 9	12	
	415-440V	A 8	11	
	500V	A 7	9	
	660-690V	A 5	6.5	
Rated operational power of three-phase motors 50-60Hz	220-240V	kW 3	4	
	380-440V	kW 4	5.5	
	500-690V	kW 4	5.5	
<b>Utilization category AC4</b>				
<b>Switching of squirrel cage motors, inching</b>				
Rated operational current $I_e$ open and enclosed	220V	A 12	15	
	230V	A 11.5	14.5	
	240V	A 11	14	
	380-400V	A 9	12	
	415-440V	A 8	11	
	500V	A 7	9	
	660-690V	A 5	6.5	
Rated operational power of three-phase motors 50-60Hz	220-240V	kW 3	4	
	380-440V	kW 4	5.5	
	500-690V	kW 4	5.5	

LVSG

**Mini Motor Contactors**

Data according to IEC 947-4-1, VDE 0660, EN 60947-4-1

Main Contacts		Type	J7KNA-09-...	J7KNA-12-...
<b>Utilization category DC1</b>				
<b>Switching of resistive load</b>	1 pole 24V	A	20	20
Time constant L/R ≤ 1ms	60V	A	20	20
Rated operational current I <sub>o</sub>	110V	A	5	5
	220V	A	0.6	0.6
3 poles in series	24V	A	20	20
	60V	A	20	20
	110V	A	20	20
	220V	A	16	16
<b>Utilization category DC3 and DC5</b>				
<b>Switching of shunt motors and series motors</b>	1 pole 24V	A	20	20
Time constant L/R ≤ 15ms	60V	A	5	5
Rated operational current I <sub>o</sub>	110V	A	1	1
	220V	A	0.15	0.15
3 poles in series	24V	A	20	20
	60V	A	20	20
	110V	A	20	20
	220V	A	2	2
<b>Maximum ambient temperature</b>				
Operation	open	°C	-40 to +60 (+90) <sup>2</sup>	
	enclosed	°C	-40 to +40	
with thermal overload relay	open	°C	-25 to +60	
	enclosed	°C	-25 to +40	
Storage		°C	-50 to +90	
<b>Short circuit protection</b>				
for contactors without thermal overload relay				
Coordination-type "1" according to IEC 947-4-1				
Contact welding without hazard of persons				
max. fuse size	gL (gG)	A	40	40
Coordination-type "2" according to IEC 947-4-1				
Light contact welding accepted				
max. fuse size	gL (gG)	A	25	25
Contact welding not accepted				
max. fuse size	gL (gG)	A	10	10
For contactors with thermal overload relay the device with the smaller admissible backup fuse (contactor or thermal overload relay) determines the fuse size.				
<b>Cable cross-sections</b>				
for contactors without thermal overload relay				
main connector	solid or stranded	mm <sup>2</sup>	0.5 - 2.5	0.5 - 2.5
	flexible	mm <sup>2</sup>	0.5 - 2.5	0.5 - 2.5
	flexible with multicore cable end	mm <sup>2</sup>	0.5 - 1.5	0.5 - 1.5
Cables per clamp			2	2
	solid or stranded	AWG	18 - 14	18 - 14

**Mini Motor Contactors**

Data according to IEC 947-4-1, VDE 0660, EN 60947-4-1

Main Contacts		Type	J7KNA-09-...	J7KNA-12-...
<b>Frequency of operations z</b>	without load	1/h	10000	10000
Contactors without thermal overload relay	AC3, I <sub>b</sub>	1/h	600	700
	AC4, I <sub>b</sub>	1/h	120	150
	DC3, I <sub>b</sub>	1/h	600	700
<b>Mechanical life</b> AC operated	S x	10 <sup>6</sup>	5	5
	DC operated	S x	10 <sup>6</sup>	15
<b>Short time current</b>	10s-current	A	96	120
<b>Power loss</b> per pole	at I <sub>g</sub> /AC3 400V	W	0.15	0.25
<b>Resistance to shock according to IEC 68-2-27</b>				
Shock time 20ms sine-wave				
AC operated	NO	g	5	5
	NC	g	5	5
DC operated	NO	g	8	8
	NC	g	6	6

\*1) Suitable at 690V for: earthed-neutral systems, overvoltage category I to IV, pollution degree 3 (standard-industry): U<sub>imp</sub> = 8kV.  
Data for other conditions on request.

\*2) With reduced control voltage range 0.9 up to 1.0 x U<sub>s</sub> and with reduced rated current I<sub>g</sub>/AC1 according to I<sub>g</sub>/AC3



**Mini Motor Contactors**

Data according to IEC 947-5-1, VDE 0660, EN 60947-5-1

Auxiliary Contacts		Type	J7KNA-09... J7KNA-12...	J7KNA-09...D(VS) J7KNA-12...D(VS)	J73KN-A...
<b>Rated insulation voltage U<sub>i</sub></b>		V AC	690 <sup>1</sup>	690 <sup>1</sup>	690 <sup>1</sup>
<b>Thermal rated current I<sub>th</sub> to 690V</b>					
Ambient temperature	40°C	A	10	10	10
	60°C	A	6	6	6
<b>Power loss per pole</b>					
	at I <sub>th</sub>	W	0.5	0.5	0.5
<b>Utilization category AC15</b>					
Rated operational current I <sub>e</sub>	220-240V	A	3	3	3
	380-415V	A	2	2	2
	440V	A	1.6	1.6	1.6
	500V	A	1.2	1.2	1.2
	660-690V	A	0.6	0.6	0.6
<b>Utilization category DC13</b>					
Rated operational current I <sub>e</sub>	60V	A	2	2	2
	110V	A	0.4	0.4	0.4
	220V	A	0.1	0.1	0.1
<b>Maximum ambient temperature</b>					
Operation	open	°C	-40 to +60 (+90) <sup>2</sup>		
	enclosed	°C			
Storage		°C	-40 to +90		
<b>Short circuit protection</b> short-circuit current 1kA, contact welding not accepted					
max. fuse size	gL (gG)	A	20	20	20
For contactors with thermal overload relay the device with the smaller admissible control fuse (contactor or thermal overload relay) determines the fuse size.					
<b>Power consumption of coils</b>					
AC operated	inrush	VA	25	-	-
	sealed	VA	4 - 5	-	-
		W	1.2	-	-
DC operated	inrush	W	-	2.5	-
	sealed	W	-	2.5	-
<b>Operation range of coils</b> in multiples of control voltage U <sub>s</sub>			19 - 30V DC		
			0.85 - 1.1	0.8 - 1.1	-
<b>Switching time at control voltage U, ±10%<sup>3,4</sup></b>					
AC operated	make time	ms	15 - 25	-	-
	release time	ms	8 - 25	-	-
	arc duration	ms	10 - 15	-	-
DC operated	make time	ms	-	15 - 19	-
	release time	ms	-	8 - 25	-
	arc duration	ms	-	10 - 15	-

**Mini Motor Contactors**

Data according to IEC 947-5-1, VDE 0660, EN 60947-5-1

Auxiliary Contacts	Type	J7KNA-09... J7KNA-12...	J7KNA-09...D(VS) J7KNA-12...D(VS)	J73KN-A...
<b>Cable cross-section</b>				
all connectors	solid	mm <sup>2</sup> 0.75 - 2.5	0.75 - 2.5	0.75 - 2.5
	flexible	mm <sup>2</sup> 0.75 - 2.5	0.75 - 2.5	0.75 - 2.5
	flexible with multicore cable end	mm <sup>2</sup> 0.5 - 1.5	0.5 - 1.5	0.5 - 2.5
Clamps per pole		2	2	2
	solid or stranded	AWG 18 - 14	18 - 14	18 - 14

\*1) Suitable at 690V for: earthed-neutral systems, overvoltage category I to IV, pollution degree 3 (standard-industry): U<sub>imp</sub> = 8kV.  
Data for other conditions on request.

\*2) With reduced control voltage range 0.9 up to 1.0 x U<sub>s</sub> and with reduced thermal rated current I<sub>th</sub> to I<sub>θ</sub>/AC15

\*3) Summary switching time = release time + arc duration

\*4) Release time of NC make time of NO increase when suppressor units for voltage peak protection are used (Varistor, RC-units, Diode units).

**Mini Contactors for North America**

Data according to UL508

Main Contacts (cULus)	Type	J7KNA-09...	J7KNA-12...	J73KN-A...
Rated operational current "General Use"	A	15	20	10
Rated operational power of three-phase motors at 60Hz (3ph)	115V hp	1½	2	-
	200V hp	3	3	-
	230V hp	3	3	-
	460V hp	5	7½	-
	575V hp	7½	10	-
Rated operational power of AC motors at 60Hz (1ph)	115V hp	½	¾	-
	200V hp	1	1½	-
	230V hp	1½	2	-
Fuses	A	30	30	-
Suitable for use on a capability of delivering not more than rms	A	5000	5000	-
	V	600	600	-
Rated voltage	V AC	600	600	600
<b>Auxiliary Contacts (cULus)</b>	heavy pilot duty	AC A600	A600	A600
	standard pilot duty	DC Q600	Q600	Q600

LVSG



■ Dimensions

AC and DC operated  
with screw terminals

Auxiliary Contact Blocks

J7KNA-09...  
J7KNA-12...



J73KN-A...

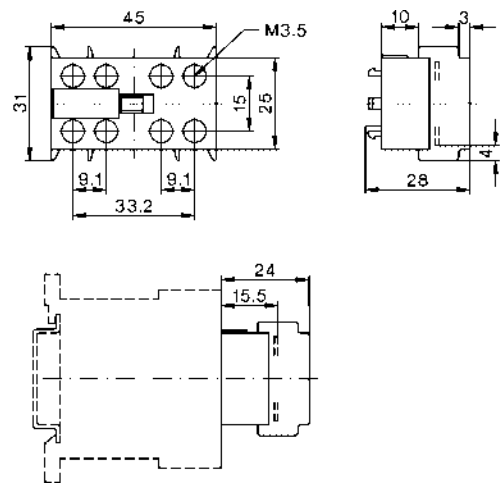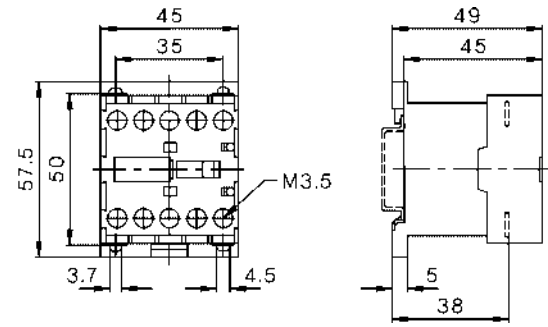

Reversing Contactors

J7KNA-09-01-W...  
J7KNA-12-01-W...

J7KNA-09-01-W... + J7TKN-A  
J7KNA-12-01-W... + J7TKN-A

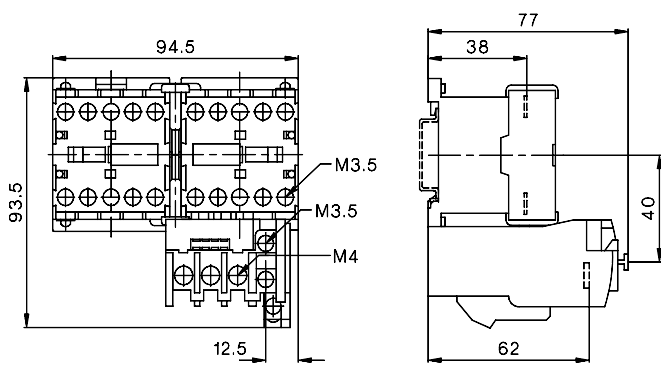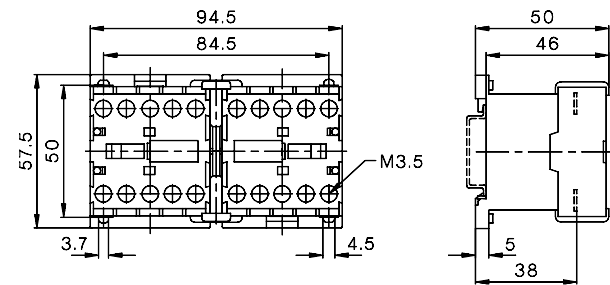

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

# Motor Contactor J7KN

## Main contactor

- AC & DC operated
- Integrated auxiliary contacts
- Screw fixing and snap fitting (35 mm DIN rail) up to 45 kW
- Range from 4 to 110 kW (AC 3, 380/415V)
- Finger proof (VBG 4)

## Accessories

- front mounted single pole additional auxiliary contacts (1 NO or 1 NC)
- Side mounted additional auxiliary contacts (1 NO/1 NC)
- Mechanical interlock
- Suppressors (RC and varistor)
- Pneumatic timer modules
- Link modules MPCB - Motor contactor



## Approved Standards

Standard	Guide No (US,C)
UL	NLDX, NLDX7
ICE 947-4-1	
VDE 0660	
EN 60947-4-1	

LVSG

OMRON

# Ordering Information

## ■ Model Number Legend

### 1. Motor Contactors

J7KN-□□-□□-□□□□  
1 2 3 4

- 1) Motor Contactor
- 2) Rated Motor Current (AC3 400V)
  - 10: 10A
  - 14: 14A
  - 18: 18A
  - 22: 22A
  - 24: 24A
  - 32: 32A
  - 40: 40A
  - 50: 50A
  - 62: 62A
  - 74: 74A
  - 85: 85A
  - 110: 110A
  - 150: 150A
  - 175: 175A
  - 200: 200A
- 3) Integrated auxiliary contact
  - 10: 1NO 0NC
  - 01: 0NO 1NC
  - 21: 2NO 1NC
  - 22: 2NO 2NC
  - : 0NO 0NC
- 4) Coil voltage (AC operated)
  - 24: AC24V 50/60Hz
  - 48: AC48V 50Hz
  - 110: AC110V 50Hz, AC110-120V 60Hz
  - 180: AC180-210V 50Hz, AC200-240V 60Hz
  - 230: AC220-240V 50Hz, AC240V 60Hz
  - 400: AC380-415V 50Hz, AC415-440V 60Hz
  - 500: AC500-550V 50Hz, AC550-600V 60Hz

Coil voltage(DC operated)

  - 24D: DC24V
  - 48D: DC48V
  - 110D: DC110V
  - 125D: DC125V

### 2. Aux. Contact Modules for Motor Contactors

J73KN-□□□□-□□  
1 2 3 4

- 1) Auxiliary Contact Modules
- 2) B: for motor contactor (4-37kW)  
C: for motor contactor (11-37kW)
- 3) Combination of NO/NC contacts
  - 10: 1NO 0NC
  - 01: 0NO 1NC
  - 11: 1NO 1NC
- 4) S: side mounting  
: front mounting

### 3. Accessories for Motor Contactors (Link Modules MPCB - Motor Contactor)

J74KN-□□□□-□□  
1 2 3

- 1) Accessories for Motor Contactors
- 2) VD: Link module type  
HU: DIN-rail adapter type
- 3) 12: for motor contactor (4 - 7.5kW)  
25: for motor contactor (11 - 15kW)

### 4. Accessories for Motor Contactors (Pneumatic Timers)

J74KN-□□□□□□□□  
1 2 3 4 5

- 1) Accessories for Motor Contactors
- 2) B: Motor Contactor (4-11kW)
- 3) TP: Pneumatic Timer
- 4) 40: 40 sec  
180: 180 sec
- 5) DA: ON-delayed  
IA: OFF-delayed

### 5. Accessories for Motor Contactors (Mechanical Interlock)

J74KN-□□□□□□  
1 2 3

- 1) Accessories for Motor Contactors
- 2) B: Motor Contactor (4-18.5kW)  
C: Motor Contactor (11-37kW)  
D: Motor Contactor (45-55kW)
- 3) ML: Mechanical Interlock

### 6. Accessories for Motor Contactors (RC Suppressor units)

J74KN-□□□□□□□□  
1 2 3 4

- 1) Accessories for Motor Contactors
- 2) A: for Mini Motor Contactor and Motor Contactor (4-18.5kW)  
(between DIN-rail and Contactor)  
B: for Mini Motor Contactor and Motor Contactor (4-55kW)  
C: for Motor Contactor (4-37kW) to snap on the contactor
- 3) RC: RC-surge suppressors
- 4) 48: 24 - 48 VAC/DC (A+B type)  
230: 110 - 230 VAC/DC (A+B type)  
400: 250 - 415 VAC/DC (A+B type)  
24: 12 - 48 VAC/DC (C type)  
110: 48 - 127 VAC/DC (C type)  
230: 110 - 250 VAC/DC (C type)

### 7. Accessories for Motor Contactors (Varistor units)

J74KN-□□□□□□□□  
1 2 3 4

- 1) Accessories for Motor Contactors
- 2) A: for Motor Contactor (4-11kW) to snap on to coil terminals  
B: for Motor Contactor (4-37kW) to snap on to contactor
- 3) VG: Varistor Suppressors
- 4) 230: 110-230VAC/DC  
400: 250-415VAC/DC








LVSG

■ List of Models

Contactors 3-pole

- Up to 210A AC3
- Up to 350A AC1
- DIN-rail mounting up to AC3 74A
- International Approvals
- Data according to IEC 947 / EN 60947



Ratings													
AC3	400V Motor	10A	14A	18A	22A	24A	32A	40A	50A	62A	74A		
	380-400V	4kW	5,5kW	7,5kW	11kW	11kW	15kW	18,5kW	22kW	30kW	37kW		
	660-690V	5,5kW	7,5kW	10kW	10kW	15kW	18,5kW	18,5kW	30kW	37kW	45kW		
AC1	690V at 40°C	25A	25A	32A	32A	50A	65A	80A	110A	120A	130A		
Type		J7KN-10-10	J7KN-14-10	J7KN-18-10	J7KN-22-10	J7KN-24	J7KN-32	J7KN-40	J7KN-50	J7KN-62	J7KN-74		
Auxiliary contacts		1NO	1NO	1NO	1NO	-	-	-	-	-	-		
Type		J7KN-10-01	J7KN-14-01	J7KN-18-01	J7KN-22-01	-	-	-	-	-	-		
Auxiliary contacts		1NC	1NC	1NC	1NC	-	-	-	-	-	-		
Cable cross-section													
Solid	mm <sup>2</sup>	0,75 - 6				1,5 - 25			4 - 50				
Flexible	mm <sup>2</sup>	1 - 4				2,5 - 16			10 - 35				
Cables per clamp		2				1 + 1			1 + 1				
Auxiliary contact													
I <sub>th</sub>	40°C	A	16			-			-				
AC15	230V	A	12			-			-				
	400V	A	4			-			-				
Power consumption of coils													
Inrush VA		33 - 45				90 - 115			140 - 165				
Hold VA		7 - 10				9 - 13			13 - 18				
Operation range of coils		0,85 - 1,1				0,85 - 1,1			0,85 - 1,1				
Mounting		35mm DIN-rail or base											
Additional aux. contact blocks													
Front mounting contacts	Type	 J73KN-B-10 1NO f. low level switching				 J73KN-B-01 1NC f. low level switching				maximal 4 J73KN-B..			
Side mounting contacts	Type	-				 J73KN-C-11S 1NO+1NC f. low level switching max. 2 J73KN-C-11S				-			
Overload Relay (thermal)													
Single phase protection													
Temperature compensation													
Trip and alarm contacts													
Type		J7TKN-B		J7TKN-A		J7TKN-C		J7TKN-D					
Setting Ranges		0,12 - 0,18A		1,8 - 2,7A		28 - 42A		20 - 28A					
		0,18 - 0,27A		2,7 - 4A				28 - 42A					
		0,27 - 0,4A		4 - 6A				40 - 52A					
		0,4 - 0,6A		6 - 9A				52 - 65A					
		0,6 - 0,9A		8 - 11A				60 - 74A					
		0,8 - 1,2A		10 - 14A									
		1,2 - 1,8A		13 - 18A									
		17 - (23)24A		(22)23 - (30)32A									








Ratings						
AC3	400V Motor	85A	110A	150A	175A	210A
	380-400V	45kW	55kW	75kW	90kW	110kW
AC1	660-690V	55kW	55kW	75kW	110kW	132kW
	690V at 40°C	150A	170A	200A	250A	350A
Type		J7KN-85-22	J7KN-110-22	J7KN-150-11	J7KN-175-11	J7KN-200-22
Auxiliary contacts		2NO+2NC	2NO+2NC	1NO+1NC	1NO+1NC	2NO+2NC
Type		-	-	-	-	-
Auxiliary contacts		-	-	-	-	-
<b>Cable cross-section</b>						
Solid	mm <sup>2</sup>	10 - 70	10 - 70	busbar	busbar	busbar
Flexible	mm <sup>2</sup>	16 - 50	16 - 50	18x5	18x5	22x4
Cables per clamp		1	1	1	1	1
<b>Auxiliary contact</b>						
I <sub>th</sub>	40°C	A 16		10		
AC15	230V	A 12		3		
	400V	A 6		2		
<b>Power consumption of coils</b>						
	Inrush VA	350 - 420		550	550	1100
	hold VA	23 - 29		130	130	66
	Operation range of coils	0,85 - 1,1		0,85 - 1,1		
Mounting		base				
<b>Additional aux. contact blocks</b>						
Front mounting contacts	Type					
<b>Additional aux. contact blocks</b>						
Side mounting contacts	Type	-	-	-	-	-
<b>Overload Relay (thermal)</b>						
Single phase protection Temperature compensation Trip and alarm contacts						
Type		J7TKN-E	J7TKN-F			
Setting Ranges		60 - 90A	100 - 150A			
		80 - 120A	140 - 220A			
		<b>Busbar Sets</b>				
		J74TK-SU-175, J74TK-SU-200				

LVSG



**Contactors 3-pole**  
AC Operated

	Ratings			Rated Current AC1 690V A	Aux. Contacts		Type	Pack	Weight	
	AC2, AC3 380V 400V 415V kW	500V kW	660V 690V kW		Built-in					Additional see page 34 Type
					NO	NC	Coil Voltage*1 24 24V 50/60Hz 110 110V 50Hz 230 220-240V 50Hz	pcs.	kg/pc.	
	4	5.5	5.5	25	1	-	max. 4 J73KN-B	1	0.23	
	4	5.5	5.5	25	-	1		J7KN-10-01□□□□	1	0.23
	5.5	7.5	7.5	25	1	-		J7KN-14-10□□□□	1	0.23
	5.5	7.5	7.5	25	-	1		J7KN-14-01□□□□	1	0.23
	7.5	10	10	32	1	-		J7KN-18-10□□□□	1	0.23
	7.5	10	10	32	-	1		J7KN-18-01□□□□	1	0.23
	11	10	10	32	1	-		J7KN-22-10□□□□	1	0.23
	11	10	10	32	-	1		J7KN-22-01□□□□	1	0.23
	11	15	15	50	-	-	max. 4 J73KN-B + 2 J73KN- C-11S	1	0.48	
	15	18.5	18.5	65	-	-		J7KN-24□□□□	1	0.48
	18.5	18.5	18.5	80	-	-		J7KN-32□□□□ J7KN-40□□□□	1	0.48
	22	30	30	110	-	-	max. 4 J73KN-B + 2 J73KN- C11S	1	0.85	
	30	37	37	120	-	-		J7KN-50□□□□	1	0.85
	37	45	45	130	-	-		J7KN-62□□□□ J7KN-74□□□□	1	0.85
	Ratings			Rated Current AC1 690V A	Aux. Contacts		Type	Pack	Weight	
	AC2, AC3 380V 415V kW	500V kW	660V 690V kW		Built-in					Coil Voltage*1 230 220-230V 50Hz 400 380-400V 50Hz
					NO	NC		pcs.	kg/pc.	
	45	55	55	150	2	2		1	1.8	
	55	75	55	170	2	2		J7KN-85-22□□□□ J7KN-110-22□□□□	1	1.9
	75	75	75	200	1	1		1	5	
	90	90	90	250	1	1		J7KN-150-11□□□□ J7KN-175-11□□□□	1	5
	110	132	132	350	2	2		J7KN-200-22□□□□	1	7.3

\*1) Coil voltage range and other coil voltages see page 37


**Contactors 3-pole**  
DC Operated

Type	Coil voltage		Aux. Contacts		Weight kg/pc.	Accept Overload Relay page 57 Type	Busbar Set for Overload Relay page 59 Type	Wiring Diagram Coil Circuits see page 36 Terminal Markings
	24 60 110 220	24V DC 60V DC 110V DC 220V DC	Built-in NO	Additional <sup>*)</sup> NC Type				
J7KN-10-10□□□□D			1	-	0.25	J7TKN-B	-	
J7KN-10-01□□□□D			-	1	0.25	J7TKN-A	-	
J7KN-14-10□□□□D			1	-	0.25		-	
J7KN-14-01□□□□D			-	1	0.25		-	
J7KN-18-10□□□□D			1	-	0.25		-	
J7KN-18-01□□□□D			-	1	0.25		-	
J7KN-22-10□□□□D			1	-	0.25		-	
J7KN-22-01□□□□D			-	1	0.25		-	
J7KN-24□□□□D			-	-	0.55	J7TKN-B J7TKN-C	-	
J7KN-32□□□□D			-	-	0.55		-	
J7KN-40□□□□D			-	-	0.55		-	
J7KN-50□□□□D			-	-	0.9	J7TKN-D		
J7KN-62□□□□D			-	-	0.9			
J7KN-74□□□□D			2	1	1.6			
Type	Coil voltage		Aux. Contacts		Weight kg/pc.	Accept Overload Relay page H-57 Type	Busbar Set for Overload Relay page H-57 Type	Wiring Diagram
	110 220	110V DC 220V DC	Built-in NO	NC				
J7KN-85-21□□□□D			2	1	1.8	J7TKN-E		
J7KN-110-21□□□□D			2	1	1.9			
						J7TKN-F	J73TK-SU-175 J73TK-SU-200	

LVSG


\*1) Only 3 additional Aux. Contacts are possible! (See also the wiring diagrams coil circuit DC operated page 36)

**Contactors 4-pole**  
AC Operated


	Ratings		Rated Current AC1 690V A	Aux. Contacts		Type	Pack	Weight
	AC2, AC3 380V 400V 415V kW	AC1 400V kW		Built-in	Additional see below			
	4	17.5	25	-	-	max. 4 J73KN-B	1	0.22

\*1) Coil voltage range and other coil voltages see page 37


**Auxiliary Contact Blocks** for contactors J7KN-10... to -74... type J73KN for low level switching\*1

Front mounting	Rated Operational Current			Contacts				Type	Pack	Weight
	AC15 230V A	AC15 400V A	AC1 690V A	NO	NC	EM	LB			
	3	2	10	1	-	-	-	J73KN-B-10	10	0.02
	3	2	10	-	1	-	-	J73KN-B-01	10	0.02

**Auxiliary Contact Blocks** for contactors J7KN-24... to -74... type J73KN for low level switching\*1


Side mounting	Rated Operational Current			Contacts	Type	Pack	Weight	
	AC15 230V A	AC15 400V A	AC1 690V A					
	3	2	10	for side mounting max. 2	NO NC	J73KN-C-11S	10	0.02

**Pneumatic Timer** for contactors J7KN-10... to -22...




	Function	Time range s	Contacts				Type	Pack	Weight
			NO	NC	NO	NC			
	On-delay	0.1 - 40	1	1	-	-	J74KN-B-TP40DA	1	0.09
	On-delay	10 - 180	1	1	-	-	J74KN-B-TP180DA	1	0.09
	Off-delay	0.1 - 40	-	-	1	1	J74KN-B-TP40IA	1	0.09
	Off-delay	10 - 180	-	-	1	1	J74KN-B-TP180IA	1	0.09

1. suitable according to DIN 19240 (test ratings 17V DC, 5mA)  
Technical data see page 51

**Mechanical Interlocks**






	Interlocks contactor with contactor		Mounting	Type	Pack pcs.	Weight kg/pc.
	Type	+ Type				
	J7KN10 - J7KN40	+ J7KN10 - J7KN40	horizontal	J74KN-B-ML	1	0.006
	J7KN24 - J7KN74	+ J7KN24 - J7KN74	horizontal	J74KN-C-ML	1	0.010
	J7KN85 - J7KN110	+ J7KN85 - J7KN110	horizontal	J74KN-D-ML	1	0.076

**Suppressor Units**

	Voltage Range V	Mounting	Type	Pack pcs.	Weight kg/pc.
	<b>Varistor</b> for contactors J7KN-10 to J7KN-22				
	110 - 230V AC/DC	to snap on to coil terminals	J74KN-A-VG230	10	0.01
	250 - 415V AC/DC	to snap on to coil terminals	J74KN-A-VG400	10	0.01
	<b>Varistor</b> for contactors J7KN-10 to J7KN-74				
	110 - 230V AC/DC	to snap on the contactor	J74KN-B-VG230	10	0.02
	250 - 415V AC/DC	to snap on the contactor	J74KN-B-VG400	10	0.02
	<b>RC-unit</b> for contactors J7KN-10 to J7KN-40, J7KNA				
	110 - 230V AC/DC	between DIN-rail and contactor	J74KN-A-RC230	1	0.036
	<b>RC-units</b> for contactors J7KN-10 to J7KN-110				
	24 - 48V AC/DC	universal (fixing band, adhesive strip)	J74KN-B-RC48	5	0.02
	110 - 230V AC/DC	universal (fixing band, adhesive strip)	J74KN-B-RC230	5	0.02
	250 - 415V AC	universal (fixing band, adhesive strip)	J74KN-B-RC400	5	0.02
	<b>RC-units</b> for contactors J7KN-10 to J7KN-74				
	12 - 48V AC (50/60Hz) & DC	to snap on the contactor	J74KN-C-RC24	10	0.02
	48 - 127V AC (50/60Hz) & DC	to snap on the contactor	J74KN-C-RC110	10	0.036
	110 - 250V AC (50/60Hz) & DC	to snap on the contactor	J74KN-C-RC230	10	0.036

LVSG

■ Wiring Diagrams Coil Circuit

AC operated	DC operated with double winding coil <sup>*1</sup>
J7KN-10... to J7KN-175... 	J7KN-10...D to J7KN-22...D 
J7KN-200... 	J7KN-24...D to J7KN-74...D 
	J7KN-85...D to J7KN-110...D 

\*1) Only 3 additional Aux. Contacts are possible! (See also page 33)

## Specifications

### ■ Coil Voltages

Type-suffix for contactor types J7KN-10... to J7KN-74...

Suffix to contactor type e.g. J7KN-10-10-24	Voltage Marking at the coil		Rated Control Voltage U <sub>s</sub> range for			
	for 50Hz V	for 60Hz V	50Hz		60Hz	
			min V.	max V.	min V.	max V.
<b>24</b>	<b>24</b>	<b>24</b>	<b>22</b>	<b>24</b>	<b>24</b>	<b>27</b>
48	48		47	52	52	58
<b>110</b>	<b>110</b>	<b>110-120</b>	<b>100</b>	<b>110</b>	<b>110</b>	<b>122</b>
180	180-210	200-240	180	210	200	240
<b>230</b>	<b>220-240</b>	<b>240</b>	<b>220</b>	<b>240</b>	<b>240</b>	<b>264</b>
<b>400</b>	<b>380-415</b>	<b>415-440</b>	<b>380</b>	<b>415</b>	<b>415</b>	<b>460</b>
500	500-550	550-600	500	550	550	600

Standard voltages in bold type letter

Type-suffix for contactor types J7KN-85... to J7KN-110...

Suffix to contactor type e.g. J7KN-85-22-24	Voltage Marking at the coil		Rated Control Voltage U <sub>s</sub> range for			
	for 50Hz V	for 60Hz V	50Hz		60Hz	
			min V.	max V.	min V.	max V.
<b>24</b>	<b>24</b>		<b>24</b>	<b>27</b>	<b>29</b>	<b>32</b>
48	48	60	47	52	56	62
<b>110</b>	<b>110-120</b>		<b>110</b>	<b>122</b>	<b>132</b>	<b>146</b>
180	180-200	208-240	180	200	208	240
<b>230</b>	<b>220-240</b>	<b>277</b>	<b>220</b>	<b>240</b>	<b>264</b>	<b>288</b>
<b>400</b>	<b>380-415</b>	<b>460-480</b>	<b>380</b>	<b>415</b>	<b>455</b>	<b>498</b>
500	500-550	600-660	500	550	600	660

Standard voltages in bold type letter

Type-suffix for contactor types J7KN-150... to J7KN-200...

Suffix to contactor type e.g. J7KN-150-110	Voltage Marking at the coil		Rated Control Voltage U <sub>s</sub> range for			
	for 50Hz V	for 60Hz V	50Hz		60Hz	
			min V.	max V.	min V.	max V.
24	24		24	24	-	-
48	48		48	48	-	-
110	110	110	110	110	110	110
180	180	220	180	180	220	220
<b>230</b>	<b>220-230</b>	<b>220</b>	<b>220</b>	<b>230</b>	<b>220</b>	<b>220</b>
240	240	240	240	240	240	240
<b>400</b>	<b>380-400</b>		<b>380</b>	<b>400</b>	-	-
440		440	-	-	440	440

Standard voltages in bold type letter

LVSG

■ Engineering data and characteristics

Approximate Values for three-phase Motors

Motor Full Load Currents

Approximate values of motor F.L.C. and minimum „slow blow“ respectively „gL“ short-circuit fuse

Motor rating				220-230V Motor			240V Motor			380-400V Motor			415V Motor			500V Motor			660-690V Motor			
Range according to BS for 415V				Value of fusing at motor start			Value of fusing at motor start			Value of fusing at motor start			Value of fusing at motor start			Value of fusing at motor start			Value of fusing at motor start			
kW	PS-hp	hp	cosφ	%	F.L.C. A	D.O.L. A	YD A	F.L.C. A	D.O.L. A	YD A	F.L.C. A	D.O.L. A	YD A	F.L.C. A	D.O.L. A	YD A	F.L.C. A	D.O.L. A	YD A	F.L.C. A	D.O.L. A	YD A
0.06	0.08	-	0.7	59	0.38	1	1	0.35	1	1	0.22	1	1	-	-	-	0.16	1	1	-	-	-
0.09	0.12	-	0.7	60	0.55	2	2	0.5	2	2	0.33	1	1	-	-	-	0.24	1	1	-	-	-
0.12	0.16	-	0.7	61	0.76	2	2	0.68	2	2	0.42	2	2	-	-	-	0.33	1	1	-	-	-
0.18	0.24	-	0.7	61	1.1	2	2	1	2	2	0.64	2	2	-	-	-	0.46	1	1	-	-	-
0.25	0.34	-	0.7	62	1.4	4	2	1.38	4	2	0.88	2	2	-	-	-	0.59	2	2	-	-	-
0.37	0.5	-	0.72	64	2.1	4	4	1.93	4	4	1.22	4	2	-	-	-	0.85	2	2	0.7	2	2
0.55	0.75	-	0.75	69	2.7	4	4	2.3	4	4	1.5	4	2	-	-	-	1.2	4	2	0.9	2	2
0.75	1	1	0.8	74	3.3	6	4	3.1	6	4	2	4	4	2	4	4	1.48	4	2	1.1	2	2
1.1	1.5	1.5	0.83	77	4.9	10	6	4.1	6	6	2.6	4	4	2.5	4	4	2.1	4	4	1.5	4	2
1.5	2	2	0.83	78	6.2	10	10	5.6	10	10	3.5	6	4	3.5	6	4	2.6	4	4	2	4	4
2.2	3	3	0.83	81	8.7	16	10	7.9	16	10	5	10	6	5	10	6	3.8	6	6	2.9	6	4
2.5	3.4	-	0.83	81	9.8	16	16	8.9	16	10	5.7	10	10	-	-	-	4.3	6	6	-	-	-
3	4	4	0.84	81	11.6	20	16	10.6	20	16	6.6	16	10	6.5	16	10	5.1	10	10	3.5	6	4
3.7	5	5	0.84	82	14.2	25	20	13	25	16	8.2	16	10	7.5	16	10	6.2	16	10	-	-	-
4	5.5	-	0.84	82	15.3	25	20	14	25	20	8.5	16	10	-	-	-	6.5	16	10	4.9	10	6
5.5	7.5	7.5	0.85	83	20.6	35	25	18.9	35	25	11.5	20	16	11	20	16	8.9	16	10	6.7	16	10
7.5	10	10	0.86	85	27.4	35	35	24.8	35	35	15.5	25	20	14	25	16	11.9	20	16	9	16	10
8	11	-	0.86	85	28.8	50	35	26.4	35	35	16.7	25	20	-	-	-	12.7	20	16	-	-	-
11	15	15	0.86	87	39.2	63	50	35.3	50	50	22	35	25	21	35	25	16.7	25	20	13	25	16
12.5	17	-	0.86	87	43.8	63	50	40.2	63	50	25	35	35	-	-	-	19	35	25	-	-	-
15	20	20	0.86	87	52.6	80	63	48.2	80	63	30	50	35	28	35	35	22.5	35	25	17.5	25	20
18.5	25	25	0.86	88	64.9	100	80	58.7	80	63	37	63	50	35	50	50	28.5	50	35	21	35	25
20	27	-	0.86	88	69.3	100	80	63.4	80	80	40	63	50	-	-	-	30.6	50	35	-	-	-
22	30	30	0.87	89	75.2	100	80	68	100	80	44	63	50	40	63	50	33	50	50	25	35	35
25	34	-	0.87	89	84.4	125	100	77.2	100	100	50	80	63	-	-	-	38	63	50	-	-	-
30	40	40	0.87	90	101	125	125	92.7	125	100	60	80	63	55	80	63	44	63	50	33	50	35
37	50	50	0.87	90	124	160	160	114	160	125	72	100	80	66	100	80	54	80	63	42	63	50
40	54	-	0.87	90	134	160	160	123	160	160	79	100	100	-	-	-	60	80	63	-	-	-
45	60	60	0.88	91	150	200	160	136	200	160	85	125	100	80	100	100	64.5	100	80	49	63	63
51	70	-	0.88	91	168	200	200	154	200	200	97	125	100	-	-	-	73.7	100	80	-	-	-
55	75	-	0.88	91	181	250	200	166	200	200	105	160	125	-	-	-	79	125	100	60	80	63
59	80	80	0.88	91	194	250	250	178	250	200	112	160	125	105	160	125	85.3	125	100	-	-	-
75	100	100	0.88	91	245	315	250	226	315	250	140	200	160	135	200	160	106	160	125	82	125	100
90	125	125	0.88	92	292	400	315	268	315	315	170	250	200	165	200	200	128	160	160	98	125	125
110	150	150	0.88	92	358	500	400	327	400	400	205	250	250	200	250	250	156	200	200	118	160	125
129	175	175	0.88	92	420	500	500	384	500	400	242	315	250	230	315	250	184	250	200	-	-	-
132	180	-	0.88	92	425	500	500	393	500	500	245	315	250	-	-	-	186	250	200	140	200	160
147	200	200	0.88	93	472	630	630	432	630	500	273	315	315	260	315	315	207	250	250	-	-	-
160	220	-	0.88	93	502	630	630	471	630	630	295	400	315	-	-	-	220	315	250	170	200	200
184	250	250	0.88	93	590	800	630	541	630	630	340	400	400	325	400	400	259	315	315	-	-	-
200	270	-	0.88	93	626	800	800	589	800	630	370	500	400	-	-	-	278	315	315	215	250	250
220	300	300	0.88	93	700	1000	800	647	800	800	408	500	500	385	500	400	310	400	400	-	-	-
250	340	-	0.88	93	803	1000	1000	736	1000	800	460	630	500	-	-	-	353	500	400	268	315	315
257	350	350	0.88	93	826	1000	1000	756	1000	800	475	630	630	450	630	500	363	500	400	-	-	-
295	400	400	0.88	93	948	1250	1000	868	1000	1000	546	800	630	500	630	630	416	500	500	-	-	-
315	430	-	0.88	93	990	1250	1250	927	1250	1000	580	800	630	-	-	-	445	630	500	337	400	400
355	483	-	0.89	95	-	-	-	-	-	-	636	800	800	-	-	-	483	630	630	366	500	400
400	545	-	0.89	96	-	-	-	-	-	-	710	1000	800	-	-	-	538	630	630	410	500	500

The motor F.L.C. be valid for standard internal and surface cooled three-pole motors with 1500 min<sup>-1</sup>. The fuses values be valid for the motor F.L.C. shown in the table and D.O.L.-start: starting current max. 6x motor F.L.C., starting time max. 5s; star-delta-start: starting current max. 2x motor F.L.C., starting time max. 15s. For motors with higher F.L.C., higher starting current and / or longer starting time, larger short-circuit fuses are required.

The maximum admissible value is dependent on the switchgear respectively thermal overload relay.

Approximate values of motor F.L.C. according to CSA and UL

Motor rating hp	Motor F.L.C. at 110-120V			Motor F.L.C. at 220-240V <sup>*1</sup>			Motor F.L.C. at 440-480V			Motor F.L.C. at 550-600V		
	1-phase A	2-phase A	3-phase A	1-phase A	2-phase A	3-phase A	1-phase A	2-phase A	3-phase A	1-phase A	2-phase A	3-phase A
1/2	9.8	4.0	4.4	4.9	2.0	2.2	2.5	1.0	1.1	2.0	0.8	0.9
3/4	13.8	4.8	6.4	6.9	2.4	3.2	3.5	1.2	1.6	2.8	1.0	1.3
1	16.0	6.4	8.4	8.0	3.2	4.2	4.0	1.6	2.1	3.2	1.3	1.7
1 1/2	20.0	9.0	12.0	10.0	4.5	6.0	5.0	2.3	3.0	4.0	1.8	2.4
2	24.0	11.8	13.6	12.0	5.9	6.8	6.0	3.0	3.4	4.8	2.4	2.7
3	34.0	16.6	19.2	17.0	8.3	9.6	8.5	4.2	4.8	6.8	3.3	3.9
5	56.0	26.4	30.4	28.0	13.2	15.2	14.0	6.6	7.6	11.2	5.3	6.1
7 1/2	80.0	38.0	44.0	40.0	19.0	22.0	21.0	9.0	11.0	16.0	8.0	9.0
10	100.0	48.0	56.0	50.0	24.0	28.0	26.0	12.0	14.0	20.0	10.0	11.0
15	135.0	72.0	84.0	68.0	36.0	42.0	34.0	18.0	21.0	27.0	14.0	17.0
20	-	94.0	108.0	88.0	47.0	54.0	44.0	23.0	27.0	35.0	19.0	22.0
25	-	118.0	136.0	110.0	59.0	68.0	55.0	29.0	34.0	44.0	24.0	27.0
30	-	138.0	160.0	136.0	69.0	80.0	68.0	35.0	40.0	54.0	28.0	32.0
40	-	180.0	208.0	176.0	90.0	104.0	88.0	45.0	52.0	70.0	36.0	41.0
50	-	226.0	260.0	216.0	113.0	130.0	108.0	56.0	65.0	86.0	45.0	52.0
60	-	-	-	-	133.0	145.0	-	67.0	77.0	-	53.0	62.0
75	-	-	-	-	166.0	192.0	-	83.0	96.0	-	66.0	77.0
100	-	-	-	-	218.0	248.0	-	109.0	124.0	-	87.0	99.0
125	-	-	-	-	-	312.0	-	135.0	156.0	-	108.0	125.0
150	-	-	-	-	-	360.0	-	156.0	180.0	-	125.0	144.0
200	-	-	-	-	-	480.0	-	208.0	240.0	-	167.0	192.0
250	-	-	-	-	-	602.0	-	-	302.0	-	-	242.0
300	-	-	-	-	-	-	-	-	361.0	-	-	289.0
350	-	-	-	-	-	-	-	-	414.0	-	-	336.0
400	-	-	-	-	-	-	-	-	477.0	-	-	382.0
500	-	-	-	-	-	-	-	-	590.0	-	-	472.0

\*1) Determine the motor current for 200V and 208V by increasing the values for 220-240V at 200V about 15% and for 208V about 10%.

LVSG



**Contactors**

**Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660**

Main Contacts	Type	J7KN-10	J7KN-14	J7KN-18	J7KN-22	J7KN-24	J7KN-32	J7KN-40	J7KN-50	J7KN-62	J7KN-74
Rated insulation voltage $U_i$ <sup>1)</sup>	V AC	690	690	690	690	690	690	690	690	690	690
Making capacity $I_m$	at $U_i = 690V$ AC A	200	200	200	200	400	500	500	700	900	900
Breaking capacity $I_b$	400V AC A	180	180	200	200	380	400	400	600	800	800
	500V AC A	150	150	180	180	300	370	370	500	700	700
J7KN-10 to J7KN-22 $\cos\phi = 0,65$	690V AC A	100	100	150	150	260	340	340	400	500	500
J7KN-24 to J7KN-72 $\cos\phi = 0,35$	1000V AC A	-	-	-	-	-	-	-	-	-	-
<b>Utilization category AC1</b>											
<b>Switching of resistive load</b>											
Rated operational current $I_n (=I_{th})$ at 40°C, open	A	25	25	32	32	50	65	80	110	120	130
Rated operational power of three-phase resistive loads 50-60Hz, $\cos\phi = 1$	220V kW	9,5	9,5	12,2	12,2	19,0	24,7	30,4	41,9	45,7	49,5
	230V kW	9,9	9,9	12,7	12,7	19,9	25,9	31,8	43,8	47,7	51,7
	240V kW	10,4	10,4	13,3	13,3	20,8	27,0	33,2	45,7	49,8	54,0
	380V kW	16,4	16,4	21,0	21,0	32,9	42,7	52,6	72,3	78,9	85,5
	400V kW	17,3	17,3	22,1	22,1	34,6	45,0	55,4	76,1	83,0	90,0
	415V kW	17,9	17,9	23,0	23,0	35,9	46,7	57,4	79,0	86,2	93,3
	440V kW	19,0	19,0	24,4	24,4	38,1	49,5	60,9	83,7	91,3	99,0
	500V kW	21,6	21,6	27,7	27,7	43,3	56,2	69,2	95,2	103,8	112,5
	660V kW	28,5	28,5	36,5	36,5	57,1	74,2	91,3	125,6	137,0	148,4
	690V kW	29,8	29,8	38,2	38,2	59,7	77,6	95,5	131,3	143,2	155,2
	1000V kW	-	-	-	-	-	-	-	-	-	-
Rated operational current $I_n (=I_{th})$ at 60°C, enclosed	A	25	25	32	32	40	55	65	90	100	110
Rated operational power of three-phase resistive loads 50-60Hz, $\cos\phi = 1$	220V kW	9,5	9,5	12,2	12,2	15,2	20,9	24,7	34,3	38,1	41,9
	230V kW	9,9	9,9	12,7	12,7	15,9	21,9	25,9	35,8	39,8	43,8
	240V kW	10,4	10,4	13,3	13,3	16,6	22,8	27,0	37,4	41,5	45,7
	380V kW	16,4	16,4	21,0	21,0	26,3	36,2	42,7	59,2	65,7	72,3
	400V kW	17,3	17,3	22,1	22,1	27,7	38,1	45,0	62,3	69,2	76,1
	415V kW	17,9	17,9	23,0	23,0	28,7	39,5	46,7	64,6	71,8	79,0
	440V kW	19,0	19,0	24,4	24,4	30,4	41,9	49,5	68,5	76,1	83,7
	500V kW	21,6	21,6	27,7	27,7	34,6	47,6	56,2	77,9	86,5	95,2
	660V kW	28,5	28,5	36,5	36,5	45,7	62,8	74,2	102,8	114,2	125,6
	690V kW	29,8	29,8	38,2	38,2	47,7	65,7	77,6	107,4	119,4	131,3
	1000V kW	-	-	-	-	-	-	-	-	-	-
Minimum cross-section of conductor at load with $I_n (=I_{th})$	mm <sup>2</sup>	4	4	6	6	10	16	25	35	50	50
<b>Utilization category AC2 and AC3</b>											
<b>Switching of three-phase motors</b>											
Rated operational current $I_n$ open and enclosed	220V A	12	15	18	22	24	30	40	50	63	74
	230V A	11,5	14,5	18	22	24	30	40	50	62	74
	240V A	11	14	18	22	24	32	40	50	62	74
	<b>380-400V A</b>	<b>10</b>	<b>14</b>	<b>18</b>	<b>22</b>	<b>24</b>	<b>32</b>	<b>40</b>	<b>50</b>	<b>62</b>	<b>74</b>
	415V A	9	14	18	22	23	30	40	50	62	74
	440V A	9	14	18	22	23	30	40	50	62	74
	500V A	7	9	9	9	17,5	21	21	33	42	42
	660-690V A	6,5	8,5	8,5	8,5	17	20	20	31	40	40
	1000V A	-	-	-	-	-	-	-	-	-	-
Rated operational power of three-phase motors 50-60Hz	220-230V kW	3	4	5	6	6	8,5	11	12,5	18,5	22
	240V kW	3	4	5	7	7	9	11,5	13,5	19	23
	<b>380-400V kW</b>	<b>4</b>	<b>5,5</b>	<b>7,5</b>	<b>11</b>	<b>11</b>	<b>15</b>	<b>18,5</b>	<b>22</b>	<b>30</b>	<b>37</b>
	415V kW	4,5	6	8,5	12	12	16	20	24	33	40
	440V kW	4,5	6	8,5	12	12	16	20	24	33	40
	500V kW	5,5	7,5	10	10	15	18,5	18,5	30	37	45
	660-690V kW	5,5	7,5	10	10	15	18,5	18,5	30	37	45
	1000V kW	-	-	-	-	-	-	-	-	-	-
<b>Utilization category AC4</b>											
<b>Switching of squirrel cage motors, inching</b>											
Rated operational current $I_n (=I_{th})$ open and enclosed	220V A	12	15	18	18	24	30	40	50	63	63
	230V A	11,5	14,5	18	18	24	30	40	50	62	62
	240V A	11	14	18	18	24	32	40	50	62	62
	<b>380-400V A</b>	<b>10</b>	<b>14</b>	<b>18</b>	<b>18</b>	<b>24</b>	<b>32</b>	<b>40</b>	<b>50</b>	<b>62</b>	<b>62</b>
	415V A	9	14	18	18	23	30	37	45	60	60
	440V A	9	14	18	18	23	30	37	45	55	55
	500V A	9	12	16	16	17,5	21	21	33	42	42
	660V A	7	9	9	9	17	20	20	31	40	40
	690V A	6,5	8,5	8,5	8,5	17	20	20	31	40	40
	1000V A	-	-	-	-	-	-	-	-	-	-

Main Contacts	Type	J7KN-10	J7KN-14	J7KN-18	J7KN-22	J7KN-24	J7KN-32	J7KN-40	J7KN-50	J7KN-62	J7KN-74
Rated operational power of three-phase motors 50-60Hz	220-230V kW	3	4	5	5	6	8,5	11	12,5	18,5	18,5
	240V kW	3	4	5	5	7	9	11,5	13,5	19	19
	<b>380-400V kW</b>	<b>4</b>	<b>5,5</b>	<b>7,5</b>	<b>7,5</b>	<b>11</b>	<b>15</b>	<b>18,5</b>	<b>22</b>	<b>30</b>	<b>30</b>
	415V kW	4,5	6	8,5	8,5	12	16	20	24	33	33
	440V kW	4,5	6	8,5	8,5	12	16	20	24	33	33
	500V kW	5,5	7,5	10	10	15	18,5	18,5	30	37	37
	660-690V kW	5,5	7,5	10	10	15	18,5	18,5	30	37	37
	1000V kW	-	-	-	-	-	-	-	-	-	-
<b>Utilization category AC 5a</b>											
<b>Switching of gas discharge lamps</b>											
Rated operational current I <sub>e</sub> per pole at 220/230V											
Fluorescent lamps,											
uncompensated and serial compensated	A	20	20	25	25	40	52	64	88	96	104
parallel compensated	A	7	9	9	9	18	22	22	30	40	45
dual-connection	A	22,5	22,5	28	28	45	58	72	98	108	117
Metal halide lamps <sup>2</sup> ,											
uncompensated	A	12	15	19	19	30	39	48	66	72	78
parallel compensated	A	7	9	9	9	18	22	22	30	40	45
Mercury-vapour lamps <sup>3</sup> ,											
uncompensated	A	22,5	25	28	28	45	58	72	99	108	117
parallel compensated	A	7	9	9	9	18	22	22	30	40	45
Mixed light lamps <sup>4</sup>	A	20	20	25	25	40	52	64	88	96	104
<b>Utilization category AC5b</b>											
<b>Switching of incandescent lamps<sup>5</sup></b>											
Rated operational current I <sub>e</sub> per pole at 220/230V											
A	12,5	12,5	12,5	12,5	25	31	31	43	56	56	56
<b>Utilization category AC6a</b>											
<b>Transformer primary switching</b>											
at inrush											
Rated operational current I <sub>e</sub>	400V A	4,5	5,5	7,5	7,5	10,5	13,5	13,5	20	27	33
Rated operational power dependent on inrush n	220-230V kVA	1,8	2,2	3	3	4,2	5,4	5,4	8	10,7	13
	240V kVA	1,9	2,3	3,1	3,1	4,3	5,6	5,6	8,3	11,2	13,5
	380-400V kVA	3,1	3,8	5,2	5,2	7,3	9,3	9,3	13,5	18,5	22,5
For different inrush-factors x use the following formula: P <sub>x</sub> =P <sub>n</sub> *(n/x)	415-440V kVA	3,4	4,2	5,7	5,7	8	10,2	10,2	15	20,5	25
	500V kVA	3,9	4,8	6,5	6,5	9	11,5	11,5	17	23	28
	660-690V kVA	5,4	6,5	9	9	12,5	16	16	24	32	39
<b>Utilization category AC6b</b>											
<b>Switching of three-phase capacitor banks</b>											
Maximum inrush current (peak value) as multiple k of the capacitor rated current											
Rated operational current I <sub>e</sub>	500V A	8	12	15,5	15,5	23	32	32	45	60	70
Rated operational power (sinφ→1)	220-230V kVA	3	4,5	6	6	8,5	12	12	17	24	28
	240V kVA	3,5	5	6,5	6,5	9,5	13	13	18,5	25	29
	380-400V kVA	5	7,5	10	10	15	20	20	29	39	46
For different multiples x use the following formula: P <sub>x</sub> =P <sub>k</sub> *(k/x)	415-440V kVA	5,5	8	11	11	16	22	22	32	43	50
	500V kVA	7	10	13	13	20	26	26	39	50	58
	660-690V kVA	7	10	13	13	20	26	26	40	50	58
<b>Switching of detuned capacitors</b>											
Rated operational current I <sub>e</sub>	690V A	8	13	18	20	28	36	42	48	72	105 <sup>1)</sup>
Rated operational power	220-230V kVA	2,9	5	7	7,5	11	14	16	20	28	33
	240V kVA	3,1	5,4	7	8	11	14	17	20	28	36
	380-400V kVA	5	9	12,5	13	20	25	27,5	33,3	50	75 <sup>1)</sup>
	415-440V kVA	5,5	9,5	13	14	22	27	30	36	53	75 <sup>1)</sup>
	500V kVA	6	11	15	17	25	30	36	40	60	75
	660-690V kVA	8	15	20	22	33	41	48	55	82	100
<b>Utilization category DC1</b>											
<b>Switching of resistive load</b>											
Time constant L/R ≤1ms											
Rated operational current I <sub>e</sub>	1 pole 24V A	20	25	32	32	50	65	80	110	120	130
	60V A	20	25	32	32	50	65	80	110	120	130
	110V A	6	6	6	6	10	10	10	12	12	12
	220V A	0,8	0,8	0,8	0,8	1,4	1,4	1,4	1,4	1,4	1,4
	3 poles in series 24V A	20	25	32	32	50	65	80	110	120	130
	60V A	20	25	32	32	50	65	80	110	120	130
	110V A	20	25	32	32	50	65	80	110	120	130
	220V A	16	20	20	20	30	35	35	63	80	80

LVSG

Main Contacts		Type	J7KN-10	J7KN-14	J7KN-18	J7KN-22	J7KN-24	J7KN-32	J7KN-40	J7KN-50	J7KN-62	J7KN-74	
<b>Utilization category DC3 and DC5</b>													
<b>Switching of shunt motors and series motors</b>													
Time constant L/R ≤15ms													
Rated operational current I <sub>o</sub>	1 pole 24V A	20	25	32	32	50	65	80	110	120	130		
		60V A	6	6	6	6	30	30	30	60	60	60	
		110V A	1,2	1,2	1,2	1,2	1,8	1,8	1,8	1,8	1,8	1,8	
	3 poles in series 24V A	0,2	0,2	0,2	0,2	0,2	0,2	0,2	0,2	0,25	0,25	0,25	
		60V A	20	25	32	32	50	65	80	110	120	130	
		110V A	20	25	32	32	40	40	40	80	80	80	
	220V A	2,5	2,5	2,5	2,5	4	4	4	5	5	5		
<b>Maximum ambient temperature</b>													
Operation	open °C	-40 to +60 (+90) <sup>6)</sup>											
	enclosed °C	-40 to +40											
with thermal overload relay	open °C	-25 to +60											
	enclosed °C	-25 to +40											
Storage	°C	-50 to +90											
<b>Short circuit protection</b>													
for contactors without thermal overload relay													
Coordination-type "1" according to IEC 947-4-1													
Contact welding without hazard of persons													
max. fuse size	gL (gG) A	63	63	63	63	80	80	80	160	160	160		
Coordination-type "2" according to IEC 947-4-1													
Light contact welding accepted													
max. fuse size	gL (gG) A	25	35	35	35	50	50	50	100	125	125		
Contact welding not accepted													
max. fuse size	gL (gG) A	16	16	16	16	25	35	35	50	63	63		
For contactors with thermal overload relay the device with the smaller admissible backup fuse (contactor or thermal overload relay) determines the fuse size.													
<b>Cable cross-sections</b>													
for contactors without thermal overload relay													
main connector	solid or stranded mm <sup>2</sup>	0,75 - 6				1,5 - 25			4 - 50				
	flexible mm <sup>2</sup>	1 - 4				2,5 - 16			10 - 35				
	flexible with multicore cable end mm <sup>2</sup>	0,75 - 4				1,5 - 16			6 - 35				
Cables per clamp		2				1			1				
	solid or stranded mm <sup>2</sup>	6+(1-6) / 4+(0,75-4)				16+(2,5-6) / 10+(4-10)			50+4 / 35+6 / 25+(6-16)				
	flexible mm <sup>2</sup>	2,5+(0,75-2,5) / 1,5+(0,75-1,5)				6+(4-6) / 4+(2,5-4)			16+(6-16) / 10+(6-16)				
Cables per clamp		2				2			2				
	solid AWG	18 - 10				16 - 10			12 - 10				
	flexible AWG	18 - 10				14 - 4			10 - 0				
Cables per clamp		2				1			1				
	solid AWG	10+(16-10) / 12+(18-12)				10+(16-10) / 12+(18-12)			10+(12-10) / 12+12				
	flexible AWG	14+(18-14) / 16+(18-16)				14+(18-14) / 16+(18-16)			1+(12-10) / 2+(8-12)				
Cables per clamp		2				2			2				
	solid AWG	10+(14-10) / 12+(18-12)				4+(18-12) / 6+(18-8)			1+(12-10) / 2+(8-12)				
	flexible AWG	14+(18-14) / 16+(18-16)				8+(18-8) / 10+(18-12)			3+(12-8) / 4+(10-6)				
<b>Frequency of operations z</b>													
Contactors without thermal overload relay													
	without load 1/h	10000	10000	10000	10000	7000	7000	7000	7000	7000	7000		
AC3, I <sub>o</sub>	1/h	600	600	600	600	600	600	600	600	400	400	400	
	AC4, I <sub>o</sub>	1/h	120	120	120	120	120	120	120	120	120	120	
	DC3, I <sub>o</sub>	1/h	600	600	600	600	600	600	600	400	400	400	
<b>Mechanical life</b>													
AC operated	S x 10 <sup>6</sup>	10	10	10	10	10	10	10	10	10	10	10	
DC operated	S x 10 <sup>6</sup>	10	10	10	10	10	10	10	10	10	10	10	
<b>Short time current</b>	10s-current A	96	120	144	176	184	240	296	360	504	592		
<b>Power loss</b> per pole	at I <sub>o</sub> /AC3 400V W	0,21	0,35	0,5	0,75	0,7	1,3	2	2,2	3,9	5,5		
<b>Resistance to shock acc. to IEC 68-2-27</b>													
Shock time 20ms sine-wave	NO g	10	10	10	10	8	8	8	8	8	8	8	
	NC g	6	6	6	6	-	-	-	-	-	-	-	

\*1) Suitable at 690V for: earthed-neutral systems, overvoltage I to IV, pollution degree 3 (standard-industry): U<sub>imp</sub> = 8kV.  
Data for other conditions on request.

\*2) Metal halide lamps and sodium-vapour lamps (high- and low-pressure lamps)

\*3) High-pressure lamps

\*4) Blended lamps, containing a mercury high-pressure unit and a tungsten helix in a fluorescent glass bulb (daylight lamps)

\*5) Current inrush approx. 16 x I<sub>o</sub>

\*6) With reduced control voltage range 0,9 up to 1,0 x U<sub>s</sub> and with reduced rated current I<sub>o</sub>/AC1 according to I<sub>o</sub>/AC3

Main Contacts		Type	J7KN-85	J7KN-110	J7KN-150	J7KN-175	J7KN-200
Rated insulation voltage $U_i$	V AC		750	750	690	690	690
Making capacity $I_m$	at $U_i = 690V$ AC A		1100	1200	1500	1800	1700
Breaking capacity $I_b$	400V AC A		950	1100	1200	1400	1600
	500V AC A		850	1000	1200	1400	1600
	690V AC A		600	600	700	800	1200
	1000V AC A		-	-	-	-	-
<b>Utilization category AC1</b>							
<b>Switching of resistive load</b>							
Rated operational current $I_n (=I_{n0})$ at 40°C, open	A		150	170	200	250	350
Rated operational power of three-phase resistive loads 50-60Hz, $\cos\phi = 1$							
	220V kW		57	64	72	90	125
	230V kW		59	67	72	90	125
	240V kW		62	70	75	94	130
	380V kW		98	111	125	156	218
	400V kW		103	117	125	156	218
	415V kW		107	122	130	160	225
	440V kW		114	129	144	180	250
	500V kW		130	147	164	205	285
	660V kW		171	194	216	270	380
	690V kW		179	203	216	270	380
	1000V kW		-	-	-	-	-
Rated operational current $I_n (=I_{n0})$ at 60°C, enclosed	A		100	125	160	200	280
Rated operational power of three-phase resistive loads 50-60Hz, $\cos\phi = 1$							
	220V kW		38	47	60	76	106
	230V kW		40	49	63	79	111
	240V kW		41	52	66	83	116
	380V kW		65	82	105	131	184
	400V kW		69	86	110	138	193
	415V kW		71	89	115	143	201
	440V kW		71	95	121	152	213
	500V kW		86	108	138	173	242
	660V kW		114	142	182	228	320
	690V kW		119	149	191	239	334
	1000V kW		-	-	-	-	-
Minimum cross-section of conductor at load with $I_n (=I_{n0})$	mm <sup>2</sup>		50	70	95	120	185
<b>Utilization category AC2 and AC3</b>							
<b>Switching of three-phase motors</b>							
Rated operational current $I_n$ open and enclosed							
	220V A		85	110	150	175	210
	230V A		85	110	150	175	210
	240V A		85	110	150	175	210
	380-400V A		85	110	150	175	210
	415V A		85	110	150	175	210
	440V A		85	110	-	-	-
	500V A		60	60	-	-	-
	660-690V A		57,5	57,5	-	-	-
	1000V A		-	-	-	-	-
Rated operational power of three-phase motors 50-60Hz							
	220-230V kW		25	33	40	50	60
	240V kW		27	35	45	55	65
	380-400V kW		45	55	75	90	110
	415V kW		49	63	80	95	115
	440V kW		49	63	85	100	125
	500V kW		55	75	75	100	132
	660-690V kW		55	55	75	110	132
	1000V kW		-	-	-	-	-
<b>Utilization category AC4</b>							
<b>Switching of squirrel cage motors, inching</b>							
Rated operational current $I_n (=I_{n0})$ open and enclosed							
	220V A		85	98	55	63	85
	230V A		85	98	55	63	85
	240V A		85	98	55	63	85
	380-400V A		85	85	55	63	85
	415V A		85	85	-	-	-
	440V A		85	85	-	-	-
	500V A		85	85	-	-	-
	660V A		60	60	-	-	-
	690V A		57,5	57,5	-	-	-
	1000V A		-	-	-	-	-

LVSG

Main Contacts		Type	J7KN-85	J7KN-110	J7KN-150	J7KN-175	J7KN-200
Rated operational power of three-phase motors 50-60Hz	220-230V	kW	25	30	15	18,5	25
	240V	kW	27	32	15,5	19	26
	380-400V	kW	45	45	25	30	45
	415V	kW	49	49	25	33	45
	440V	kW	49	49	30	34	48
	500V	kW	55	55	25	30	55
	660-690V	kW	55	55	25	30	55
	1000V	kW	-	-	-	-	-
<b>Utilization category AC 5a</b>							
<b>Switching of gas discharge lamps</b>							
Rated operational current I <sub>o</sub> per pole at 220/230V							
Fluorescent lamps,							
uncompensated and serial compensated	A	100	120	120	140	180	
parallel compensated	A	55	70	85	100	120	
dual-connection	A	112	144	120	140	180	
Metal halide lamps <sup>2</sup> ,							
uncompensated	A	85	90	95	110	140	
parallel compensated	A	55	70	75	85	110	
Mercury-vapour lamps <sup>3</sup> ,							
uncompensated	A	112	144	120	140	180	
parallel compensated	A	55	70	75	85	110	
Mixed light lamps <sup>4</sup>	A	100	120	100	120	160	
<b>Utilization category AC5b</b>							
<b>Switching of incandescent lamps<sup>5</sup></b>							
Rated operational current I <sub>o</sub> per pole at 220/230V	A	69	75	100	120	160	
<b>Utilization category AC6a</b>							
<b>Transformer primary switching</b>							
at inrush	n	30	30	30	30	30	
Rated operational current I <sub>o</sub>	400V A	38	50	65	80	90	
Rated operational power dependent on inrush n	220-230V kVA	15	20	25	30	34	
	240V kVA	15,5	20,5	27	33	37	
	380-400V kVA	26	34	45	55	60	
For different inrush-factors x use the following formula: P <sub>x</sub> =P <sub>n</sub> *(n/x)	415-440V kVA	29	38	46	57	63	
	500V kVA	33	43	55	69	75	
	660-690V kVA	45	60	56	69	100	
<b>Utilization category AC6b</b>							
<b>Switching of three-phase capacitor banks</b>							
Maximum inrush current (peak value) as multiple k of the capacitor rated current	k	20	20	20	20	15	
Rated operational current I <sub>o</sub>	500V A	87	100	120	155	195	
Rated operational power (sinφ→1)	220-230V kVAr	33	38	45	60	75	
	240V kVAr	36	42	52	62	78	
	380-400V kVAr	57	65	80	100	130	
For different multiples x use the following formula: P <sub>x</sub> =P <sub>k</sub> *(k/x)	415-440V kVAr	60	70	95	110	135	
	500V kVAr	70	80	100	130	170	
	660-690V kVAr	70	80	100	130	170	
<b>Switching of detuned capacitors</b>							
Rated operational current I <sub>o</sub>	690V A	98	105	115	140	200	
Rated operational power	220-230V kVAr	35	40	43	53	76	
	240V kVAr	39	43	45	55	80	
	380-400V kVAr	68	75	75	90	130	
	415-440V kVAr	71	77	80	100	140	
	500V kVAr	85	90	95	120	170	
	660-690V kVAr	110	120	125	150	200	
<b>Utilization category DC1</b>							
<b>Switching of resistive load</b>							
Time constant L/R ≤1ms							
Rated operational current I <sub>o</sub>	1 pole 24V A	150	170	-	-	-	
	60V A	150	170	-	-	-	
	110V A	20	25	-	-	-	
	220V A	2	2,5	-	-	-	
	3 poles in series 24V A	150	170	200	250	350	
	60V A	150	170	200	250	350	
	110V A	150	170	150	170	250	
	220V A	100	160	80	100	150	

Main Contacts		Type	J7KN-85	J7KN-110	J7KN-150	J7KN-175	J7KN-200
<b>Utilization category DC3 and DC5</b>							
<b>Switching of shunt motors and series motors</b>							
Time constant L/R ≤ 15ms							
Rated operational current I <sub>o</sub>	1 pole 24V A	150	170	-	-	-	-
		60V A	85	110	-	-	-
		110V A	2	2,5	-	-	-
		220V A	0,5	0,5	-	-	-
	3 poles in series 24V A	150	170	-	-	-	-
		60V A	100	110	-	-	-
		110V A	100	110	-	-	-
		220V A	7	8	-	-	-
<b>Maximum ambient temperature</b>							
Operation	open °C	-40 to +60 (+90) <sup>6</sup>		-25 to +55 (+70) <sup>7</sup>			
	enclosed °C	-40 to +40		-25 to +40			
with thermal overload relay	open °C	-25 to +60		-25 to +55			
	enclosed °C	-25 to +40		-25 to +40			
Storage	°C	-50 to +90		-55 to +80			
<b>Short circuit protection</b>							
for contactors without thermal overload relay							
Coordination-type "1" according to IEC 947-4-1							
Contact welding without hazard of persons							
max. fuse size	gL (gG) A	250	250	250	315	400	
Coordination-type "2" according to IEC 947-4-1							
Light contact welding accepted							
max. fuse size	gL (gG) A	160	200	200	250	315	
Contact welding not accepted							
max. fuse size	gL (gG) A	100	125	160	200	250	
For contactors with thermal overload relay the device with the smaller admissible backup fuse (contactor or thermal overload relay) determines the fuse size.							
<b>Cable cross-sections</b>							
for contactors without thermal overload relay							
main connector	solid or stranded mm <sup>2</sup>	10 - 70 <sup>8</sup>	10 - 70 <sup>8</sup>	95	120	185	
	flexible mm <sup>2</sup>	6 - 50 <sup>8</sup>	16 - 50 <sup>8</sup>	screw	screw	screw	
	flexible with multicore cable end mm <sup>2</sup>	10 - 35	10 - 35	M8	M8	M8	
Cables per clamp	solid or stranded mm <sup>2</sup>						
	flexible mm <sup>2</sup>						
main connector	solid AWG	10	10				
	flexible AWG	6 - 0	6 - 0				
	Cables per clamp	1	1				
		solid AWG					
Cables per clamp	flexible AWG						
<b>Frequency of operations z</b>							
Contactors without thermal overload relay							
	without load 1/h	3000	3000	1200	1200	1200	
	AC3, I <sub>e</sub> 1/h	300	300	-	-	-	
	AC4, I <sub>e</sub> 1/h	120	120	-	-	-	
	DC3, I <sub>e</sub> 1/h	300	300	-	-	-	
<b>Mechanical life</b>							
AC operated	S x 10 <sup>6</sup>	5	5	10	10	8	
DC operated	S x 10 <sup>6</sup>	5	5	10	10	8	
<b>Short time current</b>	10s-current A	680	880	1200	1400	1800	
<b>Power loss per pole</b>	at I <sub>e</sub> /AC3 400V W	4,3	6,0	8	11	8	
<b>Resistance to shock acc. to IEC 68-2-27</b>							
Shock time 20ms sine-wave	NO g	7	7	-	-	-	
	NC g	5	5	-	-	-	

LVSG

\*1) Suitable at 690V for: earthed-neutral systems, overvoltage I to IV, pollution degree 3 (standard-industry):  
 $U_{imp} = 8kV$ . Data for other conditions on request.  
\*2) Metal halide lamps and sodium-vapour lamps (high- and low-pressure lamps)  
\*3) High-pressure lamps  
\*4) Blended lamps, containing a mercury high-pressure unit and a tungsten helix in a fluorescent glass bulb (daylight lamps)  
\*5) Current inrush approx.  $16 \times I_o$   
\*6) With reduced control voltage range 0,9 up to  $1,0 \times U_c$  and with reduced rated current  $I_o/AC1$  according to  $I_o/AC3$   
\*7) With reduced control voltage range  $1,0 \times U_c$  and with reduced rated current  $I_o/AC1$  according to  $I_o/AC3$   
\*8) Maximum cable cross-section with prepared conductor

**Contactors**

**Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660**

Auxiliary Contacts	Type	J7KN-10	J7KN-14	J7KN-18	J7KN-22	J7KN-24	J7KN-32	J7KN-40	J7KN-50	J7KN-62	J7KN-74
Rated insulation voltage U <sub>i</sub> <sup>1)</sup>	V~	690	690	690	690	-	-	-	-	-	-
Thermal rated current I <sub>n</sub> to 690V											
Ambient temperature	40°C A	16	16	16	16	-	-	-	-	-	-
	60°C A	12	12	12	12	-	-	-	-	-	-
<b>Utilization category AC15</b>											
Rated operational current I <sub>n</sub>	220-240V A	12	12	12	12	-	-	-	-	-	-
	380-415V A	4	4	4	4	-	-	-	-	-	-
	440V A	4	4	4	4	-	-	-	-	-	-
	500V A	3	3	3	3	-	-	-	-	-	-
	660-690V A	1	1	1	1	-	-	-	-	-	-
<b>Utilization category DC13</b>											
Rated operational current I <sub>n</sub>	60V A	8	8	8	8	-	-	-	-	-	-
	110V A	1	1	1	1	-	-	-	-	-	-
	220V A	0,1	0,1	0,1	0,1	-	-	-	-	-	-
<b>Short circuit protection</b>											
short-circuit current 1kA, contact welding not accepted											
max. fuse size	gL (gG) A	25	25	25	25	-	-	-	-	-	-
For contactors with thermal overload relay the device with the smaller admissible control fuse (contactor or thermal overload relay) determines the fuse.											
<b>Control Circuit</b>											
<b>Power consumption of coils</b>											
AC operated	inrush VA	33-45				90-115			140-165		
	sealed VA	7-10				9-13			13-18		
	W	2,6-3				2,7-4			5,4-7		
DC operated	inrush W	75				140			200		
	sealed W	2				2			6		
<b>Operation range of coils</b>											
in multiples of control voltage U <sub>c</sub>	AC operated	0,85-1,1				0,85-1,1			0,85-1,1		
	DC operated	0,8-1,1				0,8-1,1			0,8-1,1		
<b>Switching time at control voltage U<sub>c</sub> ±10%<sup>2,3)</sup></b>											
AC operated	make time ms	8-16				10-25			12-28		
	release time ms	5-13				8-15			8-15		
	arc duration ms	10-15				10-15			10-15		
DC operated	make time ms	8-12				10-20			12-23		
	release time ms	8-13				10-15			10-18		
	arc duration ms	10-15				10-15			10-15		
<b>Cable cross-section</b>											
Auxiliary connector	solid mm <sup>2</sup>	0,75-6				-			-		
	flexible mm <sup>2</sup>	1-4				-			-		
flexible with multicore cable end	mm <sup>2</sup>	0,75-4				-			-		
Magnet coil	solid mm <sup>2</sup>	0,75-2,5				0,75-2,5			0,75-2,5		
	flexible mm <sup>2</sup>	0,5-2,5				0,5-2,5			0,5-2,5		
	flexible with multicore cable end mm <sup>2</sup>	0,5-1,5				0,5-1,5			0,5-1,5		
Clamps per pole		2				2			2		
Auxiliary connector	solid AWG	18 - 10				-			-		
	flexible AWG	18 - 10				-			-		
Magnet coil	solid AWG	14 - 12				14 - 12			14 - 12		
	flexible AWG	18 - 12				18 - 12			18 - 12		
Clamps per pole		2				2			2		

\*1) Suitable for: earthed-neutral systems, overvoltage category I to IV, pollution degree 3 (standard-industry): U<sub>imp</sub> = 8kV. Data for other conditions on request

\*2) Total breaking time = release time + arc duration

\*3) Values for delay of the release time of the making contact and the make time of the break contact will be increased, if magnet coils are protected against voltage peaks (varistor, RC-unit, diode-unit)

Auxiliary Contacts	Type	J7KN-85	J7KN-110	J7KN-150	J7KN-175	J7KN-200
Rated insulation voltage U <sub>i</sub> <sup>*1</sup>	V~	690	690	690	690	690
Thermal rated current I <sub>n</sub> to 690V						
Ambient temperature	40°C A	16	16	10	10	10
	60°C A	12	12	-	-	-
<b>Utilization category AC15</b>						
Rated operational current I <sub>n</sub>	220-240V A	12	12	3	3	3
	380-415V A	6	6	2	2	2
	440V A	6	6	1,5	1,5	1,5
	500V A	4	4	1,5	1,5	1,5
	660-690V A	2	2	1	1	1
<b>Utilization category DC13</b>						
Rated operational current I <sub>n</sub>	60V A	8	8	-	-	-
	110V A	1	1	0,5	0,5	1
	220V A	0,1	0,1	0,2	0,2	0,5
<b>Short circuit protection</b>						
short-circuit current 1kA, contact welding not accepted						
max. fuse size	gL (gG) A	25	25	10	10	10
For contactors with thermal overload relay the device with the smaller admissible control fuse (contactor or thermal overload relay) determines the fuse.						
<b>Control Circuit</b>						
<b>Power consumption of coils</b>						
AC operated	inrush VA	280-350	350-420	550	550	1100
	sealed VA	16-23	23-29	120	120	66
	W	4-6	6-7,3	-	-	-
DC operated	inrush W	170	320	160	160	530
	sealed W	2	4	5	5	21
<b>Operation range of coils</b>						
in multiples of control voltage U <sub>c</sub>	AC operated	0,85-1,1		0,85-1,1	0,85-1,1	0,85-1,1
	DC operated	0,8-1,1		0,85-1,1	0,85-1,1	0,85-1,1
<b>Switching time at control voltage U<sub>c</sub> ±10%<sup>*2, *3</sup></b>						
AC operated	make time ms	13-30		12-30	12-30	30-40
	release time ms	8-15		15-40	15-40	15-45
	arc duration ms	10-15		-	-	-
DC operated	make time ms	20-30		-	-	-
	release time ms	10-18		-	-	-
	arc duration ms	10-15		-	-	-
<b>Cable cross-section</b>						
Auxiliary connector	solid mm <sup>2</sup>	0,75-2,5		0,75-2,5		
	flexible mm <sup>2</sup>	0,75-2,5		0,75-2,5		
flexible with multicore cable end	mm <sup>2</sup>	0,5-1,5		-		
Magnet coil	solid mm <sup>2</sup>	0,75-2,5		1-2,5		
	flexible mm <sup>2</sup>	0,5-2,5		1-2,5		
	flexible with multicore cable end mm <sup>2</sup>	0,5-1,5		-		
Clamps per pole		14 - 12		16 - 12		
Auxiliary connector	solid AWG	18 - 12		16 - 12		
	flexible AWG	14 - 12		16 - 12		
Magnet coil	solid AWG	18 - 12		16 - 12		
	flexible AWG	2		2		
Clamps per pole		0,75-2,5		0,75-2,5		

LVSG

\*1) Suitable for: earthed-neutral systems, overvoltage category I to IV, pollution degree 3 (standard-industry): U<sub>imp</sub> = 8kV. Data for other conditions on request

\*2) Total breaking time = release time + arc duration

\*3) Values for delay of the release time of the making contact and the make time of the break contact will be increased, if magnet coils are protected against voltage peaks (varistor, RC-unit, diode-unit)



**Contactors for North America**

**Data according to UL508**

Main Contacts (cULus)		Type	J7KN-10	J7KN-14	J7KN-18	J7KN-22	J7KN-24	J7KN-32	J7KN-40	J7KN-50	J7KN-62	J7KN-74
Rated operational current "General Use"		A	25	25	30	30	50	65	80	110	120	130
Rated operational power of three-phase motors at 60Hz (3ph)		110-120V hp	1½	2	2	3	5	5	7½	10	10	10
		200V hp	3	3	5	5	7½	10	10	15	20	25
		220-240V hp	3	3	7½	7½	10	10	15	20	25	30
		277V hp	3	5	7½	7½	7½	10	15	20	25	30
		380-415V hp	5	5	10	10	10	15	20	25	30	40
		440-480V hp	5	7½	10	15	15	20	25	30	40	50
		550-600V hp	7½	10	15	20	20	25	30	40	50	50
Rated operational power of AC motors at 60Hz (1ph)		110-120V hp	½	¾	1	1½	1½	2	3	3	5	7½
		200V hp	1	1,5	2	3	3	5	7½	7½	10	15
		220-240V hp	1½	2	3	3	5	5	7½	10	15	15
		277V hp	2	3	3	5	5	7½	10	10	15	15
		380-415V hp	3	3	5	5	5	7½	10	15	20	20
		440-480V hp	3	5	5	7½	7½	10	15	20	25	25
		550-600V hp	3	5	7½	10	10	15	20	25	30	30
Rated operational power of three-phase motors at 60Hz (3ph) for elevators		110-120V hp	-	-	-	-	2	3	-	3	5	-
		200V hp	-	-	-	-	3	5	-	7½	10	-
		220-240V hp	-	-	-	-	5	7½	-	7½	10	-
Demands according to ANSI A17.5 (500.000 operations)		440-480V hp	-	-	-	-	10	15	-	20	25	-
		550-600V hp	-	-	-	-	10	20	-	25	30	-
Rated operational current		600V A	-	-	-	-	15	22	-	27	37	-
Fuses		A	30	40	50	50	90	125	175	175	225	250
Suitable for use on a capability of delivering not more than		rms A	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
		V	600	600	600	600	600	600	600	600	600	600
Auxiliary Contacts (cULus)			A600	A600	A600	A600	-	-	-	-	-	-

Main Contacts (cULus)		Type	J7KN-85	J7KN-110	J7KN-150	J7KN-175	J7KN-200
Rated operational current "General Use"		A	125	125	-	-	-
Rated operational power of three-phase motors at 60Hz (3ph)		110-120V hp	15	-	-	-	-
		200V hp	-	30	-	-	-
		220-240V hp	35	40	-	-	-
		277V hp	-	-	-	-	-
		380-415V hp	-	-	-	-	-
		440-480V hp	65	75	-	-	-
		550-600V hp	85	100	-	-	-
Rated operational power of AC motors at 60Hz (1ph)		110-120V hp	8	10	-	-	-
		200V hp	-	20	-	-	-
		220-240V hp	20	20	-	-	-
		277V hp	-	-	-	-	-
		380-415V hp	-	-	-	-	-
		440-480V hp	-	50	-	-	-
		550-600V hp	-	60	-	-	-
Rated operational power of three-phase motors at 60Hz (3ph) for elevators		110-120V hp	-	-	-	-	-
		200V hp	-	-	-	-	-
		220-240V hp	-	-	-	-	-
Demands according to ANSI A17.5 (500.000 operations)		440-480V hp	-	-	-	-	-
		550-600V hp	-	-	-	-	-
Rated operational current		600V A	-	62	-	-	-
Fuses		A	-	300	-	-	-
Suitable for use on a capability of delivering not more than		rms A	10000	10000	-	-	-
		V	600	600	-	-	-
Auxiliary Contacts (cULus)			A600	A600	-	-	-

**Contactors**

**Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660**

**Contact Life**

For selection of the suitable contactor-type according to supply voltage, power rating and application (utilization category AC1, AC3 or AC4) use contact life characteristic diagram.

For the most common supply voltages four scales of power ratings P<sub>n</sub> are provided for each utilization category.

Select contactor-type according to utilization category **AC3** (breaking current I<sub>a</sub> = I<sub>e</sub>) using the **motor rating** scales to the right, according to utilization category **AC4** (breaking current I<sub>a</sub> = 6 x I<sub>e</sub>) using the **motor rating** scales to the left.<sup>1)</sup>

Select contactor-type according to utilization category **AC1** (breaking current I<sub>a</sub> = I<sub>e</sub>/AC1) using the **breaking current** scale.<sup>1)</sup>

For contactors frequently used under AC3/AC4-mixed service conditions calculate contact life with the formula:

$$M = \frac{AC3}{1 + \frac{\%AC4}{100} \times \left( \frac{AC3}{AC4} - 1 \right)}$$

M = Contact life (switching cycles) for AC3/AC4-mixed operations


AC3 = Contact life (switching cycles) for AC3 operations (normal switching conditions). Breaking current I<sub>a</sub> = rated motor current I<sub>n</sub>.


AC4 = Contact life (switching cycles) for AC4 operations (inching).

Breaking current I<sub>a</sub> = multiples of rated motor current I<sub>n</sub>.

%AC4 = Percents of AC4-operations related to the total cycles.

1. Pay attention to the approved rated values of the selected contactor according to the national approvals

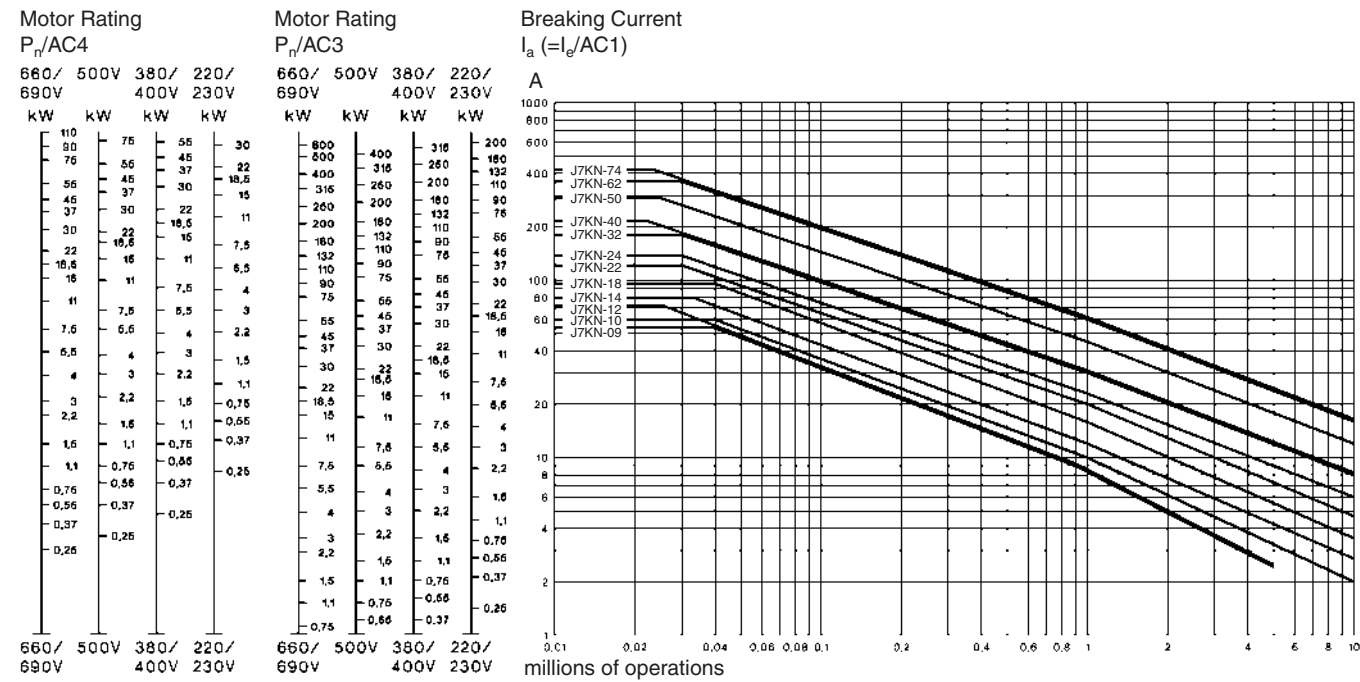

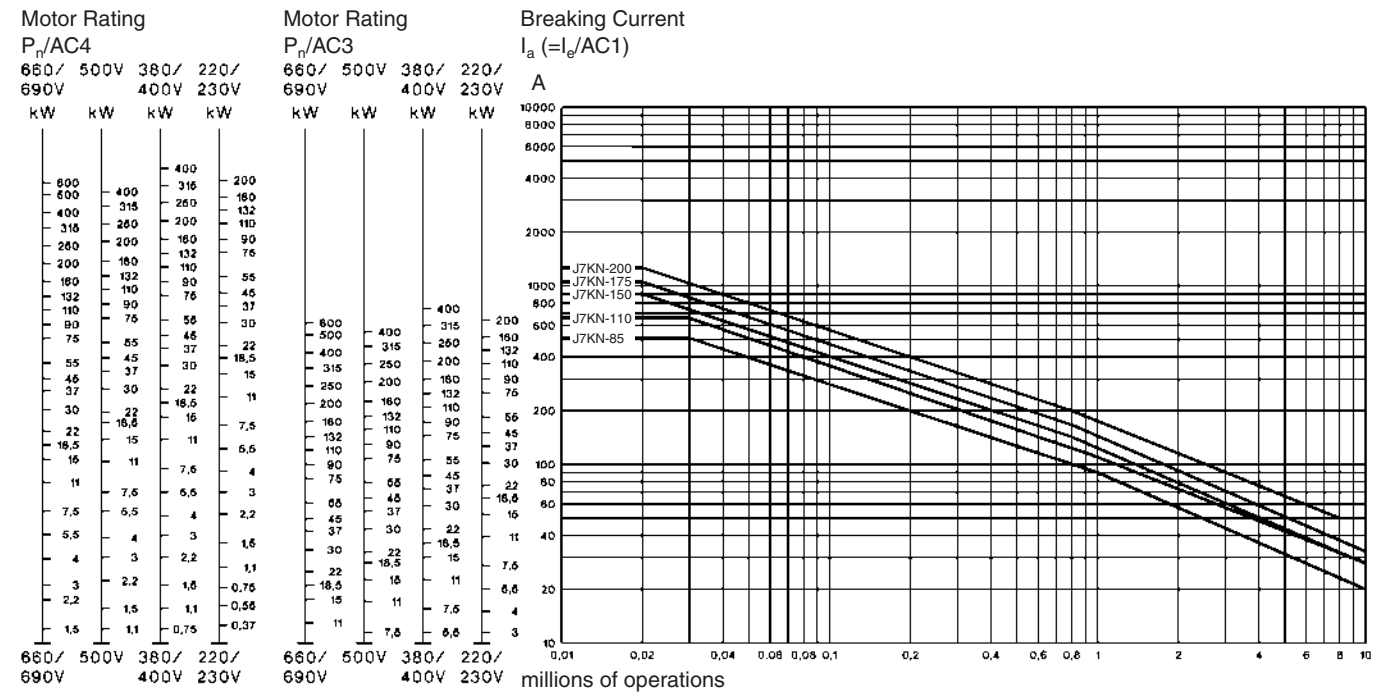

**Contactors**

**Utilization Categories**

For easier choice of devices and in order to make the comparison of different products simpler are utilization categories for contactors and motor-starters according to IEC 947-4-1 and VDE 0660 Part 102 ,for

control circuit devices and switching elements according to IEC 947-5-1 and VDE 0660 Part 200 determind. The table offers different utilization categories, typical applications and assorted test conditions.

Type of current	Category	Typical applications	Rated operational current	Test conditions for the number of on-load operating cycles						Test conditions for making and breaking capacities					
				Make I/le	U/Ue	cosφ	Break Ic/le	Ur/Ue	cosφ	Make I/le	U/Ue	cosφ	Break Ic/le	Ur/Ue	cosφ
Alternating Current	AC1	Non-inductive or slightly inductive loads-resistance furnaces	all values	1	1	0.95	1	1	0.95	1.5	1.05	0.8	1.5	1.05	0.8
	AC2	Slip-ring motors: starting, switching off	all values	2.5	1	0.65	2.5	1	0.65	4	1.05	0.65	4	1.05	0.65
	AC3	Squirrel-cage motors: starting, switching off motors during running	17A< Ie≤ 17A	6	1	0.65	1	0.17	0.65	10	1.05	0.45	8	1.05	0.45
			Ie≤ 100A	6	1	0.35	1	0.17	0.35	10	1.05	0.45	8	1.05	0.45
			Ie> 100A	6	1	0.35	1	0.17	0.35	10	1.05	0.35	8	1.05	0.35
	AC4	Squirrel-cage motors: starting, plugging, inching	17A< Ie≤ 17A	6	1	0.65	6	1	0.65	12	1.05	0.45	10	1.05	0.45
			Ie≤ 100A	6	1	0.35	6	1	0.35	12	1.05	0.45	10	1.05	0.45
			Ie> 100A	6	1	0.35	6	1	0.35	12	1.05	0.35	10	1.05	0.35
	AC5a	Switching of electric discharge lamp controls	all values	-	-	-	-	-	-	3	1.05	0.45	3	1.05	0.45
	AC5b	Switching of incandescent lamps	all values	-	-	-	-	-	-	1.5	1.05	1)	4	1.05	1)
	AC6a	Switching of transformers	Ie≤ 100A	-	-	-	-	-	-	4.5	1.05	0.45	3.6	1.05	0.45
			Ie> 100A	-	-	-	-	-	-	4.5	1.05	0.35	3.6	1.05	0.35
	AC6b	Switching of capacitor banks	-	-	-	-	-	-	-	2)			2)		
	AC7a	Slightly inductive loads in household appliances and similar applications	all values	-	-	-	-	-	-	1.5	1.05	0.8	1.5	1.05	0.8
	AC7b	Motor loadsfor household applications	Ie≤ 100A	-	-	-	-	-	-	8	1.05	0.45	6	1.05	0.45
Ie> 100A			-	-	-	-	-	-	8	1.05	0.35	6	1.05	0.35	
AC8a	Hermetic refrigerant compressor motor control with manualresetting of overload releases	Ie≤ 100A	-	-	-	-	-	-	6	1.05	0.45	6	1.05	0.45	
		Ie> 100A	-	-	-	-	-	-	6	1.05	0.35	6	1.05	0.35	
AC8b	Hermetic refrigerant compressor motor control with automatic resetting of overload releases	Ie≤ 100A	-	-	-	-	-	-	6	1.05	0.45	6	1.05	0.45	
		Ie> 100A	-	-	-	-	-	-	6	1.05	0.35	6	1.05	0.35	
AC12	Control of resistive loads and solid state loads with isolation by opto couplers	all values	-	-	-	-	-	-	1	1	0.9	1	1	0.9	
AC13	Control of solid state loads with transformer isolation	all values	-	-	-	-	-	-	10	1.1	0.65	1.1	1.1	0.65	
AC14	Control of small electromagnetic loads (<=72VA)	-	-	-	-	-	-	-	6	1.1	0.7	6	1.1	0.7	
AC15	Control of electromagnetic load (>72VA)	-	10	1	0.7	1	1	0.4	10	1.1	0.3	10	1.1	0.3	
Direct Current	DC1	Non-inductive or slightly inductive loads resistance furnaces	all values	1	1	1	1	1	1	1.5	1.05	1	1.5	1.05	1
			all values	2.5	1	2	2.5	1	2	4	1.05	2.5	4	1.05	2.5
			all values	2.5	1	7.5	2.5	1	7.5	4	1.05	15	4	1.05	15
	DC6	Switching of incandescent lamps	all values	-	-	-	-	-	-	1.5	1.05	1)	4	1.05	1)
	DC12	Control of resistive loads and solid state loads with isolation by opto couplers	all values	-	-	-	-	-	-	1	1	1	1	1	1
	DC13	Control of electromagnets	all values	1	1	≤300	1	1	≤300	1.1	1.1	≤300	1.1	1.1	≤300
	DC14	Control of electromagnetic loads having economy resistors in circuit	all values	-	-	-	-	-	-	10	1.1	15	10	1.1	15

LVSG

U, Rated operational voltage, U Voltage before make, U Recovery voltage, I, Rated operational current, I Current make, I, Current broken

- 1) Test with incandescent lamps
- 2) Test conditions according to standard

**Accessories**

**Data according to IEC 947-5-1, EN 60947-5-1, VDE 0660**

Auxiliary Contacts	Type	J73KN-B	J73KN-C	J73KN-B-TP...
Rated insulation voltage U <sup>1</sup>	V~	690	690	690
Thermal rated current I <sub>n</sub> to 690V				
Ambient temperature	40°C A	10	10	10
	60°C A	6	6	-
Frequency of operations z	1/h	3000	3000	1200
Mechanical life	S x 10 <sup>6</sup>	10	10	1
Power loss per pole at I/AC1	W	0,5	0,5	-
Utilization category AC15				
Rated operational current I <sub>n</sub>	220-240V A	3	3	4
	380-400V A	2	2	3
	440V A	1,6	1,6	2
	500V A	1,2	1,2	2
	660-690V A	0,6	0,6	2
Utilization category DC13				
Rated operational current I <sub>n</sub>	60V A	2	2	2,5
	110V A	0,4	0,4	1,5
	220V A	0,1	0,1	0,2
Short circuit protection				
short-circuit current 1kA, contact welding not accepted max. fuse size	gL (gG) A	20	20	10
For contactors with thermal overload relay or auxiliary contacts the device with the smaller admissible control fuse (contactor or thermal overload relay) determines the fuse size.				
Cable cross-sections				
	solid or stranded mm <sup>2</sup>	0,75-2,5	0,75-2,5	1-2,5
	flexible mm <sup>2</sup>	0,75-2,5	0,75-2,5	0,75-2,5
	flexible with multicore cable end mm <sup>2</sup>	0,5-1,5	0,5-1,5	0,75-2,5
Cables per clamp		2	2	2

\*1) Suitable for: earthed-neutral systems, overvoltage category I to IV, pollution degree 3 (standard-industry): U<sub>imp</sub> = 8kV. Data for other conditions on request


**Data according to CSA, UL and CUL**

Auxiliary Contacts	Type	J73KN-B	J73KN-C	J73KN-B-TP...
Rated operational current „General Use“	A	10	10	10
Rated operational voltage	max. V AC	600	600	600
Auxiliary Contacts		A600	A600	A600

**Contactors and Accessories**

**Wiring diagrams**

**Auxiliary contact blocks**

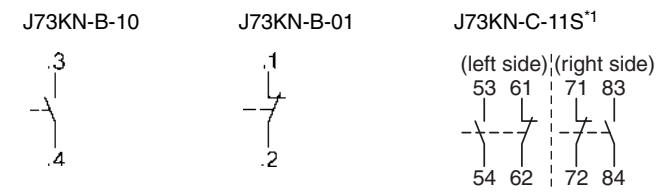

**Pneumatic timer**




\*1) Correct terminal marking is given by mounting


■ Dimensions

AC operated


J7KN-10...  
J7KN-10-4  
J7KN-14...  
J7KN-18...  
J7KN-22...

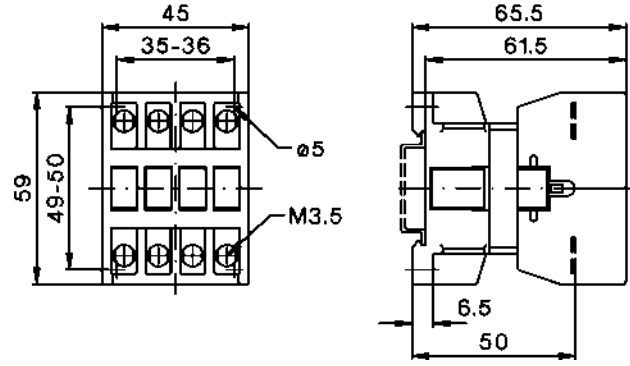

J7KN-24...  
J7KN-32...  
J7KN-40...

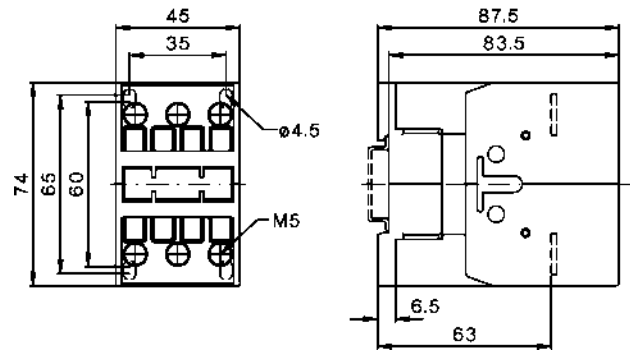


J7KN-50...  
J7KN-62...  
J7KN-74...

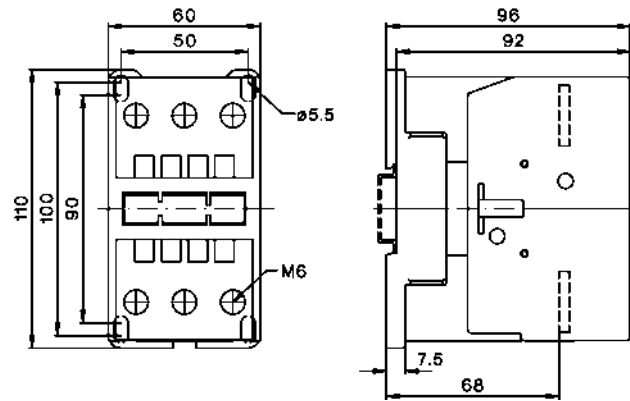


DC operated


J7KN-10...D  
J7KN-14...D  
J7KN-18...D  
J7KN-22...D

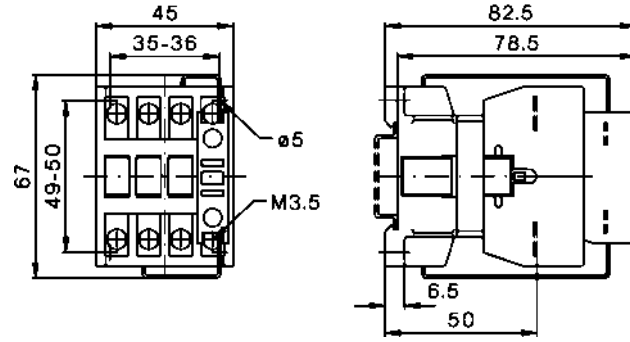

J7KN-24...D  
J7KN-32...D  
J7KN-40...D

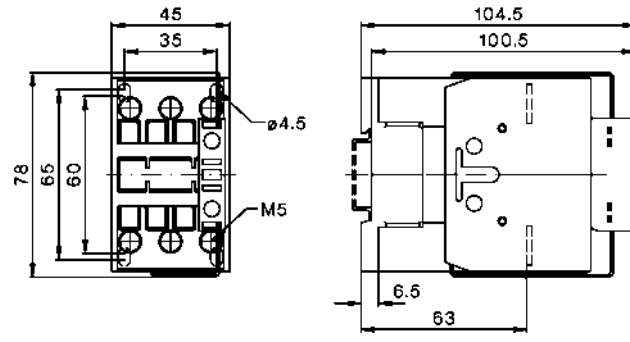


J7KN-50...D  
J7KN-62...D  
J7KN-74...D

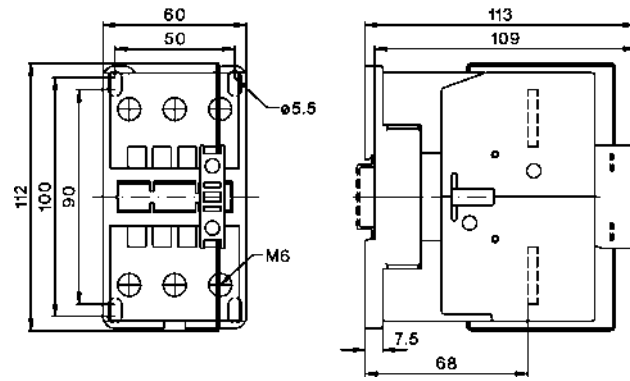


LVSG

AC operated


J7KN-85...  
J7KN-110...

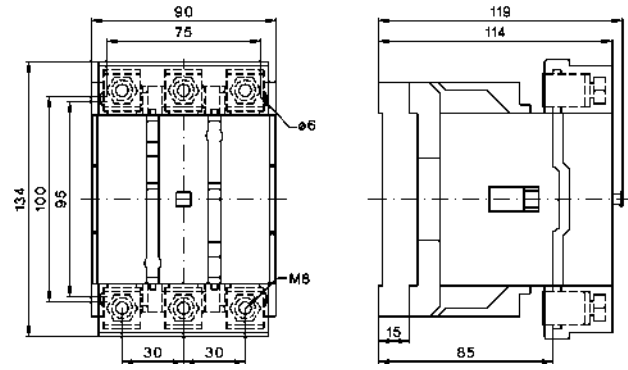

J7KN-150...  
J7KN-175...

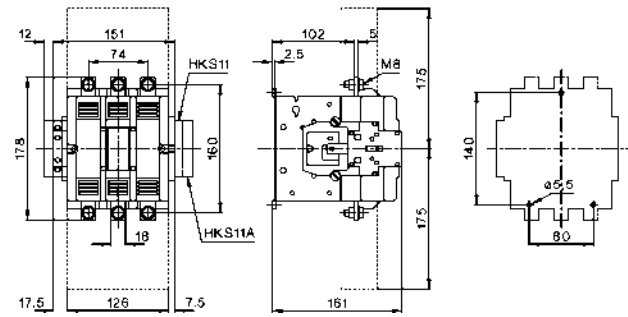


J7KN-200...

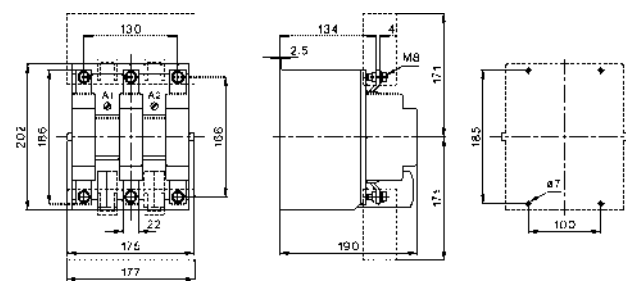


Auxiliary contact blocks

J73KN-B-01  
J73KN-B-10




J73KN-C-11S

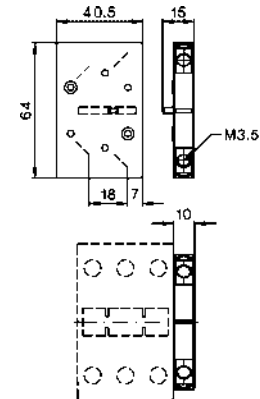


Pneumatic timer

J74KN-B-TP...

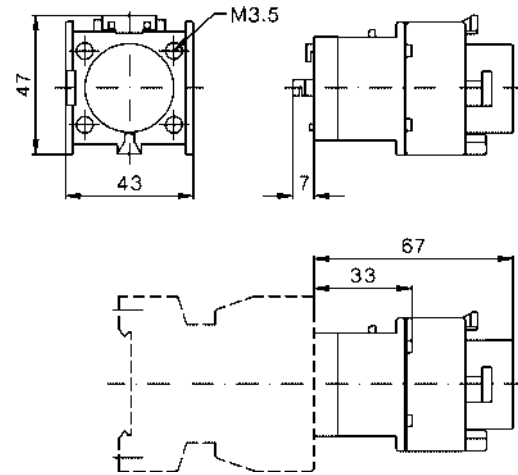


Auxiliary contact blocks


J74KN-A-VG

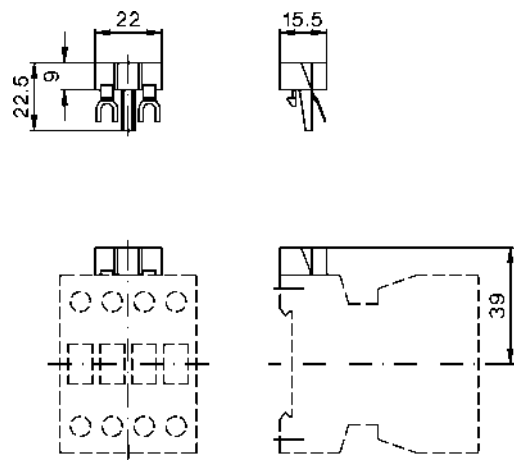


J74KN-A-RC

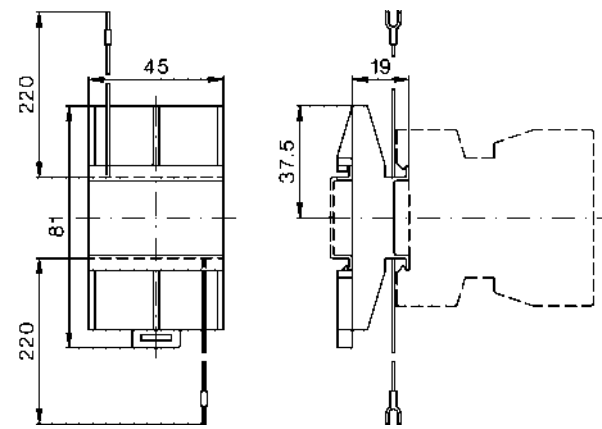

J74KN-B-VG

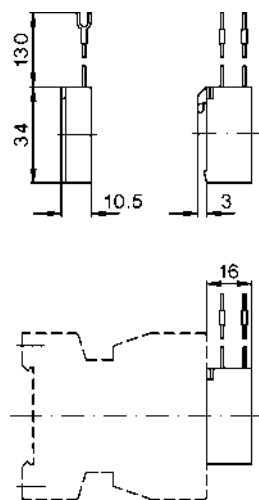

J74KN-B-RC

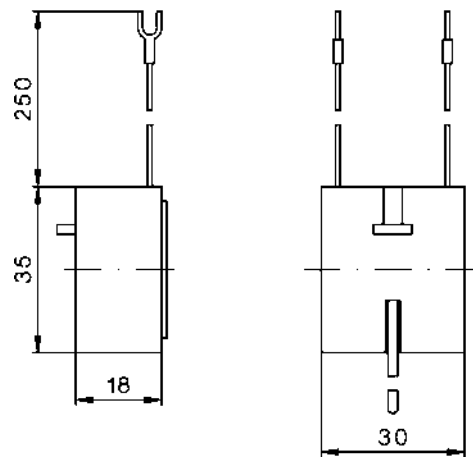


LVSG




Position of Terminals

AC operated

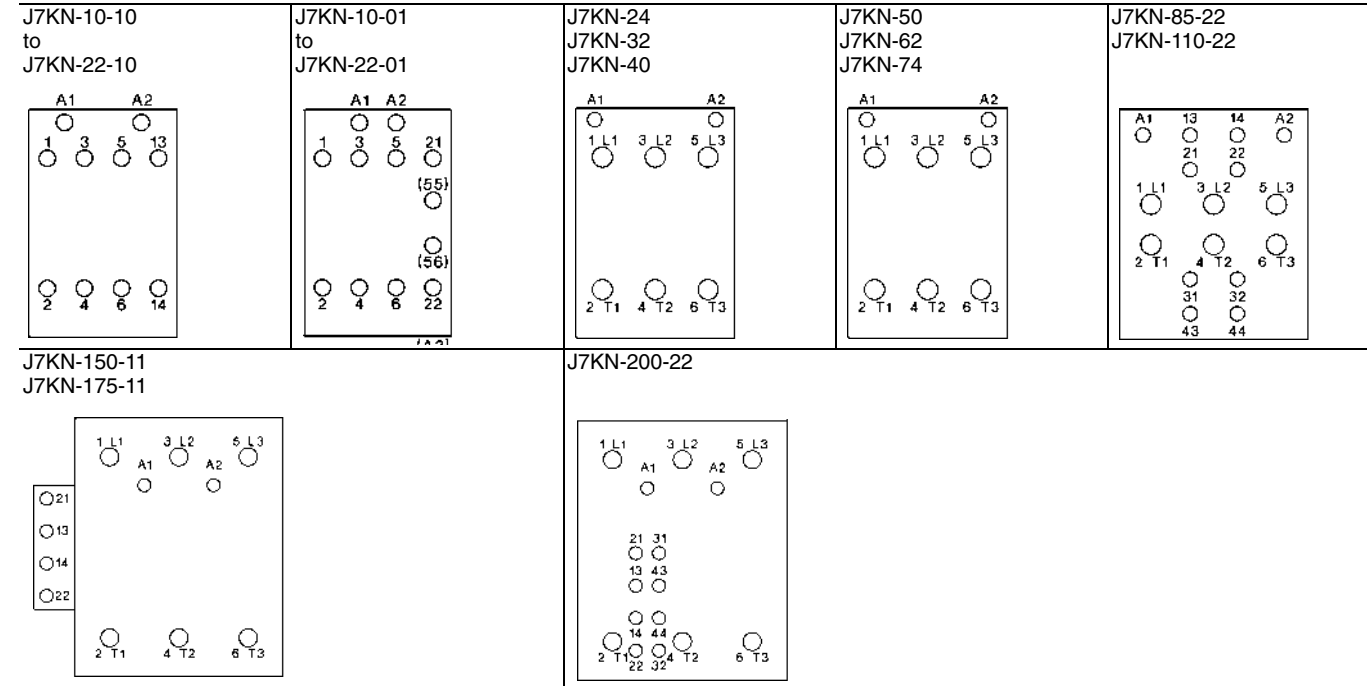

DC operated with double winding coil

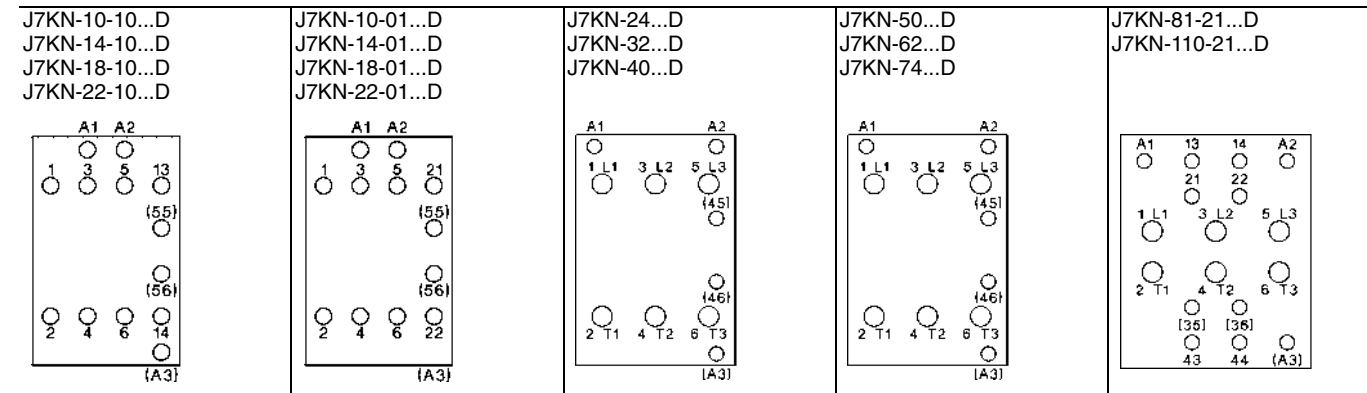

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.


# Thermal Overload Relay J7TKN

## Thermal Overload Relay

- Direct and separate mounting
- Single phasing sensitivity according to IEC 947-4-1
- Finger proof (VBG 4)

## Accessories

- Busbar sets
- Set for single mounting



## Approved Standards

Standard	Guide No (US,C)
UL	NKCR, NKCR7
ICE 947-4-1	
VDE 0660	
EN 60947-4-1	

## Ordering Information

### Model Number Legend

#### 1. Thermal Overload Relay

J7TKN-□-□□□  
1 2 3

- 1) Thermal Overload Relay
- 2) A: for mini motor contactor and motor contactor (4-11 kW)  
B: for motor contactor (4-15 kW)  
C: for motor contactor (18.5 kW)  
D: for motor contactor (22-37 kW)  
E: for motor contactor (45-55 kW)  
F: for motor contactor (75-110 kW)
- 3) Setting range (examples)  
E16: 0.12-0.16 A  
E27: 0.18-0.27 A  
...  
2E7: 1.8-2.7 A  
...  
11: 8-11 A

#### 2. Accessories for Thermal Overload Relay


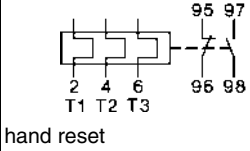

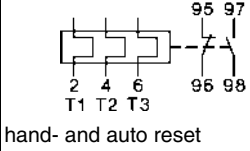


J74TK-□□-□□□  
1 2 3



- 1) Accessories for Thermal Overload Relay  
SM: Single mounting for J7TKN-B Types (4-32 kW)  
SU: Busbar sets
- 3) 175: for J7TKN-F Types (75-90 kW)  
200: for J7TKN-F Types (110 kW)

LVSG





■ System overview

Thermal Overload Relays for plug-in mounting


	Setting Range		Type	Pack pcs.	Weight kg/pc.	
	D.O.L. (A)	Star Delta (A)				
<b>For contactors J7KNA-09..., J7KNA-12..., J7KN-10... to J7KN-22...</b>						
	0.12 - 0.18	-		J7TKN-A-E18	1	0.10
	0.18 - 0.27	-		J7TKN-A-E27	1	0.10
	0.27 - 0.4	-		J7TKN-A-E4	1	0.10
	0.4 - 0.6	-		J7TKN-A-E6	1	0.10
	0.6 - 0.9	-		J7TKN-A-E9	1	0.10
	0.8 - 1.2	-		J7TKN-A-1E2	1	0.10
	1.2 - 1.8	-		J7TKN-A-1E8	1	0.10
	1.8 - 2.7	-		J7TKN-A-2E7	1	0.10
	2.7 - 4	-		J7TKN-A-4	1	0.10
	4 - 6	7 - 10.5		J7TKN-A-6	1	0.10
	6 - 9	10.5 - 15.5		J7TKN-A-9	1	0.10
	8 - 11	14 - 19		J7TKN-A-11	1	0.10
	10 - 14	18 - 24		J7TKN-A-14	1	0.10
	13 - 18	23 - 31		J7TKN-A-18	1	0.10
17 - 23	30 - 40	J7TKN-A-23	1	0.10		
22 - 30	38 - 52	J7TKN-A-30	1	0.10		
<b>For contactors J7KN-10... to J7KN-40...</b>						
	0.12 - 0.18	-		J7TKN-B-E18	1	0.14
	0.18 - 0.27	-		J7TKN-B-E27	1	0.14
	0.27 - 0.4	-		J7TKN-B-E4	1	0.14
	0.4 - 0.6	-		J7TKN-B-E6	1	0.14
	0.6 - 0.9	-		J7TKN-B-E9	1	0.14
	0.8 - 1.2	-		J7TKN-B-1E2	1	0.14
	1.2 - 1.8	-		J7TKN-B-1E8	1	0.14
	1.8 - 2.7	-		J7TKN-B-2E7	1	0.14
	2.7 - 4	-		J7TKN-B-4	1	0.14
	4 - 6	7 - 10.5		J7TKN-B-6	1	0.14
	6 - 9	10.5 - 15.5		J7TKN-B-9	1	0.14
	8 - 11	14 - 19		J7TKN-B-11	1	0.14
	10 - 14	18 - 24		J7TKN-B-14	1	0.14
	13 - 18	23 - 31		J7TKN-B-18	1	0.14
17 - 24	30 - 41	J7TKN-B-24	1	0.14		
23 - 32	40 - 55	J7TKN-B-32	1	0.14		
<b>For contactors J7KN-24... to J7KN-40...</b>						
	28 - 42	48 - 73		J7TKN-C-42	1	0.30

	Setting Range			Type	Pack	Weight
	D.O.L. (A)	Star Delta (A)			pcs.	kg/pc.
<b>For contactors J7KN-50...-J7KN-74...</b>						
	40 - 52	70 - 90		J7TKN-D-52	1	0.40
	52 - 65	90 - 112		J7TKN-D-65	1	0.40
	60 - 74	104 - 128		J7TKN-D-74	1	0.40

**Thermal Overload relays for separate mounting**

	Setting Range			Type	Pack	Weight
	D.O.L. (A)	Star Delta (A)			pcs.	kg/pc.
<b>For contactors J7KN-85... to J7KN-150...</b>						
	60 - 90	104 - 156		J7TKN-E-90	1	0.90
	80 - 120	140 - 207		J7TKN-E-120	1	0.90
<b>For contactors J7KN-175... to J7KN-200...</b>						
	100 - 150	175 - 260		J7TKN-F-150	1	1.5
	140 - 220	240 - 380		J7TKN-F-210	1	1.5

**Accessories**

	for overload relays	for contactors	Type	Pack	Weight
				pcs.	kg/pc.
<b>Busbar Sets</b>					
	J7TKN-F-175	J7KN-150, J7KN-175	J74TK-SU-175	1	0.6
	J7TKN-F-210	J7KN-200	J74TK-SU-200	1	0.7
busbars must be installed by users					

	for overload relay	Cable Cross-section to clamp (mm²)			Type	Pack	Weight
		solid or stranded	flexible	flex. with multicore cable end		pcs.	kg/pc.
<b>Sets for single mounting</b>							
	J7TKN-B	0.75 - 6	0.75 - 4	0.5 - 4	J74TK-SM	1	0.035

LVSG


# Specifications

## ■ Engineering data and Characteristics

### Thermal Overload Relays, tripping times for selection to motors of protection degree EEx e Relays With Standard Tripping Characteristic

Setting Range		Tripping time depending on the multiple of the current setting from cold condition (tolerance ±20% of the tripping time)					
A	A	I <sub>A</sub> /I <sub>N</sub>	I <sub>A</sub> /I <sub>N</sub>	I <sub>A</sub> /I <sub>N</sub>	I <sub>A</sub> /I <sub>N</sub>	I <sub>A</sub> /I <sub>N</sub>	I <sub>A</sub> /I <sub>N</sub>
		3	4	5	6	7,2	8
<b>J7TKN-A-...</b>		s	s	s	s	s	s
0,12	- 0,18	18,5	10,4	7,2	5,5	4,3	<b>3,6</b>
0,18	- 0,27	16,7	9,8	6,5	5	4,1	<b>3,5</b>
0,27	- 0,4	19,4	12,1	8,2	5,9	4,9	<b>4,2</b>
0,4	- 0,6	18,7	11,2	8	6	4,9	4,1
0,6	- 0,9	19,7	11,6	8,1	6,1	4,9	<b>4,2</b>
0,8	- 1,2	22,9	13,6	10	7,3	6	<b>5,2</b>
1,2	- 1,8	22,2	13,2	9,2	7,6	5,8	<b>5,3</b>
1,8	- 2,7	23	13,7	9,3	7,6	5,7	<b>5,1</b>
2,7	- 4	24	14,4	9,9	7,8	5,9	5,1
4	- 6	24,7	13,8	9,9	7,3	5,6	4,8
6	- 9	22	13,4	8	5,7	4,1	3,5
8	- 11	17,4	9,2	5,9	4,1	2,9	2,3
10	- 14	26,4	12,9	7,6	5,2	3,5	2,8
13	- 18	14,7	7,7	4,8	3,2	2,3	1,7
17	- 23	16,2	8,4	5	3,6	2,4	1,8
22	- 30	16,8	8,5	5	3,6	2,3	1,9
<b>J7TKN-C-42</b>		s	s	s	s	s	s
28	- 42	25,2	13,3	8	5,5	4	3,1
<b>J7TKN-D-...</b>		s	s	s	s	s	s
40	- 52	18,3	9,2	5,6	3,9	2,8	2,2
52	- 65	17,8	8,7	5,2	3,4	2,5	1,9
60	- 74	19,5	13,5	11	10	9,5	8,5
<b>J7TKN-E-...</b>		s	s	s	s	s	s
60	- 90	19,5	13,5	11	10	9,5	8,5
80	- 120	18	11	10	9	8,5	8
<b>J7TKN-F-...</b>		s	s	s	s	s	s
100	- 150	34	26	24	20,5	19	<b>18</b>
140	- 210	30	24	21	18,5	17	<b>16</b>

All tripping times of overload relays J7TKN-A are shorter than the minimum values of the  $t_E$  time for motors of protection degree EEx e acc. to EN 50019 and therefore are suitable for all motors of protection degree EEx e. For these overload relays the selection on basis of tripping curves is thereby not necessary.

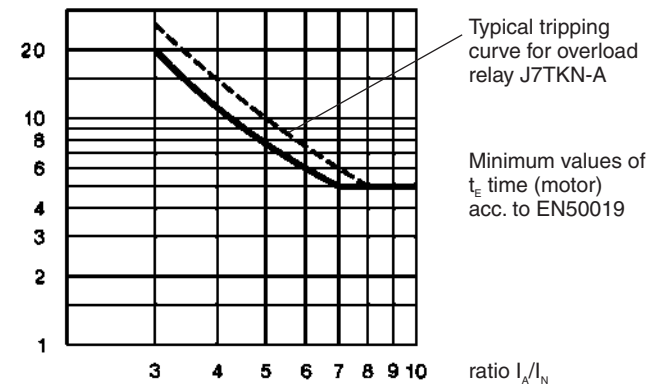

Labels of tripping curves for each setting range, sized 148x105mm (self-adhesive) are available on request. Specify type and setting range.

When selecting a standard overload, refer to the tripping curve. Determine the values of the starting current ratio  $I_A/I_N$  and the time  $t_E$  which is marked on the label of the motor. The overload must trip within the  $t_E$  time, which means that the tripping curve from cold condition must be (20% due to tolerance) below the coordination point  $I_A/I_N$  and the time  $t_E$ .

$I_A$  = Starting current of motor

$I_N$  = Rated current of motor

$t_E$  =  $t_E$ -time of motor

Fuses for J7TKN-A; J7TKN-B; J7TKN-C; J7TKN-D; J7TKN-E; J7TKN-F


Type	Setting Range		Max. Fuse Size According to Coordination-type				Fuse UL
	DOL	Star Delta	"2" <sup>1</sup> quick	slow, gL(gG)	"1" <sup>1</sup> slow, gL(gG)	aM	
	A	A	A	A	A	A	A
J7TKN-A J7TKN-B	0.12 - <b>0.18</b>	-	0.5 <sup>2</sup>	0.5 <sup>2</sup>	25	-	15
	0.18 - <b>0.27</b>	-	1.0 <sup>2</sup>	1.0 <sup>2</sup>	25	-	15
	0.27 - <b>0.4</b>	-	2	2	25	-	15
	0.4 - <b>0.6</b>	-	2	2	25	-	15
	0.6 - <b>0.9</b>	-	4	4	25	-	15
	0.8 - <b>1.2</b>	-	4	4	25	2	15
	1.2 - <b>1.8</b>	-	6	6	25	2	15
	1.8 - <b>2.7</b>	-	10	10	25	4	15
	2.7 - <b>4</b>	-	16	10	25	4	15
	4 - <b>6</b>	7 - 10.5	20	16	25	6	15
	6 - <b>9</b>	10.5 - 15.5	35	25	35	10	25
	8 - <b>11</b>	14 - 19	35	25	35	16	30
	10 - <b>14</b>	18 - 24	50	35	63	16	40
	13 - <b>18</b>	23 - 31	50	35	63	20	50
17 - <b>(23)24</b>	30 - (40)41	63	50	63	25	60	
(22)23 - <b>(30)32</b>	(38)40 - (52)55	80	63	80	35	70	
J7TKN-C	28 - <b>42</b>	48 - 73	100	80	150	50	110
J7TKN-D	40 - <b>52</b>	70 - 90	160	100	150	63	200
	52 - <b>65</b>	90 - 112	160	125	150	80	250
	60 - <b>74</b>	104 - 128	160	125	150	80	250
J7TKN-E	60 - <b>90</b>	104 - 156	For short circuit protecting overload relays with current transformer use fuse according to the 7contactor of the combination.				300
J7TKN-F	80 - <b>120</b>	140 - 207					-
J7TKN-F	all ranges						-

\*1) Coordination-type according to IEC 947-4-1:  
 „2“: Light contact welding accepted. Thermal overload relay must not be damaged.  
 „1“: Welding of contactor and damage of the thermal overload relay allowed.  
 \*2) Miniature fuse

LVSG


**Tripping Characteristics for J7TKN-A, J7TKN-B, J7TKN-C, J7TKN-D**

Detailed tripping times for each range see table page 60

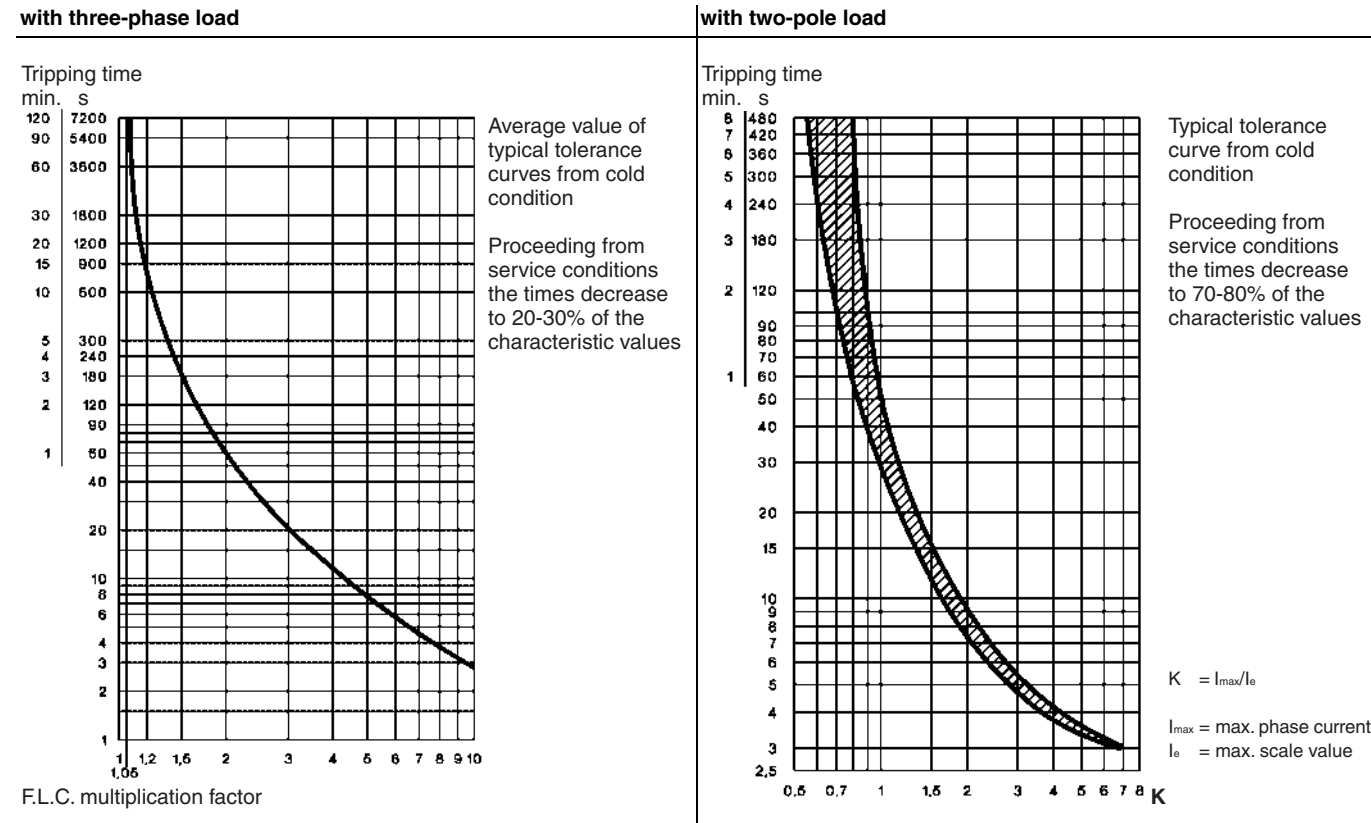

**Tripping Characteristics for J7TKN-E**


Detailed tripping times for each range see table page 60

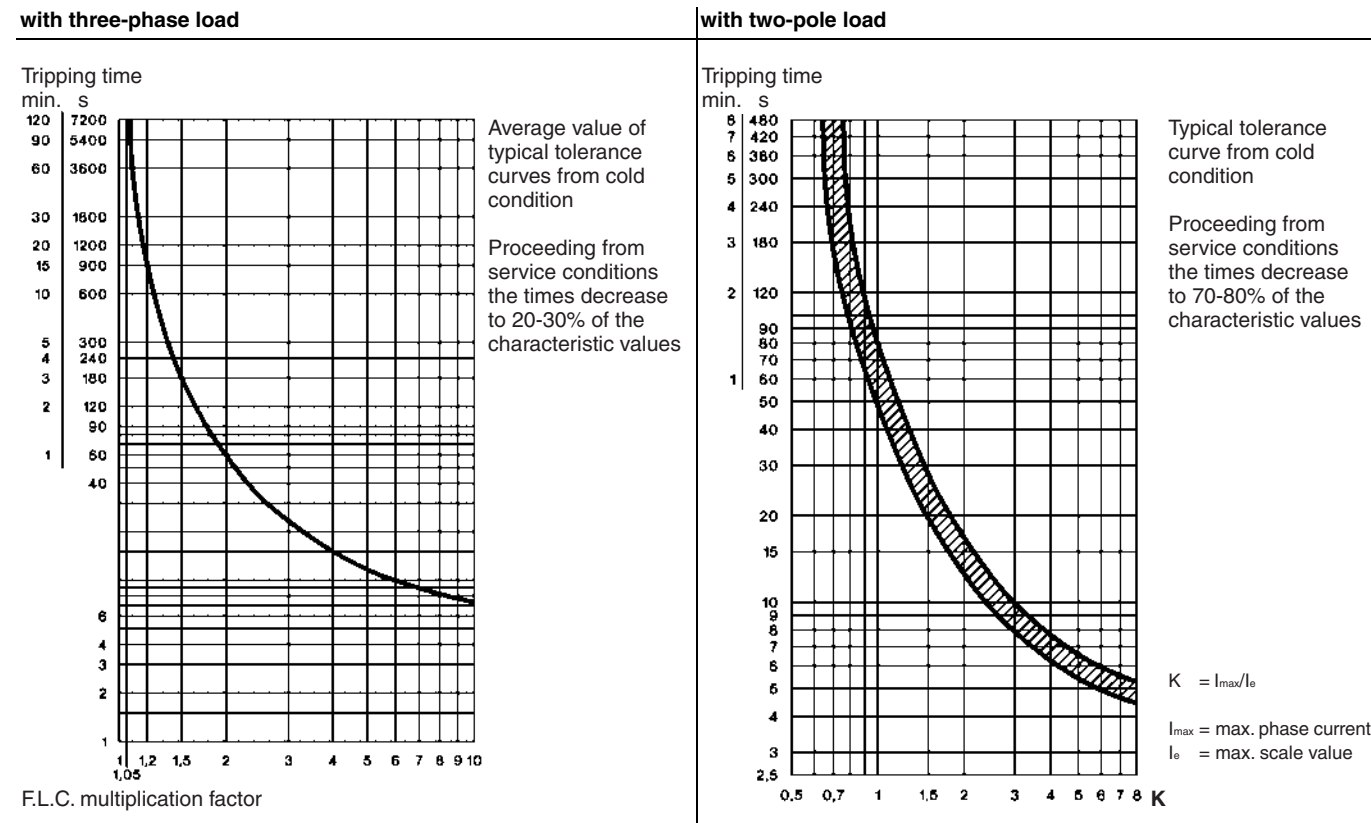


**Tripping Characteristics for J7TKN-F**

Detailed tripping times for each range see table page 60


**with three-phase load**

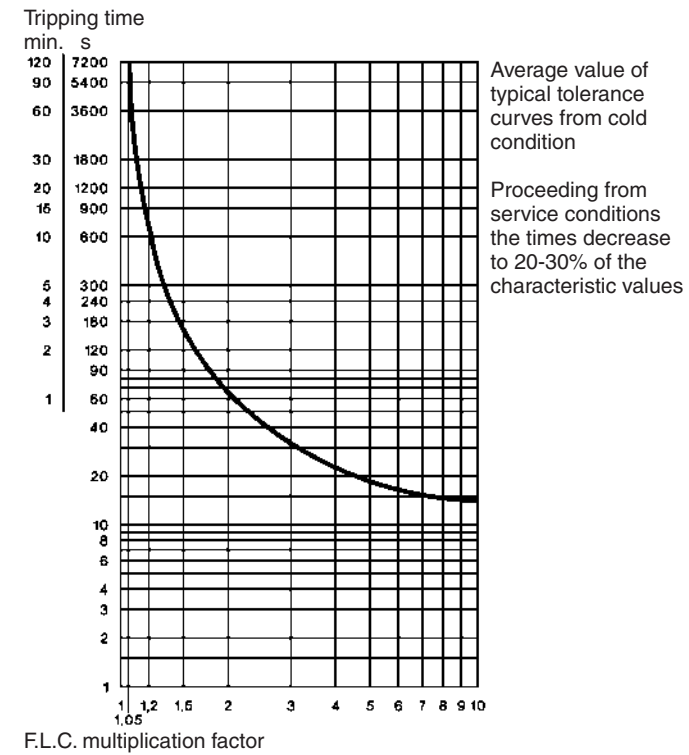

**with two-pole load**

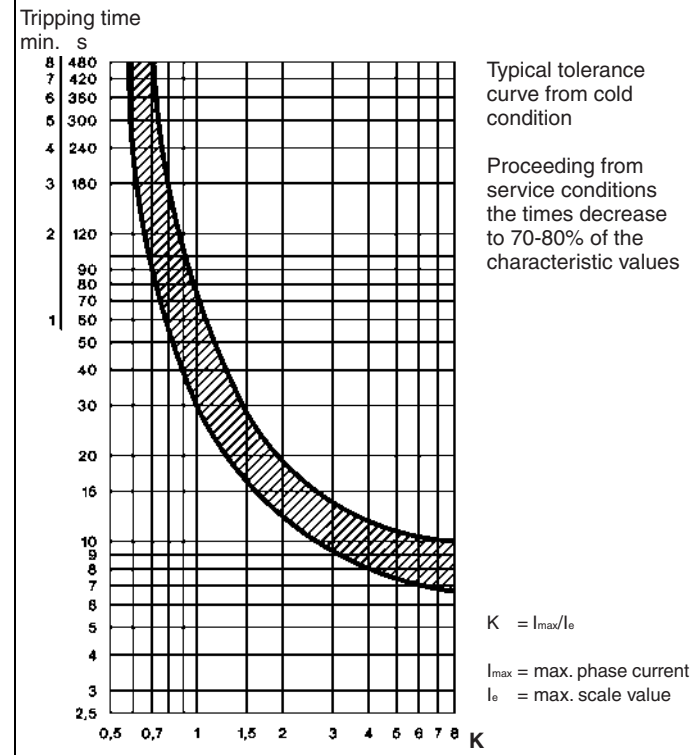

**Position of Terminals**

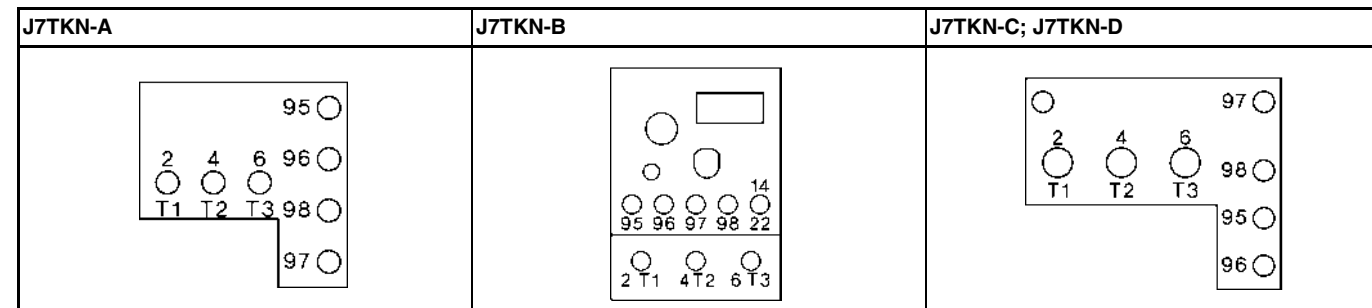

LVSG



**Thermal Overload Relays**

Data according to IEC 947-4-1, IEC 947-5-1, VDE 0660, EN 60947-4-1, EN 60947-5-1

Type		J7TKN-A	J7TKN-B	J7TKN-C	J7TKN-D	J7TKN-E	J7TKN-F
<b>Rated insulation voltage U<sub>i</sub><sup>*1</sup></b>	V~	690	690	690	690	750	690
<b>Permissible ambient temperature</b>							
operation	open °C				-25 to +60		
storage	°C				-50 to +70		
<b>Trip class according to IEC 947-4-1</b>							
		10A	10A	10A	10A	20	20
<b>Cable cross-section</b>							
main connector	solid or stranded	mm <sup>2</sup>	0.75-6 + 0.75-2.5 <sup>2</sup>	0.75-6	0.75-10	4-35 <sup>2</sup>	*3
		mm <sup>2</sup>	0.75-4 + 0.5-2.5 <sup>2</sup>	1-4	0.75-6	6-25 <sup>2</sup>	
	flexible	mm <sup>2</sup>	0.5-2.5 + 0.5-1.5	0.75-4	0.75-6	4-25	
	flexible with multicore cable end	mm <sup>2</sup>					
Cables per clamp	number	1+1	2	2	1		
auxiliary connector	solid	mm <sup>2</sup>			0.75-2.5 <sup>2</sup>		
	flexible	mm <sup>2</sup>			0.5-2.5 <sup>2</sup>		
	flexible with multicore cable end	mm <sup>2</sup>			0.5-1.5		
Cables per clamp	number				2		
<b>Auxiliary contacts</b>							
<b>Rated insulation voltage U<sub>i</sub><sup>*1</sup></b>							
same potential	V~	690	690		690		690
different potential	V~	440	440		250		440
<b>Utilization category AC15</b>							
Rated operational current I <sub>e</sub>	24V A	5	3		4 <sup>5</sup>		5
	230V A	3	2		2.5		3
	400V A	2	1		1.5		2
	690V A	0.6	0.5		0.6		0.6
<b>Utilization category DC13</b>							
Rated operational current I <sub>e</sub>	24V A	1.2	1		1.2		1.2
	110V A	0.15	0.15		0.15		0.15
	220V A	0.1	0.1		0.1		0.1
<b>Short circuit protection (without welding 1kA)</b>							
highest fuse rating	gL (gG) A	6	4		6		6
<b>Setting range</b>							
	A	to 23	all	28-42	52-65	all	-
<b>Power loss per current path (max.)</b>							
minimum setting value	W	1.1	1.1	1.3	2.9	1.1	-
maximum setting value	W	2.3	2.3	3.3	4.5	2.5	-

\*1) Suitable for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industry: U<sub>imp</sub> = 4kV (at 440V), 6kV (at 690V).  
Data for other conditions on request.

\*2) Maximum cable cross-section with prepared conductor

\*3) Without terminals, suitable for bushing one connector 70mm<sup>2</sup> (stranded) per phase

\*4) Busbar sets see accessories page 59

\*5) Switching capacity of the start contact: AC15 300VA, max. 1.5A, DC13 (max. 220V) 30W, max. 1.5A

Data according to cULus

Type		J7TKN-A	J7TKN-B	J7TKN-C	J7TKN-D	J7TKN-E
Rated insulation voltage	V~	600	600	600	600	600
Rated current	A	23	32	42	74	85
<b>Auxiliary contacts</b>						
Rated voltage						
same potential	V AC	600	600	600	600	600
different potential	V~	150	150	150	150	150
<b>Switching capacity AC</b>						
of aux. contacts						
	VA	500	500	600	600	600
	A	4	2	4	4	4

Temperature Compensation

In case of higher ambient temperature use the following formula:  
 $(\text{Ambient temperature} - 20) \times 0.125 = \text{correction factor in \% of the full load motor current}$


Example:  
 Ambient temperature 70°C, full load motor current 7A

$$(70 - 20) \times 0.125 = 6.25\%$$


$$\text{Setting value: } 7A + 6,25\% = 7.44A$$

■ Dimensions


J7KNA-09 + J7TKN-A  
J7KNA-12

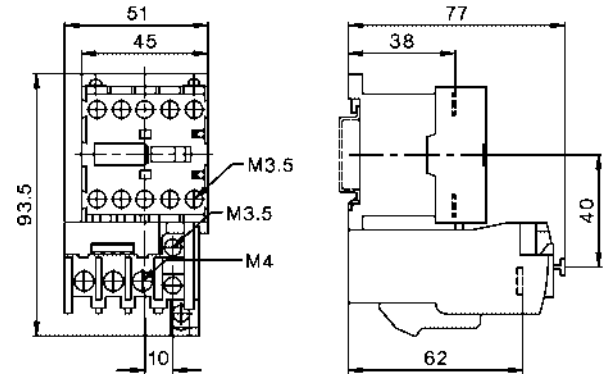


J7KN-10 + J7TKN-B  
J7KN-14  
J7KN-18  
J7KN-22

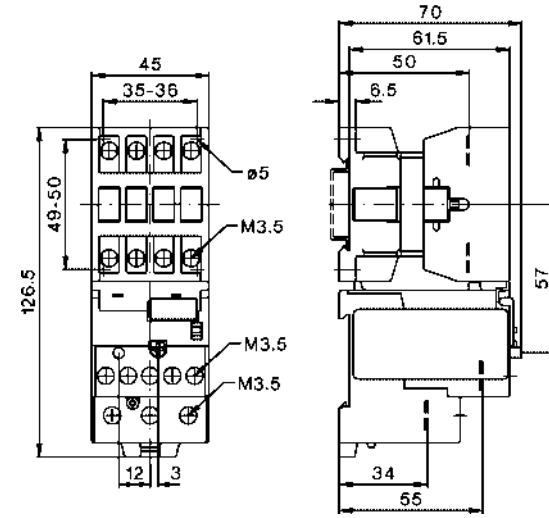


J7KN-10 + J7TKN-A  
J7KN-14  
J7KN-18  
J7KN-22

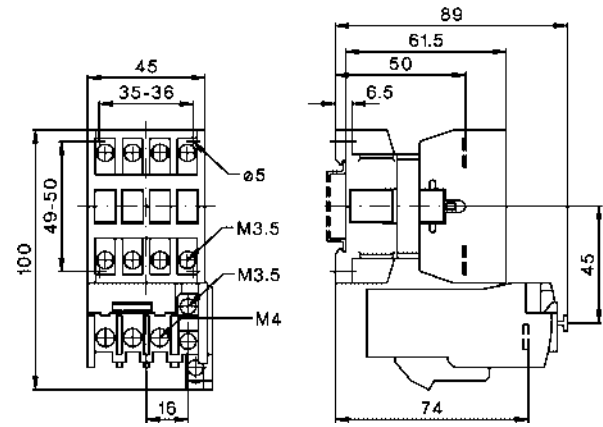


J7KN-24 + J7TKN-B  
J7KN-32  
J7KN-40

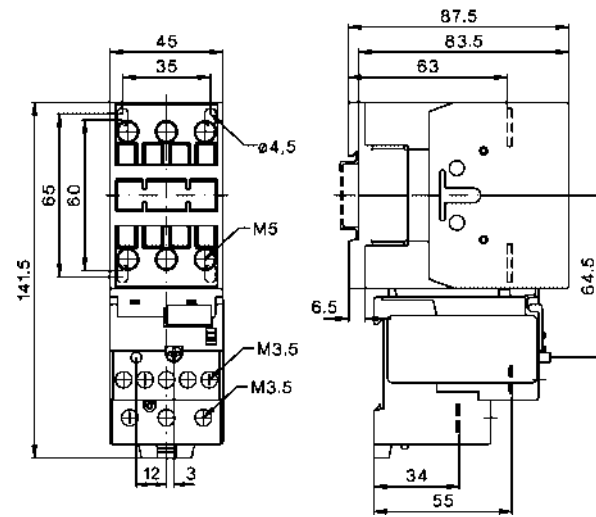


J7KN-24 + J7TKN-C  
J7KN-32  
J7KN-40

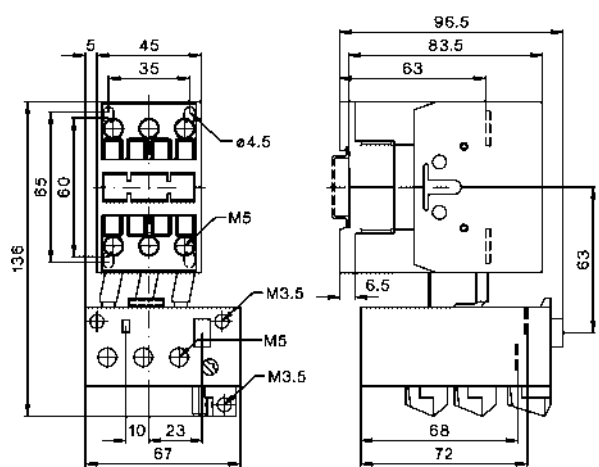


J7KN-50 + J7TKN-D  
J7KN-62  
J7KN-74

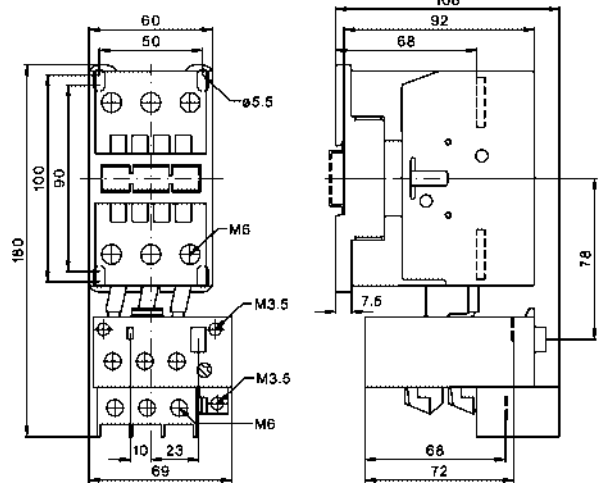

J7KN-85 + J7TKN-E  
J7KN-110

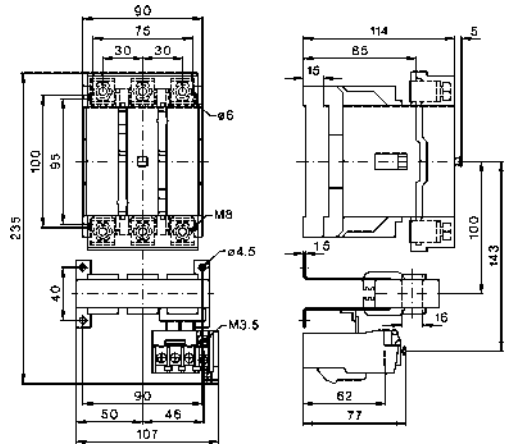


J7KN-150 + J7TKN-F  
J7KN-175

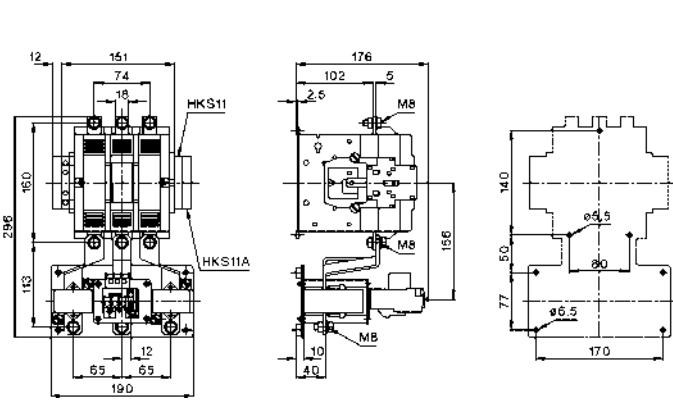

LVSG

J7KN-200 + J7TKN-210

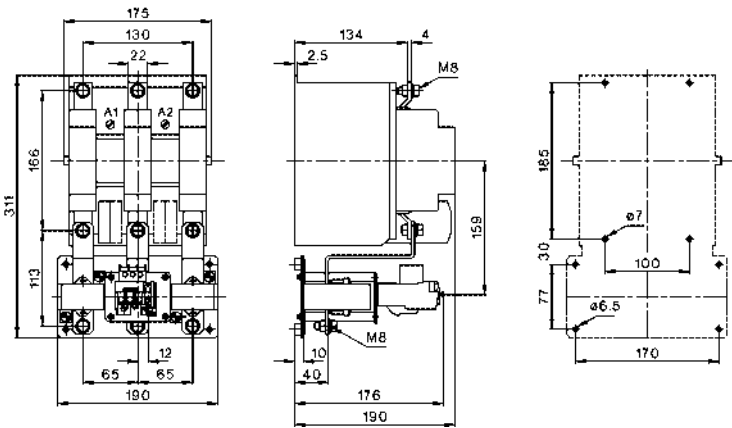

OMRON

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

Cat. No. J509-E2-02A

In the interest of product improvement, specifications are subject to change without notice.

# Motor Protection Circuit Breaker (MPCB) J7MN

## MPCB system (motor protection CLASS 10)

- Rotary and switch types
- Rated operational current = 12 A, 25 A, 50 A and 100 A
- Switching capacity up to 12.5 A = 100 kA/400 V
- Fixed short-circuit release =  $13 \times I_u$
- Overload release adjustable  $0.7 - 1 \times I_u$
- Single phasing sensitivity



## Auxiliary contact modules

- ON/OFF indication for MPCB front mounting and side mounting
- Trip indication for MPCB side mounting

## Accessories

- Undervoltage release
- Shunt release
- Three phase busbar system up to 5 MPCB
- Moulded plastic enclosures (IP55)
- Moulded plastic front plates (IP55)
- Door coupling rotary mechanisms (black and red/yellow)

## Approved Standards

Standard	Guide No (US,C)
UL	see page 95
ICE 947-5-1	
VDE 0660	
EN 60947-5-1	

LVSG

## Ordering Information

### ■ Model Number Legend

#### 1. Motor Protection Circuit Breaker (MPCB)

J7MN-□□-□□□  
1 2 3

- 1) Motor Protection Circuit Breaker (MPCB)
- 2) Type
  - 12: Switch type (0.16 - 12 A)
  - 25: Rotary type (0.16 - 25 A)
  - 50: Rotary type (25 - 40 A)
  - 100: Rotary type (45 - 100 A)
- 3) Setting range (examples)
  - E16: 0.11 - 0.16 A
  - E2: 0.14 - 0.2 A
  - 16: 10 - 16 A
  - ...

#### 2. Aux. Contacts for MPCB

J73MN-□□□  
1 2 3

- 1) Aux. Contact for MPCB
- 2) 11: 1 NO 1 NC
- 3) S: side mounting  
F: front mounting

J73MN-□□□□  
1 2 3 4

- 1) Aux. Contact for MPCB
- 2) T: Trip indicating contact
- 3) 11: 1 NO 1 NC
- 4) S: side mounting

#### 3. Accessories for MPCB

J74MN-□□□  
1 2 3

- 1) Accessories for MPCB
- 2) S: Shunt release  
U: Under voltage release
- 3) N1: 230 V 50 Hz / 240 V 60 Hz  
N2: 210 - 230 V 50/60 Hz

J74MN-□□□□  
1 2 3

- 1) Accessories for MPCB
- 2) PF: Enclosure IP55  
P: Module plastic front plate  
PH: Holder for front plate
- 3) 12: Switch type  
25: Rotary type

J74MN-□□□□  
1 2 3

- 1) Accessories for MPCB
- 2) DC: Door coupling rotary mechanism
- 3) B: black / gray  
RY: red / yellow

J74MN-□□□□□  
1 2 3

- 1) Accessories for MPCB
- 2) L3: 3-phase busbar system (45 mm modular spacing)  
DS: Shroud for unused terminal
- 3) 1/2: for 2 circuit breakers  
1/3: for 3 circuit breakers  
1/4: for 4 circuit breakers  
1/5: for 5 circuit breakers

J74MN-□□□□  
1 2 3


- 1) Accessories for MPCB
- 2) TC: Line side terminal
- 3) 12: for switch type  
25: for rotary type

J74MN-□□□□□  
1 2 3

- 1) Accessories for MPCB
- 2) TB: Terminal block for UL/cUL type E
- 3) 25: for rotary type up to 25A  
100: for rotary type up to 100A

■ System overview

Motor Protection Circuit Breaker (MPCB)




	Rated current	Suitable for motors*1 3~400V kW	Current setting range		Short-circuit breaking capacity at 3~400V kA	Type	Pack pcs.	Weight approx. kg/pcs.
	In A		Thermal overload release A	Instantaneous short-circuit release A				
<b>Circuit-Breakers J7MN-12</b>								
	0.16	-	0.11 – 0.16	2.1	100	J7MN-12-E16	1	0.21
	0.2	-	0.14 – 0.2	2.6	100	J7MN-12-E2	1	0.21
	0.25	0.06	0.18 – 0.25	3.3	100	J7MN-12-E25	1	0.21
	0.32	0.09	0.22 – 0.32	4.2	100	J7MN-12-E32	1	0.21
	0.4	-	0.28 – 0.4	5.2	100	J7MN-12-E4	1	0.21
	0.5	0.12	0.35 – 0.5	6.5	100	J7MN-12-E5	1	0.21
	0.63	0.18	0.45 – 0.63	8.2	100	J7MN-12-E63	1	0.21
	0.8	-	0.55 – 0.8	10	100	J7MN-12-E8	1	0.21
	1	0.25	0.7 – 1	13	100	J7MN-12-1	1	0.21
	1.25	0.37	0.9 – 1.25	16	100	J7MN-12-1E25	1	0.21
	1.6	0.55	1.1 – 1.6	21	100	J7MN-12-1E6	1	0.21
	2	0.75	1.4 – 2	26	100	J7MN-12-2	1	0.21
	2.5	-	1.8 – 2.5	33	100	J7MN-12-2E5	1	0.21
	3.2	1.1	2.2 – 3.2	42	100	J7MN-12-3E2	1	0.21
	4	1.5	2.8 – 4	52	100	J7MN-12-4	1	0.21
	5	-	3.5 – 5	65	100	J7MN-12-5	1	0.21
6.3	2.2	4.5 – 6.3	82	100	J7MN-12-6E3	1	0.21	
8	3	5.5 – 8	104	50	J7MN-12-8	1	0.21	
10	4	7 – 10	130	50	J7MN-12-10	1	0.21	
12	5.5	9 – 12	156	50	J7MN-12-12	1	0.21	

\*1) Recommended values for standard motors

\*2) max. motor current 95A

LVSG








	Rated current	Suitable for motors <sup>*1</sup>	Current setting range		Short-circuit breaking capacity at 3~400V kA	Type	Pack pcs.	Weight approx. kg/pcs.
	In A	3~400V kW	Thermal overload release A	Instantaneous short-circuit release A				
<b>Circuit-Breakers J7MN-25</b>								
	0.16	-	0.11 – 0.16	2.1	100	J7MN-25-E16	1	0.32
	0.2	-	0.14 – 0.2	2.6	100	J7MN-25-E2	1	0.32
	0.25	0.06	0.18 – 0.25	3.3	100	J7MN-25-E25	1	0.32
	0.32	0.09	0.22 – 0.32	4.2	100	J7MN-25-E32	1	0.32
	0.4	-	0.28 – 0.4	5.2	100	J7MN-25-E4	1	0.32
	0.5	0.12	0.35 – 0.5	6.5	100	J7MN-25-E5	1	0.32
	0.63	0.18	0.45 – 0.63	8.2	100	J7MN-25-E63	1	0.32
	0.8	-	0.55 – 0.8	10	100	J7MN-25-E8	1	0.32
	1	0.25	0.7 – 1	13	100	J7MN-25-1	1	0.32
	1.25	0.37	0.9 – 1.25	16	100	J7MN-25-1E25	1	0.32
	1.6	0.55	1.1 – 1.6	21	100	J7MN-25-1E6	1	0.32
	2	0.75	1.4 – 2	26	100	J7MN-25-2	1	0.32
	2.5	-	1.8 – 2.5	33	100	J7MN-25-2E5	1	0.32
	3.2	1.1	2.2 – 3.2	42	100	J7MN-25-3E2	1	0.32
	4	1.5	2.8 – 4	52	100	J7MN-25-4	1	0.32
	5	-	3.5 – 5	65	100	J7MN-25-5	1	0.32
	6.3	2.2	4.5 – 6.3	82	100	J7MN-25-6E3	1	0.32
	8	3	5.5 – 8	104	100	J7MN-25-8	1	0.32
	10	4	7 – 10	130	100	J7MN-25-10	1	0.32
	12.5	5.5	9 – 12.5	163	100	J7MN-25-12E5	1	0.32
16	7.5	11 – 16	208	50	J7MN-25-16	1	0.32	
20	-	14 – 20	260	50	J7MN-25-20	1	0.32	
22	-	17 – 22	286	50	J7MN-25-22	1	0.32	
25	11	20 – 25	325	50	J7MN-25-25	1	0.32	
<b>Circuit-Breakers J7MN-50</b>								
	25	11	18 – 25	325	50	J7MN-50-25	1	0.96
	32	15	22 – 32	416	50	J7MN-50-32	1	0.96
	40	18.5	28 – 40	520	50	J7MN-50-40	1	0.96
	45	-	36 – 45	585	50	J7MN-50-45	1	0.96
	50	22	40 – 50	650	50	J7MN-50-50	1	0.96
<b>Circuit-Breakers J7MN-100</b>								
	63	30	45 – 63	819	50	J7MN-100-63	1	2.1
	75	37	57 – 75	975	50	J7MN-100-75	1	2.1
	90	-	70 – 90	1170	50	J7MN-100-90	1	2.1
	100	45	80 – 100 <sup>*2</sup>	1235	50	J7MN-100-100	1	2.1

\*1) Recommended values for standard motors




\*2) max. motor current 95A



Accessories

	Description	Version	for circuit breaker	Type	Pack pcs.	Weight approx. kg/pcs.
<b>Transverse auxiliary contact block</b>						
	Contact block	1NO + 1NC	all	J73MN-11F	10	0.02
<b>Auxiliary contact block for left hand side mounting (max 1pc. per circuit breaker)</b>						
	Contact block	1NO + 1NC 9 mm	all	J73MN-11S	10	0.03
<b>Signalling switch for left hand side mounting (max 1pc. per circuit breaker)</b>						
	Signalling switch	1NO + 1NC each Individual tripped and short-circuit signalling	J7MN-25 J7MN-50	J73MN-T-11S	1	0.07
<b>Auxiliary releases for right hand side mounting (max 1pc. per circuit breaker)</b>						
	<b>Undervoltage release</b> Trips the circuit-breaker when the voltage is interrupted. Prevents the motor from being restarted accidentally when the voltage is restored, suitable for EMERGENCY STOP acc. to VDE 0113	AC 50 Hz 230 V      AC 60 Hz 240 V	all	J74MN-U-N1	1	0.12
	<b>Shunt release</b> Trips the circuit-breaker when the release coil energized.	50/60 Hz 100% ON 210-240 V      50/60 Hz, DC 5 sec ON 190-330 V	J7MN-12	J74MN-S-N2	1	0.11




LVSG

Enclosures and Front Plates




	Description	Version	for circuit breaker	Type	Pack pcs.	Weight approx. kg/pcs.
<b>Front Plates</b>						
	<b>Moulded plastic front plate</b> with actuator diaphragm and holder for circuit breaker	for actuation of circuit-breakers in any enclosure protection degree IP55	J7MN-12	J74MN-P12	1	0.08
	<b>Moulded plastic front plate</b> with rotary operating mechanism lockable	for actuation of circuit-breakers in any enclosure protection degree IP55	J7MN-25 J7MN-50	J74MN-P25	1	0.08
	<b>Holder for front plate</b> J74MN-P25	Holder is mounted on front plate, circuit-breaker (with accessories) is snapped on	J7MN-25	J74MN-PH	1	0.12
<b>Enclosures</b>						
	<b>Moulded plastic enclosure</b> with actuator diaphragm knockouts for J7MN-25 sealable	protection degree IP55 with N- and PE- terminal (+ aux. contact + release)	J7MN-12	J74MN-PF12	1	0.27

	Description	Version	for circuit breaker	Type	Pack pcs.	Weight approx. kg/pcs.
	<b>Moulded plastic enclosure</b> with rotary operating mechanism knockouts for J7MN-25 lockable	protection degree IP55 with N- and PE- terminal (+ aux. contact + release)	J7MN-25	<b>J74MN-PF25</b>	1	0.30
<b>Door-coupling mechanisms</b>						
	The door-coupling rotary operating mechanisms consist of a knob, a coupling driver and a extension shaft (5 mm x 5 mm). The door-coupling rotary operating mechanisms are designed for degree of protection IP 65. The door locking device prevents accidental opening of the cubicle door in the ON position of the circuit-breaker. The OFF position can be locked with up to 3 padlocks.					
	<b>Door-coupling rotary mechanism black</b>	extension shaft 330 mm with supporting bracket	J7MN-25 to J7MN-50	<b>J74MN-DC-B</b>	1	0.3
	<b>Emergency-Stop Door-coupling rotary mechanism red/yellow</b>	extension shaft 330 mm with supporting bracket	J7MN-25 to J7MN-50	<b>J74MN-DC-RY</b>	1	0.3

**Busbars**

	Description	Version	for circuit breaker	Type	Pack pcs.	Weight approx. kg/pcs.
<b>Insulated 3-phase busbar systems</b>						
	For feeding several modular circuit-breakers on standard mounting rails, insulated, shock-protected. Rated operational voltage max. 690 V					
	<b>3-phase busbars</b> modular spacing 45 mm	for 2 circuit-breakers for 3 circuit-breakers for 4 circuit-breakers for 5 circuit-breakers	J7MN-12 J7MN-25	<b>J74MN-L3-1/2</b> <b>J74MN-L3-1/3</b> <b>J74MN-L3-1/4</b> <b>J74MN-L3-1/5</b>	1 1 1 1	0.03 0.05 0.07 0.10
	For connecting the 3-phase busbars from circuit-breakers different sizes. Clamping together J7MN-12 and J7MN-25 circuit-breakers is not possible due to the different modular spacings and the different heights of the terminals.					
	<b>Line side terminal</b> 3-pole, connection from top	Conductor cross-section solid or stranded 6- 25 mm <sup>2</sup> with ferrule 4-16 mm <sup>2</sup>	J7MN-12 J7MN-25	<b>J74MN-TC12</b> <b>J74MN-TC25</b>	1 1	0.04 0.04
	<b>Shroud</b>	for unused terminals	J7MN-12 J7MN-25	<b>J74MN-DS</b>	20	-

**Mounting Parts for Fuseless Load Feeders**

	Description	Version	for circuit breaker	Type	Pack pcs.	Weight approx. kg/pcs.
<b>DIN-rail adapters</b>						
	<b>Adapter</b> for mechanical fixing of circuit-breaker and contactor	35 mm-DIN-rail (DIN EN50022) or screw mounting	J7MN...	<b>J74MN-HU</b>	10	0.05
<b>Link modules</b>						
	for electrical connection between circuit-breaker and contactor					
	<b>Link module</b>	up to 20 A up to 32 A	J7MN...	<b>J74MN-VD-12</b> <b>J74MN-VD-25</b>	10 10	- -
<b>Terminal block</b>						
	with increased creepage distances and clearances acc. to cULus Type „E“					
	<b>Terminal block</b>	up to 600 V acc. to UL 489 not for transverse aux. contact block	J7MN-25 J7MN-100	<b>J74MN-TB25</b> <b>J74MN-TB100</b>	1 1	0.12 0.15

## Specifications

### ■ Engineering data and Characteristics

#### Components for Fuseless Load Feeders, DIN-Rail Mounting

Type of coordination „1“ 3 x 415 V 10 kA (other conditions on request)

Motor 3~400V kW	Setting range A	Circuit-breaker page 72 Type	Contactors 220-230V 50Hz Type	Link module Type	DIN-rail adapter Type
-	0.11- 0.16	J7MN-25-E16	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
-	0.14- 0.2	J7MN-25-E2	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
0.06	0.18- 0.25	J7MN-25-E25	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
0.09	0.22- 0.32	J7MN-25-E32	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
-	0.28- 0.4	J7MN-25-E4	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
0.12	0.35- 0.5	J7MN-25-E5	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
0.18	0.45- 0.63	J7MN-25-E63	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
-	0.55- 0.8	J7MN-25-E8	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
0.25	0.7- 1	J7MN-25-1	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
0.37	0.9- 1.25	J7MN-25-1E25	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
0.55	1.1- 1.6	J7MN-25-1E6	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
0.75	1.4- 2	J7MN-25-2	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
-	1.8- 2.5	J7MN-25-2E5	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
1.1	2.2- 3.2	J7MN-25-3E2	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
1.5	2.8- 4	J7MN-25-4	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
-	3.5- 5	J7MN-25-5	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
2.2	4.5- 6.3	J7MN-25-6E3	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
3	5.5- 8	J7MN-25-8	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
4	7- 10	J7MN-25-10	J7KN-10-10 230	J74MN-VD-12	J74MN-HU
5.5	9- 12.5	J7MN-25-12E5	J7KN-14-10 230	J74MN-VD-12	J74MN-HU
7.5	11- 16	J7MN-25-16	J7KN-18-10 230	J74MN-VD-12	J74MN-HU
-	14- 20	J7MN-25-20	J7KN-22-10 230	J74MN-VD-25	J74MN-HU
-	17- 22	J7MN-25-22	J7KN-22-10 230	J74MN-VD-25	J74MN-HU
11	20- 25	J7MN-25-25	J7KN-22-10 230	J74MN-VD-25	J74MN-HU

LVSG

**Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660**

This table shows the rated ultimate short-circuit breaking capacity  $I_{cu}$  and the rated service short-circuit breaking capacity  $I_{cs}$  of the J7MN circuit-breakers with different operational voltages as a function of the rated current  $I_n$  of the circuit-breakers.

The circuit-breakers can be fed at the top or bottom supply terminals without any reduction of the rated data.

If the short-circuit current exceeds the rated short-circuit breaking capacity of the circuit-breaker specified in the tables at the installation point, a back-up fuse is to be used.

The maximum rated current for the back-up fuse is specified in the tables. These fuses are only suitable for the short-circuit-currents as indicated on the fuses.

Circuit-breaker Type	Rated current $I_n$ A	up to AC 240V <sup>*1)</sup>			up to AC 400V <sup>*1)</sup> up to AC 415V <sup>*2)</sup>			up to AC 440V <sup>*1)</sup> up to AC 460V <sup>*2)</sup>			up to AC 500V <sup>*1)</sup> up to AC 525V <sup>*2)</sup>			up to AC 690V <sup>*1)</sup>		
		$I_{cu}$ kA	$I_{cs}$ kA	max. fuse (gL/gG) A	$I_{cu}$ kA	$I_{cs}$ kA	max. fuse (gL/gG) A	$I_{cu}$ kA	$I_{cs}$ kA	max. fuse (gL/gG) A	$I_{cu}$ kA	$I_{cs}$ kA	max. fuse (gL/gG) A	$I_{cu}$ kA	$I_{cs}$ kA	max. fuse (gL/gG) A
<b>J7MN-12</b>	0.16 to 0.8	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	1	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	1.25	100	100	--	100	100	--	100	100	--	100	100	--	2	2	20
	1.6	100	100	--	100	100	--	100	100	--	100	100	--	2	2	20
	2	100	100	--	100	100	--	100	100	--	10	10	35	2	2	35
	2.5	100	100	--	100	100	--	100	100	--	10	10	35	2	2	35
	3.2	100	100	--	100	100	--	10	10	40	3	3	40	2	2	40
	4	100	100	--	100	100	--	10	10	40	3	3	40	2	2	40
	5	100	100	--	100	100	--	10	10	50	3	3	50	2	2	50
	6.3	100	100	--	100	100	--	10	10	50	3	3	50	2	2	50
	8	100	100	--	50	12.5	80 <sup>*3)</sup>	10	10	63	3	3	63	2	2	63
	10	100	100	--	50	12.5	80 <sup>*3)</sup>	10	10	63	3	3	63	2	2	63
	12	100	100	--	50	12.5	80 <sup>*3)</sup>	10	10	80	3	3	80	2	2	80
<b>J7MN-25</b>	0.16 to 1.25	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	1.6	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	2	100	100	--	100	100	--	100	100	--	100	100	--	8	8	25
	2.5	100	100	--	100	100	--	100	100	--	100	100	--	8	8	25
	3.2	100	100	--	100	100	--	100	100	--	100	100	--	8	8	32
	4	100	100	--	100	100	--	100	100	--	100	100	--	6	3	32
	5	100	100	--	100	100	--	100	100	--	100	100	--	6	3	32
	6.3	100	100	--	100	100	--	100	100	--	100	100	--	6	3	50
	8	100	100	--	100	100	--	50	25	63 <sup>*3)</sup>	42	21	63	6	3	50
	10	100	100	--	100	100	--	50	25	80 <sup>*3)</sup>	42	21	63	6	3	50
	12.5	100	100	--	100	100	--	50	25	80 <sup>*3)</sup>	42	21	80	6	3	63
	16	100	100	--	50	25	100 <sup>*3)</sup>	20	10	80	10	5	80	4	2	63
	20	100	100	--	50	25	125 <sup>*3)</sup>	20	10	80	10	5	80	4	2	63
22	100	100	--	50	25	125 <sup>*3)</sup>	20	10	100	10	5	80	4	2	63	
25	100	100	--	50	25	125 <sup>*3)</sup>	20	10	100	10	5	80	4	2	63	
<b>J7MN-50</b>	25	100	100	--	50	25	125 <sup>*3)</sup>	30	15	100	12	6	80	5	3	63
	32	100	100	--	50	25	125 <sup>*3)</sup>	30	15	125	10	5	100	4	2	63
	40	100	100	--	50	25	160 <sup>*3)</sup>	30	15	125	10	5	100	4	2	63
	45	100	100	--	50	25	160 <sup>*3)</sup>	30	15	125	10	5	100	4	2	63
	50	100	100	--	50	25	160 <sup>*3)</sup>	30	15	125	10	5	100	4	2	80
<b>J7MN-100</b>	63	100	100	--	50	25	160 <sup>*3)</sup>	40	20	160	12	6	125	6	3	80
	75	100	100	--	50	25	160 <sup>*3)</sup>	40	20	160	8	4	125	5	3	100
	90	100	100	--	50	25	160 <sup>*3)</sup>	40	20	160	8	4	125	5	3	125
	100	100	100	--	50	25	160 <sup>*3)</sup>	40	20	160	8	4	125	5	3	125

\*1) 10% overvoltage  
 \*2) 5% overvoltage  
 \*3) Back-up fuse required if short-circuit current at installation point > 50 kA  
 -- No back-up fuse required.

Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660

Main Circuit

Type		J7MN-12	J7MN-25	J7MN-50	J7MN-100	
<b>Number of poles</b>		3	3	3	3	
<b>Max. rated current Inmax (=max. rated operational current Ie)</b>	A	12	25	50	100	
<b>Permissible ambient temperature</b>						
Storage/transport	°C	-50 to +80				
Operation	°C	-20 to +70 <sup>*1)</sup>				
Permissible rated current at temperature inside cubicle of:	+60 °C	%	100			
	+70 °C	%	87			
Circuit-breaker inside enclosure	Permissible rated current at temperature inside enclosure of:	+60 °C	%	100		
		+70 °C	%	87		
<b>Rated operational voltage Ue</b>	V	690 <sup>*2)</sup>				
<b>Rated frequency</b>	Hz	50/60				
<b>Rated insulation voltage Ui</b>	V	690				
<b>Rated impulse withstand voltage Uimp</b>	kV	6				
<b>Utilization category</b>						
IEC 60 947-2 (circuit-breaker)		A				
IEC 60 947-4-1 (motor starter)		AC-3				
<b>Class</b>	acc. to IEC 60 947-4-1	10				
<b>DC short-circuit breaking capacity</b> (time constant t = 5 ms)						
1 conducting path DC 150 V	kA	10				
2 conducting paths in series DC 300 V	kA	10				
3 conducting paths in series DC 450 V	kA	10				
<b>Power loss Pv per circuit-breaker</b>	In -> to 1.25 A	W	5	-	-	-
dependent on rated current In (upper setting range)	In -> 1.6 to 6.3 A	W	6	-	-	-
	In -> 8 to 12 A	W	7	-	-	-
	R per conducting path = P/(I <sup>2</sup> × 3)					
	In -> 1 to 6.3 A	W	-	6	-	-
	In -> 8 to 16 A	W	-	7	-	-
	In -> 20 to 25 A	W	-	8	-	-
	In -> to 25 A	W	-	-	12	-
	In -> 32 A	W	-	-	15	-
	In -> 40 to 50 A	W	-	-	20	-
	In -> to 63 A	W	-	-	-	20
	In -> 75 to 90 A	W	-	-	-	30
In -> to 100 A	W	-	-	-	38	
<b>Shock resistance</b>	acc. to IEC 68 Part 2-27	g	25	25	25	25
<b>Degree of protection</b>	acc. to IEC 60 529		IP 20	IP 20	IP 20 <sup>*3)</sup>	IP 20 <sup>*3)</sup>
<b>Shock hazard protection</b>	acc. to DIN VDE 0106 Part 100	safe against finger touch				
<b>Temperature compensation</b>	acc. to IEC 60 947-4-1	°C	-20 to +60			
<b>Phase failure sensitivity</b>	acc. to IEC 60 947-4-1		yes			
<b>Explosion protection</b>	acc. to EC Directive 94191 EC		yes <sup>*4)</sup>			
<b>Isolator characteristics</b>	acc. to IEC 60 947-3		yes			
<b>Main and EM. STOP switch characteristics</b>	acc. to IEC 60 204-1 (VDE 0113)		yes <sup>*5)</sup>			
<b>Safe isolation between main and auxiliary circuits</b>	acc. to DIN VDE 0106 Part 101 up to 400 V + 10 %		yes			
	up to 415 V+ 5 %		yes			
<b>Mechanical endurance</b>	operating cycles		100 000	100 000	50 000	50 000
<b>Electrical endurance</b>			100 000	100 000	25 000	25 000
<b>Max. operating frequency per hour (motor starts)</b>	1/h		15	15	15	15
<b>Permissible mounting position</b>	any. acc. to IEC 60 447 start command "I" right-hand side or top					

LVSG

\*1) Over +60°C current reduction  
 \*2) 500 V with moulded-plastic enclosure  
 \*3) Terminal compartment IP00  
 \*4) KEMA-test certification on request  
 \*5) With appropriate accessories

**Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660**

**Conductor cross-sections for main Circuit**

Type		J7MN-12	J7MN-25	J7MN-50	J7MN-100
Terminal type		Screw-type	Screw-type	Box terminal	Box terminal
Terminal screw		Pozidriv size 2	Pozidriv size 2	Pozidriv size 2	Allen screw 4 mm
Tightening torque	Nm	0.8 to 1.2	2 to 2.5	3 to 4.5	4 to 6
<b>Conductor cross-sections</b>					
solid	mm <sup>2</sup>	2 x (0.5 to 1.5)	2 x (1 to 2.5)	2 x (0.75 to 16)	2 x (2.5 to 16)
	mm <sup>2</sup>	2 x (0.75 to 2.5)	2 x (2.5 to 6)	–	–
	mm <sup>2</sup>	1 x (0.5 to 4)	–	–	–
finely stranded with end ferrule	mm <sup>2</sup>	2 x (0.5 to 1.5)	2 x (1 to 2.5)	2 x (0.75 to 16)	2 x (2.5 to 35)
	mm <sup>2</sup>	2 x (0.75 to 2.5)	2 x (2.5 to 6)	1 x (0.75 to 25)	1 x (2.5 to 50)
	mm <sup>2</sup>	–	1 x (1 to 10)	–	–
stranded	mm <sup>2</sup>	2 x (0.5 to 1.5)	2 x (1 to 2.5)	2 x (0.75 to 25)	2 x (10 to 50)
	mm <sup>2</sup>	2 x (0.75 to 2.5)	2 x (2.5 to 6)	1 x (0.75 to 35)	1 x (10 to 70)
	mm <sup>2</sup>	1 x (0.5 to 4)	1 x (1 to 10)	–	–
AWG-wires, solid or stranded	AWG	2 x (18 to 14)	2 x (14 to 10)	2 x (18 to 3)	2 x (10 to 1/0)
	AWG	–	–	1 x (18 to 2)	1 x (10 to 2/0)
conductor bar (number x width x thick)	mm	–	–	2 x (6 x 9 x 0.8)	2 x (6 x 9 x 0.8)
	mm	–	–	–	18 x 10
	mm <sup>2</sup>	–	–	–	up to 2 x 70

**Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660**

**Auxiliary switches**

Switching capacity				Control voltage			
<b>Front transverse auxiliary switch with 1 NO + 1 NC</b>							
Rated operational voltage U <sub>e</sub>	AC	V	24	230			
Rated operational current I <sub>e</sub> /AC-15		A	2	0.5			
Rated operational current I <sub>e</sub> /AC-12 lth		A	2.5	2.5			
Rated operational voltage U <sub>e</sub>	DC L/R 200 ms	V	24	48	60		
Rated operational current I <sub>e</sub> /DC-13		A	1	0.3	0.15		
<b>Lateral auxiliary switch and signalling switch</b>							
Rated operational voltage U <sub>e</sub>	AC	V	24	230	400	690	
Rated operational current I <sub>e</sub> /AC-15		A	6	6	3	1	
Rated operational current I <sub>e</sub> /AC-12 lth		A	10	10	10	10	
Rated operational voltage U <sub>e</sub>	DC L/R 200 ms	V	24	110	220	440	
Rated operational current I <sub>e</sub> /DC-13		A	2	0.5	0.25	0.1	
<b>Undervoltage release</b>							
Power consumption	during pick-up	VA/W	20.2/13				
	uninterrupted duty	VA/W	7.2/2.4				
Response voltage	trip	V	0.7 to 0.35 × U <sub>s</sub>				
	pick-up	V	0.85 to 1.1 × U <sub>s</sub>				
Max. opening time		ms	20				
<b>Shunt release</b>							
Power consumption during pick-up		AC VA/W	20.2/13				
		DC W	13 to 80				
Response voltage acc. to IEC 60 947-1, trip		V	0.7 to 1.1 × U <sub>s</sub>				
Max. opening time		ms	20				
<b>Short-circuit protection for auxiliary and control circuits</b>							
Fuse	gL/gG	A	10				
Miniature circuit breaker C-characteristic		A	6 <sup>*1)</sup>				
<b>Conductor cross-sections for auxiliary and control circuits</b>							
solid		mm <sup>2</sup>	2 x (0.5 to 1.5) / 2 x (0.75 to 2.5)				
finely stranded with ferrule		mm <sup>2</sup>	2 x (0.5 to 1.5) / 2 x (0.75 to 2.5)				
stranded		mm <sup>2</sup>	2 x (0.5 to 1.5) / 2 x (0.75 to 2.5)				
AWG-wires, solid or stranded		AWG	2 x (18 to 14)				

\*1) Prospective short-circuit current < 0.4 kA.

## Description

J7MN circuit-breakers are compact, current-limiting circuit-breakers which are optimised for load feeders. The circuit-breakers are used for switching and protecting three-phase induction motors of up to 18,5 kW at AC 400 V and for loads with rated currents of up to 40 A.

### Construction

The circuit-breakers are available in three sizes:

J7MN-12 overall width 45 mm. Max. rated current 12 A. Suitable for 3-phase induction motors of up to 5.5 kW at voltages of 400 V AC.

J7MN-25 overall width 45 mm. Max. rated current 25 A. Suitable for 3-phase induction motors of up to 11 kW at voltages of 400 V AC.

J7MN-50 overall width 55 mm. Max. rated current 40 A. Suitable for 3-phase induction motors of up to 18,5 kW at voltages of 400 V AC.

### Releases

Circuit-breakers J7MN are equipped with bimetallic-based, inverse-time delayed overload releases and with instantaneous overcurrent releases (electromagnetic short-circuit releases).

The overload releases can be set in accordance with the load current. The overcurrent releases are permanently set to a value 13 times the rated current and thus enable trouble-free start-up of motors.

The scale cover can be sealed to prevent unauthorized adjustments to the set current.

### Operating mechanisms

circuit-breakers J7MN-12 are actuated via a switch operating mechanism and circuit-breakers J7MN-25 and J7MN-50 via a rotary operating mechanism. If the circuit-breaker trips, the rotary operating mechanism switches to the tripped position to indicate this. Before the circuit-breaker is reclosed, the rotary operating mechanism must be reset to the 0 position by hand, in order to prevent the former from closing by mistake before the fault has been cleared.

In the case of circuit-breakers with rotary operating mechanisms, there is an electrical signal via a signalling switch to indicate that the circuit-breaker has tripped.

All operating mechanisms can be locked in the 0 position with a padlock (shackle diameter 3.5 to 4.5 mm).

The J7MN circuit-breakers fulfil the isolation characteristics specified in IEC 60 947-2.

### Operating conditions

Circuit-breakers J7MN are suitable for use in any climate. They are designed for operation in enclosed rooms under normal conditions (e. g. no dust, corrosive vapours or harmful gases). Suitable enclosures must be provided for installation in dusty or damp rooms.

Circuit-breakers J7MN can also be fed from below. The standards in accordance with which the circuit-breakers are constructed, the permissible ambient temperatures, the maximum making and breaking capacities, the tripping currents and other boundary conditions can be found in the technical data and tripping characteristics.

Since the operational currents, starting currents and current peaks vary as a result of the inrush current, even in the case of motors with identical output ratings, the values specified for these output ratings in the selection tables are intended as a guide only. The specific rated and start-up data of the motor to be protected is always paramount to the choice of the most suitable circuit-breaker.

In order to prevent premature tripping due to phase failure sensitivity, the circuit-breakers should always be connected in such a way that current flows through all three main conducting paths.

### Short-circuit protection

The short-circuit releases of J7MN circuit-breakers disconnect the faulty load feeder from the system in the event of a short circuit and thus prevent any further damage.

Circuit-breakers with a short-circuit breaking capacity of 50 kA or 100 kA at a voltage of 400 V AC are practically short-circuit-proof at this voltage, as higher short-circuit currents are not usually encountered at the installation point.

Back-up fuses are only necessary if the short-circuit current at the installation point exceeds the rated ultimate short-circuit breaking capacity of the circuit-breakers.

### Motor protection

The tripping characteristics of J7MN circuit-breakers are designed mainly to protect three-phase induction motors. The circuit-breakers are therefore also referred to as motor circuit-breakers. The current of the motor to be protected is set with the aid of the scale.

Circuit-breakers with thermal overload releases are normally designed in accordance with release Class 10.

### Line protection

J7MN circuit-breakers for motor protection are also suitable for line protection. In order to prevent premature tripping due to phase failure sensitivity, the three conducting paths must always be uniformly loaded. The conducting paths must be connected in series in the case of single-phase loads.

The J7MN circuit-breakers meet the isolation conditions of IEC 60 947-3 as well as the additional test conditions for circuit-breakers with isolation characteristics specified in IEC 60 947-2. Taking IEC 60 204-1 into consideration, they can thus be implemented as main and EMERGENCY STOP switches.

Door-coupling rotary operating mechanism do not fulfil the isolation characteristics specified in IEC 60 947-2. Door-coupling rotary operating mechanism according isolation characteristics specified in IEC 60 947-2 on request.



**Characteristics**

The time/current characteristic, the current limiting characteristics and the  $I^2t$  characteristics were determined in accordance with DIN VDE 0660 and IEC 60 947.

The tripping characteristic of the inverse-time delayed overload releases (thermal overload releases or 'a' releases) for DC and AC with a frequency of 0 to 400 Hz also apply to the time/current characteristic.

The characteristics apply to the cold state. At operating temperature, the tripping times of the thermal releases are reduced to approximately 25 %.

Under normal operating conditions, all three poles of the device must be loaded. The three main conducting paths must be connected in series in order to protect single-phase or DC loads.


With 3-pole loading, the maximum deviation in the tripping time for 3 times the setting current and upwards is  $\pm 20\%$  and thus in accordance with DIN VDE 0165.

The tripping characteristics for the instantaneous, electromagnetic overcurrent releases (short-circuit releases or 'n' releases) are based on the rated current  $I_n$ , which is also the maximum value of the setting range for circuit-breakers with adjustable overload releases. If the current is set to a lower value, the tripping current of the 'n' release is increased by a corresponding factor.


The characteristics of the electromagnetic overcurrent releases apply to frequencies of 50/60 Hz. Appropriate correction factors must be used for lower frequencies up to 16 2/3 Hz, for higher frequencies up to 400 Hz and for DC.

The characteristic shown here is a schematic representation of circuit-breakers for all ranges.



Time/current characteristics, current limiting characteristics and  $I^2t$  characteristics are available on request.

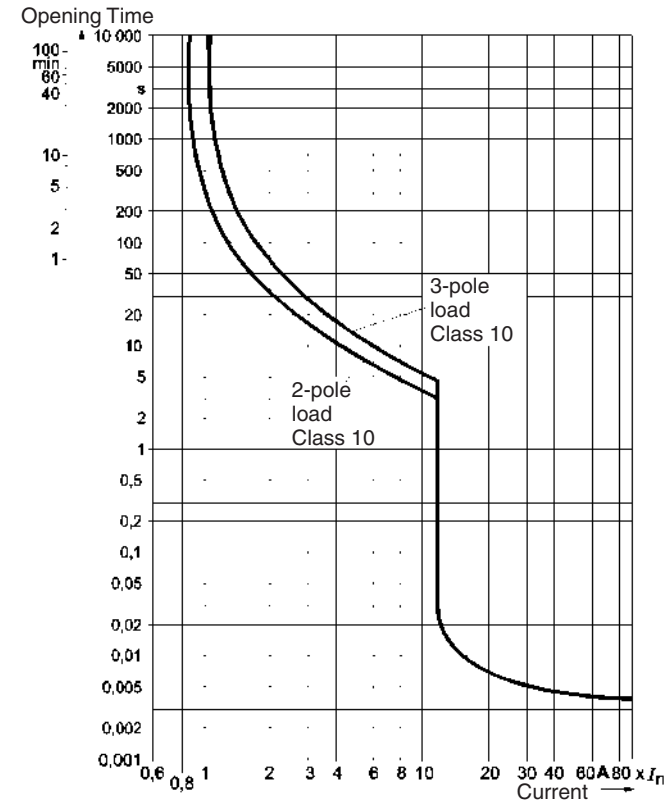


**Wiring diagrams**

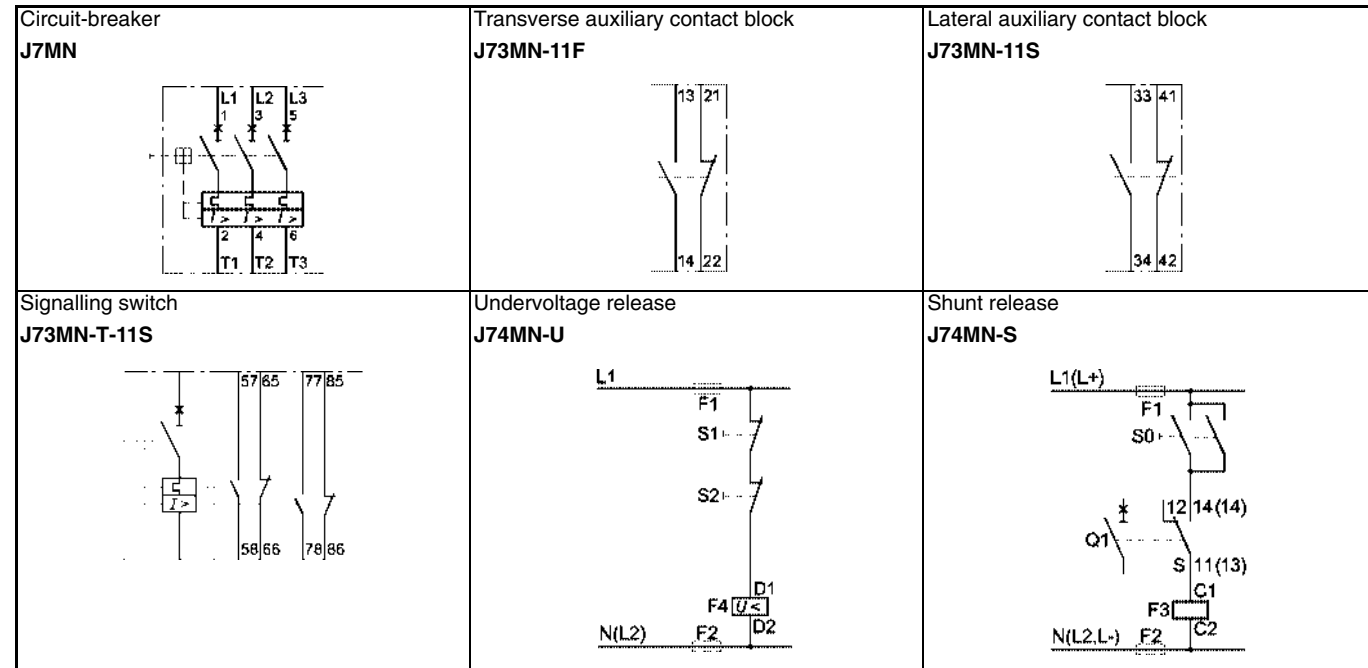

■ Dimensions

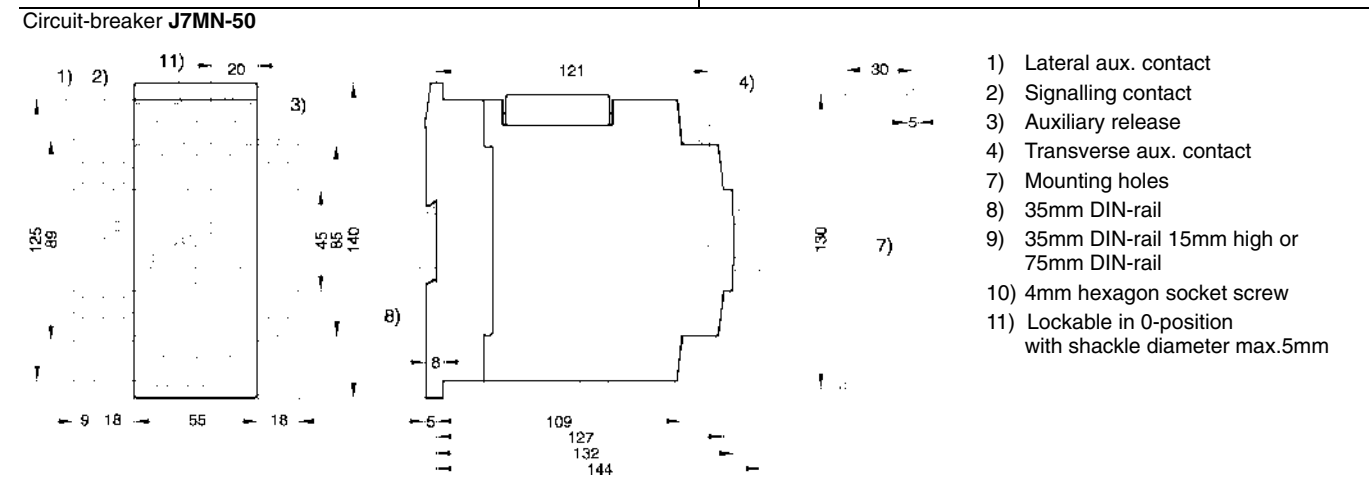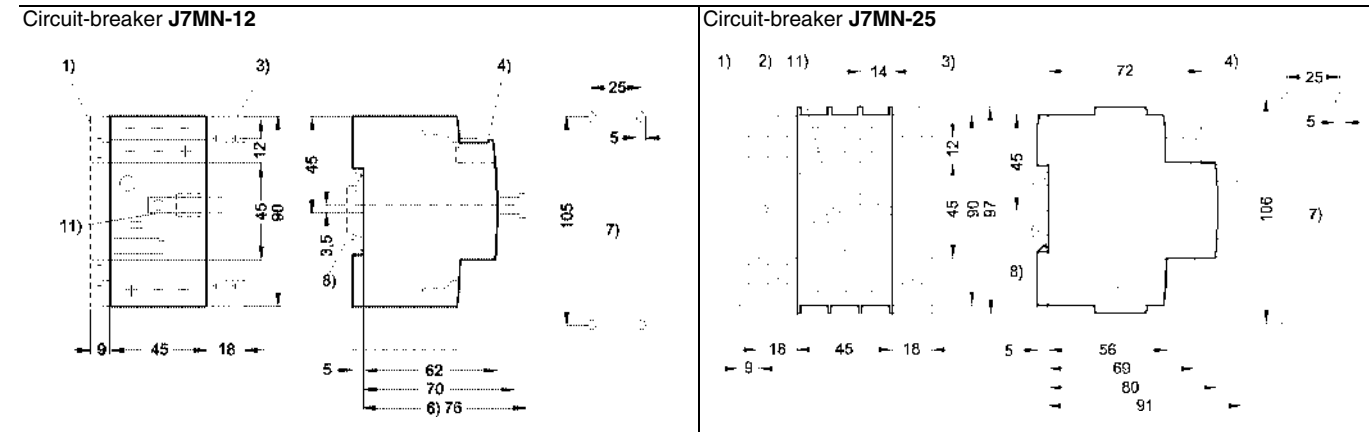


- 1) Lateral aux. contact
- 2) Signalling contact
- 3) Auxiliary release
- 4) Transverse aux. contact
- 7) Mounting holes
- 8) 35mm DIN-rail
- 9) 35mm DIN-rail 15mm high or 75mm DIN-rail
- 10) 4mm hexagon socket screw
- 11) Lockable in 0-position with shackle diameter max.5mm

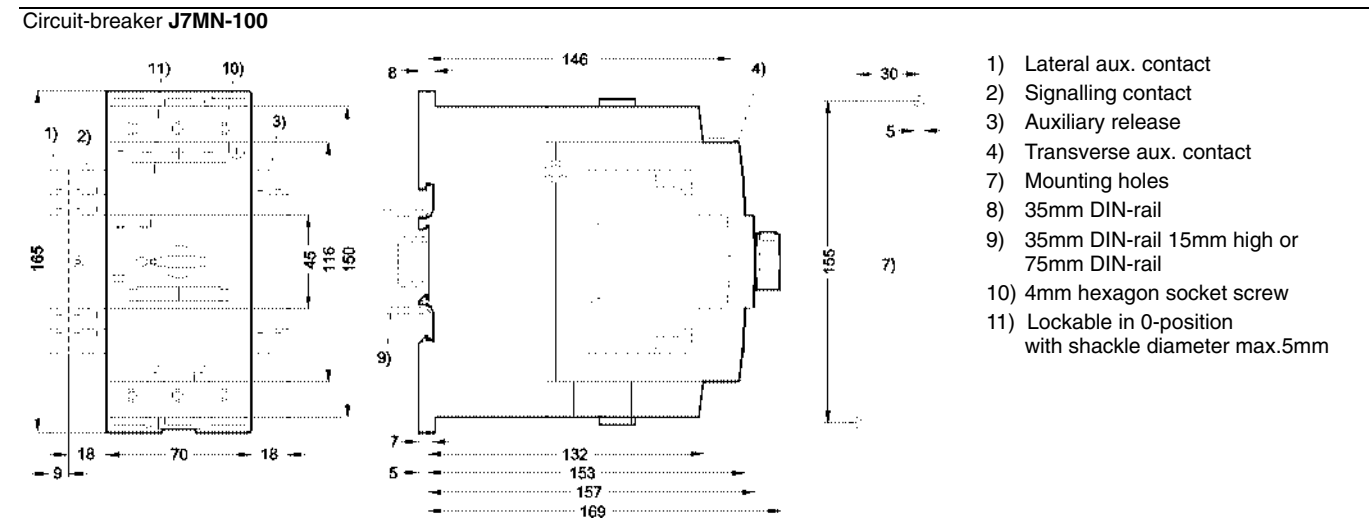


- 1) Lateral aux. contact
- 2) Signalling contact
- 3) Auxiliary release
- 4) Transverse aux. contact
- 7) Mounting holes
- 8) 35mm DIN-rail
- 9) 35mm DIN-rail 15mm high or 75mm DIN-rail
- 10) 4mm hexagon socket screw
- 11) Lockable in 0-position with shackle diameter max.5mm

LVSG


Moulded plastic front plate **J74MN-P12**

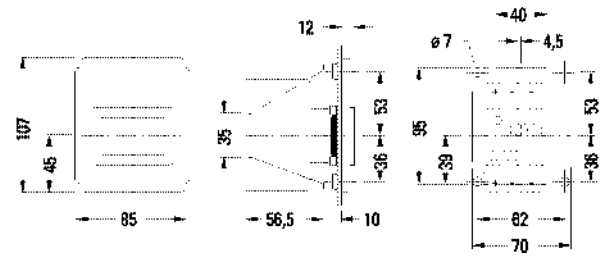


Moulded plastic front plate **J74MN-P25**

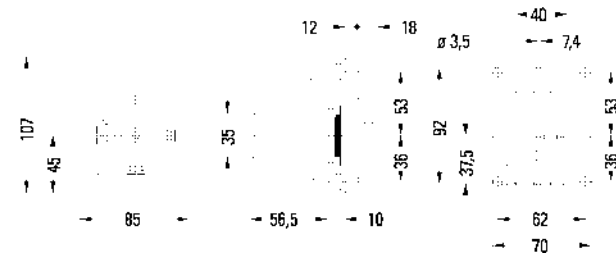


Moulded plastic enclosure **J74MN-PF12**

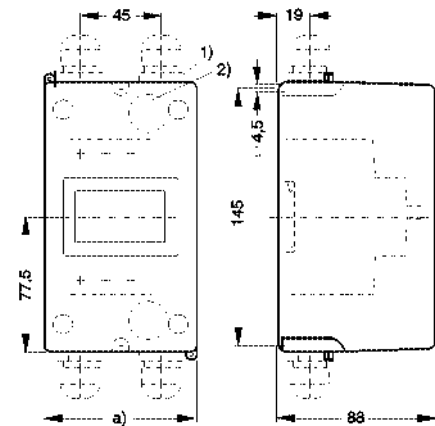


Door-coupling rotary operating mechanism **J74MN-DC**

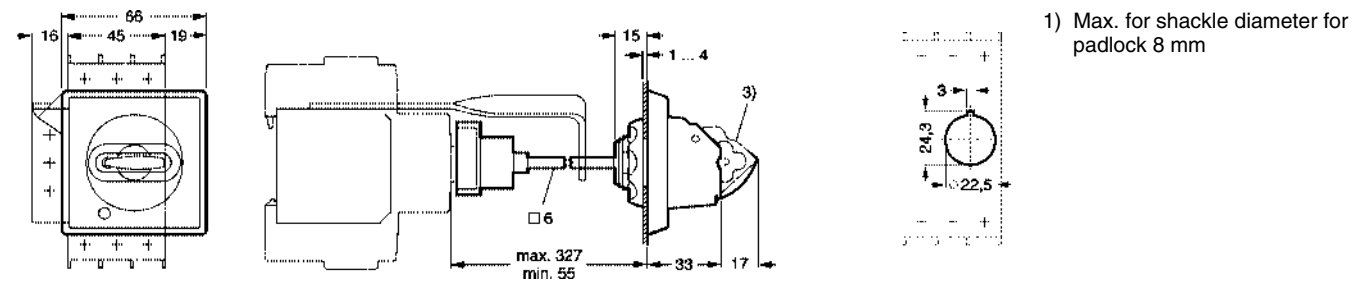

3-phase busbar **J74MN-L3-□/□**  
for J7MN-12 and J7MN-25, modular spacing 45 mm

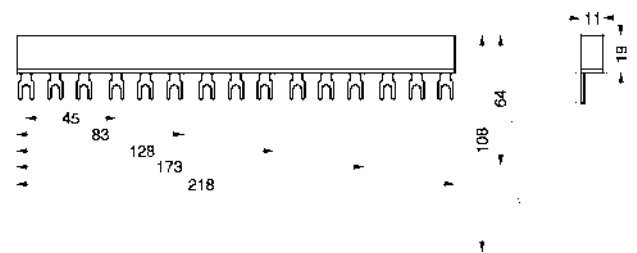

3-phase line-side terminal **J74MN-TC12** and **J74MN-TC25**



ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

## Appendix

---

### ● Precautions

#### ■ Notice

Use under rated condition, otherwise contactors will not only cause malfunction, but also cause a fire or damage the contactor.

Life period of contactor depends on the operating application. Please check the electrical life under real application in advance.

If you continue to use malfunctioning contactor, a fire or breakdown may occur.

Do not miss-wire or miss-charge the power supply, otherwise the contactor does not work correctly.

Do not operate in places with explosive or flammable gas, otherwise a fire or explosion may occur by arc or heating from contactor.

Make sure to use the circuit well considered about safety, in case there is any possibility to cause secondary disaster by contact trouble (welding, faulty contact).

Do not supply short-circuit current to electromagnetic switch (contactor with thermal relay). Doing so may result failure in heater of thermal relay. Please use short-circuit protection like fuse or protective circuit breaker.

Do not use a contactor or thermal relay which has been dropped or dismantled. Doing so may cause malfunction or a fire.

Make sure to shut off power supply to contactors before wiring or replacing.

Do not operate the actuator of a contactor manually. Doing so may cause contact welding by chattering or burn out by arc.

**Unless otherwise stated in the catalogue, modifications, especially those of stated values, sizes and weights are subject to alternation.**

**Diagrams and tables are subject to alternation and not to be regarded as binding drawings.**

#### ■ Correct use

##### General use

Unexpected malfunction may occur in real application. Please carry out as many tests as possible.

Ratings in this catalogue measured under the condition according to IEC unless otherwise specified. In cases of check by real application, please carry out the test under the same condition as expected in the actual application.

##### Selection

##### **Coil specification**

Please select suitable coil to circuit design, otherwise malfunction may occur or coil may have a burn out by overvoltage etc.

##### **Type**

Please check contact ratings, switching capacity, thermal characteristics etc. when selecting product type.

##### **Thermal relay**

Motor current differs by supplier, type, number of poles, frequency. Please confirm operational current level.

##### **Coil surge suppressor**

Coil surge suppressor type should be selected by contactor type, auxiliary relay type and applied voltage. Make sure to use defined each contactor.

In case of installing coil surge suppressor, please check the actual circuit because the release time will be delayed.

##### **Electrical life expectancy**

Electrical life expectancy tests in this catalogue are based on IEC.

##### Circuit design

##### **Supplied voltage waveform for input**

Make sure to apply and remove the voltage instantly. Do not use under the condition that the coil voltage waveform increases or decreases gradually.

##### **In case of DC contactor use (input voltage ripple)**

Please use DC contactor input voltage with a ripple ratio less than 5%. Excessive ripple (pulsating current) may cause contact welding.

##### **Fluctuation of input voltage**

Make sure to supply sufficient voltage to actuate contactors properly. Continuous supply of insufficient voltage results in excessive heating and may cause burn out of coil.

##### **Maximum applied voltage**

Do not supply the voltage over the maximum rated voltage, otherwise burn out or insulation failure may occur.

The temperature inside control panel has much influence to the coil temperature, so make sure not to exceed the specified value in the catalogue.

Basically rated voltage should be supplied to coil. To supply higher voltage than rated would result in shorter electrical life, even if it is lower than the maximum rated voltage.

##### **Reverse**

Make sure to use reversible contactors for reverse operation.

Make sure to use interlock device in reverse operation by two contactors, otherwise short circuit current may burn out or give damage to contactors and motors.

LVSG

## **Installation**

### **Mounting**

Make sure to use specified wire size, mounting screw size, mounting screw number, and DIN rail size.

### **Tightening Screw**

Tighten each screw securely by specified tightening torque. Loose tightening may cause a fire by excessive heating.

### **Combination**

Please use only OMRON product combinations in case of thermal relay, timer block and auxiliary contact block etc.

Wrong-combinations may result in damage to contactors.

### **Mounting direction**

Some products have a defined specific mounting direction. Please refer to datasheet before use.

## **Operation ambience**

### **Dust**

Dust on the surface of the contacts could result in contact malfunctioning. Take countermeasure in excessive dusty surrounding.

### **Temperature, humidity**

Use contactors within the temperature and humidity conditions specified in datasheet. To use or store contactor in excessive temperature or humidity may result in malfunction of contact by organic film composed by sulfication and oxidation on the surface of the contacts.

Use contactors within the temperature and humidity conditions specified in the datasheet, to prevent contactors from insulation resistance failure by condensation or insulation resistance deterioration by tracking.

### **Gas**

NH<sub>3</sub>, H<sub>2</sub>S, SO<sub>2</sub>, Cl<sub>2</sub>, Si and NO<sub>2</sub> have bad effects on a contactor. With these gases, a corrosive metal film is generated on the surface of the contacts and could result in contact malfunctioning. Use a contactor in low humidity and no corrosive gas surroundings.

### **Oil**

Do not use a contactor in places where oil is sprayed onto the contactor. It will cause cracks on polymer parts.

### **Shock and vibration**

Do not use a contactor in places where there is excessive shock or vibration. It may cause malfunctioning.

### **Storage**

Store contactors in a place with no direct sunshine or ultraviolet rays. It will cause crack on polymer parts.

When contactors are to be stored for a long time, they must be stored with care. Though it generally depends where contactors are stored, deterioration of contacts may occur after long storage. Please check the characteristics before use after long time storage.

## ● European Standards


### ■ IEC 947, EN 60947

#### European Standards for Low-Voltage Switchgear

For Europe and most other industrial countries of the world, the new IEC 947 and EN 60 947 specifications for low-voltage switchgear have unified the regulations which previously varied from nation to nation.

This required the introduction of new terms, and new test methods and utilization categories. The new specifications are aimed primarily at manufacturers. However, the user also will come across new technical terms and data in the manufacturers' catalogues and on the devices themselves which are important for the selection and application of the devices. The present paper deals with the currently published specifications. Further specifications and supplements are in preparation.

Since 1993, all low-voltage switchgear purchased in Europe had to satisfy the EN 60 947 European Standard. Installations in existence prior to 1993 are not affected by the standard and need not to be refitted with new devices. Devices constructed and tested to the IEC standards and EN standards can be used worldwide, with the exception of the USA and Canada. In these countries UL and CSA specifications continue to apply. Switchgear which conforms to IEC 947 and EN 60 947 and which has, in addition, UL- and CSA approvals, in the meantime has entered the market. Such 'world market' devices offer the advantage that they can be used throughout the world, including the USA and Canada.

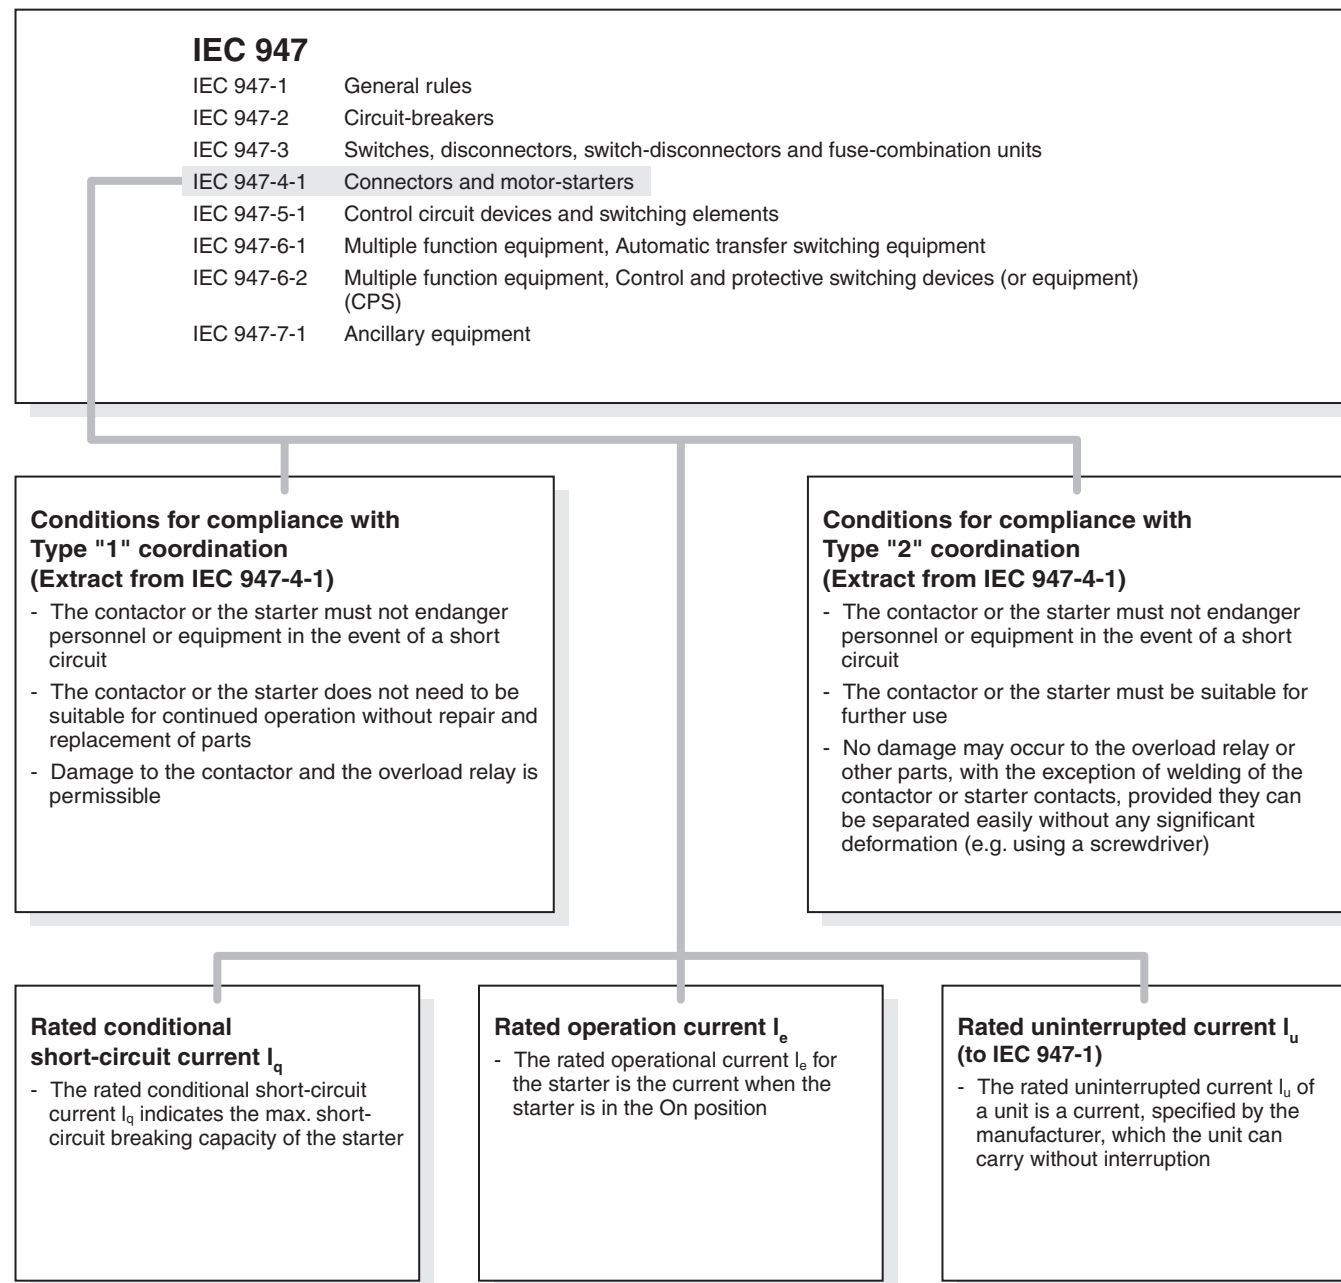

**Overview**

The following table shows in summarized form both the previous and the new IEC, EN and DIN VDE standards.

Previous specification		New specification		Content
IEC	DIN VDE	IEC	EN 60947 DIN VDE	
-	-	947-1	60947-1 0660, Part 100	Low-voltage switchgear, General rules
157	0660, Part 101	947-2	60947-2 0660, Part 101	Low-voltage switchgear, Circuit-breakers
406	0660, Part 107	947-3	60947-3 0660, Part 107	Low-voltage switchgear, Switches, Disconnectors, Switch-disconnectors, Fuse-combination units
158 292-1 292-2 292-3	0660, Part 102 0660, Part 104 0660, Part 106 0660, Part 301	947-4-1	60947-4-1 0660, Part 102	Low-voltage switchgear, Control circuit devices and switching elements
337	0660 Part 200 to Part 205	947-5-1	60947-5-1 0660, Part 200	Low-voltage switchgear, Multiple-function equipment, Automatic transfer switching equipment
-	-	947-6-1	60947-6-1 0660, Part 114	Low-voltage switchgear, Multiple-function equipment, Control and protective switching devices (CPS)
-	0611 Part 1 and 2	947-7-1	60947-7-1 0611, Part 1	Low-voltage switchgear, Ancillary equipment (e.g. terminal blocks)

**Switches, disconnectors, switch-disconnectors and fuse combination units**

**(IEC 947-3, EN 60947-3)**

These devices must now be labelled with the product function designated by the manufacturer. This means placing clearly visible symbols on the device itself.

Devices with an isolating function are subject to special safety requirements. They must for example have greater creepage distances and clearances across the opened contacts than is necessary for other devices.

**Device functions and corresponding symbols**

Making/breaking	Isolating	Making/breaking + isolating
Switch 	Disconnector 	Switch-disconnector 
Switch-fuse 	Disconnector-fuse 	Switch-disconnector-fuse 
Fuse-switch 	Fuse-disconnector 	Fuse switch-disconnector 

**OMRON equipment is designed for the world's markets**

It is manufactured and tested in accordance with national and international specifications, the most important of which are listed below:

- IEC 947-..., EN 60947: Low-voltage switch gear and control gear
- IEC 664: Insulation co-ordination including clearances and creepage distances for equipment
- IEC364: Electrical installations of buildings
- IEC 204-..., EN 60204-...: Electrical equipment of industrial machines
- DIN VDE 0105: Operation of electrical power installations
- IEC 536: Protection against electric shock

**Utilization categories for contactors to IEC 947-4-1 and EN 60947**

Type of current	Utilization category	Typical examples of application I = current made, I <sub>c</sub> = current broken I <sub>e</sub> = rated operational current U = voltage before make U <sub>r</sub> = rated operational voltage U <sub>i</sub> = recovery voltage	Verification of electrical endurance						Verification of rated making and breaking capacities							
			Make			Break			Make			Break				
			I <sub>e</sub>	I	U	cos φ	I <sub>c</sub>	U <sub>r</sub>	cos φ	I <sub>e</sub>	I	U	cos φ	I <sub>c</sub>	U <sub>r</sub>	cos φ
AC	AC-1	Non-inductive or slightly inductive loads, resistance furnaces	All values	1	1	0.95	1	1	0.95	All values	1.5	1.05	0.8	1.5	1.05	0.8
	AC-2	Slip-ring motors: starting, switching off	All values	2.5	1	0.65	2.5	1	0.65	All values	4	1.05	0.65	4	1.05	0.65
	AC-3	Squirrel-cage motors: starting, switching off motors during running <sup>4</sup>	I <sub>e</sub> ≤ 17 I <sub>e</sub> > 17	6 6	1 1	0.65 0.35	1 1	0.17 0.35	0.65 0.35	I <sub>e</sub> ≤ 100 I <sub>e</sub> > 100	10 10	1.05 1.05	0.45 0.35	8 8	1.05 1.05	0.45 0.35
	AC-4	Squirrel-cage motors: starting, plugging, inching	I <sub>e</sub> ≤ 17 I <sub>e</sub> > 17	6 6	1 1	0.65 0.35	6 6	1 1	0.65 0.35	I <sub>e</sub> ≤ 100 I <sub>e</sub> > 100	12 12	1.05 1.05	0.45 0.35	10 10	1.05 1.05	0.45 0.35
	AC-5A	Switching of electric discharge lamp controls	-	-	-	-	-	-	-	-	3.0	1.05	0.45	3.0	1.05	0.45
	AC-5B	Switching of incandescent lamps	-	-	-	-	-	-	-	-	1.5 <sup>2</sup>	1.05 <sup>2</sup>	2)	1.5 <sup>2</sup>	1.05 <sup>2</sup>	2)
	AC-6A <sup>3</sup>	Switching of transformers	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	AC-6B <sup>3</sup>	Switching of capacitor banks	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	AC-7A	Slightly inductive loads in household appliances and similar applications	-	-	-	-	-	-	-	-	1.5	1.05	0.8	1.5	1.05	0.8
	AC-7B	Motor-loads for household applications	-	-	-	-	-	-	-	-	8.0	1.05 <sup>1)</sup>	1)	8.0	1.05 <sup>1)</sup>	1)
AC-8A	Hermetic refrigerant compressor motor control with manual resetting of overload releases <sup>5</sup>	-	-	-	-	-	-	-	-	6.0	1.05 <sup>1)</sup>	1)	6.0	1.05 <sup>1)</sup>	1)	
AC-8B	Hermetic refrigerant compressor motor control with automatic resetting of overload releases <sup>5</sup>	-	-	-	-	-	-	-	-	6.0	1.05 <sup>1)</sup>	1)	6.0	1.05 <sup>1)</sup>	1)	

Type of current	Utilization category	Typical examples of application I = current made, I <sub>c</sub> = current broken I <sub>e</sub> = rated operational current U = voltage before make U <sub>r</sub> = rated operational voltage U <sub>i</sub> = recovery voltage	Verification of electrical endurance						Verification of rated making and breaking capacities							
			Make			Break			Make			Break				
			I <sub>e</sub>	I	U	L/R	I <sub>c</sub>	U <sub>r</sub>	L/R	I <sub>e</sub>	I	U	L/R	I <sub>c</sub>	U <sub>r</sub>	L/R
DC	DC-1	Non-inductive or slightly inductive loads, resistance furnaces	All values	1	1	1	1	1	1	All values	1.5	1.05	1	1.5	1.05	1
	DC-3	Shunt motors: starting, plugging, inching, dynamic braking	All values	2.5	1	2	2.5	1	2	All values	4	1.05	2.5	4	1.05	2.5
	DC-5	Series motors: starting, plugging, inching, dynamic braking	All values	2.5	1	7.5	2.5	1	7.5	All values	4	1.05	15	4	1.05	15
	DC-6	Switching of incandescent lamps	-	-	-	-	-	-	-	-	1.5 <sup>2)</sup>	1.05 <sup>2)</sup>	2)	1.5 <sup>2)</sup>	1.05 <sup>2)</sup>	2)

- Note 1:** cos φ = 0.45 for I<sub>e</sub> ≤ 100 A; cos φ = 0.35 for I<sub>e</sub> > 100 A.  
**2:** The tests are to be carried out with an incandescent light load.  
**3:** The test data are to be derived from the test values for AC-3 or AC-4 according to Table VIIb, EN 60947-4-1.  
**4:** AC-3 category may be used for occasional inching (jogging) or plugging for limited time periods such as machine set-up; during such limited time periods the number of such operations should not exceed five per minute or more than ten in a ten minute period.  
**5:** A hermetic refrigerant compressor motor is a combination consisting of a compressor and a motor, both of which are enclosed in the same housing, with no external shaft or shaft seals, the motor operating in the refrigerant.

**Utilization categories for control switches to IEC 947-5-1 and EN 60947**

Type of current	Utilization category	Typical examples of application I = current made, I <sub>c</sub> = current broken I <sub>e</sub> = rated operational current U = voltage before make U <sub>r</sub> = rated operational voltage U <sub>i</sub> = recovery voltage t <sub>0.95</sub> = time in ms to reach 95 % of the steady-state current P = U <sub>e</sub> × I <sub>e</sub> = rated power consumption in watts	Normal conditions of use						Abnormal conditions of use						
			Make			Break			Make			Break			
			I <sub>e</sub>	I	U	cos φ	I <sub>c</sub>	U <sub>r</sub>	cos φ	I <sub>e</sub>	I	U	cos φ	I <sub>c</sub>	U <sub>r</sub>
AC	AC-12	Control of resistive and solid state loads as in opto-coupler input circuits	1	1	0.9	1	1	0.9	-	-	-	-	-	-	-
	AC-13	Control of solid state loads with transformer isolation	2	1	0.65	1	1	0.65	10	1.1	0.65	1.1	1.1	0.65	
	AC-14	Control of small electromagnetic loads (≤ 72 VA)	6	1	0.3	1	1	0.3	6	1.1	0.7	6	1.1	0.7	
	AC-15	Control of electromagnetic loads (> 72 VA)	10	1	0.3	1	1	0.3	10	1.1	0.3	10	1.1	0.3	

Type of current	Utilization category	Typical examples of application I = current made, I <sub>c</sub> = current broken I <sub>e</sub> = rated operational current U = voltage before make U <sub>r</sub> = rated operational voltage U <sub>i</sub> = recovery voltage t <sub>0.95</sub> = time in ms to reach 95 % of the steady-state current P = U <sub>e</sub> × I <sub>e</sub> = rated power consumption in watts	Normal conditions of use						Abnormal conditions of use						
			Make			Break			Make			Break			
			I <sub>e</sub>	I	U	t <sub>0.95</sub>	I <sub>c</sub>	U <sub>r</sub>	t <sub>0.95</sub>	I <sub>e</sub>	I	U	t <sub>0.95</sub>	I <sub>c</sub>	U <sub>r</sub>
DC	DC-12	Control of resistive and solid state loads as in opto-coupler input circuits	1	1	1	1 ms	1	1	1 ms	-	-	-	-	-	-
	DC-13	Control of electromagnets	1	1	6xP <sup>1)</sup>	1	1	6xP <sup>1)</sup>	1.1	1.1	6xP <sup>1)</sup>	1.1	1.1	6xP <sup>1)</sup>	
	DC-14	Control of electromagnetic loads having economy resistors in circuits	10	1	15 ms	1	1	15 ms	10	1.1	15 ms	10	1.1	15 ms	

- Note 1:** The value "6 x P" results from an empirical relationship which is found to represent most DC magnetic loads to an upper limit of P = 50 W, viz 6 x P = 300 ms. Loads having power consumption greater than 50 W are assumed to consist of smaller loads in parallel. Therefore, 300 ms is to be an upper limit, irrespective of the power consumption value.

**Utilization categories for switches, disconnectors, switch-disconnectors, and fuse combination units to IEC 947-3 and EN 60947**

Type of current	Utilization category	Typical applications I = current made, I <sub>c</sub> = current broken I <sub>e</sub> = rated operational current U = voltage before make U <sub>r</sub> = rated operational voltage U <sub>i</sub> = recovery voltage	Verification of electrical endurance						Verification of switching capacity							
			Make			Break			Make			Break				
			I <sub>e</sub>	I	U	cos φ	I <sub>c</sub>	U <sub>r</sub>	cos φ	I <sub>e</sub>	I	U	cos φ	I <sub>c</sub>	U <sub>r</sub>	cos φ
AC	AC-20 A(B) <sup>2</sup>	Connecting and disconnecting under no-load conditions	All values	1)	1)	1)	1)	1)	1)	All values	1)	1.05	1)	1)	1.05	1)
	AC-21 A(B) <sup>2</sup>	Switching of resistive loads, including moderate overloads	All values	1	1	0.95	1	1	0.95	All values	1.5	1.05	0.95	1.5	1.05	0.95
	AC-22 A(B) <sup>2</sup>	Switching of mixed resistive and inductive loads, including moderate overloads	All values	1	1	0.8	1	1	0.8	All values	3	1.05	0.65	3	1.05	0.65

LVSG



Utilization categories for switches, disconnectors, switch-disconnectors, and fuse combination units to IEC 947-3 and EN 60947																
Type of current	Utilization category	Typical applications I = current made, I <sub>c</sub> = current broken I <sub>o</sub> = rated operational current U = voltage before make U <sub>o</sub> = rated operational voltage U <sub>r</sub> = recovery voltage	Verification of electrical endurance						Verification of switching capacity							
			Make			Break			Make			Break				
			I <sub>e</sub> A	I <sub>c</sub> A	U <sub>o</sub> V	cos φ	I <sub>c</sub> A	U <sub>r</sub> V	cos φ	I <sub>e</sub> A	I <sub>c</sub> A	U <sub>o</sub> V	cos φ	I <sub>c</sub> A	U <sub>r</sub> V	cos φ
	AC-23 A(B) <sup>2</sup>	Switching of motor loads or other highly inductive loads	All values	1	1	0.65	1	1	0.65	I <sub>e</sub> ≤ 100 I <sub>e</sub> > 100	10 10	1.05 1.05	0.45 0.35	8 8	1.05 1.05	0.45 0.35

			I <sub>e</sub> A	I <sub>c</sub> A	U <sub>o</sub> V	L/R ms	I <sub>c</sub> A	U <sub>r</sub> V	L/R ms	I <sub>e</sub> A	I <sub>c</sub> A	U <sub>o</sub> V	L/R ms	I <sub>c</sub> A	U <sub>r</sub> V	L/R ms
DC	DC-20 A(B) <sup>2</sup>	Connecting and disconnecting under no-load conditions	All values	1 <sup>1)</sup>	1 <sup>1)</sup>	1 <sup>1)</sup>	1 <sup>1)</sup>	1 <sup>1)</sup>	1 <sup>1)</sup>	All values	1 <sup>1)</sup>	1.05	1 <sup>1)</sup>	1 <sup>1)</sup>	1.05	1 <sup>1)</sup>
	DC-21 A(B) <sup>2</sup>	Switching of resistive loads, including moderate overloads	All values	1	1	1	1	1	1	All values	1.5	1.05	1	1.5	1.05	1
	DC-22 A(B) <sup>2</sup>	Switching of mixed resistive and inductive loads, including moderate overloads (e.g. shunt motors)	All values	1	1	2	1	1	2	All values	4	1.05	2.5	4	1.05	2.5
	DC-23 A(B) <sup>2</sup>	Switching of highly inductive loads (e.g. series motors)	All values	1	1	7.5	1	1	7.5	All values	4	1.05	15	4	1.05	15

**Note 1:** If the switching device has a making and/or breaking capacity, the figures for the current and the power factor (time constants) must be stated by the manufacturer.  
**2:** A: frequent operation, B: infrequent operation.

### Protection against electrical shock, to IEC 536

IEC 536 covers the setting up of electrical apparatus, and its arrangement in electrical installations with rated voltages up to 1000 VAC and 1500 VDC, with regard to protection against direct contact where operating elements such as push-buttons and switches are located in the vicinity of live parts.

“Finger-proofing” relates only to the operating device, and only in the normal direction of operation. A clearance of at least 30 mm radius from the centre point of the device to any live parts, must be ensured.

The IP 20 degree of protection is superior to “finger-proofing” in that it embodies protection against contact with electrical apparatus in any direction. Devices which are “finger-proof” and of IP 00 degree of protection can be provided with further protection against contact in the form of shrouding, if so desired.

### Damp heat, constant, to IEC 68 Part 2-3

In this test, the effects of a constant high level of humidity (93 ±2/-3%) and a constant temperature (40 ±2)°C over a prescribed duration, are observed.

### Damp heat, cyclic, to IEC 68 Part 2 - 30, Test Db

This test is used to assess the suitability of electrical products for operation and storage at high relative humidity levels, in conjunction with cyclic temperature fluctuation. A test cycle consists of 12 hours at 40 ±2°C, with relative humidity of 93 ±3%, and 12 hours at 25 ±3°C, with the relative humidity of at least 95%.

### Ambient temperature

Ambient temperature is the temperature of the room (e.g. factory bay or switchgear room), in which the open or enclosed device is installed, a prerequisite being that this temperature is not significantly influenced by the heat losses from the device.

## ● Glossary of standard terms

This Glossary offers brief explanations of some of the standard terms used in this catalogue. However, it must not be regarded as a substitute for the actual text of the standard, especially where the new terms used in IEC 947 are concerned.

Reference is therefore made alongside each such term to the relevant section of the standard, e.g. IEC 947-1 in addition, IEC numbers are given to enable you to find foreign language equivalents in the International Electrotechnical Vocabulary (IEG 50), if required.

### Rated conditional short-circuit current $I_q$ (IEC 947-1; 2.5.29/IEV 441-17-20)

The prospective current which a switching device, e.g. a circuit-breaker, protected by a short-circuit protective device such as a motor-protective circuit-breaker, can carry for the duration of the protective device tripping time.

### Minimum command time

Minimum duration for a trip-initiating factor (control pulse, short circuit) to effect the corresponding reaction, e.g. the short-circuit duration necessary to initiate tripping.

### Rated breaking capacity (IEC 947-1; 4.3.5.3)

The r.m.s. value of current which a switching device is capable of breaking according to its utilization category. The rated breaking capacity is stated by reference to the rated operational voltage and the rated operational current.

The equipment must be capable of breaking any value of current up to and including its rated breaking capacity stated.

### Rated actuating voltage $U_c$ (rated control circuit voltage) (IEC 947-1; 4.5.1)

The voltage which is applied to the actuating make contact in a control circuit. Due to the presence in the control circuit of transformers or resistors, this voltage may differ from the rated control supply voltage.

### Rated service short-circuit breaking capacity $I_{cs}$ (IEC 947-2; 4.3.5.2.2)

The prospective short-circuit current which, depending on the rated operational voltage, a circuit-breaker is capable of breaking repeatedly (test cycle: O - CO - CO; previously P-2). After interrupting this current value, the circuit-breaker must be capable, despite its own thermal level having increased, of continuing to carry and disconnect in the event of overloading, the rated uninterrupted current.

### Rating or rated power (IEC 947-1; 4.3.2.3)

The rated operational power which an equipment is capable of switching at the associated rated operational voltage in accordance with the utilization category.

For example:  
motor contactor utilization category AC-3: 37 kW at 400 V.

### Rated operational voltage $U_e$ (IEC 947-1; 4.3.1.1)

The voltage to which the characteristics of an equipment are referred. The rated operational current must not in any case exceed the rated insulation voltage.

### Rated operational current $I_e$ (IEC 947-1; 4.3.2.3)

The current which an equipment is capable of carrying taking into account the rated operational current, duration of operation, utilization category and ambient temperature.

### Rated uninterrupted current $I_u$ (IEC 947-1; 4.3.2.4)

The value of current which an equipment can carry in uninterrupted duty (i.e. for weeks, months or years).

### Rated making capacity (IEC 947-1; 4.3.5.2)

The value of current which an equipment is capable of switching On in accordance with the utilization category and at the rated operational voltage.

### Rated frequency (IEC 847-1; 4.3.3)

The frequency for which an equipment is designed and to which the other characteristic values are referred.

### Rated ultimate short-circuit breaking capacity $I_{cu}$ (IEC 947-2; 4.3.5.2.1)

The maximum prospective fault current which a circuit-breaker is capable of interrupting (test cycle: O - CO; previously P-1)

### Rated insulation voltage $U_i$ (IEG 947-1; 4.3.1 .2)

The voltage to which insulation tests and creepage distances of an equipment are referred. The maximum operational voltage must not in any case exceed the rated insulation voltage.

### Rated short-circuit breaking capacity $I_{cn}$ (IEC 947-1; 4.3.6.3)

The maximum value of current which an equipment is capable of switching Off at rated operational voltage and rated frequency, and without sustaining damage. It is expressed as r.m.s. value.

### Motor rating (IEC 947-1; 4.3.2.3)

Power output of a motor at the associated operational voltage.

### Rated control supply voltage $U_s$ (IEC 947-1; 4.5.1)

The voltage applied to the input terminals of the control circuit of an equipment. Due to the presence of transformers or resistors in the control circuit, this may differ from the rated actuating (control circuit) voltage.

**Rated impulse withstand voltage  $U_{imp}$**   
(IEC 947-1; 4.3.1 .3)

Measures the stability of the internal clearances of an equipment against overvoltage peaks. The utilization of suitable switchgear can ensure that overvoltages are prevented from transferring from the mains to deenergized system sections within it.

**Rated current  $I_n$**   
(of a circuit-breaker)  
(IEC 947-2; 4.3.2.3)

For circuit-breakers, this current value is equal to the uninterrupted current and the conventional free air thermal current.

**Protection against direct contact**

Design measures incorporated into equipment in order to prevent direct contact, i.e. without tools, with live parts of a system (finger proof, back-of-hand proof).

**Control circuit reliability**

Measures the probability of switching states arising during the lifespan of a contact, which would be interpreted as faults by downstream electronic controllers (PLCs). Control circuit reliability is expressed in values based on tests using standard limit values for signal inputs.

**Damp heat, constant**

This test subjects the equipment to an ambient temperature of 40°C at a constant humidity of 93%. At set intervals during the test, the electrical and mechanical function of the equipment are examined.

**Damp heat, cyclic**

This test subjects the equipment to cyclically changing climatic conditions: a cycle applies 40°C ambient temperature at 93% relative humidity for 12 hours, followed by 12 hours of 25°C at 95% relative humidity. At set intervals during the test, the electrical and mechanical function of the equipment are examined.

**Finger proof**

An equipment whose live parts cannot be touched by the operator during actuation is termed finger proof. This also affects operator activity on neighbouring switching devices. The finger proof area of a push-actuated operating medium is a circular area of at least 30 mm radius around the actuating element, and vertical to the direction of actuation.

Within this circular area, touch-critical parts must be located at not less than 80 mm depth under the actuating level.

**Utilization category**  
(IEC 947-1; 2.1 .18/IEV 441-17-19)

A combination of specified requirements relating to the condition in which the switching device or the fuse fulfills its purpose, selected to represent a characteristic group of practical applications. The specified requirements may concern, e.g. the values of making capacities, breaking capacities and other characteristic values, data concerning associated circuits, and the relevant conditions of use and behaviour.

(IEC 947-2; 4.4)

For circuit-breakers, the utilization category denotes whether the equipment is designed for selectivity using time delay (category B) or not (category A).

**Back-of-hand proof**

An equipment whose live parts cannot be touched by a sphere of 50 mm diameter, is regarded as back-of-hand proof.

**Altitude**

The density of air decreases with increasing altitude, and this reduces its insulating capacity as well as its heat transfer capability. The rated operational voltage and current of switching devices, conductors and motors as well as the tripping behaviour of thermal overload relays are affected by this.

Upon request, OMRON ELECTRONICS will supply information as to the suitability or otherwise of switchgear for operation at altitudes above the 2000 m limit specified by the standard.

**Conventional free air thermal current**  
(IEC 947-1; 4.3.2.1)

The maximum value of current which an equipment is capable of carrying for a minimum of eight hours without thermal overloading. As a rule, it corresponds to the maximum operational current.

**Creepage path**  
(IEC 947-1; 2.5.51/IEV 151-03-37)

The shortest distance along the surface of the insulating material between two conductive parts. The creepage distance is determined by the rated insulation voltage, the pollution degree and the creepage current resistance of the material used.

**Clearance**  
(IEC 947-1; 2.5.46/IEV 441-17-31)

The distance between two conductive parts along a string stretched the shortest way between these conductive parts. The clearance in air is determined by the rated impulse withstand voltage, overvoltage category and pollution degree.

### Emergency-stop switching device

Switching device within an emergency-stop circuit which is intended to prevent danger to persons, damage to machinery or working materials.

### Opening delay (IEV 441-17-36)

The interval of time between the specified instant of initiation of the opening operation and the instant when the arcing contacts have separated in all poles. The opening time is the sum of the tripping time and the inherent delay of the contacts.

### Closing delay

The interval of time between the instant of command and the first make operation of the contacts of the first pole to close. The closing delay is made up of the response delay and the closing time.

### Shock resistance

The capacity of an equipment to withstand pulse-like motions without changing its operating status or sustaining damage. No contact lifting must take place on devices in the On position, the main contacts must not knock against each other in the Off position. A safety switch must not trip, and control circuit switches must not change their switching status.

### Safe isolation (IEC 536, DIN VDE 0106 Part 101)

Isolation of circuits not carrying dangerous voltages (e.g. protective extra-low voltage) from circuits in which dangerous voltages flow. Such isolation is achieved by means of reinforced or double insulation which reliably prevents voltage transfer from one circuit to another. This might otherwise take place between main circuits and control circuits in switching devices or between transformer primary and secondary. "Safe isolation" is a priority requirement for safety circuits and functional low-voltage circuits.

### Isolating function (IEC 947-1; 2.1.19)

Equipments are deemed to possess this isolating function provided their switching contacts when in the open position, achieve the separation distance prescribed for the isolation of electrical circuits, and their creepage paths and clearance distances are of the required size. The power supply to the entire installation or a section of the installation can thus be cut off for safety reasons, e.g. during maintenance.

### Tamper proof

An emergency-stop switching device is regarded as tamper proof provided it cannot be reset without tools or via a prescribed procedure, after tripping has taken place. The device latches in the tripped position. Accidental or deliberate manipulation (inching) is thus ruled out.

### Overvoltage category (IEC 947-1; 2.5.60)

Conventional number for prospective overvoltages at the point of installation, as might be caused for example by the effect of lightning or switching processes. The overvoltage category applicable to industrial switchgear is III. The applicability of switchgear according to the overvoltage categories is defined as follows:

#### Overvoltage category IV:

Use allowed directly at the termination point of the installation (directly affected by any lightning), e.g. at an overhead line connection point.

#### Overvoltage category III:

Operating media with special requirements as to the serviceability for connection in fixed installations, which are protected by overvoltage diversion measures, e.g. circuit-breakers in low-voltage distribution systems or in control systems for industrial use.

#### Overvoltage category II:

Power consumers for connection to fixed installations, e. g. household appliances, electrical tools.

#### Overvoltage category I:

Operating media for connection to circuits containing overvoltage protection schemes, e.g. electronic devices.

### Ambient temperature, open (IEV 441-11-13)

Room temperature for example of the workshop or switch room in which the switching device is located.

### Ambient temperature, enclosed (IEV 441-11-13)

Temperature at which the switching device is capable of being operated within a closed housing. For this purpose, it must be taken into account that the heat losses of the device will add to the internal temperature rise within the enclosure.

### Losses (IEV 151-03-18)

The difference between the input power and the output power of a device. The main type of loss in electrical power distribution switchgear and operating media is current heat loss.

### Pollution degree (IEC 947-1; 6.1.3.2)

Conventional number for the prospective quantities of conductive dust and humidity which can lead to a reduction in the control circuit reliability of a device. The pollution degree is described by the following influencing factors:

#### Pollution degree 1:

No pollution or only dry, non-conductive pollution occurs. The pollution does not affect the control circuit reliability.

#### Pollution degree 2:

Usually, only non-conductive pollution. However, transient conductivity through condensation is to be expected.

#### Pollution degree 3: (switchgear for industrial use)

Conductive pollution or dry, non-conductive pollution which is rendered conductive through condensation.

#### Pollution degree 4:

The pollution leads to long-term conductivity, e.g. pollution by conductive dust, rain or snow.

### Coordination type

Status of a switchgear combination (motor starter) during and after testing at **rated conditional current**:

#### Coordination Type “1”:

- No risk to persons or installations
- No requirement for immediate readiness for renewed operation
- Damage to the starter is permissible

#### Coordination type “2”:

- No risk to persons or installations
- Starter is capable of renewed operation
- No damage to the starter with the exception of a slight welding of the contacts, provided they can be separated without significant deformation.

### Positive opening operation

(IEC 947-1; 2.4.11/IEV 441-16-12)

This opening operation is designed to ensure that auxiliary contacts of a switching device are always in the respective positions corresponding to the open or closed position of the main contacts. The contacts of a contactor are **interlocked opposing contacts**, pro-

vided they are mechanically linked in such a way as to ensure that normally open and normally closed contacts can never be closed simultaneously.

This arrangement must also ensure that minimum contact separation of 0.5 mm is maintained over the entire lifespan of the device, even during a fault, e.g. the welding of one contact.

The relevant German Trade Association requires the use of contactors with interlocked opposing contacts for control systems on power presses in the metal processing industry.

### Positive/enforced operation/actuation

This describes an arrangement where a link between the actuator and the switching element ensures that the force exerted on the actuator is transferred directly, i.e. without the intervention of sprung parts, onto the switching element.

### Positive opening

(IEC 947-1; 2.4.10/IEV 441-16-11)

An opening operation which ensures that the main contacts of a mechanical switching device have attained the open position when the actuator is in the Off-position.

## Symbols used in Technical Data and Formulae

DF	Duty factor	$I_{th}$	Conventional free air thermal current
$I_{cn}$	Rated short-circuit breaking capacity	$I_{the}$	Conventional thermal current of enclosed devices
$I_{cs}$	Rated service short-circuit breaking capacity	$I_u$	Rated uninterrupted current
$I_{cu}$	Rated ultimate short-circuit breaking capacity	$S_{NT}$	Transformer rating
$I_e$	Rated operational current	$U_c$	Rated actuating voltage
$I''_{sc}$	Transformer initial short-circuit current AC	$U_e$	Rated operational voltage
$I_n$	Rated current	$U_i$	Rated insulation voltage
$I_{NT}$	Rated transformer current	$U_{imp}$	Rated impulse withstand voltage
$I_q$	Rated conditional short-circuit current	$u_k$	Transformer short-circuit voltage
$I_r$	Set value of overcurrent release	$U_s$	Rated control voltage
$I_{rm}$	Response value of non-delayed short-circuit release		

## ● Additional ordering information for contactors

### CE-Marking

The manufacturer has to sign his products with the CE-Marking. With the CE-Marking the manufacturer confirms the accordance with the different EEC Directives. The CE-Marking is absolutely necessary to sell the products in the EEC.

Attached you find the EEC Directives concerning our products.

Low Voltage Directive (73/23/EEC)

EMC Directive (89/336/EEC)

Declarations of Conformity art. no. D586.. on request.

### Test Authorities, Registration Mark, Approvals













OMRON Low voltage switchgear is built and tested to national and international specifications. All devices suit all important specifications without any test obligation, like VDE, BS and also relative to IEC Recommendations and to European Standards like IEC 947 and EN 60947.



It is for this reason OMRON Low voltage switchgear is used all over the world. In order to provide special versions, limitations to the max. voltages, currents and power ratings or special markings are sometimes necessary.

OMRON Low voltage switchgear is also suitable for applications in marine environments.

They are classified in "Lloyd's Register of Shipping" and in the "Maritime Register of Shipping" (GUS). The "American Bureau of Shipping" does not claim a general approval for single components, the complete electrical equipment on board has to be approved. The devices should have UL- and CSA-approvals. Further information for Guide-No. and File-No. (CSA, UL) you will find on page 95.

For approved values see technical data of the devices.State deputy

Country	Canada	USA	Switzerland	Denmark	Norway	Sweden	Finland	Poland	Slowlia	Czech	Hungaria	
State deputy or private examination (state admitted)	CSA UL	UL	SEV	DEMKO	NEMKO	SEMKO	SETI	SEP	SKTC	EZU	MEEI	
Label marking of examination boards												
Duty of approvals	All switchgear	 Approval of switchgear commendable	No approval since 1.1.1994 Our devices are according to the harmonised European Standards e.g. EN 60947 (IEC 947, VDE 0660) and can be used generally									
Specification	UL is authorised for approvals acc. to Canadian Standards		Marking with approbation label is no longer necessary									

\*1) CSA-approvals are replaced by UL-approvals valid for USA and Canada. From 1. 1. 2000 switchgear will be marked with the combined approval. UL-mark  or  only.

### Explanations for choice and supply of low voltage switchgears in Canada and USA

Marking of auxiliary contacts

At several devices in UL-data are two voltages for auxiliary contacts mentioned (e. g.: 600 volts at same potential, 150 volts at different potentials). That means, if the voltage is higher than 150 volts, the control voltage applied to input terminals must be at the same potential



Low voltage switchgear for auxiliary circuits (e. g. contactor relays, control units, auxiliary contacts in general) usually approved for "Heavy Duty" or "Standard Duty" UL and besides these marked with the admissible max. voltage or with short codes (see table).



Marking of auxiliary contacts according to CSA and UL	Max. rated values per pole				Contact Rating Code Designation
	Voltage	Current		Cont. Current	
		Make	Break		
Heavy Duty (HD or HVY DTY)	AC 120	60	6	10	A150
	AC 240	30	3	10	A300
	AC 480	15	1,5	10	A600
	AC 600	12	1,2	10	A600
	DC 125	2,2	2,2	10	N150
	DC 250	1,1	1,1	10	N300
	DC 600	0,4	0,4	10	N600
Standard Duty (SD or STD DTY)	AC 120	30	3	5	B150
	AC 240	15	1,5	5	B300
	AC 480	7,5	0,75	5	B600
	AC 600	6	0,6	5	B600
	DC 125	1,1	1,1	5	P150
	DC 250	0,55	0,55	5	P300
	DC 600	0,2	0,2	5	P600

Marking of auxiliary contacts according to CSA and UL	Max. rated values per pole				Contact Rating Code Designation
	Voltage	Current		Cont. Current	
		Make	Break		
-	AC 120	15	1,5	2,5	C150
	AC 240	7,5	0,75	2,5	C300
	AC 480	3,75	0,375	2,5	C600
	AC 600	3	0,3	2,5	C600
	DC 125	0,55	0,55	2,5	Q150
	DC 250	0,27	0,27	2,5	Q300
	DC 600	0,1	0,1	2,5	Q600
-	AC 120	3,6	0,6	1	D150
	AC 240	1,8	0,3	1	D300
	DC 125	0,22	0,22	1	R150
	DC 250	0,11	0,11	1	R300
-	AC 120	1,8	0,3	0,5	E150





LVSG

Discernment at UL-Standards

Recognized Component Industrial Control Equipment	Listed Industrial Control Equipment
UL issues yellow "Guide cards" with Guide- and File-No.	UL issues white "Guide cards" with Guide- and File-No.
Devices have permission to be marked with  on the label	Devices have to be marked with the "UL-Listing Mark"  .
Devices as components approved for "factory wiring": devices for employment in control panels, when they are selected, mounted and wired according to the charging conditions by skilled worker.	Devices approved for "field wiring", a) devices for employment in control panels, when they are mounted and wired by skilled worker. b) devices for retail in USA
Valid UL-Standards: UL 508, "Standard for Industrial Control Equipment" (partly limited)	Valid UL-Standards: UL 508, "Standard for Industrial Control Equipment" (unlimited) UL 486 "Standard for Wire Connectors and Soldering Lugs"

Are devices approved as "Listed Equipment"  the approval is also valid for using as "Recognized Component" .



Approvals

Country	USA, Canada		Switzerland	Europe	Register of Shipping			CENELEC CB-Certificates
	UL 		SEV 		Great Britain LRS	GUS MRS	Italy RINA	
Type								
Mini Contactors J7KNA and Accessories								
J7KNA-AR...(D)	o	-	-	o	-	-	-	o
J7KNA-09...(D)	o	-	-	o	-	-	-	o
J7KNA-12...(D)	o	-	-	o	-	-	-	-
J73KN-A..., J73KN-AM	o	-	-	o	-	-	-	o
Contactors Series J7KN								
J7KN-10...(D)	o	-	-	o	-	-	-	o
J7KN-14...(D)	o	-	-	o	-	-	-	o
J7KN-18...(D)	o	-	-	o	-	-	-	o
J7KN-22...(D)	o	-	-	o	-	-	-	o
J7KN-24...(D)	o	-	-	o	-	-	-	o
J7KN-32...(D)	o	-	-	o	-	-	-	o
J7KN-40...(D)	o	-	-	o	-	-	-	o
J7KN-50...(D)	o	-	-	o	-	-	-	o
J7KN-62...(D)	o	-	-	o	-	-	-	o
J7KN-74...(D)	o	-	-	o	-	-	-	o
J7KN-85...(D)	o	-	-	o	-	-	-	o
J7KN-110...(D)	o	-	-	o	-	-	-	o
J7KN-150...	-	-	-	o	-	-	-	-
J7KN-175...	-	-	-	o	-	-	-	-
J7KN-200...	-	-	-	o	-	-	-	-
Accessories								
J73N-KB...	o	-	-	o	-	-	-	o
J73N-KC-115	o	-	-	o	-	-	-	x
J74KN-B-PT...	o	-	-	o	-	-	-	-
J74KN-A-VG...	o	-	-	o	-	-	-	-
J74KN-B-VG	-	-	-	o	-	-	-	-
Thermal Overload Relays								
J7TKN-B	o	-	-	o	-	-	-	x
J7TKN-C	o	-	-	o	-	-	-	x
J7TKN-D	o	-	-	o	-	-	-	x
J7TKN-A	o	-	-	o	-	-	-	o
J7TKN-E	o	-	-	o	-	-	-	o
J7TKN-F	-	-	-	o	-	-	-	-

o In Standard version approved    x In Test    - Not provided for test until now

 and -Guide- and File-No.

These data are important for UL-inspecting

Devices	Guide-No. 			
	Kanada	USA	Kanada	USA
Contactors	NLDX7	NLDX	NLDX8	NLDX2
Accessories	NKCR7	NKCR	NKCR8	NKCR2
Thermal Overload Relays	NKCR7	NKCR	-	-
Circuit Breakers J7MN as Manual Motor Controller	NLRV7	NLRV	-	-
Circuit Breakers J7MN as Combination Motor Controller	NKJH7	NKJH	-	-
J7MN Bus Bar Assemblies	NLRV7	NLRV	-	-
J7MN Accessories	NKCR7	NKCR	-	-

LVSG



## ■ Technical information

### Degree of protection acc. to EN60947

Protection ratings are prefixed by the internationally agreed letters IP followed by two digits.

1<sup>st</sup> digit: Pertains to solid objects

2<sup>nd</sup> digit: Pertains to water.

1 <sup>st</sup> digit	Short description	Definition
1	Protected against solid objects greater than 50 mm	Excludes solid objects exceeding 50 mm in diameter and protects against contact with live and moving parts by a large body surface such as a hand (but not against deliberate access).
2L	Protected against solid objects greater than 12,5 mm and against contact by standard test finger	Excludes solid objects exceeding 12,5 mm in diameter and protects against contact with live and moving parts by a standard test finger or similar objects not exceeding 80 mm in length.
3	Protected against solid objects greater than 2,5 mm	Excludes solid objects exceeding 2,5 mm in diameter or thickness.
4	Protected against solid objects greater than 1 mm	Excludes solid objects exceeding 1 mm in diameter or thickness.
5	Dust protected	Prevents ingress of dust in quantities and locations that would interfere with the intended operation of the equipment.
6	Dust tight	Prevents ingress of dust.


2 <sup>nd</sup> digit	Short description	Definition
1	Protected against dripping water	Dripping water (vertically falling drops) shall have no harmful effect.
2	Protected against dripping water when tilted up to 15°	Vertically dripping water shall have no harmful effect when the enclosure is tilted at any angle up to 15° from its normal position.
3	Protected against spraying water	Water falling as a spray at an angle up to 60° from the vertical shall have no harmful effect.
4	Protected against splashing water	Water splashed against the enclosure from any direction shall have no harmful effect.
5	Protected against water jets	Water protected by a nozzle against the enclosure from any direction shall have no harmful effect.
6	Protected against heavy seas	Water from heavy seas or water projected in powerful jets shall not enter the enclosure in harmful quantities.
7	Protected against the effects of immersion	Ingress of water in a harmful quantity shall not be possible when the enclosure is immersed in water under standard conditions of pressure and time.
8	Protected against submersion	No ingress of water.

### Terminal markings acc. to EN50011

Auxiliary contacts of AC contactors and contacts of contactor relays and thermal overload relays are particularly marked. The terminal markings of normally-open contacts are printed as positive figures, they of normally-closed contacts as negative figures.

This gives a clear indication of the function of the contacts.

The figure below illustrates the determination of terminal markings for contactors with auxiliary contact blocks.

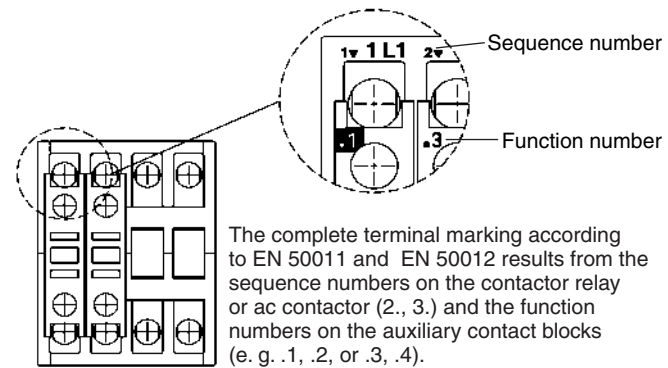

### Resistance to climatic conditions acc. to IEC 68

Open-type devices are climate-resistant in the constant climate according to IEC 68-2-3 (this is a climate with an ambient temperature of 40°C and an atmospheric humidity of 90 to 95%).

Enclosed devices are climate-resistant in an alternating climate according to IEC 68-2-30 (this is a moist alternating climate with a 24-hour cycle between climates with an ambient temperature of 25°C, and an atmospheric humidity of 95 to 100% and an ambient temperature of 40°C, and an atmospheric humidity of 90 to 96% in the presence of condensation during rises in temperature).

Data are valid up to an altitude of 2000m above sea level.


### Short circuit protection

Back up fuses should be used to protect contactors and starters against short circuits. For starters the device with the smaller admissible fuse at the main and at the control circuit (contactor or thermal overload) determines the fuse size.

After a short circuit devices have to be checked for correct operation.

Disconnect power before proceeding with any work on the equipment!

Mounting positions of contactors

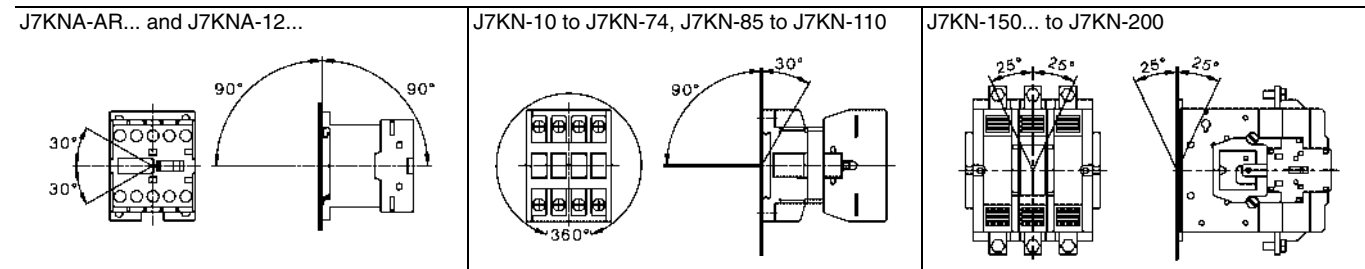

Terminal screws

Devices	Kind of connection		Devices	Kind of connection	
	Screw with washer	Screw with clamp box		Screw with washer	Screw with clamp box
<b>Mini Contactors</b>					
All conductors					
J7KN-AR...; J7KNA-09...; J7KNA-12...	M3,5	-			
<b>Contactors</b>					
Main conductor					
J7KN-10... to J7KN-22...	M3,5	-			
J7KN-24... to J7KN-40...	-	M5			
J7KN-50... to J7KN-74...	-	M6			
J7KN-85..., J7KN-110...	-	M8			
Auxiliary conductor					
J7KN-10... to J7KN-22...	M3,5	-			
J7KN-85... to J7KN-110	M3,5	-			
<b>Thermal Overload Relays</b>					
Main conductor					
J7TKN-A	M4	-			
J7TKN-B	M3,5	-			
J7TKN-C	M5	-			
J7TKN-D	-	M6			
Auxiliary conductor					
All devices	M3,5	-			

Terminal screws in relation to screwdriver sizes and tightening torques

Terminal screws	Size	Pozidriv	Screw driver	Tightening torque	
				Nm	lb. inch
Screw with Pozidriv and slot	M3	Pz 1	Size 1	0,6 - 1,2	5 - 11
	M3,5	Pz 2	Size 2, 3	0,8 - 1,4	7 - 12
	M4	Pz 2	Size 3, 4	1,2 - 1,8	11 - 16
	M5	Pz 2	Size 3, 4, 5	2,5 - 3	22 - 26
	M6	Pz 3	Size 4, 5	3,5 - 4,5	31 - 40
Screw or nut with hexagonal-head	M8	-	-	6 - 10	53 - 88

LVSG

● General technical information

■ Current carrying capacities of PVC insulated 600/1000 Volt cables with copper or aluminium conductors.

In accordance with the 16th edition of the "Wiring Regulations for Electrical Installations".

Basic assumptions: Ambient temperature of 30°C.

Circuit of protected by a OMRON circuit-breaker to IEC 947-2, or a fuse to BS 88 or BS 1361.

Figures must be adjusted by the correction factors for ambient temperature and/or cable grouping as detailed in the IEE regs.

Conductor size mm <sup>2</sup>	In conduit or trunking (enclosed)				Clipped to surface or cable tray, bunched, embedded in plaster (unenclosed)				Fixed to vertical surface of wall or open cable trench with 20 mm separation between cables and wall			
	Single-phase		Three-phase		Single-phase		Three-phase		Single-phase		Three-phase	
	Cu [A]	Al [A]	Cu [A]	Al [A]	Cu [A]	Al [A]	Cu [A]	Al [A]	Cu [A]	Al [A]	Cu [A]	Al [A]
Single core, PVC insulated cable non-armoured, copper or aluminium conductors.												
1.0	13.5	-	12.0	-	15.5	-	14.0	-	-	-	-	-
1.5	17.5	-	15.5	-	20.0	-	18.0	-	-	-	-	-
2.5	24.0	-	21.0	-	27.0	-	25.0	-	-	-	-	-
4.0	32.0	-	28.0	-	37.0	-	33.0	-	-	-	-	-
6.0	41.0	-	36.0	-	47.0	-	43.0	-	-	-	-	-
10.0	57.0	-	50.0	-	65.0	-	59.0	-	-	-	-	-
16.0	76.0	-	68.0	-	87.0	-	79.0	-	-	-	-	-
25.0	101.0	-	89.0	-	114.0	-	104.0	-	126.0	-	112.0	-
35.0	125.0	-	110.0	-	141.0	-	129.0	-	156.0	-	141.0	-
50.0	151.0	118.0	134.0	104.0	182.0	134.0	167.0	123.0	191.0	144.0	172.0	132.0
70.0	192.0	150.0	171.0	133.0	234.0	172.0	214.0	156.0	246.0	185.0	223.0	169.0
95.0	232.0	181.0	207.0	161.0	284.0	210.0	261.0	194.0	300.0	225.0	273.0	206.0
120.0	296.0	210.0	239.0	186.0	330.0	245.0	303.0	226.0	349.0	261.0	318.0	240.0
150.0	300.0	234.0	262.0	204.0	381.0	283.0	349.0	261.0	404.0	301.0	369.0	277.0
185.0	341.0	266.0	296.0	230.0	436.0	324.0	400.0	299.0	463.0	344.0	424.0	317.0
240.0	400.0	312.0	346.0	269.0	515.0	384.0	472.0	354.0	549.0	407.0	504.0	375.0
300.0	458.0	358.0	394.0	306.0	594.0	444.0	545.0	410.0	635.0	469.0	584.0	435.0
400.0	546.0	-	467.0	-	694.0	-	634.0	-	732.0	-	679.0	-
500.0	626.0	-	533.0	-	792.0	-	723.0	-	835.0	-	778.0	-
630.0	720.0	-	611.0	-	904.0	-	826.0	-	953.0	-	892.0	-
Twin and multi-core PVC insulated cable, non-armoured, copper or aluminium conductors.												
1.0	11.0	-	11.5	-	15.0	-	13.5	-	17.0	-	14.5	-
1.5	14.0	-	15.0	-	19.5	-	17.5	-	22.0	-	18.5	-
2.5	18.5	-	20.0	-	27.0	-	24.0	-	30.0	-	25.0	-
4.0	25.0	-	27.0	-	36.0	-	32.0	-	40.0	-	34.0	-
6.0	32.0	-	34.0	-	46.0	-	41.0	-	51.0	-	43.0	-
10.0	43.0	-	46.0	-	63.0	-	57.0	-	70.0	-	60.0	-
16.0	57.0	54.0	62.0	48.0	85.0	66.0	76.0	59.0	94.0	73.0	80.0	61.0
25.0	75.0	71.0	80.0	62.0	112.0	83.0	96.0	73.0	119.0	89.0	101.0	78.0
35.0	92.0	86.0	99.0	77.0	138.0	103.0	119.0	90.0	148.0	111.0	126.0	96.0
50.0	110.0	104.0	118.0	92.0	168.0	125.0	144.0	110.0	180.0	135.0	153.0	117.0
70.0	139.0	131.0	149.0	116.0	213.0	160.0	184.0	140.0	232.0	173.0	196.0	150.0
95.0	167.0	157.0	179.0	139.0	258.0	195.0	261.0	170.0	282.0	210.0	238.0	183.0
120.0	192.0	-	206.0	160.0	299.0	245.0	259.0	197.0	328.0	-	276.0	212.0
150.0	219.0	-	225.0	184.0	344.0	283.0	299.0	227.0	379.0	-	319.0	245.0
185.0	248.0	-	255.0	210.0	392.0	324.0	341.0	259.0	434.0	-	364.0	280.0
240.0	291.0	-	297.0	248.0	461.0	384.0	403.0	305.0	514.0	-	430.0	330.0
300.0	334.0	-	339.0	258.0	530.0	444.0	464.0	351.0	593.0	-	497.0	381.0
400.0	-	-	402.0	-	634.0	-	557.0	-	715.0	-	597.0	-

■ Overall diameter of cables (Copper)

The dimensions are based on BS specification or the average values as given by the manufacturers.  
The overall diameters given are for cables of 600/1000 V grade.

Number and nominal area of cables (mm <sup>2</sup> )	Approx. overall diameter in mm		Number and nominal area of cables (mm <sup>2</sup> )	Approx. overall diameter in mm	
	PVC/SWA	PVC		PVC/SWA	PVC
1 x 1.0	-	4.5	2 x 1.0	-	-
1 x 1.5	-	4.9	2 x 1.5	11.7	7.2
1 x 2.5	-	5.8	2 x 2.5	13.1	8.6
1 x 4.0	-	6.8	2 x 4.0	15.1	10.7
1 x 6.0	-	7.4	2 x 6.0	16.5	12.0
1 x 10.0	-	8.8	2 x 10.0	20.1	14.9
1 x 16.0	-	10.5	2 x 16.0	21.9	17.2
1 x 25.0	-	12.5	2 x 25.0	23.0	18.4
1 x 35.0	-	13.5	2 x 35.0	24.9	20.1
1 x 50.0	19.1	15.1	2 x 50.0	27.8	22.8
1 x 70.0	21.1	16.9	2 x 70.0	30.4	25.5
1 x 95.0	23.4	19.4	2 x 95.0	35.5	29.3
1 x 120.0	26.3	21.0	2 x 120.0	38.0	31.8
1 x 150.0	28.3	23.2	2 x 150.0	41.3	35.1
1 x 185.0	30.8	25.8	2 x 185.0	46.4	39.1
1 x 240.0	34.1	29.0	2 x 240.0	51.2	43.9
1 x 300.0	37.0	32.1	2 x 300.0	56.4	48.7
1 x 400.0	42.0	35.8	2 x 400.0	61.9	54.2
1 x 500.0	45.6	39.6	-	-	-
1 x 630.0	49.7	43.8	-	-	-


Number and nominal area of cables (mm <sup>2</sup> )	Approx. overall diameter in mm		Number and nominal area of cables (mm <sup>2</sup> )	Approx. overall diameter in mm	
	PVC/SWA	PVC		PVC/SWA	PVC
3 x 1.0	-	-	4 x 1.0	-	-
3 x 1.5	12.3	7.6	4 x 1.5	13.0	8.3
3 x 2.5	13.6	9.1	4 x 2.5	14.5	10.0
3 x 4.0	15.8	11.5	4 x 4.0	17.8	12.6
3 x 6.0	18.0	12.8	4 x 6.0	19.2	14.2
3 x 10.0	21.2	15.8	4 x 10.0	22.8	17.7
3 x 16.0	23.1	19.7	4 x 16.0	26.3	20.6
3 x 25.0	25.0	20.4	4 x 25.0	27.8	22.9
3 x 35.0	27.3	22.4	4 x 35.0	30.5	25.4
3 x 50.0	30.5	25.5	4 x 50.0	35.4	29.2
3 x 70.0	35.0	28.7	4 x 70.0	39.2	33.0
3 x 95.0	39.3	33.3	4 x 95.0	44.3	38.3
3 x 120.0	42.2	36.3	4 x 120.0	49.3	41.8
3 x 150.0	47.5	40.0	4 x 150.0	53.6	46.3
3 x 185.0	51.9	44.6	4 x 185.0	59.0	61.3
3 x 240.0	57.8	50.1	4 x 240.0	65.7	58.0
3 x 300.0	63.2	55.6	4 x 300.0	72.0	64.6
3 x 400.0	69.6	62.2	4 x 400.0	81.3	72.0

LVSG

■ Conversion table

To convert	Multiply by
Inches to millimeters (mm)	25.4
Millimeters to inches (In.)	0.03937
Feet to meters (m)	0.3048
meters to feet (ft)	3.2808
Yards to meters (m)	0.9144
meters to yards (yd)	1.0936
Miles to kilometers (km)	1.6093
Kilometers to miles (mil.)	0.6214
Square inches to square millimeters (mm <sup>2</sup> )	645.16
Square millimeters to square inches (inch <sup>2</sup> )	0.00155
Square yards to square meters (m <sup>2</sup> )	0.8361
Square meters to square yards (yd <sup>2</sup> )	1.196
Cubic inches to cubic centimeters (cm <sup>3</sup> )	16.387
Cubic centimeters to cubic inches (inch <sup>3</sup> )	0.06102
Pounds to kilogrammes (kg)	0.4536
Kilogrammes to pounds (lb)	2.2046
Tons (2,240 lb) to kilogrammes (kg)	1,016.05
Kilogrammes to tons (240 lb)	0.0009842
Ounces (avoirdpois) to grammes (g)	28.3495
Grammes to ounces	0.0353
Gallons to litres (l)	4.561
Litres to gallons	0.220
Force N (newtons) to lbft 1 N = 1 kg (mass) accelerated at 1 metre/sec.	0.225
1 Nm = 1 J (joule) to calorie	0.239
Horse-power to kilowatts (kW)	0.7458
Kilowatts to horse-power (h.p.) 1 W (watt) = 1J/s	1.3408
Atmospheres to lb per square inch (lb/inch <sup>2</sup> ) 1 bar = 1 kg/cm <sup>2</sup> = 735.6 mm Hg = 14.2 lb/inch <sup>2</sup>	14.68

Conversion table for:  
Centigrade/Fahrenheit

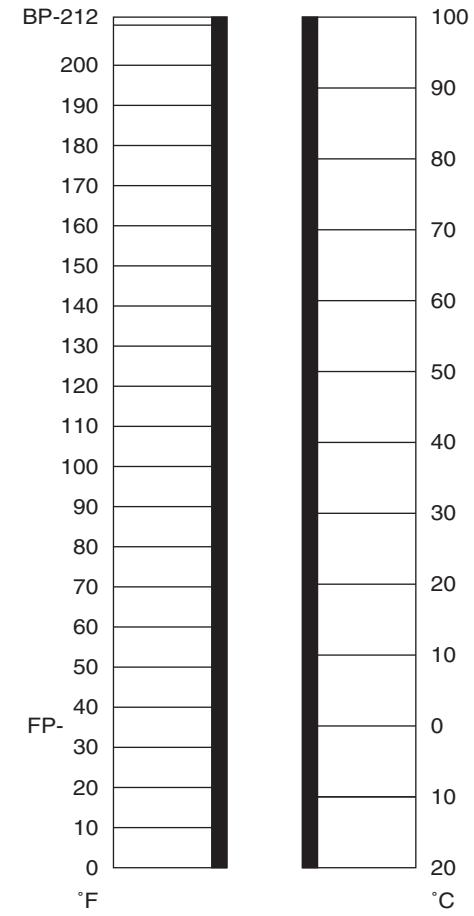

Conversion table for mm<sup>2</sup>/AWG cable sizes

mm <sup>2</sup>	AWG
0.75	18
1.0	17
1.5	16
2.5	13
4.0	12
6.0	10
10.0	8

■ **Rated currents of 3-phase motors (approx. figures for squirrel-cage motors)**

**Minimum fuse size for protection of 3-phase motors**

The maximum size is determined by the requirements of the switchgear or overload relay.

The rated motor currents are for standard 1500 r.p.m. 3-phase enclosed ventilated and totally enclosed fan-cooled motors.

D.O.L. starting: Maximum starting current 6 x rated motor current. Maximum starting time 5 s.

Y/D starting: Maximum starting current 2 x rated motor current. Maximum starting time 15 s.

Set overload relay in the phase lead to 0.58 x rated motor current.

Rated fuse currents for Y/D starting are also valid for 3-phase motors with slip-ring motors.

For higher rated currents, starting currents and/or longer starting times, larger fuses are required.

Table is valid for "slow" and/or "gL" fuses (DIN VDE 0636).

For NH fuses with aM characteristics, fuses = rated current is selected.

Motor rating			230 V			400 V			415 V		
			Rated motor current	Fuse starting D.O.L.	Y/Δ	Rated motor current	Fuse starting D.O.L.	Y/Δ	Rated motor current	Fuse starting D.O.L.	Y/Δ
kW	cos φ	η %	A	A	A	A	A	A	A, BS	A, BS	
0.06	0.7	58	0.37	2.0	-	0.21	2.0	-	0.21	2.0	2
0.09	0.7	60	0.54	2.0	-	0.31	2.0	-	0.30	2.0	2
0.12	0.7	60	0.72	4.0	2	0.41	2.0	-	0.40	2.0	2
0.18	0.7	62	1.04	4.0	2	0.6	2.0	-	0.58	2.0	2
0.25	0.7	62	1.4	4.0	2	0.8	4.0	2	0.8	4.0	2
0.37	0.72	66	2.0	6.0	4	1.1	4.0	2	1.1	4.0	2
0.55	0.75	69	2.7	10.0	4	1.5	4.0	2	1.5	6.0	4
0.75	0.79	74	3.2	10.0	4	1.9	6.0	4	1.8	6.0	4
1.1	0.81	74	4.6	10.0	6	2.6	6.0	4	2.6	10.0	6
1.5	0.81	74	6.3	16.0	10	3.6	6.0	4	3.5	16.0	10
2.2	0.81	78	8.7	20.0	10	5.0	10.0	6	4.8	16.0	10
3.0	0.82	80	11.5	25.0	16	6.6	16.0	10	6.4	20.0	16
4.0	0.82	83	14.8	32.0	16	8.5	20.0	10	8.2	20.0	16
5.5	0.82	86	19.6	32.0	25	11.3	25.0	16	10.9	25.0	20
7.5	0.82	87	26.4	50.0	32	15.2	32.0	16	14.6	35.0	25
11.0	0.84	87	38.0	80.0	40	21.7	40.0	25	20.9	50.0	32
15.0	0.84	88	51.0	100.0	63	29.3	63.0	32	28.2	80.0	40
18.5	0.84	88	63.0	125.0	80	36.0	63.0	40	35.0	80.0	50
22.0	0.84	92	71.0	125.0	80	41.0	80.0	50	40.0	80.0	50
30.0	0.85	92	96.0	200.0	100	55.0	100.0	63	53.0	100.0	80
37.0	0.86	92	117.0	200.0	125	68.0	125.0	80	65.0	125.0	80
45.0	0.86	93	141.0	250.0	160	81.0	160.0	100	78.0	125.0	80
55.0	0.86	93	173.0	250.0	200	99.0	200.0	125	96.0	160.0	100
75.0	0.86	94	233.0	315.0	250	134.0	200.0	160	129.0	250.0	160
90.0	0.86	94	279.0	400.0	315	161.0	250.0	200	155.0	250.0	160
110.0	0.86	94	342.0	500.0	400	196.0	315.0	200	189.0	315.0	200
132.0	0.87	95	401.0	630.0	500	231.0	400.0	250	222.0	355.0	250
160.0	0.87	95	486.0	630.0	630	279.0	400.0	315	269.0	355.0	315
200.0	0.87	95	607.0	800.0	630	349.0	500.0	400	337.0	450.0	355
250.0	0.87	95	-	-	-	437.0	630.0	500	421.0	500.0	450
315.0	0.87	96	-	-	-	544.0	800.0	630	525.0	630.0	560
400.0	0.88	96	-	-	-	683.0	1000.0	800	-	-	-
450.0	0.88	96	-	-	-	769.0	1000.0	800	-	-	-
500.0	0.88	97	-	-	-	-	-	-	-	-	-
560.0	0.88	97	-	-	-	-	-	-	-	-	-
630.0	0.88	97	-	-	-	-	-	-	-	-	-

LVSG

**Minimum fuse size for protection of 3-phase motors**

The maximum size is determined by the requirements of the switchgear or overload relay.

The rated motor currents are for standard 1500 r.p.m. 3-phase enclosed ventilated and totally enclosed fan-cooled motors.

D.O.L. starting: Maximum starting current 6 x rated motor current. Maximum starting time 5 s.

Y/D starting: Maximum starting current 2 x rated motor current. Maximum starting time 15 s.

Set overload relay in the phase lead to 0.58 x rated motor current.

Rated fuse currents for Y/D starting are also valid for 3-phase motors with slip-ring motors.

For higher rated currents, starting currents and/or longer starting times, larger fuses are required.

Table is valid for "slow" and/or "gL" fuses (DIN VDE 0636).

**For NH fuses with aM characteristics, fuses = rated current is selected.**

Motor rating			500 V			600 V		
			Rated motor current	Fuse starting D.O.L.	Y/Δ	Rated motor current	Fuse starting D.O.L.	Y/Δ
kW	cos φ	η %	A	A	A	A	A	A
0.06	0.7	58	0.17	2.0	-	0.12	2.0	-
0.09	0.7	60	0.25	2.0	-	0.18	2.0	-
0.12	0.7	60	0.33	2.0	-	0.24	2.0	-
0.18	0.7	62	0.48	2.0	-	0.35	2.0	-
0.25	0.7	62	0.70	2.0	-	0.50	2.0	-
0.37	0.72	66	0.90	2.0	2	0.70	2.0	-
0.55	0.75	69	1.20	4.0	2	0.90	4.0	2
0.75	0.79	74	1.50	4.0	2	1.10	4.0	2
1.1	0.81	74	2.1	6.0	4	1.5	4.0	2
1.5	0.81	74	2.9	6.0	4	2.1	6.0	4
2.2	0.81	78	4.0	10.0	4	2.9	10.0	4
3.0	0.82	80	5.3	16.0	6	3.8	10.0	4
4.0	0.82	83	6.8	16.0	10	4.9	16.0	6
5.5	0.82	86	9.0	20.0	16	6.5	16.0	10
7.5	0.82	87	12.1	25.0	16	8.8	20.0	10
11.0	0.84	87	17.4	32.0	20	12.6	25.0	16
15.0	0.84	88	23.4	50.0	25	17.0	32.0	20
18.5	0.84	88	28.9	50.0	32	20.9	32.0	25
22.0	0.84	92	33.0	63.0	32	23.8	50.0	25
30.0	0.85	92	44.0	80.0	50	32.0	63.0	32
37.0	0.86	92	54.0	100.0	63	39.0	80.0	50
45.0	0.86	93	65.0	125.0	80	47.0	80.0	63
55.0	0.86	93	79.0	160.0	80	58.0	100.0	63
75.0	0.86	94	107.0	200.0	125	78.0	160.0	100
90.0	0.86	94	129.0	200.0	160	93.0	160.0	100
110.0	0.86	94	157.0	250.0	160	114.0	200.0	125
132.0	0.87	95	184.0	250.0	200	134.0	250.0	160
160.0	0.87	95	224.0	315.0	250	162.0	250.0	200
200.0	0.87	95	279.0	400.0	315	202.0	315.0	250
250.0	0.87	95	349.0	500.0	400	253.0	400.0	315
315.0	0.87	96	436.0	630.0	500	316.0	500.0	400
400.0	0.88	96	547.0	800.0	630	396.0	630.0	400
450.0	0.88	96	615.0	800.0	630	446.0	630.0	630
500.0	0.88	97	-	-	-	491.0	630.0	630
560.0	0.88	97	-	-	-	550.0	800.0	630
630.0	0.88	97	-	-	-	618.0	800.0	630

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Industrial Relays](#) category:*

*Click to view products by [Omron](#) manufacturer:*

Other Similar products are found below :

[6-1617801-8](#) [6-1618107-9](#) [7-1618273-3](#) [EV250-4A-02](#) [EV250-6A-01](#) [FCA-125-CX8](#) [FCA-325-159](#) [FCA-410-138](#) [8000-S3121](#) [8-1618273-6](#)  
[8-1618393-1](#) [GCA63A220VAC60HZ](#) [GCA63A277VAC60HZ](#) [GCA63A600VAC60HZ](#) [1-1672275-3](#) [1-1833005-4](#) [H-16/S1](#) [A711Z](#) [H-8C](#)  
[H-8/S11](#) [H-8/S68](#) [ACC530U20](#) [ACC730U30](#) [RF303ZM4-12](#) [DH18DA](#) [1423675-8](#) [AR4-15F13-C01](#) [AR7-41F11](#) [AVR907](#) [15732A200](#)  
[B07B032AC1-0329](#) [B329](#) [B490A](#) [1618279-1](#) [BHR124Y](#) [1810DDB-SX](#) [N417](#) [P30C42A12D1-120](#) [2-1617748-6](#) [2-1618375-1](#) [2-1618396-6](#)  
[2-1618398-1](#) [JMAPD-5XL](#) [JMGACD-5M](#) [JMGSC-5LW](#) [JMGSCD-5L](#) [PBO-18A1218](#) [PBO-40A3040](#) [K8DSPH1200480VAC](#) [KA-3C-12A](#)