Programmable Relay

ZEN V2 Units

CSM_ZEN_DS_E_5_1

Even Broader Applications with Increased Functionality and Higher Precision

- Increased functionality in a compact body (70 mm wide × 90 mm high).
- Easy programming is available using the LCD and operation buttons. (See note 1.)
- This single Unit easily provides relay, timer, counter, and time switch functions.
- Expansion is easy with Expansion I/O Units, allowing up to 44 I/O points. (See note 2.)
- Economy-type and Communications-type CPU Units have been added to series.
- Improved Weekly Timers (See note 1.)
 Increased timing accuracy with a monthly deviation of ±15 s max. Multiple-day operation and pulse output operation have been added.
- Select from two power supply options: 100 to 240 VAC or 12 to 24 VDC.

Note: 1. Not supported for ZEN-\(\subseteq C2\(\subseteq -\subseteq -V2\) models.

2. When using CPU Units with 20 I/O points.

The information in this document applies to V2 Units. Refer to page 28 for details on differences with previous products.








Refer to Safety Precautions on page 33

Features

■ Easy and Simple Programming for Automatic Small-scale Control

Saves Space, Wiring, and Installation Steps

- \bullet Versatile functionality in a compact body (70 mm wide $\times\,90$ mm high).
- This single Unit easily provides relay, timer, counter, and time switch functions. Wiring work is greatly reduced because separate wiring is not required for devices such as timers and counters.



Easy Programming

The LCD screen comes with 8 operation buttons on the front panel to enable programming in ladder view format. The LCD screen also has a backlight, making it easier to see when the ZEN is used in dark locations.

Note: Not supported for ZEN-\(\text{C2}\(\text{\pi}\)-\(\text{\pi}\)-V2 models.



ZEN V2 Units

Flexible Expansion Enables Up to 44 I/O Points

Up to three Expansion I/O Units can be connected if there are not enough I/O points. Expansion I/O Units are only 35 mm wide.

Note: CPU Units with 10 I/O points can be expanded to 34 I/O points. Expansion I/O Units cannot be connected to Economy-type CPU Units.



Support Software with Simulation Function

- Programs can be easily written, saved, and monitored by personal computer.
- Programs can be simulated on the personal computer without connecting to the ZEN.



Note: For notebook computers that do not have an RS-232C serial port, connect the computer to the ZEN by connecting an OMRON CS1W-CIF31 USB-Serial Conversion Cable to the ZEN-CIF01 Connecting Cable.

Other Versatile Functions

- Use of a Memory Cassette makes it easy to copy and save programs.
- Equipped with two analog input channels (CPU Units with DC power supply only).
- Password function ensures security. (See note.)
- Multi-language display in six languages (English, Japanese, German, French, Spanish, Italian). (See note.)
- Display user-set messages or analog-converted values. (See note.)

Note: Not supported for ZEN-\(\sigma C2 \subseteq -\subseteq -V2 \) models.

■ Enhanced Features of V2 CPU Units

Improved Weekly Timer and Calendar Timer Functions

Note: Not supported for ZEN-\(\subseteq C2\subseteq \text{-}\subseteq V2 models.

- The time precision has been increased.
 Conventional model: 2-min difference/month
 - -V2 models: ±15-s difference/month (at 25°C)
- Multiple-day operation and pulse-output operation are now possible.
- These improved functions are convenient for time-controlled applications such as lighting and air conditioning control.



Lighting control

Air conditioning control

Economy-type Added to the Series

 Economy-type CPU Units with a more affordable price have been added to the series, although Expansion I/O Units cannot be added.


12 to 24 VDC Line Voltage Operation

Operation is now possible with 12 VDC.

Expansion I/O Units have been reduced to half-size (35 mm wide).

RS-485 Communications Model Added to Series

Production line conditions can be remotely monitored by monitoring the ZEN control status.



More Precise Analog Input

Conventional model: \pm 10% FS \rightarrow -V2 models: \pm 1.5% FS DC power supply models are equipped with two analog inputs (0 to 10 V). There are four analog comparators. The increased precision makes it even easier to use the Unit in simple control applications with voltage, current, temperature, and other analog values.

8-digit Counter, 150-Hz Counter

- An 8-digit counter and 8-digit comparator have been added.
- The maximum count for DC power supply models is 150 Hz.


Twin-timer Operation Added

Twin-timer operation allows you to set ON and OFF times separately, greatly simplifying intermittent operation.

■ Series Configuration

CPU Units

Power supply voltage: 100 to 240 VAC, 12 to 24 VDC, Output: Relay, transistor output

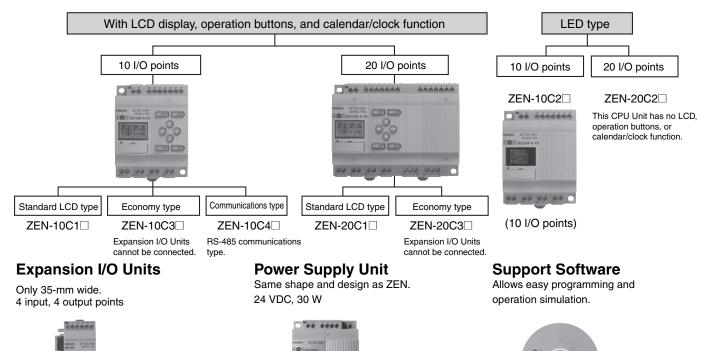

Model Number Structure

■ Model Number Legend

Note: This model number legend includes combinations that are not available. Please check *List of Models* on page 5 for availability.

CPU Units



1. Number of I/O points

10: 6 inputs and 4 outputs (See note.)

20: 12 inputs and 8 outputs

2. Type classifier

1: Standard LCD type with display

2: LED type without display

3: Economy type with display

(Expansion I/O Units cannot be connected.)

4: Communications type with display

Note: The Communications-type CPU Unit has 6 inputs and 3 outputs.

3. Input type

A: AC input

D: DC input

4. Output type

R: Relay

T: Transistor

5. Supply voltage

A: AC power supply

D: DC power supply

Expansion I/O Units

ZEN-8E1 ...

1. Number of I/O points

8: 4 inputs and 4 outputs

2. Unit version classifier

E1: Can connect to V2 CPU Units (See note.)

3. Input type

A: AC input

D: DC input

4. Output type

R: Relay

T: Transistor

Note: Use a ZEN-8E□□/-4E□ to connect to pre-V1 and V1 CPU Units.

This data sheet is provided as a guideline for selecting products. Be sure to refer to the following user manuals for application precautions and other information required for operation before attempting to use the product.

ZEN Operation Manual (Cat. No. Z211)

ZEN Communications Manual (Cat. No. Z212)

ZEN Support Software Operation Manual (Cat. No. Z184-E1-03)

The PDF versions of these manuals can be downloaded from the following website.

ZEN Website http://www.fa.omron.co.jp

4

Ordering Information

■ List of Models

CPU Units and Expansion I/O Units

Unit	Name	No. of I/O points	LCD display	Power supply voltage		Inputs		Outputs	Buttons, calendar, and clock	Analog input	Model
CPU	Standard	10	Yes	100 to 240 VAC	6	100 to 240 VAC	4	Relays	Yes	No	ZEN-10C1AR-A-V2
Units	LCD type			12 to 24 VDC	Ī	12 to 24 VDC	Ī			Yes	ZEN-10C1DR-D-V2
								Transistors	1		ZEN-10C1DT-D-V2
		20		100 to 240 VAC	12	100 to 240 VAC	8	Relays	1	No	ZEN-20C1AR-A-V2
				12 to 24 VDC	Ī	12 to 24 VDC	Ī			Yes	ZEN-20C1DR-D-V2
								Transistors	1		ZEN-20C1DT-D-V2
	LED type	10	No	100 to 240 VAC	6	100 to 240 VAC	4	Relays	No	No	ZEN-10C2AR-A-V2
	without display			12 to 24 VDC	Ī	12 to 24 VDC	Ī			Yes	ZEN-10C2DR-D-V2
	(See note 1.)							Transistors			ZEN-10C2DT-D-V2
		20		100 to 240 VAC	12	100 to 240V AC	8	Relays	1	No	ZEN-20C2AR-A-V2
				12 to 24 VDC	Ī	12 to 24 VDC	Ī			Yes	ZEN-20C2DR-D-V2
								Transistors			ZEN-20C2DT-D-V2
	Economy	10	Yes	100 to 240 VAC	6	100 to 240 VAC	4	Relays	Yes	No	ZEN-10C3AR-A-V2
	type (Expansion	(Expansion I/O Units 20		12 to 24 VDC	1	12 to 24 VDC			-	Yes	ZEN-10C3DR-D-V2
				100 to 240 VAC	C 12	100 to 240 VAC	8	Relays		No	ZEN-20C3AR-A-V2
	connected)			12 to 24 VDC		12 to 24 VDC				Yes	ZEN-20C3DR-D-V2
	Communica-	9		100 to 240 VAC	6	100 to 240 VAC	3	Relays	1	No	ZEN-10C4AR-A-V2
	tions type			12 to 24 VDC	Ī	12 to 24 VDC	Ī			Yes	ZEN-10C4DR-D-V2
ZEN Kit		Set cont	aining CPI	J Unit (ZEN-10C1A	R-A-V	2), Connecting Cat	ole, ZE	N Support Softwar	e, and manual.	,	ZEN-KIT01-EV4
		Set cont	aining CPI	J Unit (ZEN-10C1D	R-D-V	(2), Connecting Cal	ole, ZE	N Support Softwar	e, and manual	Ē	ZEN-KIT02-EV4
Expansion	n I/O Units	8		100 to 240 VAC	4	100 to 240 VAC	4	Relays			ZEN-8E1AR (See notes 2, 3.)
				12 to 24 VDC		12 to 24 VDC					ZEN-8E1DR (See note 2.)
								Transistors			ZEN-8E1DT (See note 2.)

Note: 1. Programming is not possible using only the CPU in the LED-type CPU Unit. ZEN Support Software or a Memory Cassette is required.

- 2. Cannot be connected to pre-V1 and V1 CPU Units.
- 3. The ZEN-8E1AR cannot be connected to a CPU Unit with DC power supply.

Power Supply Unit

Power ratings	Input voltage	Output voltage	Output current	Model
30 W	100 to 240 VAC	24 VDC	1.3 A	ZEN-PA03024

Note: Refer to the ZEN-PA03024 Datasheet (Cat. No. L103) for detailed specifications.

Accessories (Order Separately)


Name	Specifications		Remarks		Model
Memory Cassette	EEPROM (for data security and copying)	Enables programs and parameter settings to be saved or copied to another ZEN. (See note 1.)			ZEN-ME01
			LCD-type CPU Unit with display (See note 2.)	LED-type CPU Unit without display (See note 3.)	
		Transfer from ZEN to Memory	Supported	Not supported	
		Transfer from Memory Cassette to ZEN	Supported	Automatic transfer when power turned ON	
		Memory Cassette initialization	Supported	Not supported	
Connecting Cable	2 m RS-232C (9-pin D- sub connector)				ZEN-CIF01
Battery Unit	10 years min. Battery life (at 25°C)	Ladder programs and parameter settings are saved to the CPU Unit EEP-ROM but calendar, clock, and holding timer bits and holding timer/counter present values are held by the capacitor. Therefore, if the power supply is interrupted for 2 days or more (at 25°C), this data will be reset. Use a Battery Unit for systems where the power supply may be interrupted for long periods.			ZEN-BAT01
ZEN Support Software	Runs on Windows 95, 98, 2000, ME, XP, NT 4.0, Vista or 7. (See note 4.)	Specifically designed for	the ZEN (CD-ROM).		ZEN-SOFT01-V4

- Note: 1. Memory Cassettes created using a CPU Unit can be read to other CPU Units, regardless of which model is used. Restrictions, apply, however, to the functions that can be used, depending on the CPU Unit version combination. For details, refer to Memory Cassette and CPU Unit Combinations on page 31.
 - 2. Standard LCD-type, Economy-type, and Communications-type CPU Units (i.e., excluding ZEN-\(\subseteq C2\(\subseteq \)-\(\subseteq -V2\) models).
 - 3. LED-type CPU Unit without display (i.e., ZEN-\C2\\-\-\-V2 models).
 - 4. Except for 64-bit versions of Windows.

Mounting Accessories (Order Separately)

Name	Specifications	Model
Mounting Track	50 cm (I) × 7.3 mm (t)	PFP-50N
	1 m (l) × 7.3 mm (t)	PFP-100N
	1 m (l) × 16 mm (t)	PFP-100N2
End Plate	PFP-M	
Spacer		PFP-S

System Configuration

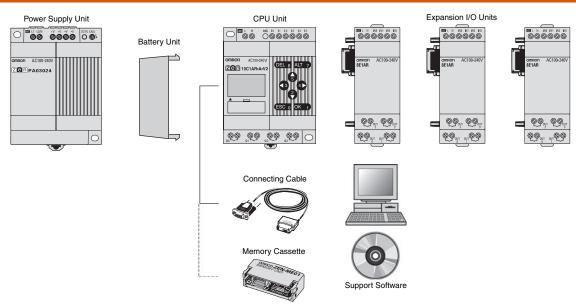

- Note: 1. Up to 3 Expansion I/O Units can be connected to any type of CPU Unit except for Economy-type CPU Units. Expansion I/O Units with AC Inputs, however, cannot be connected to CPU Units with DC Power Supplies.
 - 2. The Connecting Cable and Memory Cassette cannot be connected to the ZEN at the same time.
 - 3. Programs cannot be written to LED-type CPU Units (i.e., ZEN-\(\subseteq C2 \subseteq \subseteq \subseteq V2 models) without the ZEN Support Software or a Memory Cassette.


Specifications


■ Ratings

Item	Spe	cification	
	ZEN-□C□AR-A-V2/ZEN-8E1AR	ZEN-□C□D□-D-V2/ZEN-8E1D□	
Rated supply voltage	100 to 240 VAC, 50/60 Hz	12 to 24 VDC (DC ripple rate: 5% max.)	
Operating voltage range	85 to 264 VAC	10.8 to 28.8 VDC	
Power consumption	CPU Units without Expansion I/O Units • ZEN-10C1AR-A-V2/ZEN-10C2AR-A-V2/ ZEN-10C3AR-A-V2 100 V AC: 5 VA max. 240 V AC: 7 VA max. • ZEN-10C4AR-A-V2 100 V AC: 6 VA max. 240 V AC: 8 VA max. 240 V AC: 8 VA max. • ZEN-20C□AR-A-V2 100 V AC: 7 VA max. 240 V AC: 10 VA max. CPU Units with three Expansion I/O Units • ZEN-10C1AR-A-V2/ZEN-10C2AR-A-V2 100 V AC: 6 VA max. 240 V AC: 8 VA max. 240 V AC: 8 VA max. • ZEN-10C4AR-A-V2 100 V AC: 7 VA max. 240 V AC: 9 VA max. 240 V AC: 9 VA max. 240 V AC: 9 VA max. • ZEN-20C□AR-A-V2 100 V AC: 8 VA max. 240 V AC: 11 VA max. Expansion I/O Units • ZEN-8E1AR 100 V AC: 3 VA max. 240 V AC: 4 VA max.	CPU Units without Expansion I/O Units • ZEN-10C□DR-D-V2 12/24 V DC: 3 W max. (ZEN-10C□DT-D-V2: 2.8 W max.) • ZEN-10C□DT-D-V2 12/24 V DC: 2 W max. • ZEN-20C□DR-D-V2 12/24 V DC: 4 W max. • ZEN-20C□DT-D-V2 12/24 V DC: 2 W max. CPU Units with three Expansion I/O Units • ZEN-10C□DR-D-V2 12/24 V DC: 4 W max. • ZEN-10C□DT-D-V2 12/24 V DC: 3 W max. • ZEN-10C□DT-D-V2 12/24 V DC: 3 W max. • ZEN-20C□DR-D-V2 12/24 V DC: 5 W max. • ZEN-20C□DT-D-V2 12/24 V DC: 3 W max. • ZEN-20C□DT-D-V2 12/24 V DC: 3 W max. • ZEN-20C□DT-D-V2 12/24 V DC: 3 W max. Expansion I/O Units • ZEN-8E1DR 12/24 V DC: 2 W max.	
Inrush current	ZEN-10C□AR-A-V2: 4.5 A max. ZEN-20C□AR-A-V2: 4.5 A max. ZEN-8E1AR: 4 A max.	ZEN-10C□D□-D-V2: 30 A max. ZEN-20C□D□-D-V2: 30 A max. ZEN-8E1DR: 15 A max.	
Ambient temperature	0 to 55°C (–25 to 55°C for ZEN-□C2□□-□-V2 mode	,	
Ambient storage temperature	_20 to 75°C (_40 to 75°C for ZEN-□C2□□-□-V2 mo	odels)	
Ambient humidity	10% to 90% (with no condensation)		
Ambient conditions	No corrosive gases		
Mounting method	Surface mounting, DIN track mounting (standard (vertical) installation and horizontal installation) (See notes and 2.)		
Terminal block	Solid-line terminal block (use solid wire or fine-strand	ded wire)	
Terminal screw tightening torque	0.565 to 0.6 N·m (5 to 5.3 in-lb)		
Degree of protection	IP20 (Mounted inside a control panel)		
	•		

Note: 1. Can be mounted to 35-mm DIN Track.

2. Standard (Vertical) installation Horizontal installation





■ Characteristics

Item	Specification
Control method	Stored program control
I/O control method	Cyclic scan
Programming language	Ladder diagram
Program capacity	96 lines (3 input conditions and 1 output per line)
Max. No. of control I/O points	44 points (See note 1.) CPU Units with 20 I/O points: 12 inputs and 8 outputs Expansion I/O Units: 4 inputs and 4 outputs each, up to 3 Units.
LCD display (See note 2.)	12 characters × 4 lines, with backlight
Operation buttons (See note 2.)	8 (4 cursor buttons and 4 operation buttons)
User program backup	Internal EEPROM, Memory Cassette (optional)
Power interruption hold	Internal holding bit status, holding timer/counter present values, calendar and clock (year, month, day of month, day of week, time) • Super capacitor backup time: 2 days min. (25°C) • Life of optional battery: 10 years min. (25°C)
Calendar and clock function (See note 2.)	Accuracy: ±15 s/month (at 25°C)
Timer accuracy	0.01 s unit: -0.05% -10 ms max. (rate for set value) min/s unit: -0.05% -1 s max. (rate for set value) h/min unit: -0.05% -1 min max. (rate for set value)
Maximum counting speed	150 Hz: 8-Digit counter (F) set to high-speed operations (CPU Units with DC power supplies only) (The counting speed may be less than 150 Hz depending on the cycle time of the program. See page 21.)
Insulation resistance	$20~\mathrm{M}\Omega$ (at 500 VDC) min.: Between power supply terminals and all output terminals. Between terminals of different output circuits. Between all terminals of CPU Unit and all terminals of Expansion I/O Unit.
Insulation	Reinforced insulation Between power supply or input terminals and output terminals. Between terminals of different output circuits. Between all terminals of CPU Unit and all terminals of Expansion I/O Unit. No separation Between power supply and input terminals of the same unit. Between power supply terminals of CPU Unit and computer connector, Battery Unit connector, or all Expansion Unit connectors (all interfaces are live parts).
Dielectric strength	2,300 VAC, 50/60 Hz for 1 min (leakage current 1 mA max.): Between power supply terminals and all output terminals. Between terminals of different output circuit. Between all terminals of CPU Unit and all terminals of Expansion I/O Unit.
Vibration resistance	Conforms to IEC60068-2-6, 5 to 9 Hz with 3.5-mm single amplitude, 9 to 150 Hz acceleration 9.8 m/s², 10 sweeps each in X, Y, and Z directions (1 octave/min)
Shock resistance	Conforms to IEC60068-2-27, 147 m/s², 3 times each in X, Y, and Z directions.
Weight	CPU Unit with 10 I/O points: Approx. 300 g max. CPU Unit with 20 I/O points: Approx. 350 g max. Expansion I/O Unit: Approx. 120 g max.

Note: 1. Up to 34 points for CPU Units with 10 I/O points. With Communications-type CPU Units, however, the CPU Unit has 6 inputs and 3 outputs, for a maximum of 33 I/O points.

2. Not provided for LED-type CPU Unit without display (i.e., ZEN-□C2□□-□-V2 models).

■ Communications Specifications (Communications-type CPU Units)

Item	ZEN-10C4□R-□-V2	
Communications	RS-485 (two-wire, half duplex)	
Synchronization method	Start-stop synchronization	
Baud rate	4800, 9600, or 19200 bps	
Transmission code	ASCII	
Data bit length	7 or 8 bits	
Stop bit length	1 or 2 bits	
Error detection	Vertical parity (none, even, odd), Block check character (BCC)	
Flow control	None	
Interface	RS-485	
Retry function	None	
Node number	0 to 99 (default: 1), XX (broadcasting)	

■ Approved Standards

Item		Specification			
Safety standards	cULus: UL508/CSA C22.2 No.142 Class I D Conforms to EN/IEC 61131-2 clause 11, exc conforms to IEC 60664-1)		vervoltage category 2 and Pollution degree II		
EMC (See note.)	Radiation Field Emission Noise Terminal Voltage Emission	CISPR11 CISPR11	Class A, Group 1 Class A, Group 1		
	Electrostatic Discharge Immunity Electromagnetic Field Immunity Electrical Fast Transient/Burst Immunity	IEC61000-4-2 IEC61000-4-3 IEC61000-4-4	10 V/m		
	Surge Immunity	IEC61000-4-5	Normal Noise AC power supply, AC I/O: 1 kV DC power supply, DC I/O: 0.5 kV Common Noise AC power supply, AC I/O: 2 kV DC power supply: 1 kV DC I/O: 0.5 kV		
	Immunity to Conducted Disturbances Induce	ed by Radio-freque IEC61000-4-6			
	Momentary Power Interruption Immunity	IEC61131-2	CPU Units with AC Power Supplies: 10 ms max. CPU Units with DC Power Supplies: 2 ms max. (level: PS1)		

Note: EMC conforms to EN 61131-2 clause 8 except in the following cases.

- When Expansion I/O Units with DC inputs are connected to a CPU Unit with an AC power supply, the burst immunity between power supplies will be 1 kv.
- When the signal wire for transistor outputs exceeds 10 m, the surge immunity of DC output signal lines will not conform.

■ Input Specifications

CPU Units

AC Inputs (Not Isolated)

Item	Specifications	Circuit drawing
Input voltage	100 to 240 VAC +10%, -15%, 50/60 Hz	
Input impedance	680 kΩ	
Input current	0.15 mA/100 VAC, 0.35 mA/240 VAC	SIN, 330 kΩ 300 kΩ
ON voltage	80 VAC min.	IN ↓ Internal Internal
OFF voltage	25 VAC max.	100 to 240 VAC
ON response time	50 ms or 70 ms at 100 VAC (See note.)	00 10 240 VAO N
OFF response time	100 ms or 120 ms at 240 VAC (See note.)	

Note: Can be selected using the filter settings.

DC Inputs: I0 to I3 for Units with 10 I/O points, I0 to I9 for Units with 20 I/O Points (Not Isolated)

Item	Specifications	Circuit drawing
Input voltage	12 to 24 VDC +20%, -10%	[
Input impedance	5.3 kΩ	F.,10
Input current	4.5 mA (typ.)/24 VDC	SIN, 5.1 kΩ 1.8 kΩ
ON voltage	8 VDC min.	12 to 24 VDC IN Internal
OFF voltage	5 VDC max.	Com T circuit
ON response time	15 ms or 50 ms (See note.)	
OFF response time		Ĺi

Note: Can be selected using the input filter settings, except when I0 is being used for an 8-digit counter with a high-speed input.

9

DC Inputs: I4 and I5 for Units with 10 I/O points, Ia and Ib for Units with 20 I/O Points (Not Isolated)

	Item	Specifications	Circuit drawing
DC Inputs	Input voltage	12 to 24 VDC +20%, -10%	
	Input impedance	PNP: 5.5 kΩ/14 VDC min. 100 kΩ/14 VDC max. NPN: 5.2 kΩ	[
	Input current	PNP: 4.3 mA (typ.)/24 VDC NPN: 4.6 mA (typ.)/24 VDC	150 kΩ SIN
	ON voltage	8 VDC min.	47 kΩ ξ6.2 kΩ <u>11.</u>
	OFF voltage	3 VDC max.	
	ON response time	15 ms or 50 ms (See note.)	220 kΩ L L L L L L L L L L L L L L L L L L
	OFF response time		ontino in the second se
Analog	Input range	0 to 10 V	
Inputs	External input impedance	100 k Ω min.	12 to 24 VDC 5.6 kΩ W1
	Resolution	0.1 V (1/100 FS)	
	Accuracy	±1.5% FS (at ambient operating temperature within rated range)	
	AD conversion data	0 to 10.5 V (in increments of 0.1 V)	1

Note: Can be selected using the input filter settings.

Expansion I/O Units

AC Inputs (Not Isolated)

Item	Specifications	Circuit drawing
Input voltage	100 to 240 VAC +10%, -15%, 50/60 Hz	
Input impedance	680 kΩ	
Input current	0.15 mA/100 VAC, 0.35 mA/240 VAC	Since in the state of the state
ON voltage	80 VAC min.	"'
OFF voltage	25 VAC max.	100 to 240 VAC
ON response time	50 ms or 70 ms at 100 VAC (See note.)	⊚ N;
Off response time	100 ms or 120 ms at 240 VAC (See note.)	

Note: Can be selected using the input filter settings.

DC Inputs (ZEN-8E1DR: Not Isolated, ZEN-8E1DT: Photocoupler Isolated)

Item	Specifications	Circuit drawing
Input voltage	12 to 24 VDC +20%, -10%	
Input impedance	6.5 kΩ	IN.
Input current	3.7 mA (typ.)/24 VDC	S _{IN} 6.2 kΩ 1.8 kΩ
ON voltage	8 VDC min.	/± \(\)(See \) \(\)(See \) \(\)(Internal \)
OFF voltage	5 VDC max.	24 VDC T COM!
ON response time	15 ms or 50 ms (See note 1.)	
OFF response time		L

Note: 1. Can be selected using the input filter settings.

2. The ZEN-8E1DT has no +/- terminals. There is no need to supply power.

10

■ Output Specifications (CPU Units and Expansion I/O Units)

Units with Relay Outputs


Item		Specifications	Circuit drawing	
Maximum switching capacity		250 VAC/8 A (resistive load: cosφ = 1) 24 VDC/5 A (resistive load) Use the following values for the total of all outputs. CPU Units with 10 I/O points: 20 A max. (15 A max. for Communications-type CPU Units) CPU Units with 20 I/O points: 40 A max. Expansion I/O Units: 20 A max.	Q0 to Q3/ΟUΤ0 to OUT3	
Minimum switching capacity		5 VDC/10 mA (resistive load) (failure level: P, reference value)	Od/Q6 COM COM COM	
Relay life Electrical		Resistive load: $50,000$ times ($\cos\phi = 1$) Inductive load: $50,000$ times ($\cos\phi = 0.4$)	Models with 20 I/O points	
Mechanical		10 million times	only	
ON response time		15 ms max.	Q5/Q7	
OFF response time		5 ms max.		

The life under the worst conditions, of the output contacts used in ZEN relay outputs is given in the above table. Guidelines for the normal life of the relays are shown in the diagram on the right.

Note: The switching capacity, switching durability, and applicable load area when actually using the relay depend on the type of load, environmental conditions, and switching conditions. Therefore, be sure to confirm these conditions for the actual machine before use.

Life-test Curve (Reference Value)

Usage: 360 times/hour



Units with Transistor Outputs

Item	Specifications	Circuit drawing	
Maximum switching capacity	24 VDC +20%, 500 mA	Each circuit is configured with an independent commo	
Leakage current	0.1 mA max.	390 Ω 28.8 VDC max.	
Residual voltage	1.5 V max.	Internal circuit + 28.8 VDC max.	
ON response time	1 ms max.	Q4/Q6 Models with 20 I/O points only	
OFF response time	1 ms max.	Q5/Q7	


Connections

■ Input Connections


Units with AC Power Supply

- Note: 1. Supply power to both the CPU Unit and Expansion I/O Units from the same power supply and turn them ON and OFF at the same time.
 - 2. The input circuit commons for CPU Units with AC power supply are internally connected to the N terminal of the power supply circuit. Wire the L terminal to the power supply of the input device.
 - 3. The input circuit commons for Expansion I/O Units with AC power supply are internally connected to the N terminal of the power supply circuit. Wire the L terminal to the power supply of the input device.


CPU Units with 10 I/O Points and Expansion I/O Units



CPU Units with 20 I/O Points and Expansion I/O Units

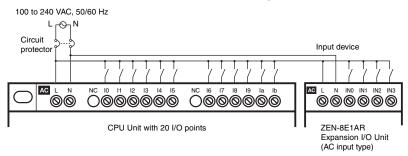

Connecting Expansion I/O Units with DC Inputs

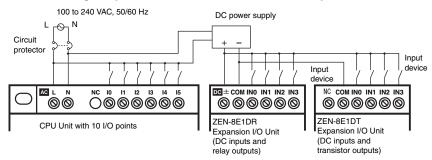


Note: When connecting Expansion I/O Units with DC inputs to a CPU Unit with an AC power supply, the burst noise immunity will be 1 kV (IEC 61000-4-4).

Units with DC Power Supply


- Note: 1. Be sure to connect the COM terminal before turning ON the power supply. If the COM terminal is disconnected, or if the wiring is changed after turning ON the power supply, a malfunction may occur.
 - 2. Apply the power supply voltage through a relay or switch in such a way that the voltage reaches the rated value within 4 s. If the voltage is applied gradually, the power may not be reset or unstable output operations may result.

CPU Units with 10 I/O Points

For Connections to Negative (-) Common (PNP Connection)




For Connecting Analog Input Devices to Input Terminals I4 and I5



Note: When connecting an analog input device, always connect the negative side to the COM terminal.

For Connections to Positive (+) Common (NPN Connection)




Note: When connected to the positive (+) common, I4 and I5 cannot be used as analog inputs.


13

CPU Units with 20 I/O Points

For Connections to a Negative Common (PNP Connection)




For Connecting Analog Input Devices to Input Terminals Ia and Ib



Note: When connecting an analog input device, always connect the negative side to the COM terminal.

For Connections to Positive (+) Common (NPN Connection)




Note: When connected to the positive (+) common, la and lb cannot be used as analog inputs.


Expansion I/O Units

- Note: 1. Supply power to both the CPU Unit and Expansion I/O Units from the same power supply and turn them ON and OFF at the same time.
 - 2. ZEN-8E1AR Expansion I/O Units with AC inputs cannot be connected to CPU Units with DC power supply.
 - 3. The input circuit commons for ZEN-8E1DR Expansion I/O Units with relay outputs are each internally connected to one side of the power supply circuit (COM terminal).
 - 4. ZEN-8E1DT Expansion I/O Units with transistor outputs do not need to be connected to a power supply.

For Connections to Negative (-) Common

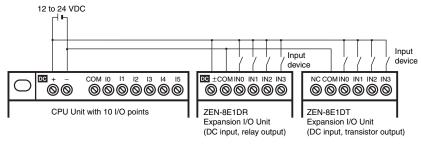

For Connections to Positive (+) Common

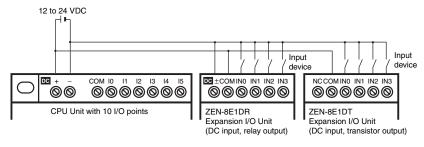


14


■ Output Connections

Units with Relay Outputs


All four relay output circuits in both CPU Units with 10 I/O points and Expansion I/O Units have independent contacts. CPU Units with 20 I/O points have 4 independent contacts (Q0 to Q3) and the remaining four (Q4 to Q7) have 2 points/common. There are no restrictions for polarity.

Standard LCD-type CPU Units, LED-type CPU Units, and Economy-type CPU Units






Communications-type CPU Units



Expansion I/O Units




Units with Transistor Outputs


For CPU Units with 10 I/O points and Expansion I/O Units, all 4 outputs in the transistor output circuits have independent circuits. The terminals of output have polarity given on the terminal block, but no problem will result from reversing the connection positions of the power supply and load.

For CPU Units with 20 I/O points, outputs Q0 to Q3 in the transistor output circuits have independent circuits and outputs Q4 to Q7 have 2 points per common. The terminals of output Q0 to Q3 have polarity given on the terminal block, but no problem will result from reversing the connection positions of the power supply and load.


Note: Do not exceed a cable length of 10 m when connecting transistor outputs.

Standard LCD-type CPU Units and LED-type CPU Units without Display






Expansion I/O Units



Nomenclature

■ Standard LCD-type, Economy-type, and Communications-type CPU Units (Except for ZEN-□C2□□-□-V2 Models)


CPU Units with 10 I/O Points

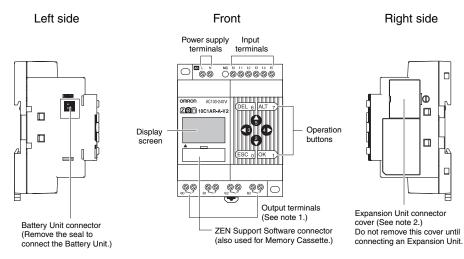

Display Screen



CPU Units with 20 I/O Points

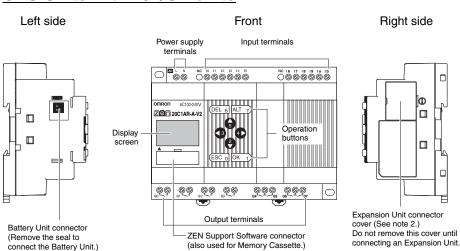


Icon Meanings

Icon	Meaning
RUN	Display while in RUN mode.
ERR	Indicates an error.
A	Displayed when there is a higher-level menu or ladder program line than the one currently displayed.
▼	Displayed when there is a lower-level menu or ladder program line than the one currently displayed.
O	Displayed when a password had been set.

Note: 1. With Communications-type CPU Units, the Q3 terminal is used as the RS-485 terminal. For details, refer to *Output Connections* on page 15.

2. Economy-type CPU Units are not provided with an Expansion Unit connector. Do not remove the cover.

Operation Buttons




OMRON

Operation Button Names and Operations


Button	Function				
	Menus	Writing ladder program	Setting parameters	Button input bit (See page 24.)	
DEL 6		Deletes inputs, outputs, connection lines, and blank lines.		B6 ON	
ALT 7		 Switches between normally open and normally closed conditions. Changes to connection line write mode. Inserts a line. 		B7 ON	
Up 5	Moves the cursor up and down.	 Moves the cursor up and down. Selects bit types and functions. 	 Moves the cursor up and down. Changes numerals and parameters. 	B5 ON	
Down 2			and parameters.	B2 ON	
Left 3		Moves the cursor right and left.	Moves the cursor right and left.	B3 ON	
Right 4				B4 ON	
ESC 0	Returns to the previous screen.	Cancels the setting and returns to the previous operation.	Cancels the setting and returns to the previous operation.	B0 ON	
OK 1)	Selects the menu item at the cursor position.	Confirms the setting.	Confirms the setting.	B1 ON	

■ LED-type CPU Units without Display (ZEN-□C2□□-□-V2)

CPU Units with 10 I/O Points

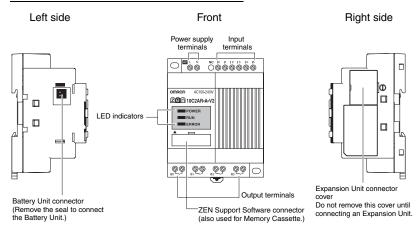


CPU Units with 20 I/O Points

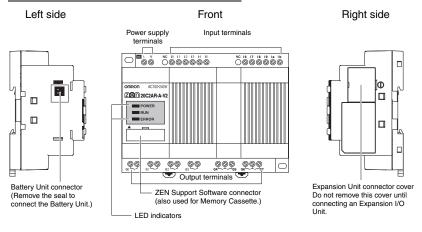

LED Indicators

Name	LED	S	tatus
POWER	Green	Lit	Power is ON.
		Not lit	Power is OFF.
RUN	Green	Lit	Operating (RUN)
		Not lit	Stopped (STOP)
ERROR	Red	Lit	Error occurred.
		Not lit	Normal


■ Expansion I/O Units (ZEN-8E1□□)

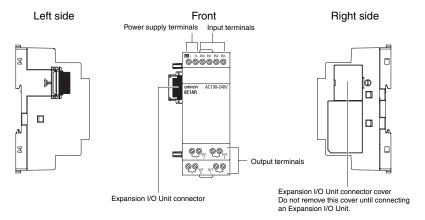

Precaution when Using Expansion I/O Units:

Up to three Expansion I/O Units can be connected.

When removing the Expansion Unit connector cover from the side of the CPU Unit, use a Phillips screwdriver to remove the cover screw, and then insert a flat-blade screw driver in the cover gap to remove the cover, as shown at the right.



Operation


■ Bits

Name	Symbol	Bit addresses	No. of points	Operation	Details (See note 1.)
Input bits	I	I0 to Ib (See note 2.)	12	Reflect the ON/OFF status of the input devices connected to the input terminals on the CPU Unit.	
Expansion input bits	Х	X0 to Xb	12	Reflect the ON/OFF status of the input devices connected to the input terminals on the Expansion I/O Units.	
Output bits	Q	Q0 to Q7 (See note 2.)	8	The ON/OFF status of these output bits is used to control the output devices connected to the output terminals on the CPU Unit.	
Expansion output bits	Υ	Y0 to Yb	12	The ON/OFF status of these output bits is used to control the output devices connected to the output terminals on the Expansion I/O Units.	1
Work bits	М	M0 to Mf	16	Work bits can be used only within the ZEN program. I/Os for external devices cannot be made (i.e., all I/O is internal).	•
Holding bits	Н	H0 to Hf	16	Used the same as the work bits. However, if the power to the ZEN is turned OFF, these bits also maintain the previous ON/OFF status.	
Timers	Т	T0 to Tf	16	X: ON-delay timer Functions are Time units can be selected	
				■: OFF-delay timer selected from the screen when screen when screen when from the following: 0.01-s unit: 0.01 to 99.99 s	
				O: One-shot pulse timer parameter settings are made. parameter settings are made. min/s unit: 00 min 01 s to 99 min 59 s	2
				F: Flashing pulse h/s unit: 00 h 01 min to 99 h 59 min	
				W: Twin timer	
Holding timers	#	#0 to #7	8	Hold the present value being counted even if the trigger input or power supply is turned OFF and continue timing when the trigger input or power is restored.	3
Counters	С	C0 to Cf	16	Reversible 4-digit counters that can be incremented and decremented.	4
8-digit counter	F	F0	1	Reversible 8-digit counters that can be incremented and decremented. CPU Units with DC power supply support a high-speed counter up to 150 Hz. For details, refer to 8-digit Counter Operation on page 21.	
Weekly timers (See note 3.)	@	@0 to @f	16	Turn ON and OFF during specified times on specified days.	6
Calendar timers (See note 3.)	*	*0 to *f	16	Turn ON and OFF between specified dates.	7
Display bits (See note 3.)	D	D0 to Df	16	Display user-specified messages, times, timer/counter present values, or analog-converted values.	8
Analog comparator bits	Α	A0 to A3	4	Used as program input conditions to output analog comparator comparison results. These bits can be used only for CPU Units with DC power supply.	9
Timer/counter comparator bits	Р	P0 to Pf	16	Compare the present values of timers (T), holding timers (#), and counters (C). Comparison can be made between the same two counters or timers, or with constants.	
8-digit counter comparator bits	G	G0 to G3	4	Used to compare the present values of 8-digit counters (F) and output the comparison results.	
Button input bits (See note 3.)	В	B0 to B7	8	Used as program input conditions and turn ON when operation buttons are pressed in RUN Mode.	12


Note: 1. For details, refer to the indicated item numbers on the following pages.

- 2. CPU Units with 10 I/O points have 6 input bits (I0 to I5) and 4 output bits (Q0 to Q3). Output bit Q3 of Communications-type CPU Units, however, cannot be output externally. It can be used as a work bit.
- 3. These input bits are not supported by LED-type CPU Units without display.


1. Additional Bit Output Functions

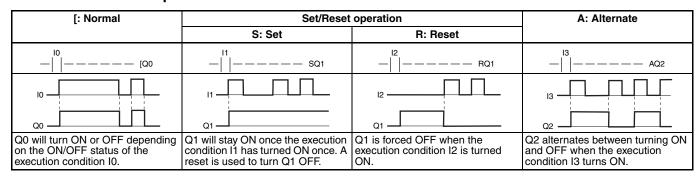


2. Using Timers and Holding Timers

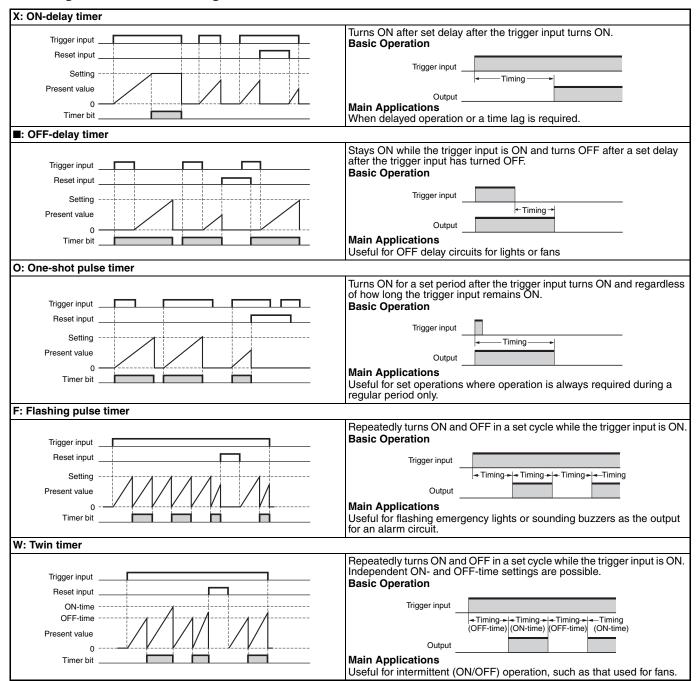

3. Using Holding Timers




4. Counter Operation



The counter bit turns ON when the counter value (present value) reaches the set value (present value \geq set value). The counter returns to 0 and the counter bit turns OFF when the reset input turns ON. Count inputs are not accepted while the reset input is turned ON. The counter present value and counter bit (ON/OFF) are held even if the operating mode is changed or the power supply is interrupted.

5. 8-digit Counter Operation

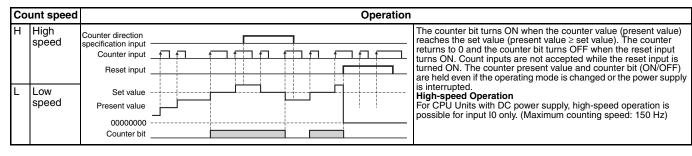


Counting Speed of the 8-digit Counter

The maximum counting speed of the 8-digit counter is 150 Hz. When the ladder program volume is large, however, this speed will be less than 150 Hz. Calculate the cycle time and confirm the maximum counting speed using the following formula. The calculation serves as a guide only, so allow a suitable margin in the actual machine.

Maximum counting speed = 1,000,000 Hz/ Cycle time (μ s) \times 2.2 Hz

Note: Even if the calculated maximum counting speed exceeds 150 Hz using this formula, the maximum counting speed will be 150 Hz.

Cycle Time Calculation Method



Refer to the following table for ZEN execution times. The execution times are provided as a guide. External factors, button operations, execution of ZEN Support Software operations, and timing of the processing affects the actual processing times.

Common Processing Time

Unit type	Common processing time
Standard LCD-type CPU Units, Economy-type CPU Units, and Communications-type CPU Units	850 μs
LED-type CPU Units	200 μs

Expansion I/O Unit Processing Time

Unit type	Expansion I/O Unit processing time
Expansion I/O Units	160 us per Unit

Communications Processing Time (only for CPU Units with Communications)

Reading information	170 μs
Writing set values	Twin timer: 11,000 μs Others: 6,000 μs
Writing time information	820 μs


Ladder Program Execution Time


Communications processing time (only

for CPU Units with communications)


		30 μs: Line containing program 7 μs: Empty lines	*1
Per output	CPU Unit output bits (Q)	4 μs	*2
	Expansion I/O Unit output bits (Y)		
	Work bits (M)		
	Holding bits (H)		
	Timers (T)/Holding timers (#)	15 μs	*3
	Counters (C)/8-Digit Counters (F)	13 μs	
	Display bits (D)	Hour and minute (CLK)/Year and month (DAT)/Month and day (DAT1): 21 μs Timers (T)/Holding timers (#)/ Counters (C)/Analog comparators: 28 μs Characters (CHR)/8-Digit Counters (F): 38 μs	
Weekly time	ers (@)	4 μs	*4
Calendar timers (*)		1 μs	
Analog comparators (A)		3 μs	
Comparators (P)		7 μs	*5
8-Digit Com	nparators (G)	4 μs	

Example Calculation of Ladder Program Execution Time






Weekly Timer Operation (Only for Standard LCD-type, Economy-type, and Communicationstype CPU Units)

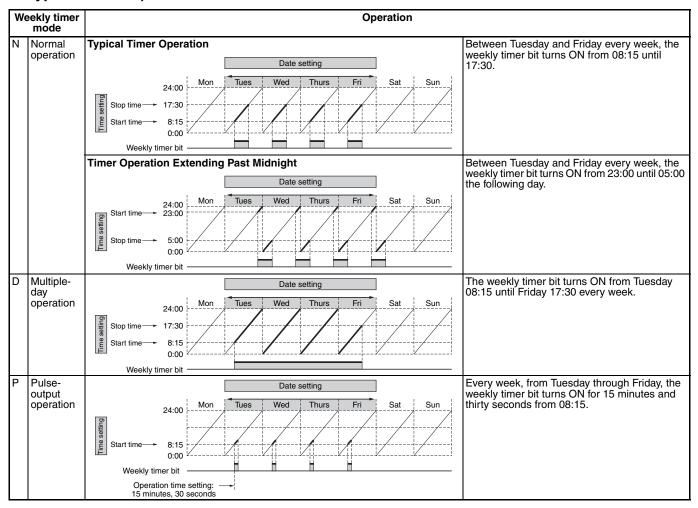

7. Calendar Timer Operation (Only for Standard LCD-type, Economy-type, and Communications-type CPU Units)




8. Display Settings (Only for Standard LCD-type, Economy-type, and Communications-type CPU Units)


Backlight/display function screen switching	L0: No backlight; No switching to display function screen (See note 1.) L1: Backlight; No switching to display function screen (See note 1.) L2: No backlight; Switching to display function screen (See note 2.) L3: Backlight; Switching to display function screen (See note 2.)			
Display start position		X (digit): 00 to 11		
Display object	CHR	CHR Characters (Up to 12 characters - English, numerals, symbols)		
	DAT Month/day (5 digits □□/□□) CLK hour/minute (5 digits □□:□□)			
	I4 to I5 Analog-converted value (4 digits □□:□)			
	T0 to Tf	T0 to Tf Timer present value (5 digits □□.□□)		
	#0 to #7	#0 to #7 Holding timer present value (5 digits \(\square\).\(\square\)		
	C0 to Cf Counter present value (4 digits □□□□)			
	F0 8-digit counter present value(8 digits □□□□□□)			
Monitoring	A: Can read settings during operation. D: Cannot read settings during operation.			

- **Note: 1.** When L0 or L1 are selected to disable the display function screen, the display function screen will not be displayed automatically. Use operation buttons to move to the display function screen.
 - 2. When L2 or L3 are selected, the ZEN switches to the display function screen if the display function is enabled and the specified data is displayed. The Main Screen will no longer be displayed. To display the Main Screen, change the CPU Unit to STOP mode.


9. Analog Comparator Operation

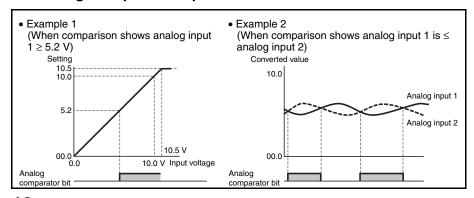

10. Timer/Counter Comparator Operation

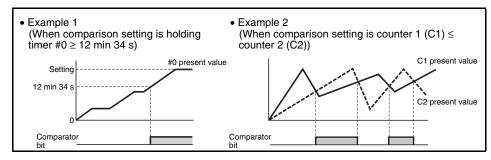


11. 8-digit Counter Comparator Operation



12. Specifications for Button Input Bits (Only for Standard LCD-type, Economy-type, and Communications-type CPU Units)

The operation buttons are used to perform operations for input bits. They are useful when checking program operations or forcefully resetting holding timers or counters.



■ Password Function (Only for Standard LCD-type, Economy-type, and Communications-type CPU Units)

The ZEN has a password function to prevent incorrect manipulation of ladder programs or settings data by other operators. When the password (0000 to 9999) is set, the following operations will not be possible unless the password is input correctly.

- Editing ladder program
- Program all clear
- Monitoring ladder programs
- · Changing/clearing password
- Changing backlight OFF time
- Setting input filter
- Setting RS-485 communications

24

■ ZEN Support Software Functions

Note: Always use ZEN-SOFT01-V4 as the Support Software for the V2 CPU Unit.

Creating Ladder Programs


ZEN ladder programs can be created with ease.



Note: The Edit Input Dialog Box is displayed when an input bit is inserted. Timer, counter, and other parameter settings are also set in the Edit Input Dialog Box. They cannot be set in the Edit Output Dialog Box.


Monitoring Ladder Programs

The operating status can be monitored from the Support Software by connecting to the ZEN using a Connecting Cable (ZEN-CIF01).




Simulating Ladder Programs

The simulation function makes it possible to check whether correct operation is performed without connecting to the ZEN.



Printing Ladder Programs

Ladder programs and I/O comments, as well as timer, counter and other parameter settings can be printed.



Note: Both RS-485 communications and the ZEN monitoring function cannot be used at the same time with Communications-type CPU Units.


The Support Software can also be used to save files and edit comments.

Refer to the ZEN Support Software Operation Manual (Cat. No. Z184-E1-03) for details.

Dimensions


Note: All units are in millimeters unless otherwise indicated.

■ CPU Units

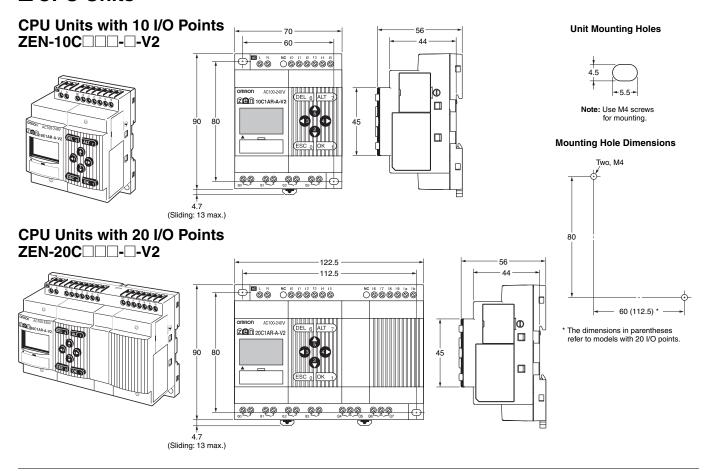

Dimensions with Battery Unit




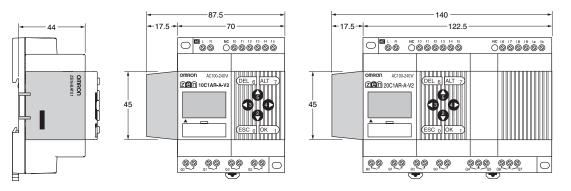



■ Expansion I/O Units


ZEN-8E1□□













■ Power Supply Unit

ZEN-PA03024





Mounting Hole Dimensions



■ Accessories (Order Separately)

Battery Unit

ZEN-BAT01

Memory Cassette

ZEN-ME01

Connecting Cable

ZEN-CIF01


Cable length: 2m







■ Track Mounting Accessories (Order Separately)

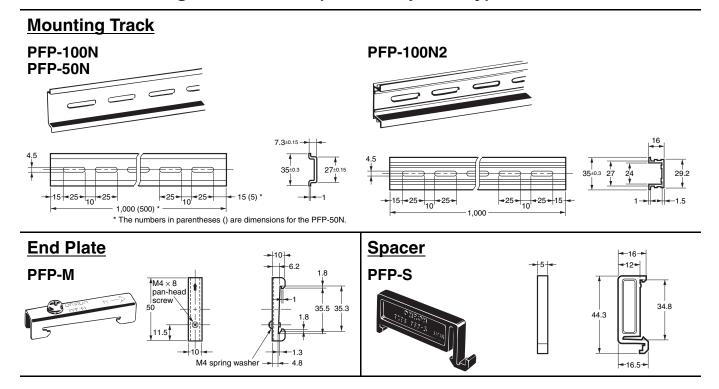


Precautions when Selecting ZEN Programmable Relays

■ Changes in Comparison with Previous Models

- The power supply and transistor output voltage ranges for CPU Units and Expansion I/O Units with DC power supply has been expanded to 10.8 to 28.8 VDC.
- The width of Expansion I/O Units has been reduced by half and only 8-point models are available.
- The connection method between the CPU Unit and Expansion I/O Units has changed.
- Twin timer operation has been added to timers.
- Multiple-day operation and pulse-output operation has been added to weekly timers.
- An 8-digit counter and 8-digit comparators have been added.
- ullet The accuracy of analog inputs has been increased to $\pm 1.5\%$ FS.
- The timing accuracy of weekly timers and calendar timers has been increased to ±15 s or less per month (at 25°C).
- Australia and New Zealand Daylight Saving Time (DST) settings have been added.
- CPU Units with RS-485 communications and economic CPU Units have been added.
- The heat slits in the cases of CPU Units and Expansion I/O Units have been removed to prevent foreign matter from entering.

Model numbers have been changed to reflect the improved functionality.

Previous Model Numbers



non model nambero	
ZEN-□C□□□-□-V2	(V2 CPU Units)
ZEN-8E1□□	(8E1-type Expansion I/O Unit)

Memory Cassettes, Connecting Cables, and Battery Units have not been changed and can be used as they are with the new models.


Precautions when Switching from Previous Units

- Previous models of Expansion I/O Units cannot be connected to V2 CPU Units.
- ZEN-8E1 R Expansion I/O Units with relay outputs need to be connected to a power supply.
- A ZEN-CDD-D-V2 CPU Unit with DC power supply cannot be connected to an Expansion I/O Unit with AC inputs.
- When connecting Expansion I/O Units with DC inputs to a CPU Unit with an AC power supply, the burst noise immunity will be 1 kV (IEC 61000-4-4).
- There is no change to the 8 A per contact for relay output, but the total output for all contacts must be as follows:

Units with 10 I/O Points: 20 A max. (15 A max. for Communications-type CPU Units)

Units with 20 I/O Points: 40 A max. Expansion I/O Units: 20 A max.

- Always use the ZEN-SOFT01-V4 Support Software for V2 CPU Units.
- Input wiring for CPU Units with DC power supplies differs from that for Pre-V1 CPU Units. Refer to the following diagrams.

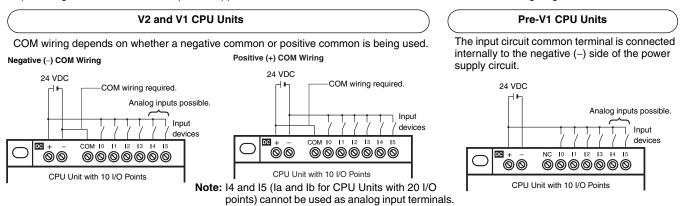

■ Changes

Ratings and Specifications

CPU Units

	Item		V2 Units	V1 Units Pre-V1 Unit		
Consumption Power supply Models with DC power supply Models with DC power supply Models with DC power supply Models with AC power supply Models with 10 I/O points: 4.5 A max. 40 A m			10.8 to 28.8 VDC	20.4 to 26.4 VDC		
Inrush currentModels with AC power supplyModels with 10 I/O points: 4.5 A max. Models with 20 I/O points: 4.5 A max.40 A max.Models with DC power supplyModels with 10 I/O points: 30 A max. Models with 20 I/O points: 30 A max. Models with 20 I/O points: 30 A max.20 A max.DC inputs I0 to I3 (See note 1.)Input impedance $0.3 \times 0.3 $			See Ratings on page 7.			
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$				Jnits connected)		
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	Inrush current		Models with 10 I/O points: 4.5 A max. Models with 20 I/O points: 4.5 A max.	40 A max.		
Input common Independent common terminal Internally connected power supply terminal Input impedance S.2 to $5.5 \text{ k}\Omega$ See note 2.) Input impedance S.2 to $5.5 \text{ k}\Omega$ So			Models with 10 I/O points: 30 A max. Models with 20 I/O points: 30 A max.	20 A max.		
	DC inputs	Input impedance	5.3 kΩ	5 kΩ	4.8 kΩ	
		ON voltage	8 VDC min.	16 VDC min.		
I4 to I5 (See note 2.) ON voltage 8 VDC min. 16 VDC min. OFF voltage 3 VDC max. 5 VDC max. Analog inputs I4 to I5 (See note 2.) Input impedance 100 kΩ min. Accuracy ±1.5% FS (at ambient operating temperature within ±10% FS (at ambient operating temperature within	(555515)	Input common	Independent common terminal		Internally connected to power supply terminal	
(See note 2.) ON voltage 8 VDC min. 16 VDC min. OFF voltage 3 VDC max. 5 VDC max. Analog inputs I4 to I5 (See note 2.) Input impedance 100 kΩ min. ±1.5% FS (at ambient operating temperature within ±10% FS (at ambient operating temperature within		Input impedance	5.2 to 5.5 k Ω	5 kΩ		
OFF voltage3 VDC max.5 VDC max.Analog inputsInput impedance100 kΩ min.150 kΩ min.I4 to I5Accuracy±1.5% FS (at ambient operating temperature within±10% FS (at ambient operating temperature within		ON voltage	8 VDC min.	16 VDC min.		
14 to 15 Accuracy ±1.5% FS (at ambient operating temperature within ±10% FS (at ambient operating temperature	(000 11010 21)	OFF voltage	3 VDC max.	5 VDC max.		
Accuracy ±1.5% FS (at ambient operating temperature within ±10% FS (at ambient operating temperature		Input impedance	100 kΩ min.	150 kΩ min.		
rated range) within rated range)		Accuracy	±1.5% FS (at ambient operating temperature within rated range)	$\pm 10\%$ FS (at ambient operating temperature within rated range)		
Control outputs 8 A per output Total for all outputs must be as follows: Units with 10 I/O Points: 20 A max. (15 A max. for Communications-type CPU Units) Units with 20 I/O Points: 40 A max.			Total for all outputs must be as follows: Units with 10 I/O Points: 20 A max. (15 A max. for Communications-type CPU Units)	8 A per output		
Transistor outputs 28.8 V max. 26.4 V max.	Transistor outputs		28.8 V max.	26.4 V max.		
Timing accuracy of weekly and calendar timers ±15 s or less per month (at 25°C) ±2 min per month	Timing accuracy of weekly and calendar timers		±15 s or less per month (at 25°C)	±2 min per month		
Mounting direction Standard (vertical) installation and horizontal installation Standard (vertical) installation	Mounting direct	tion	Standard (vertical) installation and horizontal installation	Standard (vertical) installation		
Terminal block tightening torque 0.565 to 0.6 N⋅m (5 to 5.3 in-lb) 0.5 to 0.6 N⋅m	Terminal block	tightening torque	0.565 to 0.6 N·m (5 to 5.3 in-lb)	0.5 to 0.6 N·m		
Connectable Expansion I/O Units ZEN-8E1□ (See note 3.) ZEN-4E□ and ZEN-8E□	Connectable Ex	xpansion I/O Units	ZEN-8E1□ (See note 3.)	ZEN-4E□ and ZEN-8E□		
Case structure No heat slits Heat slits	Case structure		No heat slits	Heat slits		

- Note: 1. Units with 20 I/O Points: I0 to I9
 - 2. Units with 20 I/O Points: Ia to Ib
 - 3. Refer to page 31 for details on compatible combinations of CPU Units and Expansion I/O Units.

Expansion I/O Units

	Item	8E1 type	4E/8E type
Model		Unit with 8 I/O Points	Units with 4 input, 4 output, or 8 I/O points
AC inputs	Input impedance	680 kΩ	83 kΩ
	Isolation	No isolation	Photocoupler
	Input common	Internally connected to power supply terminal	Independent common terminal
DC inputs	Input voltage	10.8 to 28.8 VDC	20.4 to 26.4 VDC
	Input impedance	6.5 kΩ	4.7 kΩ
	Isolation	ZEN-8E1DR: No isolation ZEN-8E1DT: Photocoupler	Photocoupler
	ON voltage	8 VDC min.	16 VDC min.
	Input common	ZEN-8E1DR: Internally connected to power supply terminal ZEN-8E1DT: Independent common terminal	Independent common terminal
Control output	Relay outputs	8 A per output Total for all outputs must be as follows: Units with 10 I/O Points: 20 A max. Units with 20 I/O Points: 40 A max.	8 A per output
	Transistor outputs	28.8 V max.	26.4 V max.
Mounting screws Connectable CPU Unit		M3 (mounting holes on DIN Track hooks)	M4 (mounting holes on Unit)
		V2 CPU Units (See note.)	V1 or Pre-V1 CPU Units
Dimensions (H	\times W \times D)	$90 \times 35 \times 56 \text{ mm}$	90 × 70 × 56 mm
Case structure		No heat slits	Heat slits

Note: Refer to page 31 for details on compatible combinations of CPU Units and Expansion I/O Units.

Other Functions

	Item	V2 Units	V1 Units	Pre-V1 Units
Bits	Timer operation	ON-delay, OFF-delay, one-shot pulse, flushing pulse, twin timer operation	ON-delay, OFF-delay, one pulse	e-shot pulse, flushing
operation Addition of bits		Timer operation, multiple-day operation, pulse- output operation		
		8-digit counter (1 counter, up to 150 Hz) 8-digit comparators (4 comparators)		
Daylight Saving	Time (DST) Setting	Manual, EU, US. Australia, New Zealand	Manual, EU, US	
Items set for pa	ssword	Ladder program editing Program all clear Ladder monitoring Password change/clear Backlight shut-off time Input filter settings Node number setting (See note.)		Ladder program editing Ladder monitoring Password change/clear Backlight shut-off time Input filter settings Node number setting
LCD contrast ac	djustment	Not possible	Possible	
Menus	Node number setting window	Node number setting window deleted (except for Units with communications).	Node number setting window displayed.	
Modem initialization window		Modem initialization window deleted (except for Units with communications).	Modem initialization window displayed.	
RS-485 communications		Models added with communications. ZEN-10C4□R-□-V2		
Economy-type CPU Units		Economy-type models added. ZEN-□C3□R-□-V2 Expansion I/O Units cannot be connected. Other functions are the same as the standard LCD models.		

Note: Not displayed for V2 CPU Units except for Units with Communications.

Name	CPU Unit					
		V2 Units		V1 Units		Pre-V1 Units
		10 I/O points	20 I/O points	10 I/O points	20 I/O points	10 I/O points
Input bits	I	6 points	12 points	6 points	12 points	6 points
Output bits	Q	4 points (See note.)	8 points	4 points	8 points	4 points
Timers	Т	16 points				8 points
Holding timers	#	8 points				4 points
Counters	С	16 points				8 points
Weekly timers	@	16 points				8 points
Calendar timers	*	16 points				8 points
Display bits	D	16 points				8 points
Work bits	М	16 points				
Holding bits	Н	16 points				
Expansion input bits	Χ	12 points				
Expansion output bits	Υ	12 points				
Analog comparator bits	Α	4 points				
Timer/counter comparator bits	Р	16 points				
8-digit counter	F	1 point				
8-digit counter comparator bits	G	4 points				

Note: Output bit Q3 of Communications-type CPU Units cannot be output externally. It can be used as a work bit.

■ Compatible Combinations of CPU Units and Expansion I/O Units

The Expansion I/O Units that can be connected to V2 CPU Units are different from those that can be connected to V1 CPU Units and previous CPU Units. Expansion I/O Units with AC Inputs cannot be connected to V2 CPU Units with DC Power Supplies. Expansion I/O Units cannot be connected to Economy-type CPU Units.

	Supported			
Version	CPU Unit type	Power supply	Model	Expansion I/O Units
V2	Standard LCD type LED type Communications type	AC	ZEN-□C1AR-A-V2 ZEN-□C2AR-A-V2 ZEN-10C4AR-A-V2	ZEN-8E1DR ZEN-8E1DT
	Standard LCD type LED type	DC	ZEN-□C1D□-D-V2 ZEN-□C2D□-D-V2	ZEN-8E1DR ZEN-8E1DT
	Economy type	AC ZEN-□C3AR-A-V2	Not supported.	
		DC	ZEN-□C3DR-D-V2	
V1 and Pre-V1	Standard LCD type LED type	AC	ZEN-□C1AR-A-V1 ZEN-□C1AR-A ZEN-□C2AR-A-V1 ZEN-□C2AR-A	ZEN-4EA ZEN-4ED ZEN-4ER ZEN-8EAR
		DC	ZEN-□C1D□-D-V1 ZEN-□C1D□-D ZEN-□C2D□-D-V1 ZEN-□C2D□-D	1ZEN-8EDR ZEN-8EDT

■ Memory Cassette and CPU Unit Combinations

Be aware of the following restrictions when using a Memory Cassette containing a program that was stored from a CPU Unit with a different version of system software.

	ftware version	System software version of CPU Unit used to read the Memory Cassette						
	t used to write ory Cassette	Ver. 1.0	Ver. 1.1	Ver. 2.0 (V	I CPU Units)	Ver. 3.0 (V2 CPU Units)		
the Men	ory ouddence			10 I/O points 20 I/O points		10 I/O points	20 I/O points	
Ver. 1.0		OK	OK	OK	OK	OK	OK	
Ver. 1.1		Restrictions (See note 1.)	OK	OK	OK	OK	OK	
Ver. 2.0 (V1 CPU	10 I/O points	Restrictions (See notes 1 and 2.)	Restrictions (See note 2.)	OK	ОК	OK	ОК	
Jnits) 20 I/O points	Restrictions (See notes 1, 2, and 3.)	Restrictions (See notes 2 and 3.)	Restrictions (See note 3.)	ОК	Restrictions (See note 3.)	ОК		
Ver. 3.0 (V2 CPU	10 I/O points	Restrictions (See notes 1, 2, and 4.)	Restrictions (See notes 2 and 4.)	Restrictions (See note 4.)	Restrictions (See note 4.)	OK	OK	
Units)	20 I/O points	Restrictions (See notes 1 to 4.)	Restrictions (See notes 2, 3, and 4.)	Restrictions (See note 4.)	Restrictions (See note 4.)	Restrictions (See note 3.)	ОК	

Note: 1. The display functions (display clear: -CD□ and day/month display: DAT1) cannot be used and will be ignored.

- Only the memory area ranges supported by the pre-V1 CPU Units can be used for Timers, Holding Timers, Counters, Weekly Timers, Calendar Timers, and Displays (i.e., only half of each).
 Only 6 inputs and 4 outputs can be used in the CPU Unit I/O bits. Any others will be ignored.
- Twin timer operation for timers, multiple-day operation and pulse operation for weekly timers, the 8-digit counter, and 8-digit comparators cannot be used. New Zealand and Australia cannot be set for Daylight Saving Time (DST).

■ Support Software and CPU Unit Combinations


CPU Unit system s	software	Support Software				
		Ver. 1.0 ZEN-SOFT01	Ver. 2.0 ZEN-SOFT01-V2	Ver. 3.0 ZEN-SOFT01-V3	Ver. 4.1 ZEN-SOFT01-V4	
Ver. 1.0 (Pre-V1 Units)		OK	ОК	Restrictions (See notes 1 and 2.)	Restrictions (See notes 1, 2, and 3.)	
Ver. 1.1 (Pre-V1 Units)		Restrictions (See note 1.)	ОК	Restrictions (See note 2.)	Restrictions (See notes 2 and 3.)	
Ver. 2.0 (V1 CPU Units) 10 I/O points		Restrictions (See notes 1 and 2.)	Restrictions (See note 2.)	OK	Restrictions (See note 3.)	
20 I/O points		Not applicable.	Not applicable.	OK	Restrictions (See note 3.)	
Ver. 3.0 (V2 CPU Units)		Not applicable.	Not applicable.	Not applicable.	OK	

Note: 1. The display functions (display clear: -CD□ and day/month display: DAT1) cannot be used and will be ignored.

- Only the memory area ranges supported by the pre-V1 CPU Units can be used for Timers, Holding Timers, Counters, Weekly Timers, Calendar Timers, and Displays (i.e., only half of each).
- Twin timer operation for timers, multiple-day operation and pulse operation for weekly timers, the 8-digit counter, and 8-digit comparators cannot be used. New Zealand and Australia cannot be set for Daylight Saving Time (DST).


■ Difference between ZEN Programmable Relays and PLC Ladder **Program Execution**


ZEN Programmable Relays




ZEN executes the entire ladder program (up to 96 lines) from the first to last line at one time. Each row is executed in order from left to right starting from the left bus

The ON/OFF status produced by an output contact will not be used as the input contact status in the same cycle, but it can be used in the next cycle.






OMRON SYSMAC PLCs



PLCs execute ladder programs one rung (circuit) at a time, starting with the top rung and executing it in order from the left. When the END instruction is reached, the program is executed again from the first rung.

When the following instructions are executed, Q0 turns ON/OFF at the same time as the other bits.





Safety Precautions

Refer to Safety Precautions for All Timers.

∕!\ WARNING

Serious human hazard may occasionally occur due to ignition or rupture of the lithium battery used in the Battery Unit. Do not short the battery terminals or charge, disassemble, deform under pressure, or incinerate the battery.

Never use any battery that has been dropped on the floor or otherwise subjected to excessive shock.

/ CAUTION

Electric shock, fire, or malfunction may occur. Do not disassemble, modify, or repair the ZEN or touch any of the internal parts.

Electric shock may occur. Never touch the I/O terminals, computer connector, or Battery Unit connector while power is being supplied.

Electric shock may occur. Do not remove the Expansion Unit connector cover unless an Expansion I/O Unit will be permanently installed.

Fire may occasionally occur. Tighten the terminal screws to a torque of 0.565 to 0.6 N·m (5 to 5.3 in-lb).

■ Precautions for Safe Use

Please observe the following precautions for safe use of this product.

Circuit Design

- All interface connectors and battery connectors are live parts. They
 may not be directly connected to a Safety Extra Low Voltage
 (SELV) circuit or to accessible conductive parts.
- For programming units and personal computers use only the connecting cable ZEN-CIF01 (optional accessory) manufactured by OMRON.
- ZEN-CIF01 provides safe (reinforced) insulation between personal computers and ZEN.
- Provide emergency stop circuits, external interlock circuits, limit circuits, and other safety circuits in addition to any provided within the ZEN control circuits to ensure safety of the overall system in the event of ZEN failure or external factors.
- If the ZEN discovers an error during self-diagnosis, operation will be stopped and all outputs will be turned OFF. As a countermeasure for such problems, external safety measures must be provided to ensure safety in the overall system.
- Outputs from the ZEN may remain ON or OFF due to faults in internal circuits such as output relay fusing or burning, or output transistor destruction. As a countermeasure for such problems, external safety measures must be provided to ensure safety in the overall system.
- Fail-safe measures must be taken by the user to ensure overall system safety in the event of broken signal lines or momentary power interruptions.
- The durability of the output relays is largely affected by the switching conditions. Confirm the operation of the system under actual operating conditions and set the switching frequency to ensure that adequate performance will be provided. Insulation faults and burning in the ZEN may result if relays are used after their performance has deteriorated.

Connecting Expansion I/O Units

- Supply power to both the CPU Unit and Expansion I/O Units from the same power supply and turn them ON and OFF at the same time.
- When connecting Expansion I/O Units with DC inputs to a CPU Unit with an AC power supply, the burst noise immunity will be 1 kV (IEC 61000-4-4).
- Expansion I/O Units with AC inputs (ZEN-8E1AR) cannot be connected to a CPU Unit with a DC power supply.

System Startup and Program Changes

 Check the user program for proper execution before actually running it on the Unit.

- Disconnect the output lines from the system before testing operation in any system in which incorrect operation can result in injury or equipment damage.
- Confirm safety before attempting any of the following operations.
 - Changing the operating mode (RUN/STOP).
 - Using the button switches.
 - · Changing bit status or parameter settings.
- Double-check all wiring before turning ON the power supply.
- Refer to Cycle Time Calculation Method on page 21 and confirm
 that the increase in the cycle time will not affect operation. If the
 cycle time is too long, it may become impossible to read input
 signals accurately. The increase in the cycle time will be particularly
 noticeable when set values are written in RUN mode for a CPU Unit
 with communications (ZEN-10C4□R-□-V2).

Installation and Wiring

- Do not allow the ZEN to fall during installation.
- Be sure that the DIN Track mounting levers, Memory Cassettes, Battery Units, cable connectors, and other items with locking devices are properly locked into place. Improper locking may result in malfunction.
- For surface mounting, tighten mounting screws to the following torque.

CPU Units: 1.03 N·m max. Expansion I/O Units: 0.46 N·m max.

 Use wires with cross-sectional areas of 0.2 to 2.5 mm² (equivalent to AWG24 to AWG14) for wiring and strip them for 6.5 mm.

Handling

- The environment of use for the ZEN is "Pollution degree 2" and "Overvoltage category II" specified in IEC60664-1.
- Always use the ZEN within the rated ambient operating temperature and humidity. The rated ambient operating temperature is 0 to 55°C (-25 to 55°C for LED-type CPU Units).
 If the ZEN is used near sources of heat, such as a power supply, the internal temperature of the ZEN may increase, lowering the durability of the ZEN.
- Discharge static electricity from your body, e.g., by touching a grounded metal plate, before touching any Unit.
- The exterior of the Units will be damaged if it comes into contact with organic solvents (e.g., benzene or paint thinner), strong alkalies, or strong acids. Never allow such substances to come into contact with the Units.
- Do not apply voltages exceeding the rated voltages. Internal elements may be destroyed.
- Short failures or open failures may result from the destruction of output elements. Do not use loads that exceed the rated output current.

Maintenance

When replacing a CPU Unit, transfer to the new Unit and confirm all settings for clock data, internal holding bits, holding timers, and counters before starting operation again.

<u>Transportation and Storage</u>

- Use special packing boxes when transporting the ZEN and do not subject it to excessive shock or vibration or drop it during shipment.
- Store the ZEN within the rated ranges. If the ZEN has been stored at -10°C or lower, allow it to stand at room temperature for three hours or longer before turning ON the power supply.

■ Precautions for Correct Use

Installation Environment

- Do not install the ZEN in the following locations.
 - · Locations subject to radical changes in temperature

- · Locations with high humidity subject to condensation
- · Locations subject to excessive dust or dirt
- · Locations subject to corrosive gas
- · Locations subject to direct sunlight
- Do not install the ZEN in locations subject to shock or vibration. Extended use in such locations may cause damage from stress.
- In environments subject to static electricity (e.g., close to pipes conveying forming materials, powders, or fluid materials), separate the ZEN as far as possible from the source of static electricity.
- The ZEN is neither waterproof nor oil-proof. Do not use it in locations subject to water or oil.
- Use the ZEN within the allowable power supply voltage range. Be particularly careful in locations with bad power supply conditions, e.g., large fluctuations in the power supply voltage.
- Do not install the ZEN in locations subject to excessive noise, which may cause the ZEN to fail.
- Take appropriate and sufficient countermeasures when installing systems in the following locations:
 - Locations subject to strong electromagnetic fields
 - · Locations subject to possible exposure to radioactivity

Power Supply

- Always turn OFF the power supply to the ZEN before attempting any of the following.
 - · Assembling the ZEN
 - · Connecting or disconnecting any cables or wiring
 - Attaching or removing the Memory Cassette
 - Attaching or removing the Battery Unit
- If the power supply is interrupted for two days or more (at 25°C), the internal capacitor will discharge and internal bit status and the contents of PV areas will be lost or corrupted and dates and times will be reset. When restarting operation after the power supply has been interrupted for an extended period of time, check the system in advance to confirm that no errors will occur.

Handling

- Connect connectors only after confirming that the direction or polarity is correct.
- Failures could result if dust or dirt enters the ZEN. Always connect the connector cover to the computer connector whenever it is not being used.
- Do not remove the label from the left side of the CPU Unit if a Battery Unit is not mounted.

Other

- The execution of the ladder program in the ZEN is different from that for other PLCs. Refer to Difference between ZEN Programmable Relays and PLC Ladder Program Execution on page 32.
- Abide by all local ordinances and regulations when disposing of the ZEN.
- The Battery Unit (ZEN-BAT01, sold separately) contains a lithium battery. Observe all applicable legal requirements for your area when disposing of the lithium battery.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION. ABUSE. MISUSE. OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2011.1

In the interest of product improvement, specifications are subject to change without notice.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Controllers category:

Click to view products by Omron manufacturer:

Other Similar products are found below:

61FGPN8DAC120 CV500SLK21 70177-1011 F03-03 HAS C F03-31 81550401 FT1A-C12RA-W 88981106 H2CAC24A H2CRSAC110B R88A-CRGB003CR-E R88ARR080100S R88A-TK01K DCN1-1 DRT2ID08C DTB4896VRE DTB9696CVE DTB9696LVE E53-AZ01 E53E01 E53E8C E5C4Q40J999FAC120 E5CWLQ1TCAC100240 E5GNQ03PFLKACDC24 B300LKL21 NSCXDC1V3 NSH5-232CW-3M NT20SST122BV1 NV-CN001 OAS-160-N C40PEDRA K31S6 K33-L1B K3MA-F 100-240VAC K3TX-AD31A 89750101 L595020 SRM1-C02 SRS2-1 FT1A-C14SA-S G32X-V2K 26546803 26546805 PWRA440A CPM1AETL03CH CV500SLK11 3G2A5BI081 3G2A5IA122 3G2A5LK010E 3G2A5OA223