

AN1101SSM

CMOS single power supply

■ Overview

AN1101SSM is an operational amplifier with a single power supply by CMOS diffusion process.

It has low current-consumption compared to general purpose operational amplifier by bipolar diffusion process. 0 V to V_{DD} is available for both input voltage and output voltage. And this IC is widely applicable to the battery-driven equipment and to many amplifier circuits which adopt small package products.


■ Features

- Low current-consumption: $I_{DD} = 55 \mu\text{A}$ (typ.), $V_{DD} = 3 \text{ V}$
- Operating input/output voltage range: 0 V to V_{DD}
- Small offset voltage: 0.5 mV (typ.)
- Small input bias current: 1 pA (typ.)
- Operating supply voltage range:
2.5 V to 5.5 V or $\pm 1.25 \text{ V}$ to $\pm 2.75 \text{ V}$

■ Applications

- Various small-size general consumer electronics equipment


■ Block Diagram



■ Pin Descriptions

| Pin No. | Symbol | Description |
|---------|------------------|--|
| 1 | V_{OUT} | Output |
| 2 | GND (V_{SS}) | Ground, V_{SS} (negative supply) at using two power supply |
| 3 | V_{IN+} | Input (positive) |
| 4 | V_{IN-} | Input (negative) |
| 5 | V_{DD} | Power supply |

Note) The AN1101SSM has been designed for general consumer electronics equipment, not for the specific one requiring such a high reliability that may prevent it from threatening the human lives.

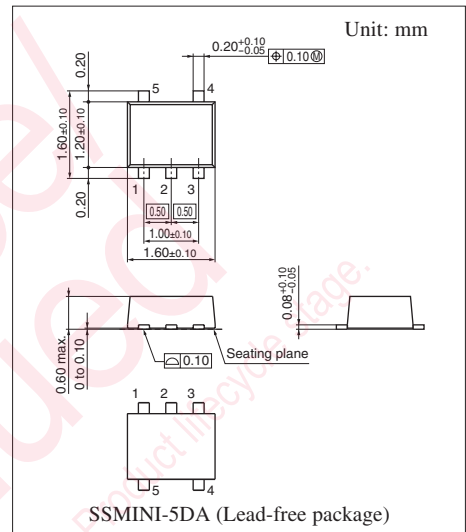

■ Absolute Maximum Ratings

| Parameter | Symbol | Rating | Unit |
|----------------------------------|-----------|----------------------|------|
| Supply voltage | V_{DD} | 5.6 | V |
| Differential input voltage | DV_{IN} | ± 5.6 | V |
| Input voltage | V_{IN} | V_{SS} to V_{DD} | V |
| Supply current | I_{DD} | — | mA |
| Power dissipation *2 | P_D | 50 | mW |
| Operating ambient temperature *1 | T_{opr} | -30 to +85 | °C |
| Storage temperature *1 | T_{stg} | -55 to +125 | °C |

Note) 1. *1: Except for the operating ambient temperature and storage temperature, all ratings are for $T_a = 25^\circ\text{C}$.

*2: The value at $T_a = +85^\circ\text{C}$.

2. This IC is not suitable for car electrical equipment.

■ Recommended Operating Range

| Parameter | Symbol | Range | Unit |
|----------------|----------|--------------------------|------|
| Supply voltage | V_{DD} | 2.5 to 5.5 | V |
| | | ± 1.25 to ± 2.75 | |

■ Electrical Characteristics at $V_{DD} = 3.0\text{ V}$, $V_{SS} = \text{GND}$, $T_a = 25^\circ\text{C} \pm 2^\circ\text{C}$

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---|------------|---|------|------|------|---------------|
| Input offset voltage | V_{IO} | Buffer circuit | — | 0.5 | 5.5 | mV |
| Common-mode input voltage | CMV_{IN} | $R_S = 10\text{ k}\Omega$, $R_F = 10\text{ k}\Omega$ | 0 | — | 3 | V |
| Open-loop gain | GV | $f = 100\text{ Hz}$ | 60 | 90 | — | dB |
| Maximum output amplitude voltage 1 | V_{OH} | $R_L \geq 10\text{ k}\Omega$ | 2.90 | 2.98 | — | V |
| Maximum output amplitude voltage 2 | V_{OL} | $R_L \geq 10\text{ k}\Omega$ | — | 0.01 | 0.05 | V |
| Common-mode input voltage rejection ratio | CMRR | $V_{IN} = 0.0\text{ V}$ to 3.0 V , $R_S = R_F = 10\text{ k}\Omega$ | 50 | 65 | — | dB |
| Supply voltage ripple rejection ratio * | SVRR | $V_{DD} = 2.5\text{ V}$ to 5.5 V | 55 | 70 | — | dB |
| Supply current | I_{DD} | No load | — | 55 | 100 | μA |

Note) * : Except for the supply voltage ripple rejection ratio (SVRR), $V_{DD} = 3\text{ V}$.


• Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.





| Parameter | Symbol | Conditions | Reference | Unit |
|----------------------|----------|------------------------------|-----------|------------------|
| Offset current | I_O | — | 1 | pA |
| Input bias current | I_{IO} | — | 1 | pA |
| Slew rate | SR | $R_L \geq 10\text{ k}\Omega$ | 0.35 | V/ μs |
| Zero-cross frequency | f_T | $A_V = 1$ | 0.8 | MHz |

■ Technical Data

- $P_D - T_a$ curve of SSMINI-5DA

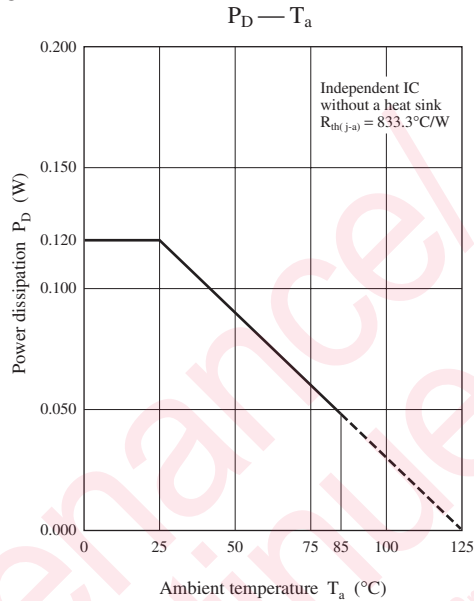


• Main characteristics

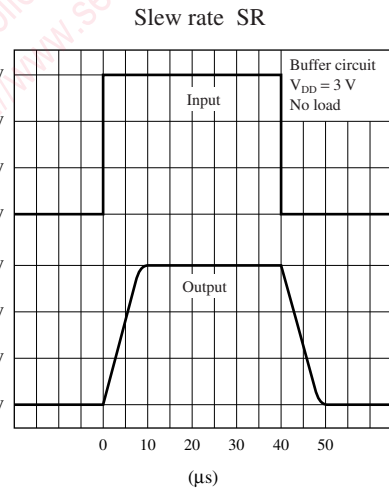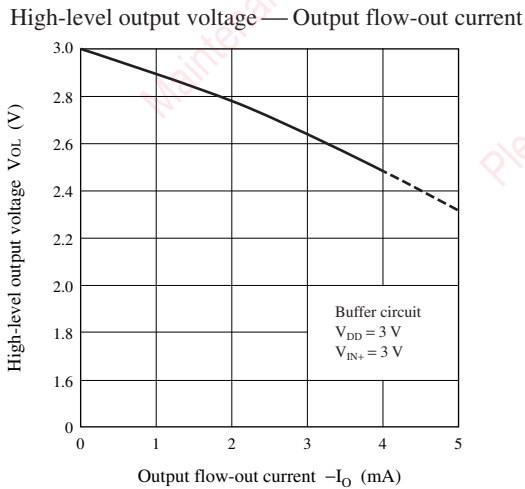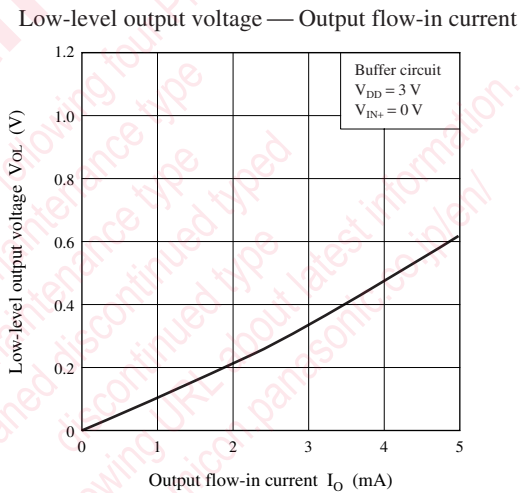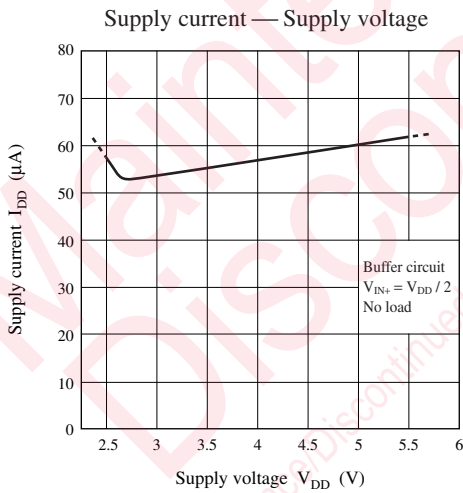


■ Technical Data (continued)

• Main characteristics (continued)


Offset voltage — Ambient temperature

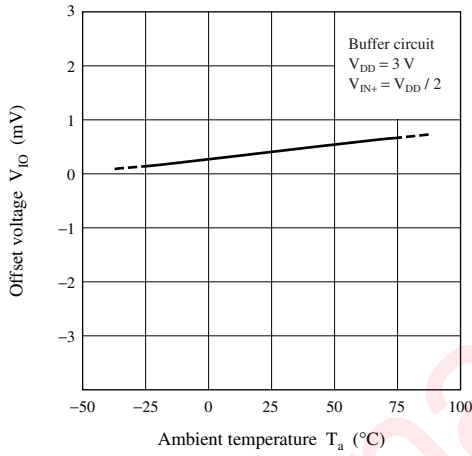


Supply current — Ambient temperature

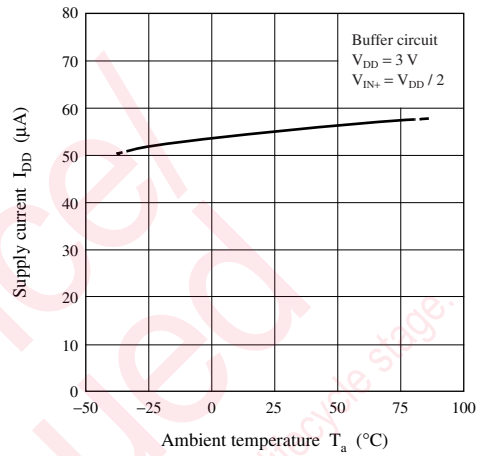

Voltage gain · Phase — Frequency characteristics

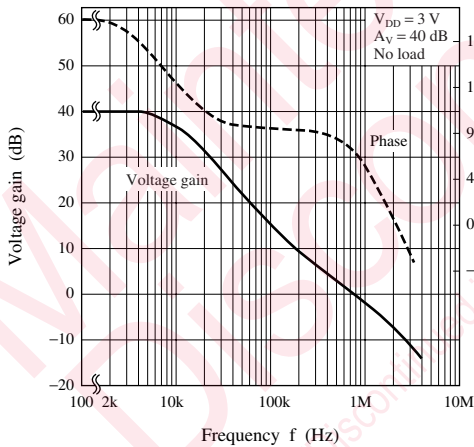

■ Application Circuit Example

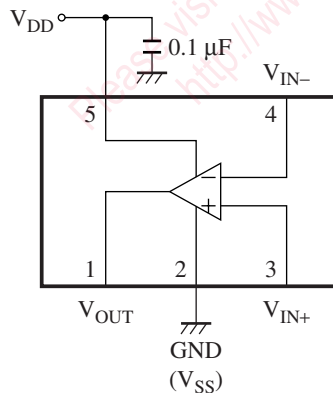

- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
- Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
- Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [panasonic](#) manufacturer:

Other Similar products are found below :

[ECE-A1HKAR47](#) [ELC-09D151F](#) [HC2-H-DC48V-F](#) [HL2-HP-AC120V-F](#) [HL2-H-DC12V-F](#) [HL2-HP-DC12V-F](#) [HL2-HP-DC6V-F](#) [HL2-HP-DC24V-F](#) [HL2-H-DC110V-F](#) [HC4-H-DC24V](#) [HL2-HTM-DC24V-F](#) [HL2-HTM-AC24V-F](#) [HC4-H-AC24V](#) [HC4-H-AC120V](#) [HC4-H-DC12V](#) [AZH2031](#) [RP-SDMF64DA1](#) [EVM-F6SA00B55](#) [RP-SMLE08DA1](#) [ERZ-V20R391](#) [ELL-ATV681M](#) [ERZ-V05V680CB](#) [LT4H-DC24V](#) [LT4HL8-AC24V](#) [LT4HW-AC24V](#) [LT4HWT8-AC240V](#) [LT4HWT-AC240VS](#) [CY-122A-P](#) [ETQ-P5M470YFM](#) [EVAL_PAN1555](#) [EVQ-PAE04M](#) [EX-14B](#) [EX-22B-PN](#) [EX-31A-C5](#) [EXB-24N121JX](#) [EX-F72-PN](#) [EX-L211](#) [EYG-A121803V](#) [FCR-M50-AC208V](#) [FC-SFBH-20](#) [FC-SFBH-24](#) [FD-F8Y](#) [MHMA102A1C](#) [MHMD022S1S](#) [MHMD041S1S](#) [MHMD042G1T](#) [MHMD082G1T](#) [FD-S9](#) [FP0-LDR](#) [FP2-AD8X](#)