


SMT POWER INDUCTORS

Power Beads - PA314xAHL Series Coupled Inductor

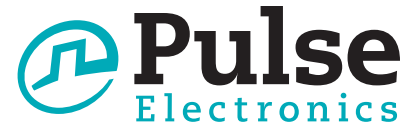

- 8mm Coupled Inductors for Volterra Gen2.5 Applications
- For use only with Volterra chipsets
- Coupled Inductors enable:
 - Phase ripple current reduction due to AC magnetic field cancellation within the inductor core.
 - Improved efficiency due to lower peak currents
 - Reduction in required output capacitance

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C


Part Number	Number of Coupled Phases	Series Inductance (nH +/- 15%)	Equivalent Transient (nH)	I _{rms_TDC} (A _{dc})	I _{max Peak} ³ per Phase (A _{dc})	Open Circuit Inductance ^{4,5} per Phase (nH)					
						Phase 1 (2-1)	Phase 2 (4-3)	Phase 3 (6-5)	Phase 4 (8-7)	Phase 5 (10-9)	DCR per Phase ⁶ (mΩ)
PA3142AHL	2	100	50	40	110	200nH Min at 0A _{dc} (25C) 150nH Min at 25A _{dc} (25C) 100nH Min at 23A _{dc} (105C)	na	na	na	0.25 Typical 0.30 Max	
PA3143AHL	3	150				200nH Min at 0A _{dc} (25C) 150nH Min at 25A _{dc} (25C) 100nH Min at 23A _{dc} (105C)	na	na			
PA3144AHL	4	200				200nH Min at 0A _{dc} (25C) 150nH Min at 25A _{dc} (25C) 100nH Min at 23A _{dc} (105C)	na				
PA3145AHL	5	250				200nH Min at 0A _{dc} (25C) 150nH Min at 25A _{dc} (25C) 100nH Min at 23A _{dc} (105C)					

Notes:


- The series inductance is the inductance when all phases are tied in series and is measured and verified in production at 100kHz, 100mVrms:
(ie: for PA3144AHL: Inductance (2-7) with (1-4 and 3-6 and 5-8 shorted))
- In a non-coupled multi-phase topology, the power supply sees the same inductance during transient and steady-state conditions. As a result, any attempt to lower the inductance to improve transient response has the negative result of increasing ripple and peak currents throughout the system during steady-state operation. However, in a coupled inductor multi-phase topology, the interaction of magnetic fields from each phase enables an overall reduction in ripple current during steady-state operation and a lower equivalent inductance during transient operation. The equivalent transient inductance per phase, as listed, represents the actual value of inductance (Lk) that would be required in a non-coupled topology to realize the same transient performance. The equivalent inductance per phase can be calculated as series inductance divided by the number of phases. For more information on the operation of the coupled inductor topology, please contact Volterra.
- The rated current (I_{rms_TDC}) is the continuous current which results in a 55° C rise of the component temperature above the ambient temperature (Conditions: Ta=55° C; 200LFM airflow; Tested on a Volterra evaluation board). The peak current (I_{max}) is the current which causes a 20% reduction of the leakage inductance compared to no load conditions at 105° C.
- The open-circuit inductance per phase is the measured inductance across each phase when all other phases are open circuit. Open circuit inductance is measured at 100kHz, 100mVrms. The open circuit inductance is equal to the magnetizing inductance, per phase (Lm) plus the equivalent transient inductance (Lk). The open circuit inductance values at 25C (0A_{dc} and 26 A_{dc}) are measured and verified during production.
- All elevated temperature measurements were verified during design but are not measured during production and therefore are for reference only.
- DCR is measured between points ② and ① as shown on the mechanical drawing.
- Optional tape and reel packaging can be ordered by adding a T suffix to the part number (ie: PA3144AHL becomes PA3144AHLT). Pulse complies to the industry standard tape and reel specification EIA481. The tape and reel for this product has the following dimensions:
PA3142AHL: W=32.0, Po=16.0, Ko=8.0
PA3143AHL: W=44.0, Po=16.0, Ko=7.6
PA3144AHL: W=56.0, Po=16.0, Ko=7.6
PA3145AHL: W=72, Po=16.0, Ko=8.0

Mechanicals


PA3142AHL

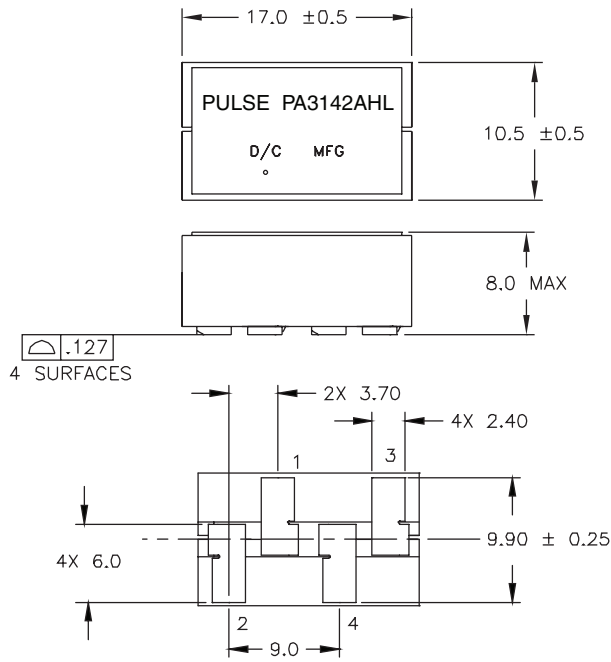

* All Dimensions in mm.
 Unless stated otherwise the tolerance on the listed dimensions are:
 .X ±0.2
 .XX ±0.10




Schematic

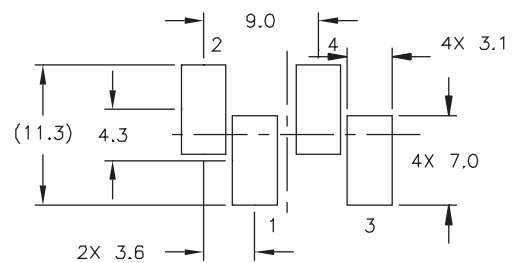


PRIMARY SUGGESTED LAND PATTERN

Mechanicals


PA3143AHL

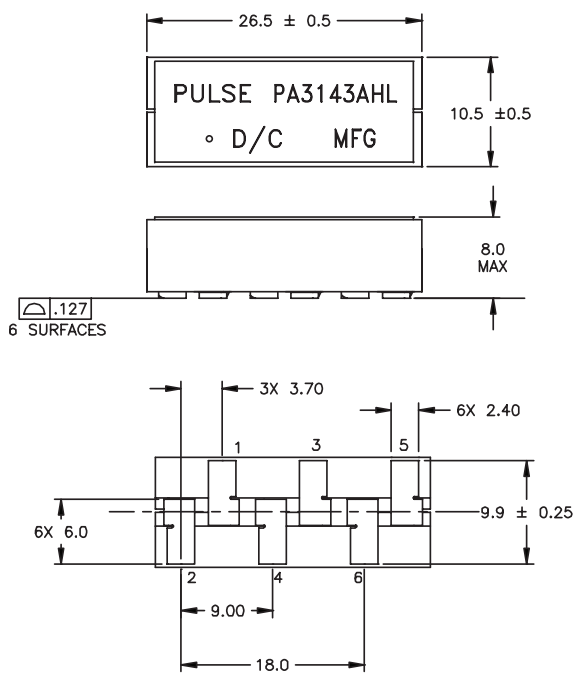

* All Dimensions in mm.
 Unless stated otherwise the tolerance on the listed dimensions are:
 .X ±0.2
 .XX ±0.10



Schematic

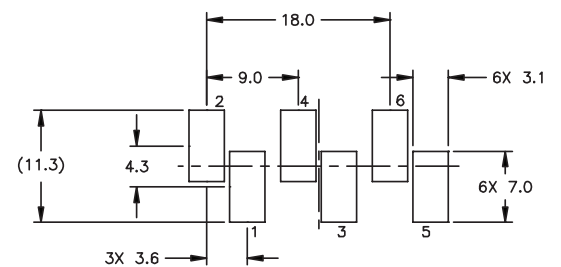


PRIMARY SUGGESTED LAND PATTERN

FINAL OUTLINE


SMT POWER INDUCTORS

Power Beads - PA314xAHL Series Coupled Inductor

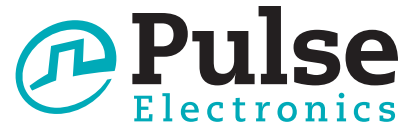


Mechanicals


PA3144AHL

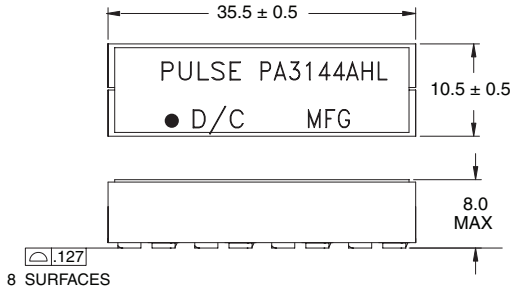


* All Dimensions in mm.
Unless stated otherwise the tolerance on the listed dimensions are:
.X ±0.2
.XX ±0.10



Schematic

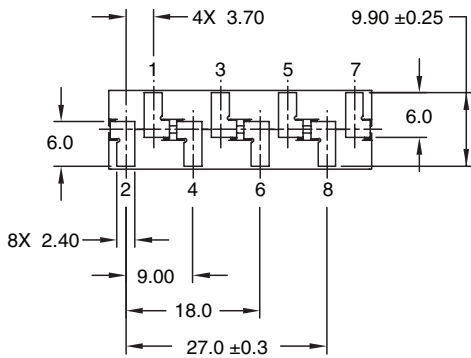


FINAL OUTLINE

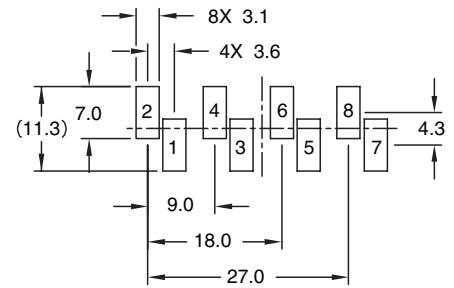


SUGGESTED LAND PATTERN
TOLERANCE ON PADS = ± 0.05

Mechanicals


PA3145AHL

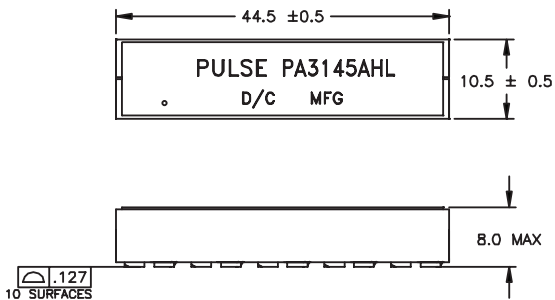


* All Dimensions in mm.
Unless stated otherwise the tolerance on the listed dimensions are:
.X ±0.2
.XX ±0.10



Schematic

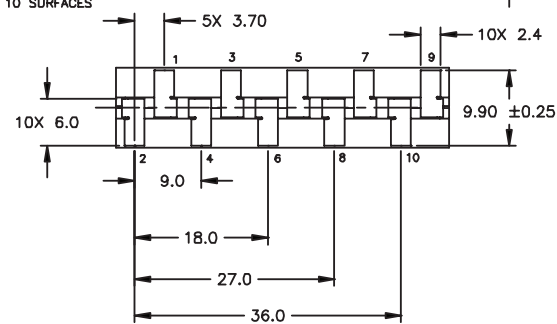


FINAL OUTLINE

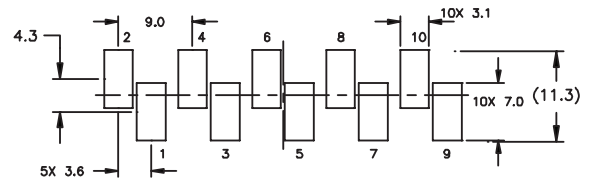

PRIMARY SUGGESTED LAND PATTERN

DCR Measurement Location

PA314XHL



For More Information

**Pulse Worldwide
Headquarters**

12220 World Trade Drive
San Diego, CA 92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Zeppelinstrasse 15
71083 Herrenberg
Germany

Tel: 49 7032 7806 0
Fax: 49 7032 7806 12

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzen, PR China 518057

Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F No. 198, Zhongyuan Road
Zhongli City
Taoyuan County (32068)
Taiwan

Tel: 886 3 4356768
Fax: 886 3 4356823

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2013. Pulse Electronics, Inc. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Pulse manufacturer](#):

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)