

南京强能传感技术有限公司


QKC18P50D15 系列霍尔电流传感器

QKC18P50D15 系列电流传感器的初、次级之间是绝缘的，具有超强抗干扰能力；用于测量直流、交流和脉动电流。

电参数

	QKC18P0 3D15	QKC18P0 5D15	QKC18P1 0D15	QKC18P1 5D15	QKC18P2 0D15	QKC18P2 5D15	QKC18P3 0D15	QKC18P4 0D15	QKC18P5 0D15	
额定输入电流	3	5	10	15	20	25	30	40	50	A
初级线径	0.6mm	0.8mm	1.0mm	1.2mm	1.6mm	1.6mm	1.6mm	1.0*6.3		
测量电流范围	9	15	30	45	60	60	60	120	120	A
额定输出电压	±4±1%									V
电源电压	±15±5%									V
静态功耗电流	≤±15									mA
零电流失调	≤±40									mV
磁失调电压	≤±40									mV
失调电压漂移	≤±1.5									mV/°C
线性度	≤±1									%FS
响应时间	<5									μS
绝缘电压	2.5(50Hz, 1min)									KV
工作温度	-10~+80									°C
储存温度	-40~+85									°C

结构参数

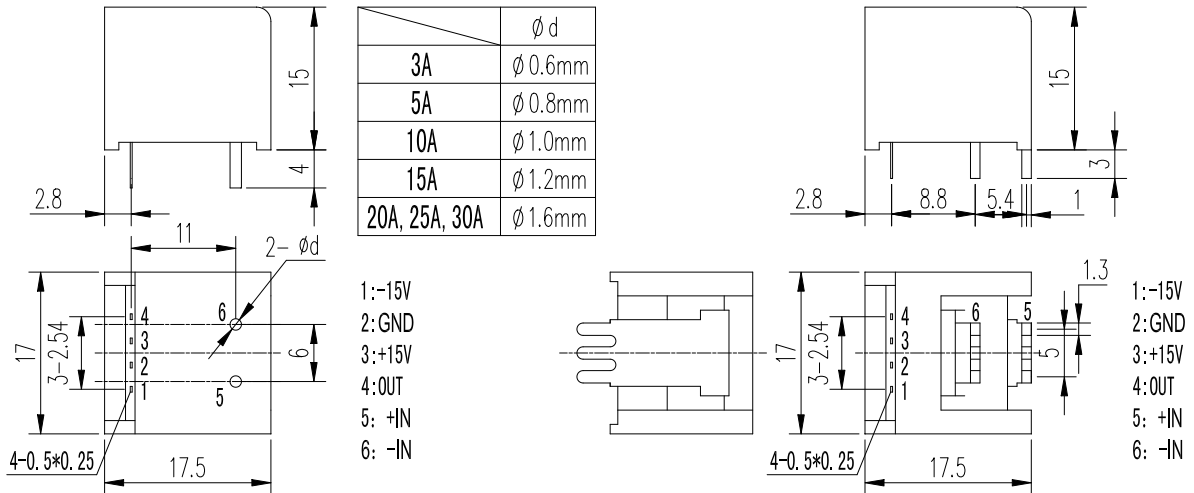

使用说明

1. 当待测电流从传感器穿过，即可在输出端测得电压大小。（注意：错误的接线可能导致传感器损坏）
2. 可按用户需求定制不同额定输入电流和输出电压的传感器。

电话：025-52619808 传真：025-52619628 网址：www.china-cgq.cn;www.chinasensors.net 邮箱：cgq@china-cgq.cn

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Current Sensors](#) category:

Click to view products by [QN](#) manufacturer:

Other Similar products are found below :

[CSNS181](#) [CSNS300M-001](#) [7SHT-301-E](#) [CSCA0075A000U12J01](#) [SAO-S1N](#) [L34S1T5D15T](#) [CS050BT5](#) [L34S1T0D15T](#) [CSNS300M-500](#)
[ACS711ELCTR-25AB-T](#) [ACS724LLCTR-10AB-T](#) [ACS770LCB-050U-PFF-T](#) [20320500101](#) [20310508201](#) [CCT354571-300-24-00](#) [T60404-](#)
[N4644-X201](#) [LCSC10T12](#) [20320300101](#) [2813473](#) [DCSA20](#) [S21S180D15JN](#) [T60404-N4644-X051](#) [L31S300S05FS](#) [ISB-300-A-802](#) [ISB-](#)
[175-A-802](#) [ISB-100-A-802](#) [ISB-100-A-800](#) [LPMG12](#) [ECS41BC](#) [ECSH40AC](#) [ECS41BD](#) [SAO-SU1N](#) [ECS41AC](#) [A-CS100B](#)
[ACS712ELCTR-20A-T](#) [BB-JC10F50-V](#) [BCY2-100IOV2M](#) [BCY2-50IOV2M](#) [BCY2-75IOV2M](#) [BL1Y2-150IOV2L](#) [BSL-800IOV2M](#) [BSY2-](#)
[100/4IOV2](#) [BSY2-150/4IOV2](#) [BSY2 -75/4IOV2](#) [BSL-800IOV2L](#) [BCY2-300IOV2M](#) [BCY2-200IOV2M](#) [CS010GT](#) [CS100EK1T5](#)
[CSM010PS3.3](#)