


# Quectel EG800Q Series

## IoT/M2M-optimized LTE Cat 1 Module

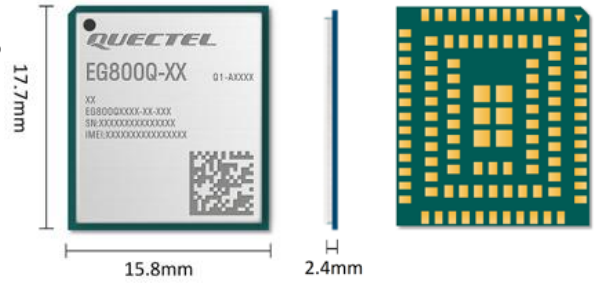

Quectel EG800Q is a series of LTE Cat 1 module optimized specially for M2M and IoT applications. Adopting the 3GPP Rel-14 LTE technology and supporting Cat 1 bis, it delivers maximum data rates up to 10 Mbps downlink and 5 Mbps uplink. Designed in a compact and unified form factor.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB serial drivers for Windows 7/8/8.1/10/11, Linux, Android) extend the applicability of the module to a wide range of M2M and IoT applications, such as asset management, commercial telematics, payment, RMAC (Remotely Managed Access Control), security and automation, smart metering and smart grid.



### Key Features

- ✓ LTE Cat 1 module optimized for M2M and IoT applications
- ✓ LTE-FDD coverage
- ✓ Supports DFOTA
- ✓ Single antenna
- ✓ LTE module in compact size
- ✓ Supports Wi-Fi Scan



LTE Cat 1  
Max. 10 Mbps (DL)  
Max. 5 Mbps (UL)



Compact Size



LGA Package




Embedded Abundant  
Protocols



DFOTA



Quectel Enhanced  
AT Commands



USB 2.0 High Speed  
Interface

# Quectel EG800Q

LTE Cat 1	EG800Q-EU	EG800Q-NA
Region/Operator	Europe	North America
Dimensions (mm)	17.7 × 15.8 × 2.4	17.7 × 15.8 × 2.4
Weight (g)	Approx. 2.0	Approx. 2.0
Package	LGA	LGA
<b>Temperature Range</b>		
Operating Temperature	-35 °C to +75 °C	-35 °C to +75 °C
Extended Temperature	-40 °C to +85 °C	-40 °C to +85 °C
<b>Frequency Bands</b>		
LTE-FDD	B1/3/5/7/8/20/28	B2/4/5/12/13/66/71
<b>Certifications</b>		
Carrier	<b>Europe</b> : Deutsche Telekom	<b>America</b> : Verizon*/AT&T*/T-Mobile*
Regulatory	<b>Europe</b> : CE <b>The UK</b> : UKCA <b>Australia/New Zealand</b> : RCM	<b>Global</b> : GCF* <b>North America</b> : PTCRB* <b>America</b> : FCC* <b>Canada</b> : IC*
Others	WHQL	WHQL
<b>Max. Data Rates</b>		
LTE-FDD (Mbps)	10 (DL)/5 (UL)	10 (DL)/5 (UL)
<b>Interfaces</b>		
USB 2.0	× 1	× 1
Digital Audio (PCM)*	× 1	× 1
USIM	× 1	× 1
NET_STATUS	× 1	× 1
UART	× 3 (Main, Debug and Auxiliary UART*)	× 3 (Main, Debug and Auxiliary UART*)
ADC	× 2	× 2
RESET_N	× 1	× 1
PWRKEY	× 1	× 1
I2C	× 1	× 1
USB_BOOT	× 1	× 1
Antenna	× 1 (Main Antenna)	× 1 (Main Antenna)
<b>Voice</b>		
Speech Codec Modes*	AMR/ WAV	AMR/ WAV
Audio*	Digital audio	Digital audio
<b>Software Features</b>		
Protocols	TCP/UDP/NTP/NITZ/FTP/HTTP/PING/HTTPS/FTPS/SSL/MQTT /CMUX/PPP/FILE/MMS*/SMTP*/SMTPS*	TCP/UDP/NTP/NITZ/FTP/HTTP/PING/HTTPS/FTPS/SSL/MQTT /CMUX/PPP/FILE/MMS*/SMTP*/SMTPS*
USB Serial Driver	Windows 7/8/8.1/10/11 Linux 2.6–5.18 Android 4.x–12.x*	Windows 7/8/8.1/10/11 Linux 2.6–5.18 Android 4.x–12.x*
RIL Driver	Android 4.x–12.x*	Android 4.x–12.x*
USB RNDIS Driver	Windows 7/8/8.1/10/11 Linux 2.6–5.18	Windows 7/8/8.1/10/11 Linux 2.6–5.18*
USB ECM Driver	Linux 2.6–5.18	Linux 2.6–5.18*
<b>Enhanced Features</b>		
DFOTA	●	●
QuecLocator®*	●	●
Wi-Fi Scan	●	●
USIM Card Detection	●	●
<b>Electrical Features</b>		
Supply Voltage Range	3.3–4.3 V, typ. 3.8 V	3.3–4.3 V, typ. 3.8 V
Power Consumption (Typ.)	50 μA @ Power off Mode 0.06 mA @ Sleep Mode (AT+CFUN = 0, USB disconnected) 0.16 mA @ Sleep Mode (AT+CFUN = 4, USB disconnected) 4.50 mA @ Idle Mode (PF = 64, USB disconnected) 22.30 mA @ Idle Mode (PF = 64, USB connected)	TBD

NOTE:

1. \*: Under development/In progress.
2. ●: Supported.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Mobile Development Tools](#) category:*

*Click to view products by [Quectel Wireless](#) manufacturer:*

Other Similar products are found below :

[5G-SOC-EVB-KIT](#) [MIKROE-5124](#) [EVK-R422M8S-0](#) [76002147](#) [ADP-SARA-R500E-01](#) [6000648](#) [6001457](#) [MIKROE-2535](#) [1946](#) [1963](#)  
[2687](#) [2691](#) [XK3-C-G1-UT-W](#) [XK3-C-G4-UT-W](#) [XK3-C-GM2-UT-W](#) [MIKROE-4118](#) [MIKROE-1298](#) [MIKROE-1375](#) [MIKROE-1720](#)  
[MIKROE-3294](#) [MIKROE-4506](#) [MIKROE-5991](#) [MIKROE-6256](#) [MIKROE-6277](#) [MIKROE-6318](#) [EG800QEULC-N03-TA0AA](#) [109030001](#)  
[109030002](#) [Monarch 2 NEKTAR-B-GM02S](#) [Monarch 2 NEKTAR-B-GM02SP](#) [Monarch-Go-STK](#) [Monarch-Go-GPS-STK](#) [6001458](#)  
[SKY68001-31EK1](#) [CEL-13120](#) [CEL-14997](#) [KIT-21229](#) [WRL-20409](#) [ADP-LEXI-R520-02](#) [ADP-R10801D-00](#) [ADP-R8001-00C](#) [ADP-](#)  
[R8001M10-00C](#) [ADP-SARA-R520-02](#) [ADP-SARA-R520M10-02](#) [ADP-LEXI-R422-01](#) [EVK-LEXI-R422-01](#) [EVK-R10801D-00](#) [EVK-](#)  
[R422M10S-0](#) [EVK-R8001-00C](#) [EVK-R8001M10-00C](#)