




PAGE 1/5	ISSUE 28-04-21A	SERIES SMPM-L	PART NUMBER R201L80000
----------	-----------------	---------------	------------------------

**Position Unlocked**

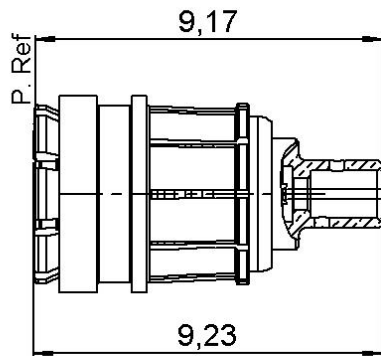

For Cable with inner conductor dia 0.29

Ø 1,28

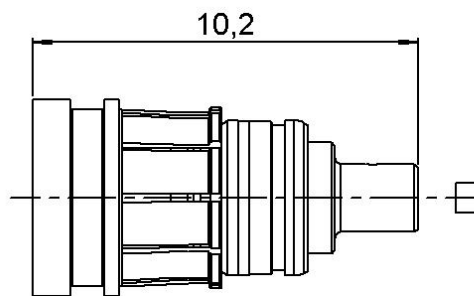



**Position Locked**

**Scale 1/1**



All dimensions are in mm. Tolerances according ISO 2768 m-H



COMPONENTS	MATERIALS	PLATING (µm)
Body	<b>BERYLLIUM COPPER</b>	<b>N2PGR</b>
Center contact	<b>BERYLLIUM COPPER</b>	<b>GOLD 1.3 OVER NICKEL2</b>
Outer contact	<b>BERYLLIUM COPPER</b>	<b>N2PGR</b>
Insulator	<b>PTFE+PEEK</b>	
Gasket		
Others parts	<b>BRONZE,BERYLLIUM COPPER</b>	<b>NICKEL, GOLD</b>
-	-	-
-	-	-

PAGE <b>2/5</b>	ISSUE <b>28-04-21A</b>	SERIES <b>SMPM-L</b>	PART NUMBER <b>R201L80000</b>
-----------------	------------------------	----------------------	-------------------------------

### PACKAGING

Standard	Unit	Other
<b>100</b>	<b>Contact us</b>	<b>Contact us</b>

### ELECTRICAL CHARACTERISTICS

Impedance	<b>50</b>	$\Omega$
Frequency	<b>0-65</b>	GHz
VSWR	* <b>0,0000</b>	x F(GHz) Maxi
Insertion loss	<b>0.12</b>	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- ( <b>**</b>	- F(GHz)) dB Maxi
Voltage rating	<b>125</b>	Veff Maxi
Dielectric withstanding voltage	<b>250</b>	Veff mini
Insulation resistance	<b>5000</b>	M $\Omega$ mini

### MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	<b>6.7</b>	N mini
Axial force – Opposite end	<b>6.7</b>	N mini
Torque	<b>NA</b>	N.cm mini
Recommended torque		
Mating	<b>NA</b>	N.cm
Panel nut	<b>NA</b>	N.cm
Clamp nut	<b>NA</b>	N.cm
A/F clamp nut	<b>0,0000</b>	mm
Mating life	<b>500</b>	Cycles mini
Nominal Weight (Add +15% for max weight)	<b>0,6100</b>	g

### ENVIRONMENTAL

Operating temperature	<b>-65/+165</b>	$^{\circ}\text{C}$
Hermetic seal	<b>NA</b>	Atm.cm3/s
Panel leakage	<b>NA</b>	

### SPECIFICATION

### CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	<b>7,000</b> <b>0</b>	<b>3,00</b> <b>00</b>	<b>1,8000</b>	-	-	-

Assembly instruction:

Recommended cable(s)

**047SC-2901**  
**UT47 M17/151-00001**

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off (UT47 M17/151-00001)	<b>45 N</b> mini
- pull off (047SC-2901)	<b>25 N</b> mini

- torque **NA** N.cm

### TOOLING

Part Number	Description	Hexagon
R282740060	BRAZING TOOL SMPM-LOCK	
R282868370	LOCK AND UNLOCK TOOL FOR SMPM-L	OPTION 1
R282918230	LOCK AND UNLOCK TOOL FOR SMPM-L	OPTION 2

### OTHER CHARACTERISTICS

(RF performances depend on cable used)

\* VSWR: **1.07 + .006 F(GHz) Maxi up to 40Ghz**

\*\***-80dB up to 3GHz**


PAGE 3/5	ISSUE 28-04-21A	SERIES SMPM-L	PART NUMBER R201L80000
----------	-----------------	---------------	------------------------

**For flexible cable**

**For Semi Rigid cable**

Before stripping, strip jacket  
And deep tin the naked braid.

We recommend a cable thermal  
preconditioning


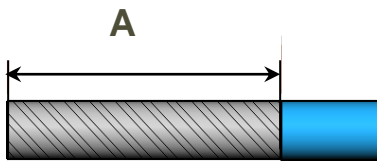


1A

- Strip the cable inner conductor.
- Make a Chamfer
- Clean the cable

1B

- Strip the cable inner conductor.
- Make a Chamfer
- Clean the cable

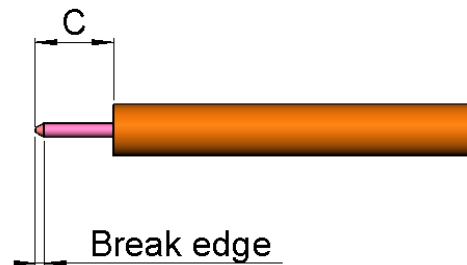
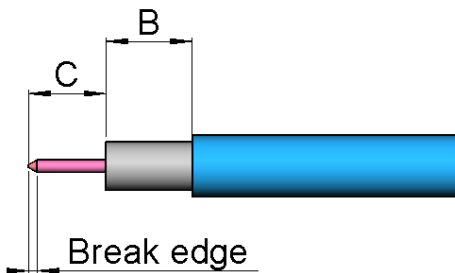


2A

- Slide the insulator onto the cable inner conductor.

2B

- Slide the insulator onto the cable inner conductor.

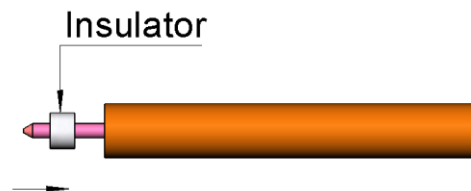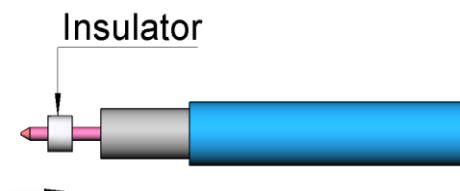


PAGE 4/5	ISSUE 28-04-21A	SERIES SMPM-L	PART NUMBER R201L80000
----------	-----------------	---------------	------------------------


3

- Introduce the cable into the connector body and place the assembly into the positioner
- Push the cable into the connector body until it stops and fixe the cable
- Solder the cable onto the body.
- After cooling remove cable assembly from the jig.


Cable in position  
See Nota 1

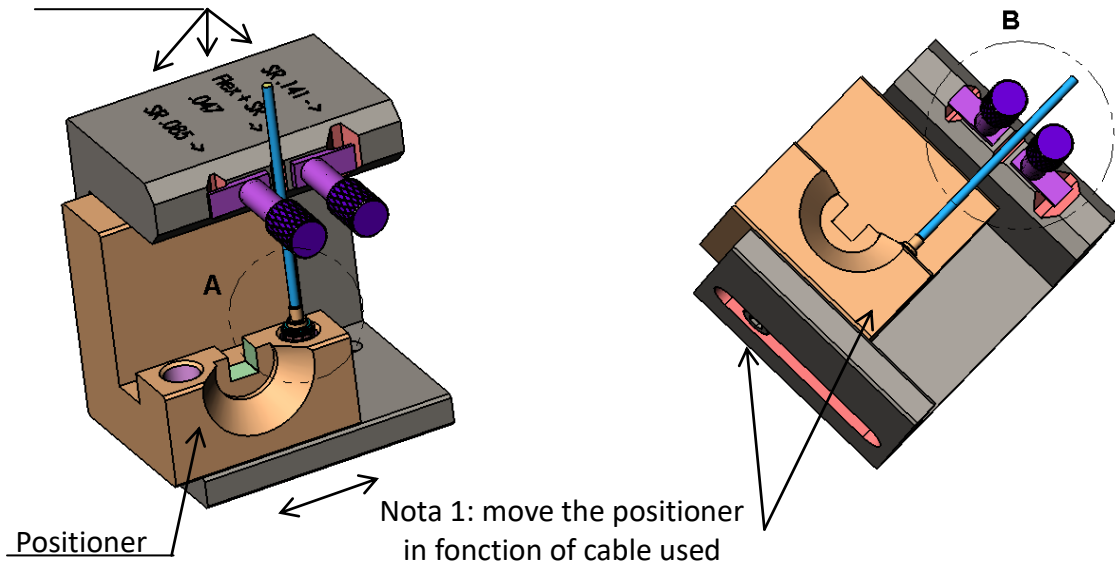

DETAIL A  
Echelle 2:1

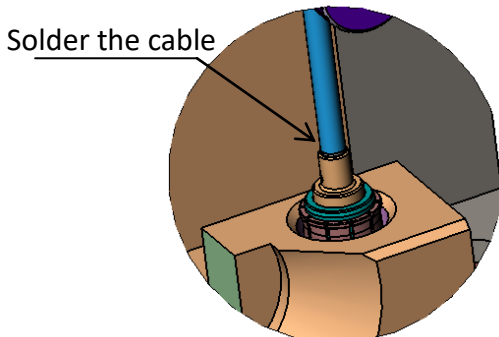


DÉTAIL B  
ECHELLE 2 : 1

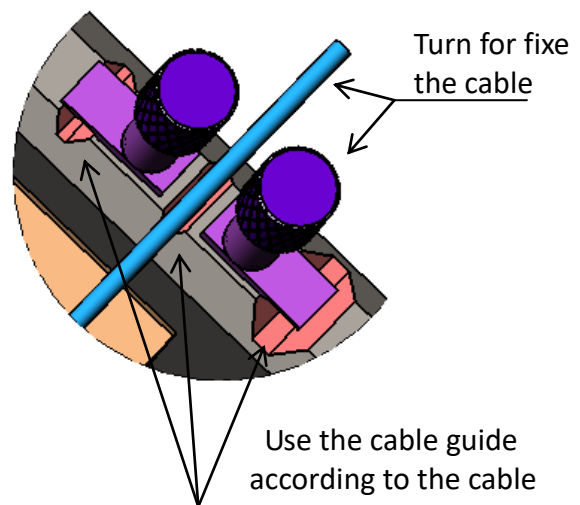


PAGE 5/5	ISSUE 28-04-21A	SERIES SMPM-L	PART NUMBER R201L80000
----------	-----------------	---------------	------------------------

**MATING, LOCKING / UNLOCKING INSTRUCTIONS**

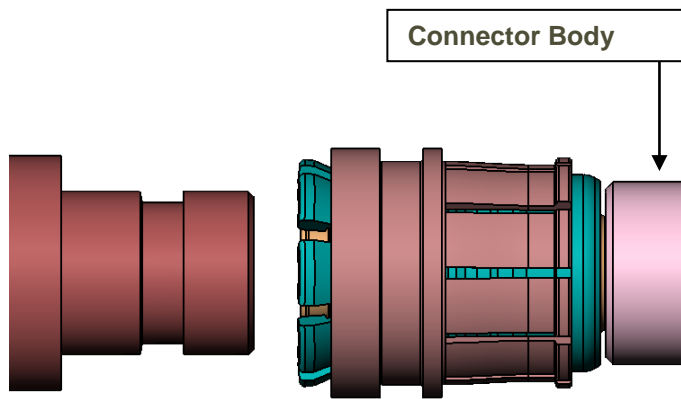


← Mate connectors until mechanical stop

**Do not make the coupling by the locking nut**

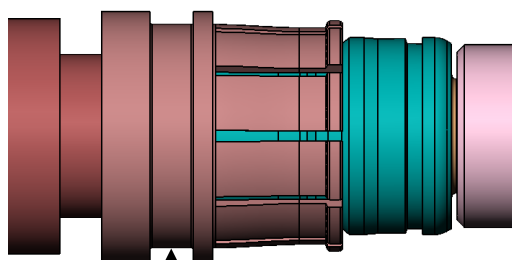


← Slide the locking nut until stop by using the specific tool (See tool option 1 or 2)

Groove for locking and unlocking tool

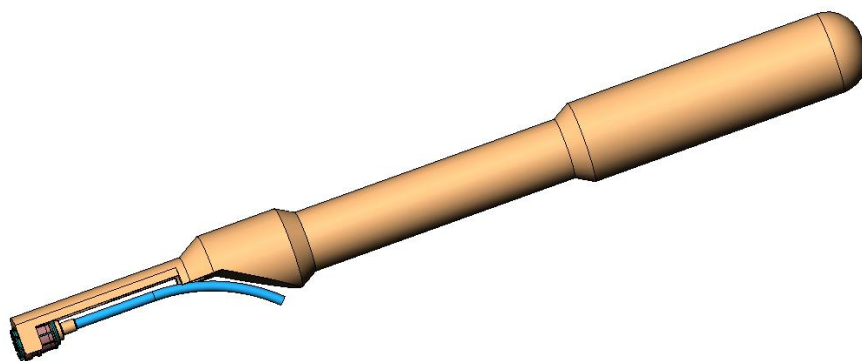

TOOL OPTION: 1

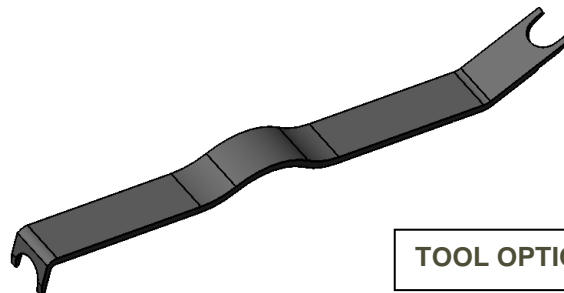

TOOL OPTION: 2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:*

*Click to view products by [Radiall](#) manufacturer:*

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7002-1542-011](#) [7002-1572-002](#) [7003-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [8527](#) [8547](#) [FS11V](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [980-8666-005](#) [1200690078](#) [1-201144-1](#) [R107003010W](#) [R110A172100](#) [R112186000](#)