

HA17431G Series

R03DS0087EJ0200

Rev.2.00

Jan 10, 2014

Adjustable Precision Shunt Regulators

Description


The HA17431G series is temperature-compensated adjustable precision shunt regulators. The products have improved features such as wide operating cathode voltage range and precision than the previous products.

Output voltage can be set to any value in the range from the reference voltage (Vref) to 40 V by two external resistors. There are two types of reference voltage accuracy sources such as $\pm 1.0\%$ standard version and $\pm 0.5\%$ A version with higher precision. As for the packages, small surface-mounted types such as MPAK, MPAK-5, and UPAK are available. Therefore, the HA17431G series is suitable for various applications that require high precision and miniaturization.


Features

- High-precision reference voltage : 2.500 V \pm 1.0% (Ta = 25°C, Standard version)
: 2.500 V \pm 0.5% (Ta = 25°C, A version)
- Maximum cathode voltage : 40 V
- Continuous cathode current : 100 mA
- K-REF pin reversing type : HA17432G (UPAK)
- Operating temperature range : -40°C to +85°C

Block Diagram

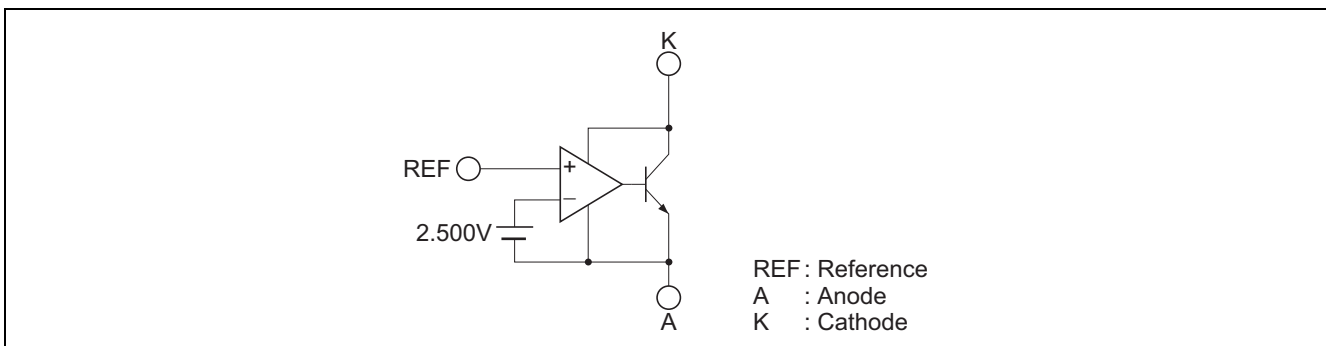


Application Circuit Example

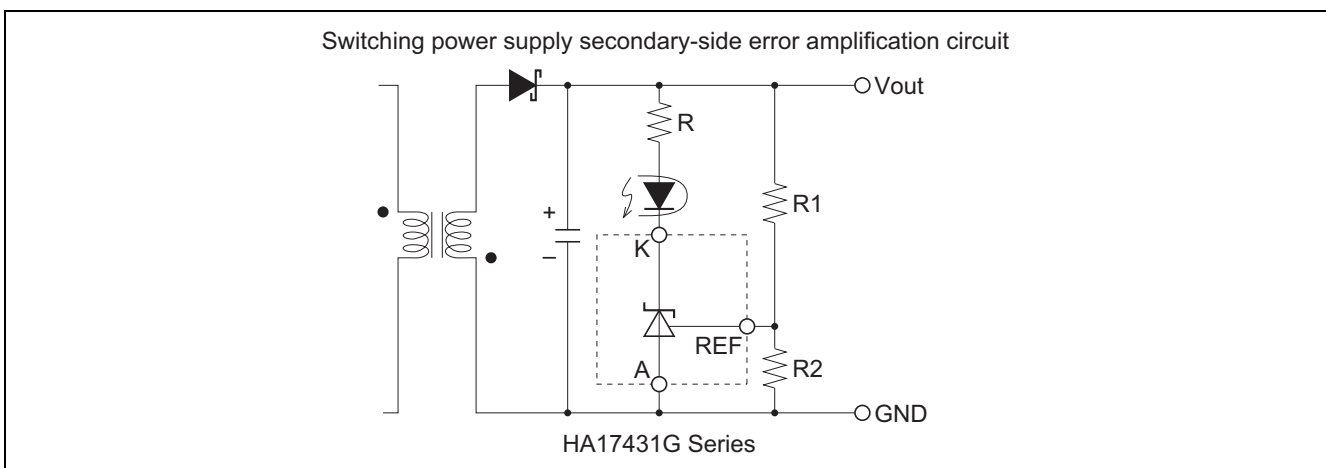

Ordering Information

Application	Type No.	Reference Voltage (Ta = 25°C)		Package Name (Package Code)	Operating Temperature Range
		Standard Version 2.500V ± 1.0%	A Version 2.500V ± 0.5%		
Industrial use	HA17431GP	○		TO-92	-40°C to +85°C
	HA17431GPA		○	(PRSS0003DA-A)	
	HA17431GLTP	○		MPAK	
	HA17431GLTPA		○	(PLSP0003ZB-A)	
	HA17431GLP	○		MPAK-5	
	HA17431GLPA		○	(PLSP0005ZB-A)	
	HA17431GUP	○		UPAK	
	HA17432GUP (K-REF pin reversing type)	○		(PLZZ0004CA-A)	

Pin Arrangement

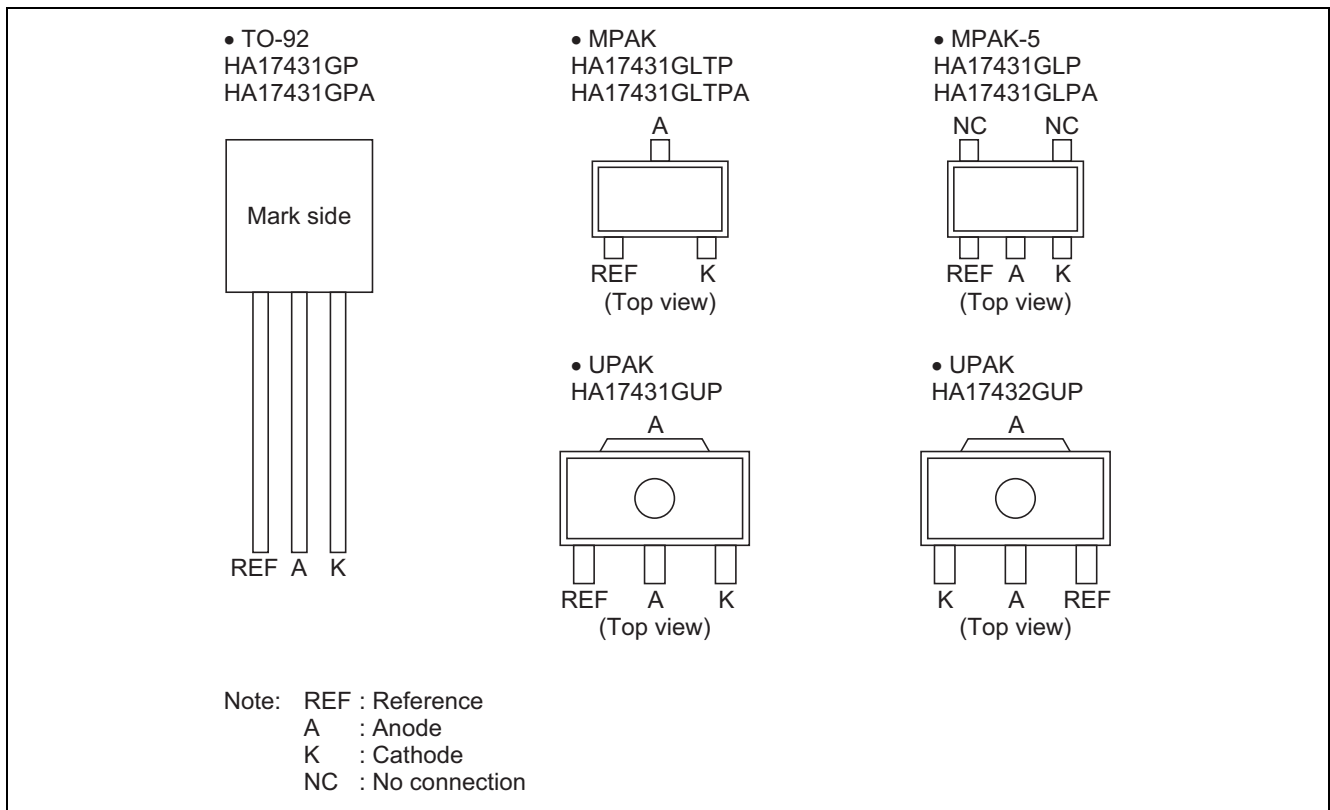

Absolute Maximum Ratings

(Ta = 25°C)

Item		Symbol	Ratings	Unit	Notes
Cathode voltage		V_{KA}	40	V	1
Continuous cathode current		I_K	-50 to +100	mA	
Reference input current		I_{ref}	-0.05 to +10	mA	
Power dissipation	TO-92	P_T	500	mW	2
	MPAK		150		3
	MPAK-5		150		3
	UPAK		800		4
Operating temperature range		T_{opr}	-40 to +85	°C	
Storage temperature		T_{stg}	-55 to +150	°C	

Notes: 1. Voltage values are with reference to the Anode pin.

2. $T_a \leq 25^\circ\text{C}$. If $T_a > 25^\circ\text{C}$, derate by $-4 \text{ mW}/^\circ\text{C}$.

3. $T_a \leq 25^\circ\text{C}$. If $T_a > 25^\circ\text{C}$, derate by $-1.2 \text{ mW}/^\circ\text{C}$.

4. 15 mm × 25 mm × 0.7mm alumina ceramic board, $T_a \leq 25^\circ\text{C}$. If $T_a > 25^\circ\text{C}$, derate by $-6.4 \text{ mW}/^\circ\text{C}$.


Electrical Characteristics

($T_a = 25^\circ\text{C}$, $I_K = 10\text{ mA}$, unless otherwise noted)


Item	Symbol	Min	Typ	Max	Unit	Test Conditions	Notes
Reference voltage	Vref	2.487	2.500	2.513	V	$V_{KA} = V_{ref}$	A
		2.475	2.500	2.525			Standard
Reference voltage temperature deviation	Vref(dev)	—	(14)	—	mV	$V_{KA} = V_{ref}$, $T_a = -40^\circ\text{C}$ to $+85^\circ\text{C}$	1, 2
Reference voltage temperature coefficient	$\Delta V_{ref}/\Delta T_a$	—	(± 30)	—	ppm/ $^\circ\text{C}$	$V_{KA} = V_{ref}$, 0°C to 50°C gradient	1
Reference voltage regulation	$\Delta V_{ref}/\Delta V_{KA}$	—	2.0	3.7	mV/V	$V_{KA} = V_{ref}$ to 10 V	
		—	2.0	3.7		$V_{KA} = 10\text{ V}$ to 40 V	
Reference input current	Iref	—	2	6	μA	$R_1 = 10\text{ k}\Omega$, $R_2 = \infty$	
Reference current temperature deviation	Iref(dev)	—	(0.9)	—	μA	$R_1 = 10\text{ k}\Omega$, $R_2 = \infty$, $T_a = -40^\circ\text{C}$ to $+85^\circ\text{C}$	1
Minimum cathode current	Imin	—	0.4	1.0	mA	$V_{KA} = V_{ref}$	3
Off state cathode current	Ioff	—	0.001	1.0	μA	$V_{KA} = 40\text{ V}$, $V_{ref} = 0\text{ V}$	
Dynamic impedance	Z_{KA}	—	0.2	0.5	Ω	$V_{KA} = V_{ref}$, $I_K = 1\text{ mA}$ to 100 mA	

Notes: 1. Reference values for design.

2. $V_{ref}(\text{dev}) = (V_{ref}\text{ maximum value at } T_a = -40^\circ\text{C to } +85^\circ\text{C}) - (V_{ref}\text{ minimum value at } T_a = -40^\circ\text{C to } +85^\circ\text{C})$

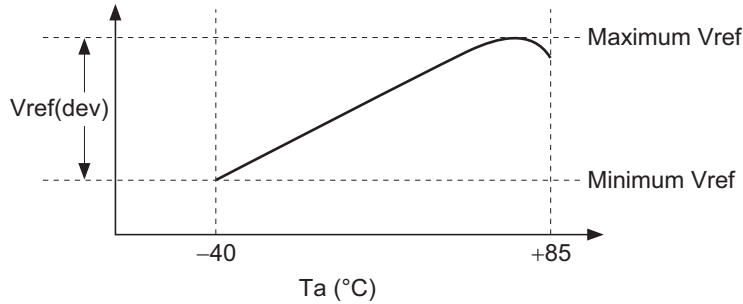


3. Definition of minimum cathode current. Imin is the cathode current value at which $V_{ref} = V_{ref}(I_K=10\text{mA}) - 15\text{ mV}$.

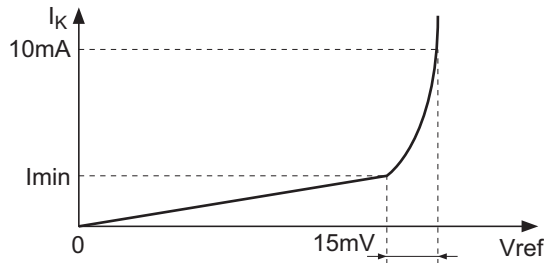

Marking Patterns

The marking patterns shown below are used on MPAK, MPAK-5 and UPAK products.


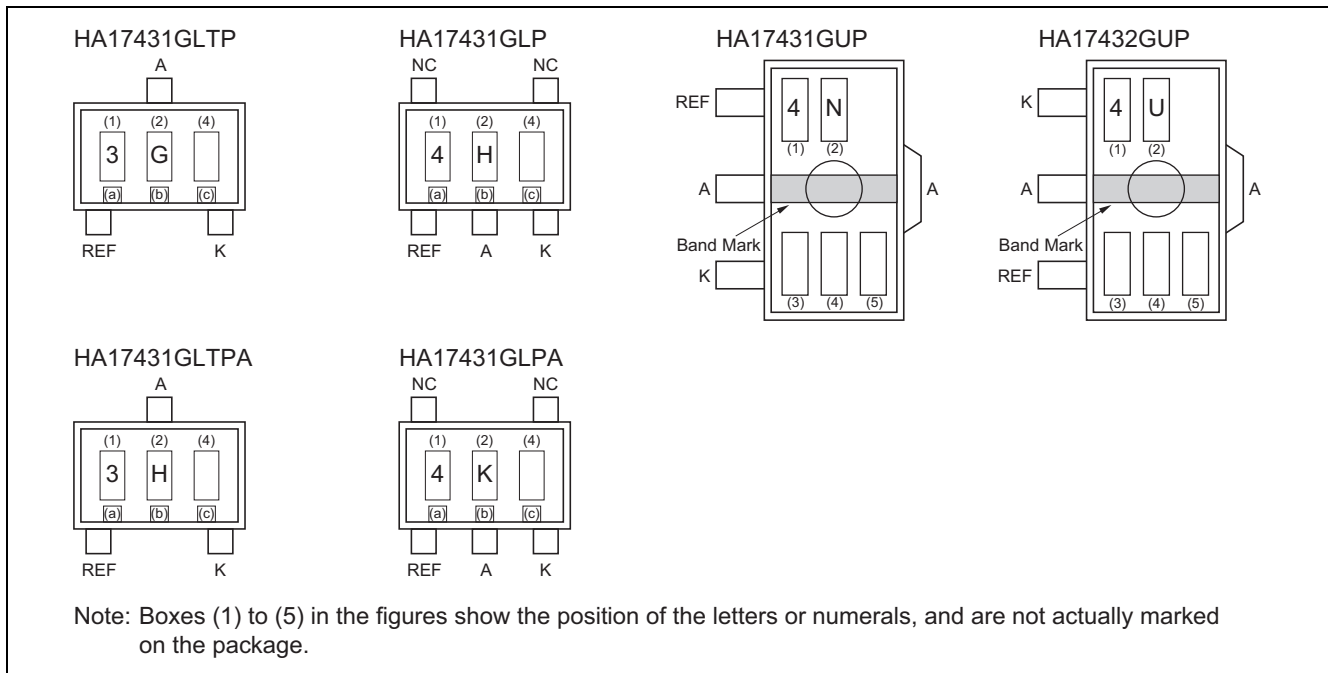


Markings


Position	Type of Marking	Meaning																																				
(1), (2)	Characters	Type No. code HA17431GLTP: 3G HA17431GLTPA: 3H HA17431GLP: 4H HA17431GLPA: 4K HA17431GUP: 4N HA17432GUP: 4U																																				
(3)		Production year code (The last digit of the year) Notes: 1. For UPAK products (HA17431GUP, HA17432GUP)																																				
(a), (b), (c)	Bar mark	Production year code <table border="1"> <thead> <tr> <th>Production Year</th> <th>2006</th> <th>2007</th> <th>2008</th> <th>2009</th> <th>2010</th> <th>2011</th> <th>2012</th> <th>2013</th> </tr> </thead> <tbody> <tr> <td>(a)</td> <td>Bar</td> <td>Bar</td> <td>Bar</td> <td>None</td> <td>None</td> <td>None</td> <td>None</td> <td>Bar</td> </tr> <tr> <td>(b)</td> <td>None</td> <td>Bar</td> <td>Bar</td> <td>None</td> <td>None</td> <td>Bar</td> <td>Bar</td> <td>None</td> </tr> <tr> <td>(c)</td> <td>Bar</td> <td>None</td> <td>Bar</td> <td>None</td> <td>Bar</td> <td>None</td> <td>Bar</td> <td>None</td> </tr> </tbody> </table> Notes: 2. Repeated every 8 years from 2014 on. 3. For MPAK products (HA17431GLTP, HA17431GLTPA) For MPAK-5 products (HA17431GLP, HA17431GLPA)	Production Year	2006	2007	2008	2009	2010	2011	2012	2013	(a)	Bar	Bar	Bar	None	None	None	None	Bar	(b)	None	Bar	Bar	None	None	Bar	Bar	None	(c)	Bar	None	Bar	None	Bar	None	Bar	None
Production Year		2006	2007	2008	2009	2010	2011	2012	2013																													
(a)	Bar	Bar	Bar	None	None	None	None	Bar																														
(b)	None	Bar	Bar	None	None	Bar	Bar	None																														
(c)	Bar	None	Bar	None	Bar	None	Bar	None																														
(4)	Characters	Production month code <table border="1"> <thead> <tr> <th>Production Month</th> <th>Jan.</th> <th>Feb.</th> <th>Mar.</th> <th>Apr.</th> <th>May</th> <th>Jun.</th> <th>Jul.</th> <th>Aug.</th> <th>Sep.</th> <th>Oct.</th> <th>Nov.</th> <th>Dec.</th> </tr> </thead> <tbody> <tr> <td>Code</td> <td>A</td> <td>B</td> <td>C</td> <td>D</td> <td>E</td> <td>F</td> <td>G</td> <td>H</td> <td>J</td> <td>K</td> <td>L</td> <td>M</td> </tr> </tbody> </table>	Production Month	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.	Code	A	B	C	D	E	F	G	H	J	K	L	M										
Production Month		Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.																									
Code	A	B	C	D	E	F	G	H	J	K	L	M																										
(5)	Management code Notes: 4. For UPAK products (HA17431GUP, HA17432GUP)																																					

Characteristics Curves


Reference Voltage vs. Ambient Temperature Characteristics

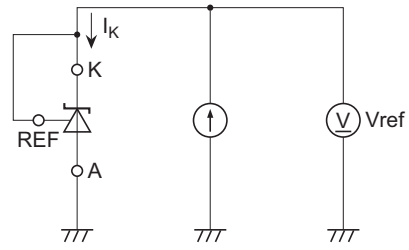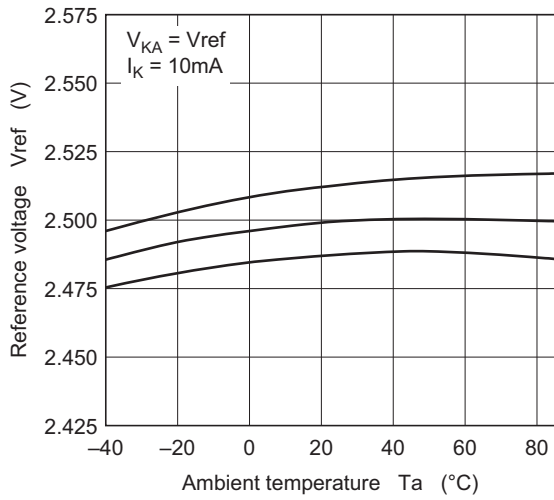



Cathode Current vs. Cathode Voltage Characteristics 1

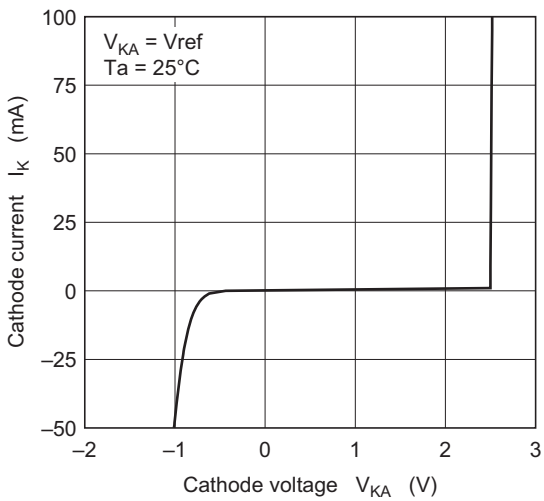

Cathode Current vs. Cathode Voltage Characteristics 2


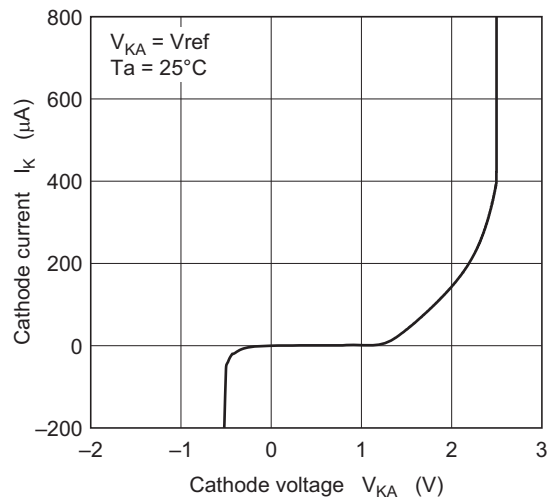


Reference Input Current vs. Ambient Temperature Characteristics

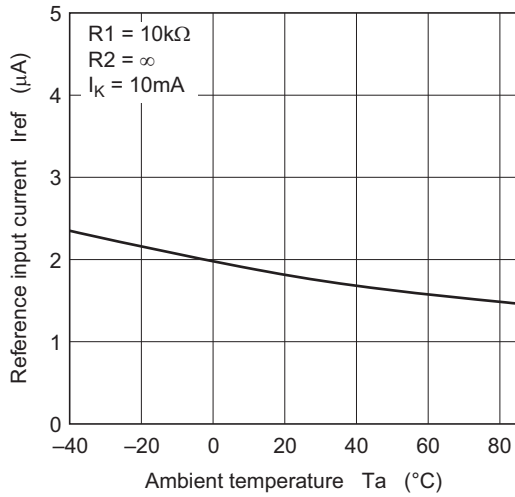



Measurement Circuit

Off State Cathode Current vs. Ambient Temperature Characteristics

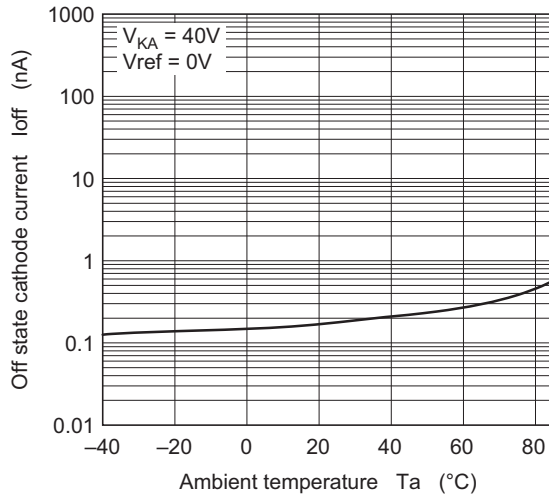

Measurement Circuit



Reference Voltage Deviation vs. Cathode Voltage Characteristics

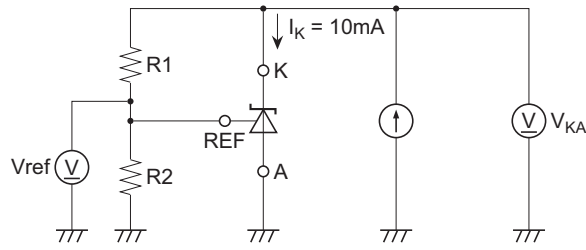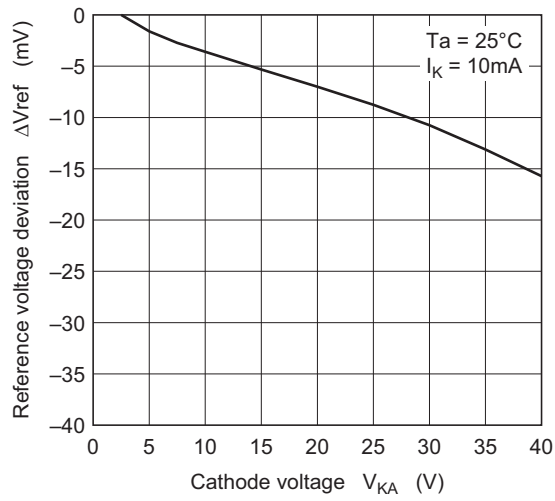

$$V_{KA} \cong V_{ref} \times \frac{R1 + R2}{R2}$$

Measurement Circuit



Open Loop Voltage Gain, Phase vs. Frequency Characteristics

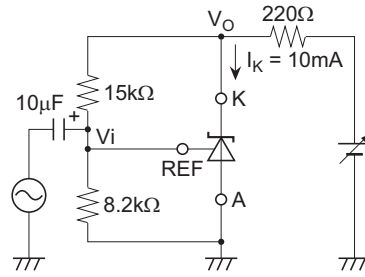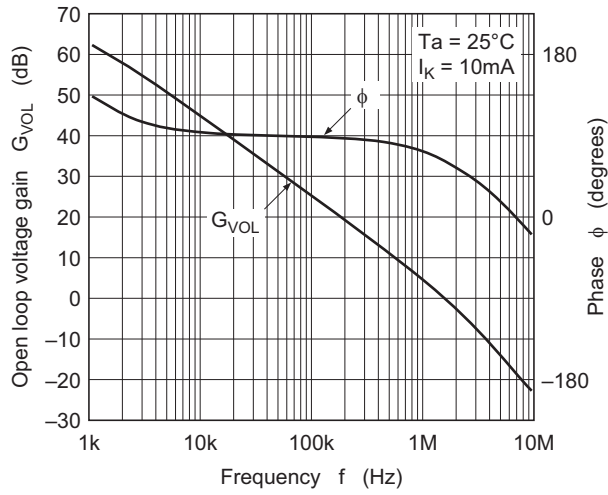

$$G_{VOL} = 20 \log \left(\frac{V_O}{V_i} \right) \text{ (dB)}$$

Measurement Circuit





Dynamic Impedance vs. Frequency Characteristics

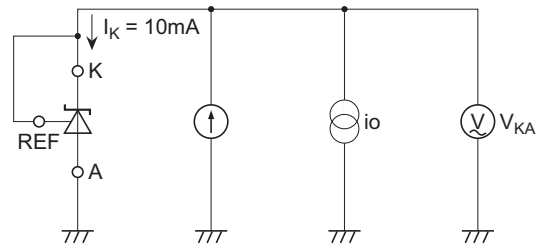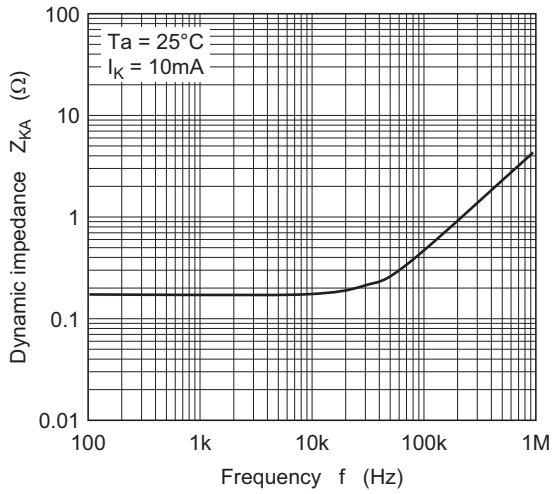

$$i_o = 707\text{mA rms} (= 2\text{mA p-p})$$

$$Z_{KA} = \frac{V_{KA}}{i_o} \text{ (}\Omega\text{)}$$




Measurement Circuit

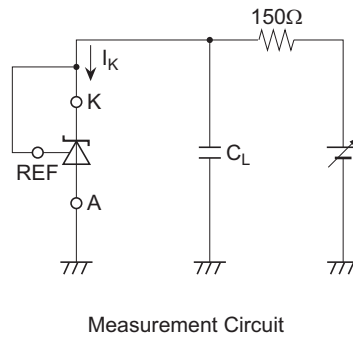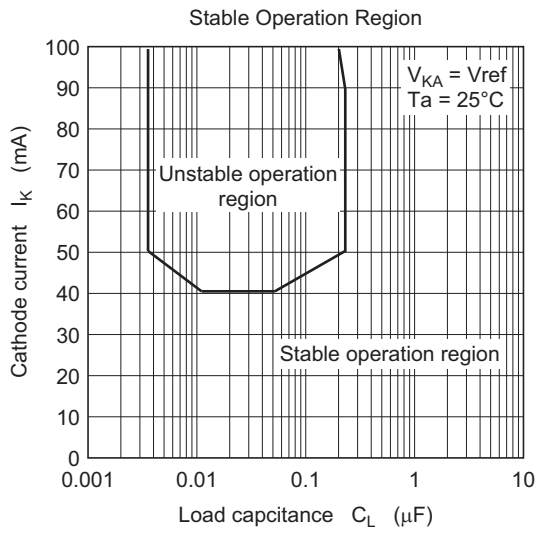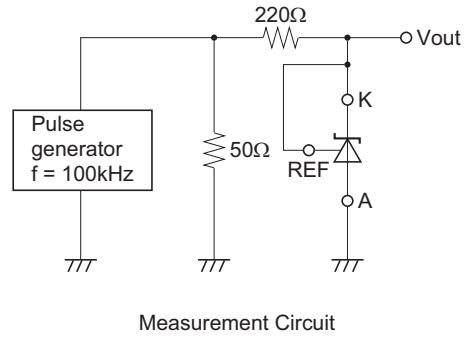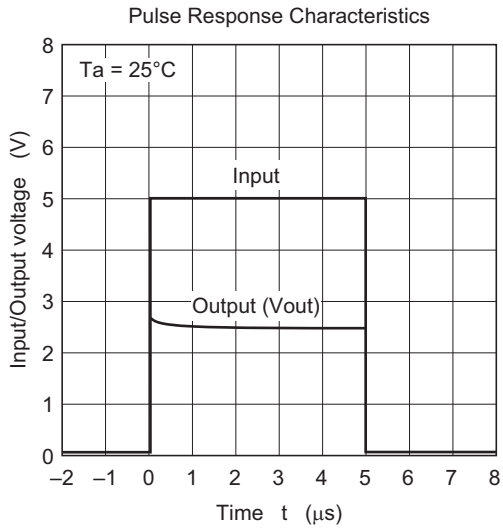

Note: In the unstable operation region, there is a possibility that the device oscillates. Please change to the setting with an enough margin in consideration of the difference when you use it.

Package Dimensions





JEITA Package Code	RENESAS Code	Previous Code	MASS (Typ) [g]
SC-59A	PLSP0003ZB-A	MPAK(T) / MPAK(T)V	0.011

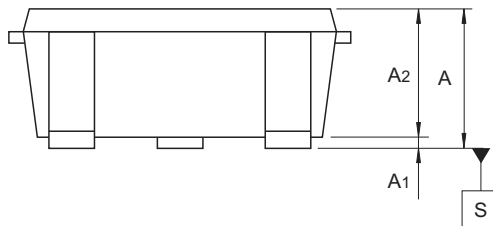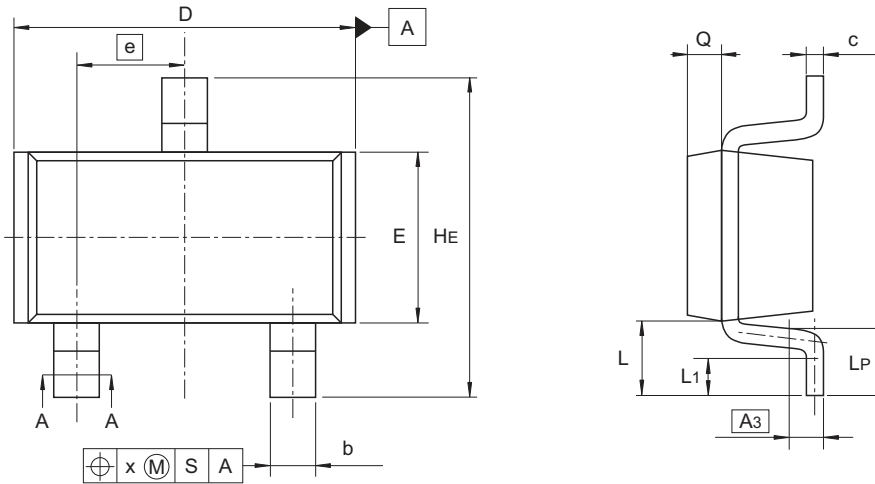

Reference Symbol	Dimensions in millimeters		
	Min	Nom	Max
A	1.0	—	1.3
A1	0	—	0.1
A2	1.0	1.1	1.2
A3	—	0.25	—
b	0.35	0.4	0.5
c	0.1	0.16	0.26
D	2.7	—	3.1
E	1.35	1.5	1.65
e	—	0.95	—
HE	2.2	2.8	3.0
L	0.35	—	0.75
L1	0.15	—	0.55
LP	0.25	—	0.65
x	—	—	0.05
Q	—	0.3	—

© 2013 Renesas Electronics Corporation. All rights reserved.

JEITA Package Code	RENESAS Code	Previous Code	MASS (Typ) [g]
SC-74A	PLSP0005ZB-A	MPAK-5 / MPAK-5V	0.015

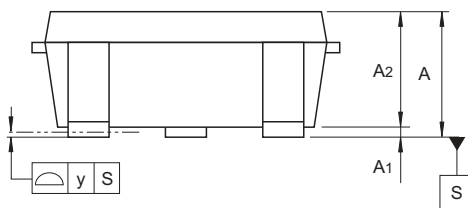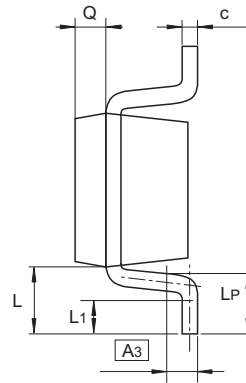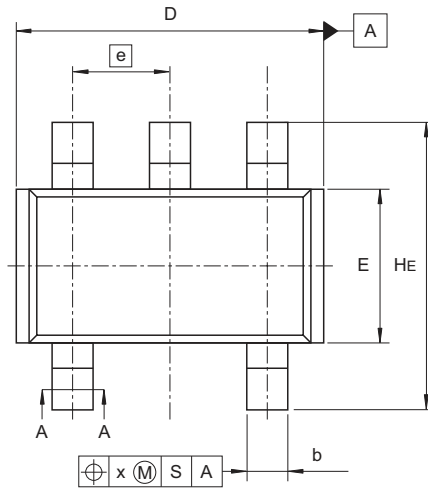


Reference Symbol	Dimensions in millimeters		
	Min	Nom	Max
A	1.0	—	1.4
A ₁	0	—	0.1
A ₂	1.0	1.1	1.3
A ₃	—	0.25	—
b	0.35	0.4	0.5
c	0.11	0.16	0.26
D	2.8	2.95	3.1
E	1.5	1.6	1.8
e	—	0.95	—
HE	2.5	2.8	3.0
L	0.3	—	0.7
L ₁	0.1	—	0.5
LP	0.2	—	0.6
x	—	—	0.05
y	—	—	0.05
Q	—	0.3	—

© 2013 Renesas Electronics Corporation. All rights reserved.

HA17431G Series


Package Name	JEITA Package Code	RENESAS Code	Previous Code	MASS[Typ.]
UPAK	SC-62	PLZZ0004CA-A	UPAK / UPAKV	0.050g

Unit: mm

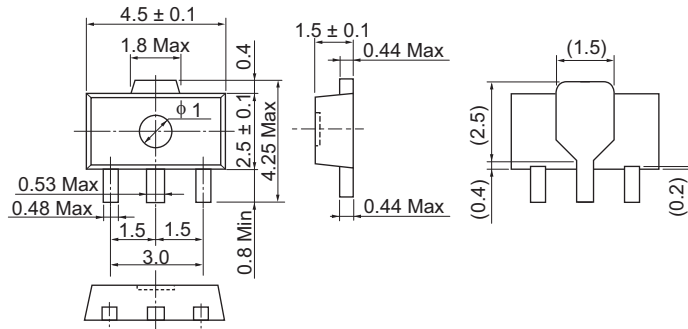

Package Name	JEITA Package Code	RENESAS Code	Previous Code	MASS[Typ.]
TO-92(1)	SC-43A	PRSS0003DA-A	TO-92(1) / TO-92(1)V	0.25g

Unit: mm

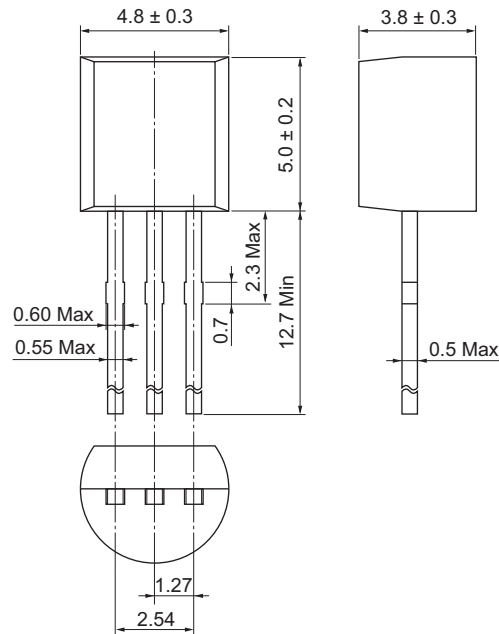

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.
Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.
6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.
2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A.
Tel: +1-408-586-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited
1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada
Tel: +1-905-898-5441, Fax: +1-905-898-3220

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-65030, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 LanGao Rd., Putuo District, Shanghai, China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2886-9318, Fax: +852 2886-9022/9044

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jin Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd.
12F., 234 Teheran-ro, Gangnam-Gu, Seoul, 135-080, Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5141

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Voltage References](#) category:

Click to view products by [Renesas](#) manufacturer:

Other Similar products are found below :

[622664A](#) [636116E](#) [748389C](#) [AS431ARTR-E1](#) [NCP431BCSNT1G](#) [NCP432BCSNT1G](#) [NCV431BSNT1G](#) [AP4313UKTR-G1](#)
[TL1431AIYDT](#) [AZ431BR-ATRE1](#) [622668D](#) [NCP432BVSNT1G](#) [5962-8686103XC](#) [NCV431BVDMR2G](#) [AP4306BUKTR-G1](#)
[SC431BVSNT1G](#) [MAX6023EBT30+T](#) [NCV431ASNT1G](#) [LM4040CEM3-5.0/V+T](#) [LT1460KCS3-3#TRM](#) [LT1460KCS3-3.3#TRM](#)
[LT1019AIS8-2.5](#) [LT6660KCDC-10#TRMPBF](#) [LTC6652BHLS8-5#PBF](#) [LTC6652AHLS8-4.096#PBF](#) [LTC6655BHLS8-4.096#PBF](#)
[LT6660HCDC-5#TRMPBF](#) [LM336Z-2.5#PBF](#) [LT1021BMH-10](#) [SC431ILPRAG](#) [TLVH431MIL3T](#) [MAX6023EBT21+T](#) [AP432AQG-7](#)
[ADR4540CRZ](#) [LM4040B25QFTA](#) [TS3325AQPR](#) [REF102AU/2K5](#) [TL4050B25QDBZR](#) [TL4051C12QDCKR](#) [TL431ACZ](#) [KA431SLMF2TF](#)
[KA431SMF2TF](#) [KA431SMFTF](#) [LM385BXZ/NOPB](#) [LM4040QCEM3-3.0/NOPB](#) [LM4041C12ILPR](#) [LM4050AEM3X-5.0/NOPB](#)
[LM4050AIM3X-5.0/NOPB](#) [LM4120AIM5-2.5/NOP](#) [LM431SCCMFX](#)