

## Mobile Solutions

NEW

VIA

# Viega Tablet

Semi-ruggedized embedded Android 10.1" tablet with IP65 rating and long battery life



## Features


- High-performance VIA Cortex-A9 dual-core SoC
- Ruggedized designed to meet MIL-STD 810G and IP65 water resistance standards
- Corner guards for anti-vibration and shock protection
- Customized Android software development
- Long-life polymer battery pack with up to 6 hours runtime

## Specifications

Model Name	Viega Tablet
Processor	1.2GHz VIA Cortex-A9 dual-core SoC
System Memory	1GB DDR3 SDRAM onboard
Storage	8GB/16GB/32GB eMMC Flash memory
Boot Loader	512KB SPI Flash ROM
Graphics	ARM Mali-400 DP GPU 2 integrated, independent 3D/2D graphics processing units Graphics engine supporting OpenGL® ES 2.0 hardware acceleration Supports MPEG-2, VC1, H.264 and VP8 video decoding up to 1080p
Sensors	ALS and PS support G sensor E compass
Connectivity	Wi-Fi 802.11b/g/n Bluetooth 4.0 NFC Type 1/2/3/4 GPS support (optional) 3G WCDMA up to 2100MHz (optional)
Audio	Headphone Jack Internal stereo speaker and microphone
Camera	2M Front camera 5M Rear camera with auto focus support (optional)
Speaker	1.5W stereo speaker inside
I/O Ports	2 Micro USB 2.0 ports - 1 for USB - 1 for 12V DC-in / COM 1 Micro HDMI 1 2MP front camera 1 5MP rear camera with auto focus support (optional) 1 Micro SIM card slot (optional) 1 Micro SD card slot 1 Stereo speaker inside 1 Power on/off button 1 Pogo pin connector
Display	10.1" LCD with LED backlight panel 1280x800 resolution Display active area: 217mm x 136mm
Power Supply	Battery pack support @ DC 7.4V Charge by AC adapter with 12 V DC-in or docking station Max runtime: 6hrs Max sleep time: 9hrs Max suspend time: 14 days (optional feature)
Operating System	Android 4.2
Operating Temperature	-10°C ~ 50°C
Relative Humidity	5 ~ 95% @ 40°C (non-condensing)
Storage Temperature	-20°C ~ 70°C



## All Sides External I/O

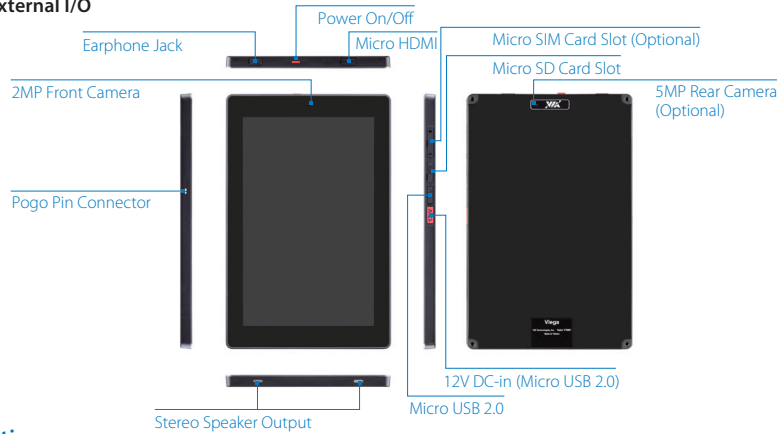


## Specifications

<b>Model Name</b>	<b>Viega Tablet</b>
<b>Compliance</b>	CE, FCC
<b>Dimensions</b>	265mm(W) x 12mm(H) x 171mm(D) (10.4" x 0.47" x 6.73")
<b>Weight</b>	0.75kg (1.65lbs)
<b>Docking Station</b>	1 Docking stand with Pogo pin interface for battery charger, Magnetic Swipe Reader (MSR) and handset (optional)

## Ordering Information

Part Number	System Built-in CPU	Description
VT60810013001-T	1.2GHz VIA Cortex-A9 dual-core	10.1" tablet with 1GB DDR3 RAM, 16GB eMMC, 2MP front camera, Micro HDMI, 2 Micro USB 2.0, Micro SD card slot, built-in Wi-Fi
VT60810013002-T	1.2GHz VIA Cortex-A9 dual-core	10.1" tablet with 1GB DDR3 RAM, 16GB eMMC, 2MP front camera, 5MP rear camera, Micro HDMI, 2 Micro USB 2.0, Micro SD card slot, built-in Wi-Fi
VT60810013003-T	1.2GHz VIA Cortex-A9 dual-core	10.1" tablet with 1GB DDR3 RAM, 16GB eMMC, 2MP front camera, 5MP rear camera, Micro HDMI, 2 Micro USB 2.0, Micro SIM card slot, Micro SD card slot, built-in Wi-Fi, GPS and 3G module

## Dimensions

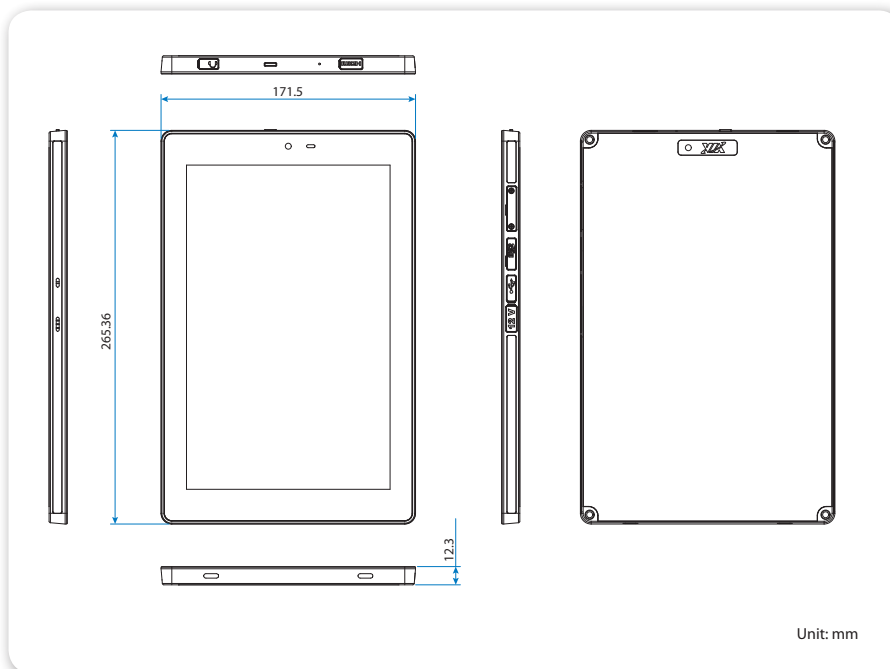

## Packing List

- 10.1" Viega tablet
- AC-to-DC adapter
- Power cord (US)
- Micro HDMI to HDMI adapter
- Micro USB to USB cable
- DC jack cable
- 4 Corner guard protectors

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Single Board Computers](#) category:*

*Click to view products by [VIA manufacturer](#):*

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN](#) [AmITX-SL-G-Q170](#) [IB100](#) [MVME61006E-2173R](#) [20-101-0738](#) [PCE-4128G2-00A1E](#)  
[RSB-4220CS-MCA1E](#) [SHB230DGGA-RC](#) [IB909AF-5650](#) [AmITX-BT-I-E3815](#) [PICO841VGA-E3827](#) [IMB210VGGA](#) [MI981AF](#) [RSB-](#)  
[4221CS-MCA1E](#) [PCE-9228G2I-00A1E](#) [IB915F-3955](#) [IB909F-5010](#) [MI958F-16C](#) [UPS-P-8G-64GB-PACK](#) [S2600WFT](#) [IB915AF-6300](#)  
[S2600STB](#) [BBS2600BPS](#) [IB915F-6100](#) [Nit6QP\\_MAX](#) [MI990VF-X28-E](#) [MI990VF-6820](#) [MI991AF-C236](#) [94AC6636](#) [BANANA PI BPI-M4](#)  
[BLKNUC7I3DNHNC1978015](#) [BLKNUC7I5DNK1E 960791](#) [IOT-LS1012A-OXALIS](#) [NITX-300-ET-DVI](#) [94AC6633](#) [A33-OLINUXINO-](#)  
[N8G](#) [A64-OLINUXINO-1GE16GW](#) [A20-SOM-E16GS16M](#) [A20-SOM204-1G-M](#) [EMB-APL1-A10-3350-F1-LV](#) [PICO-APL1-A10-F001](#)  
[PICO-APL4-A10-F003](#) [ODYSSEY - STM32MP157C BOARD WITH SOM](#) [BEAGLEBONE GREEN GATEWAY DEV BOARD](#) [ODYSSEY](#)  
[- X86J4105864 8GB RAM 64GB EMMC](#) [ODYSSEY -X86J4105864 8GB/64GB ENTERPRISE](#) [VISIONDK-STM32MP1 V.1.0](#) [VISIONDK-](#)  
[6ULL V.2.0](#) [VISIONDK-8MMINI V.1.0](#)