


Left: Spectrally Adapted Photodiodes and Phototransistors

Right: C30737PH Series T-1¼ (TO-like) Through-Hole Package (4.9mm Diameter)

AMBIENT LIGHT SENSORS

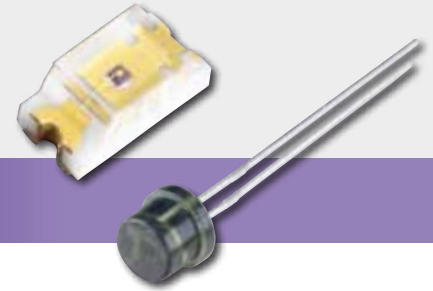

Spectrally Adapted Photodiodes and Phototransistors

Applications

- Interior and exterior light switching (dusk/dawn switch)
- Interior and exterior light control (dimming)
- Automotive headlight dimmer
- Display contrast control
- Energy conservation
- Oil burner flame monitoring

Features and Benefits

- Response approaching human eye using Excelitas' IR-BLOC™ technology
- Perfect light sensor in conjunction with Excelitas pyroelectric detectors for motion controlled light switches
- RoHS compliant
- Selectable wavelength detection range
- Small footprint
- Surface mount packages

Product Description

Ambient light sensors from Excelitas provide an easy solution for applications that require a response similar to the human eye, making it ideal when the response should only be influenced by visible light. These devices contribute in various applications to energy conservation in both fixed and portable devices. There are three main device types, one being filtered photodiodes, the second filtered phototransistors and finally wavelength selective devices based on III-V material. They are available in a number of standard packages, including surface mount for automated assembly.

Product Table


Spectrally Adapted Photodiodes and Phototransistors

Symbol	Package	Active Area	Short Circuit Current @ H=100fc, 2850K		Dark Current		Junction Capacitance		Radio-metric Sensitivity @ λ _P	Spectral Range	Peak Wavelength
			min	typ	max	typ	max	typ			
Unit		mm ²	I _{sc}	I _d	I _d	C _J	C _J	S _R	λ _{RANGE}	λ _P	
			μA	nA	nA	pF	pF	A/W	nm	nm	
VTP1220FBH	T-1¼ flat	1.219	0.7	-	10	-	18	0.27	400-700	550	
VTP9812FH	T-1¼ flat	1.548	0.7	-	10	-	18	0.034	400-700	580	
VTT9812FH	T-1¼ flat	0.192	100	-	100	-	-	7	450-700	585	
SR10SPD 470-0.9	SMT	0.70	-	-	0.03	150	-	0.18	380-556	470	
SR10SPD 525-0.9	SMT	0.73	-	-	0.03	100	-	0.25	480-560	525	

Electrical characteristics at T_{Ambient} = 25 °C


Graph 1

Responsivity @ 25° C VTT9812FH IR-BLOC™

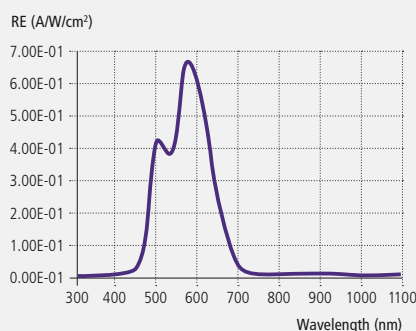

Graph 2

VTT9812FH Output Versus Low Light Levels

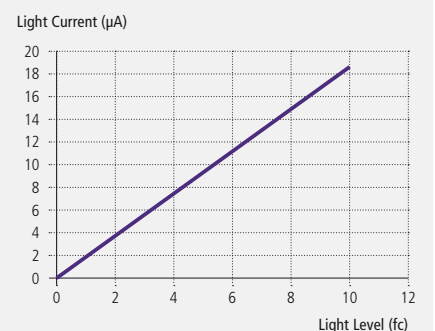

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Photodiodes](#) category:

Click to view products by [Excelitas](#) manufacturer:

Other Similar products are found below :

[LTR-526AD](#) [LV0221CS-TLM-H](#) [OED-SP-7L](#) [LTR-536AB](#) [LTR-743DBM1-TA](#) [LV0223CV-TLM-H](#) [67-21SYGC-S349-TR8](#) [SAH500M1](#)
[SFH 2200 A01](#) [BPW 34 S E9601](#) [SFH 2713](#) [SFH 2703](#) [LTR-546AD](#) [BP 104 SR-Z](#) [BPV23FL](#) [BPW 34 BS-Z](#) [BPW 34 FAS](#) [BPW 34 FS](#)
[IG17X1000S4I](#) [IG22X250S4I](#) [VTB9413BH](#) [VTD205H](#) [VTD205KH](#) [VTP1220FBH](#) [VTP1232FH](#) [VTP4085H](#) [1541201EEA400](#) [SFH 2400](#)
[OP913WSL](#) [OP955](#) [OPR5913](#) [PD15-21B/TR8](#) [PD3122FE000F](#) [PD93-21C/TR8](#) [LTR-536AD](#) [VTP8651H](#) [VTD206KH](#) [VTB1013H](#)
[BPV23NF](#) [OP905](#) [LTR-516AD](#) [BPW 34 FS-Z](#) [VTD34FH](#) [QSB34CGR](#) [SFH 2500 FA](#) [3001032](#) [3001048](#) [ARRAYC-60035-64P-PCB](#) [SFH](#)
[2240](#) [OPR2100T](#)