

Dual ground sense operational amplifier

BA10358 / BA10358F / BA10358FV / BA10358N

The BA10358, BA10358F, BA10358FV, and BA10358N are monolithic ICs with two independent built-in operational amplifiers featuring high gain and frequency compensation.

These products offer a particularly wide range of operating voltages, from 3 to 32V (when using a single power supply). Current dissipation is low and remains constant regardless of the power supply voltage. Available packages include an 8-pin DIP (BA10358), an 8-pin SOP (BA10358F), an 8-pin SSOP-B (BA10358FV), and an 8-pin SIP (BA10358N).

●Features

- 1) Can be driven with a single power supply.
- 2) Extremely low current dissipation.
- 3) Level is compatible with any kind of logic circuit.
- 4) Operating voltage range is 3 to 32V for single power supply, ± 1.5 to ± 16 V for dual power supply.
- 5) High DC voltage gain.
- 6) Wide frequency response.
- 7) Pin assignments is the same as the general-purpose 4558 model.
- 8) Compatible with model 358 operation amplifiers of other manufacturers.

●Absolute maximum ratings


Parameter	Symbol	Limits				Unit
		BA10358	BA10358F	BA10358FV	BA10358N	
Power supply voltage	V _{cc}	32 (± 16)	V			
Power dissipation	P _d	800*	550*	350*	900*	mW
Differential input voltage	V _{ID}	$\pm V_{cc}$	$\pm V_{cc}$	$\pm V_{cc}$	$\pm V_{cc}$	V
Common-mode input voltage	V _I	-0.3 ~ V _{cc}	V			
Operating temperature	T _{opr}	-40 ~ +85	-40 ~ +85	-40 ~ +85	-40 ~ +85	°C
Storage temperature	T _{stg}	-55 ~ +125	-55 ~ +125	-55 ~ +125	-55 ~ +125	°C

* Refer to the Pd characteristic diagram.


The values for the BA10358F are those when it is mounted on a glass epoxy board (50mm × 50mm × 1.6mm).

The values for the BA10358FV are those when it is mounted on a glass epoxy board (70mm × 70mm × 1.6mm).

● Block diagram

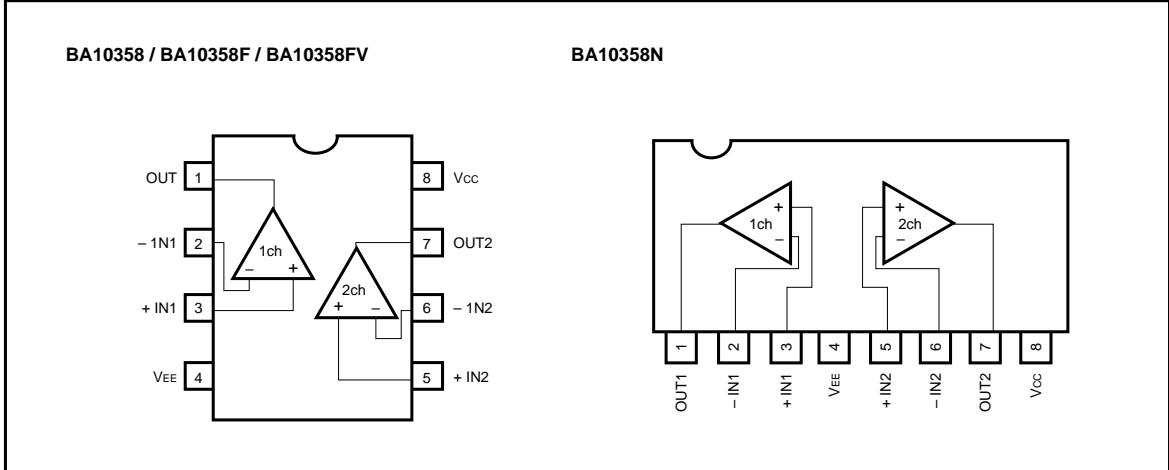

- Internal circuit configuration (diagram shows only one channel)

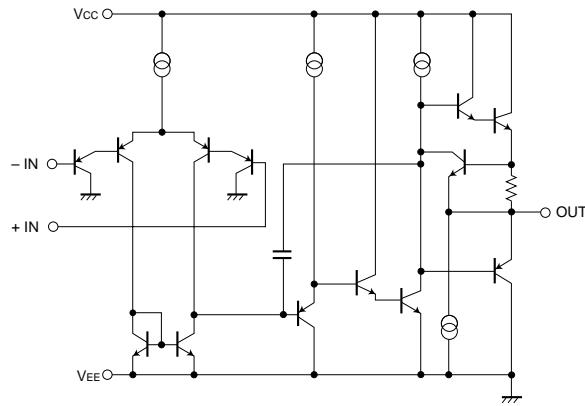

● Electrical characteristics (unless otherwise noted, $T_a = 25^\circ\text{C}$, $V_{CC} = +5\text{ V}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input offset voltage	V_{IO}	—	2	7	mV	$R_S = 50\Omega$
Input offset current	I_{IO}	—	5	50	nA	—
Input bias current	I_B	—	45	250	nA	—
High-amplitude voltage gain	A_V	25	100	—	V / mV	$R_L \geq 2k\Omega$, $V_{CC} = 15\text{ V}$
Common-mode input voltage	V_{ICM}	0	—	$V_{CC} - 1.5$	V	—
Output voltage	V_O	0	—	$V_{CC} - 1.5$	V	$R_L = 2k\Omega$
Common-mode rejection ratio	CMRR	65	80	—	dB	—
Power supply voltage rejection ratio	PSRR	65	100	—	dB	$R_S = 50\Omega$
Quiescent current	I_Q	—	0.7	1.2	mA	$R_L = \infty$, on All Op - Amps
Channel separation	CS	—	120	—	dB	$f = 1\text{ kHz}$ input conversion
Maximum output current	source	I_{source}	10	20	mA	$V_{IN^+} = 1\text{ V}$, $V_{IN^-} = 0\text{ V}$, $V_O = 0\text{ V}$
	sink	I_{sink}	10	20	mA	$V_{IN^-} = 1\text{ V}$, $V_{IN^+} = 0\text{ V}$, $V_O = V_{CC}$

● Electrical characteristic curves

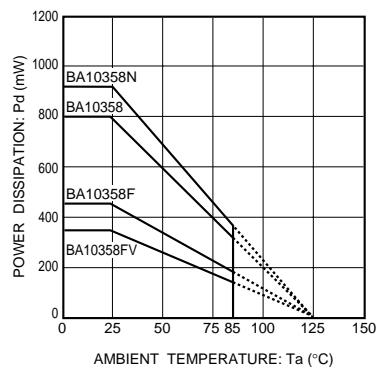


Fig. 1 Power dissipation vs. ambient temperature

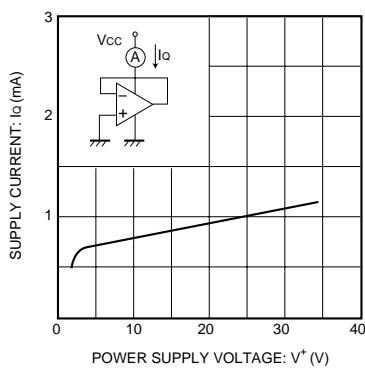


Fig. 2 Quiescent current vs. power supply voltage

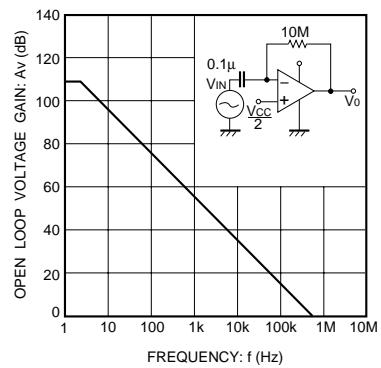


Fig. 3 Open loop voltage gain vs. frequency

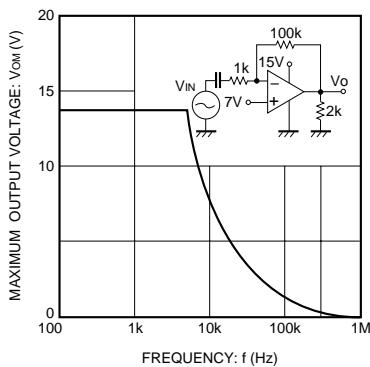


Fig. 4 Maximum output voltage vs. frequency

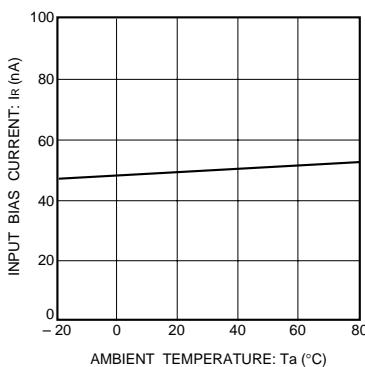


Fig. 5 Input bias current vs. ambient temperature

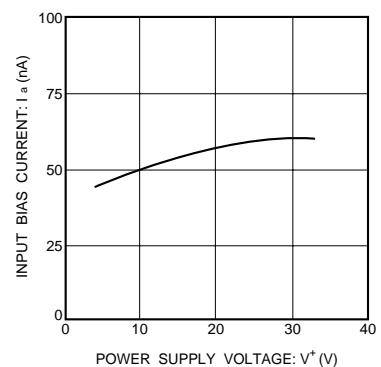


Fig. 6 Input bias current vs. power supply voltage

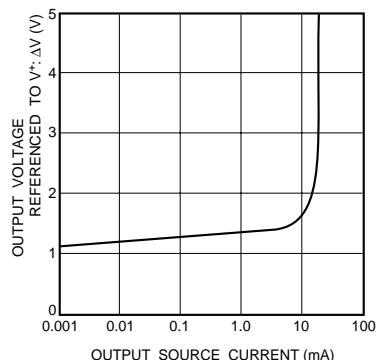


Fig. 7 Voltage difference during power supply output vs. output source current

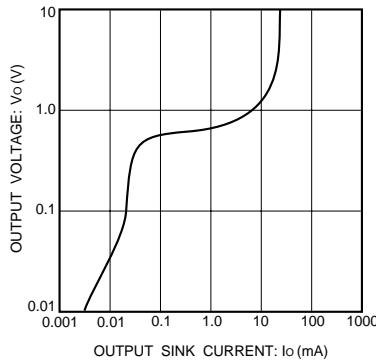


Fig. 8 Output voltage vs. output sink current

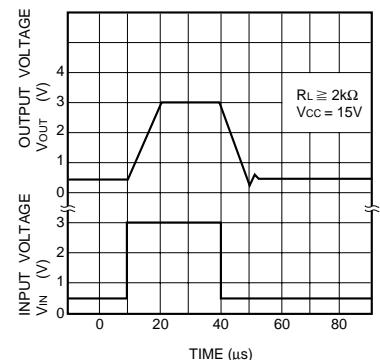


Fig. 9 Output response characteristics

● Operation notes

(1) Handling unused circuits

If there are any circuits which are not being used, we recommend making connections as shown in Figure 10, with the non-inverted input pin connected to the potential within the in-phase input voltage range (V_{ICM}).





Fig. 10 Handling unused circuits


● External dimensions (Units: mm)

BA10358

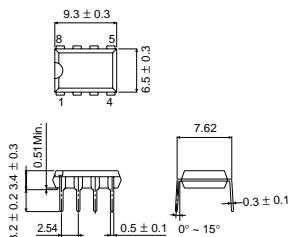


DIP8

BA10358F

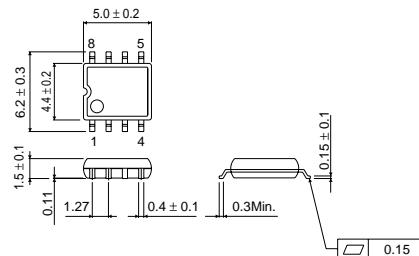


SOP8

BA10358FV

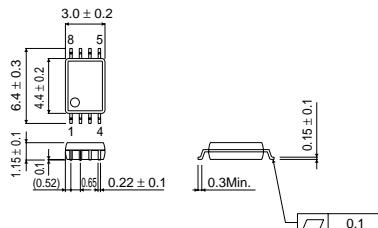

SSOP-B8

BA10358N



SIP8

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Operational Amplifiers - Op Amps category:

Click to view products by ROHM manufacturer:

Other Similar products are found below :

[NCV33072ADR2G](#) [LM358SNG](#) [430227FB](#) [UPC824G2-A](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [UPC822G2-A](#) [UPC259G2-A](#) [UPC258G2-A](#)
[NCV33202DMR2G](#) [NTE925](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#) [HA1630S01LPEL-E](#) [SCY33178DR2G](#)
[NJU77806F3-TE1](#) [NCV5652MUTWG](#) [NCV20034DR2G](#) [LM324EDR2G](#) [LM2902EDR2G](#) [NTE7155](#) [NTE778S](#) [NTE871](#) [NTE924](#) [NTE937](#)
[MCP6V17T-E/MNY](#) [MCP6V19-E/ST](#) [MXD8011HF](#) [MCP6V17T-E/MS](#) [SCY6358ADR2G](#) [ADA4523-1BCPZ](#) [LTC2065HUD#PBF](#)
[ADA4523-1BCPZ-RL7](#) [2SD965T-R](#) [RS6332PXK](#) [BDM8551](#) [BDM321](#) [MD1324](#) [COS8052SR](#) [COS8552SR](#) [COS8554SR](#) [COS2177SR](#)
[COS2353SR](#) [COS724TR](#) [ASOPD4580S-R](#) [RS321BKXF](#) [ADA4097-1Hujz-RL7](#) [NCS20282FCTTAG](#)