


## RRC-PMM20

Power Management Module for integration into all applications using RRC20xx batteries

P/N: 110269

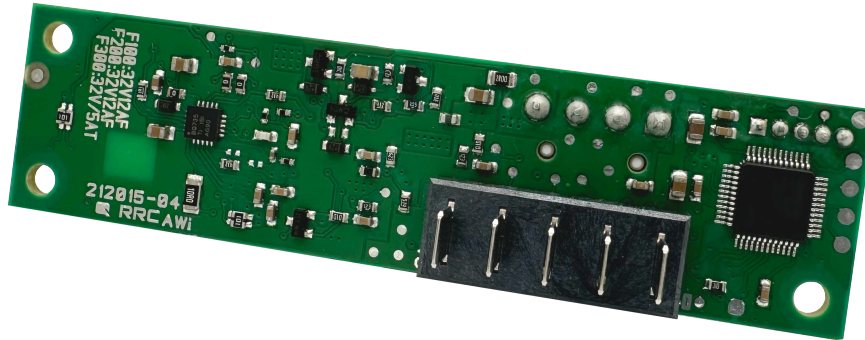

Picture only for reference



The PMM20 enables internal charging of batteries and facilitates a seamless switch between mains and battery power, ensuring uninterrupted operation and reliable power backup in a space-saving design. Multiple PMMs can be used in parallel inside one device to combine more batteries.

### Features & Benefits

- **Easy to design in**
  - Easily integrable into slot design
  - Integrated 180° battery connector for different connection options
  - Maximum flexibility: Various mounting options
  - Small footprint & slim design to not waste space within the application
  - wide DC input voltage range to perfectly match the application's needs
- **Plug & Play available embedded charging solution for RRC standard battery packs**
  - Time to market: no development time, immediate product availability
  - No NRE: no additional development, approvals, or design costs
  - Low total cost of ownership
- **Power management functionality**
  - Seamless switch between mains and battery power
  - Up to 40W charging power in power supply mode
- **Fully compliant with Smart Battery Specification**
  - SMBus communication with battery and host
- **Worldwide certified for industrial and medical applications**
- **Configurable**
  - Programmable limits for input current, charging current and charging voltage
  - Status signal can directly drive a LED

## Characteristics

<b>Input (Power Supply Output)</b>	
Input voltage range	7.50V – 24.00V, min. Battery charge voltage +1.00V
Input power	240.00W max.
Input current	10.00A max.
Input fuse	12A
Protection	Reverse polarity, short current

<b>Application Output</b>	
Output voltage range	Equal to DC input voltage if external DC power supply is present. Equal to battery voltage if no external DC power supply is present.
Total output power	168.00W max. in battery mode 160.00W max. in power supply mode
Output current	10.00A max.
Output fuse	12A

<b>Power Management</b>	
Automatic power source selection with seamless transition between ext. DC power supply and battery	

<b>Battery Input / Output</b>	
Battery charge voltage	Up to 17.40V
Battery charge current	Up to 3.60A
Battery charge power	Up to 40.00W
Battery discharge current	10.00A max.
Protection	Battery short circuit, over-temperature, over-voltage, over-current & reverse polarity
Standby current	200µA

<b>Environmental Condition</b>	
Operating Temperature	-20° to 60°C
Transport & Storage Temperature	-20° to 60°C
Relative Humidity	5% - 95% non-condensing
Altitude	5000m for operation and storage

<b>Recommended Voltage for External AC/DC Power Supplies</b>				
Battery architecture	1SxP,	2SxP,	3SxP,	4SxP
DC input voltage	6.00VDC,	12.00VDC,	15.00VDC,	19.00VDC
Power supply wattage @ 4.00A max input current	≥30.00W,	≥48.00W,	≥64.00W,	≥80.00W
Power supply wattage @ 8.00A max input current	≥60.00W,	≥96.00W,	≥128.00W,	≥160.00W

RRC-PMM20

Regulatory Approvals	
International	IEC 60601-1(ed.3), IEC 60601-1(ed.3) am1 Test report acc. IEC62368-1
Europe	CE, UKCA (EMC)
USA	FCC (EMC)
Environmental	RoHS REACH WEEE

Mechanical Details	
Board dimensions (LxWxH)	~87mm x 22.40mm, without cables and connectors With three mounting holes
Weight	~16g
Battery Connector	1x battery pack accessible via 180° mating connector for RRC20xx batteries
Input/Output Connector	1x 90° / 4pin JST style header on PCBA
Communication Interface	90° / 5pin JST style header on PCBA with 2xSMBus lines, GND and 2xGPIO

To facilitate a fast design-in process for developers, RRC provides 3D data and detailed specifications of the power management module RRC-PMM20 and RRC smart batteries. For an application note related to the power management module with additional details, contact your RRC representative. For further information on the RRC smart batteries, please refer to the RRC website ([www.rrc-ps.com](http://www.rrc-ps.com)).

## Germany/HQ

RRC power solutions GmbH

Technologiepark 1  
66424 Homburg / Saar

+49 6841 98090  
sales@rrc-ps.com

## USA

RRC power solutions Inc.

2030 Main St. Suite 1300,  
Irvine, CA 92614

+1 714 777 3604  
usa@rrc-ps.com

## Hong Kong

RRC power solutions Ltd.

S-V,6/F, Valiant Industrial  
Centre 2-12  
Au Pui Wan Street  
Fo Tan, N.T., Hong Kong

+852 2376 0106  
hkrrc@rrc-ps.cn

## China

RRC power solutions Ltd.

Room 1306, C Building,  
Tianan International Build-  
ing, Renmin South Road,  
Luohu District, Shenzhen  
518021

+86 755 8374 1908  
hkrrc@rrc-ps.cn

## Vietnam

RRC Power Solutions  
Company Ltd.

Block C, Lot CN4  
Dinh Vu – Cat Hai Eco-  
nomic Zone,  
Dong Hai 2 Ward  
Hai An District 180000  
Hai Phong City

vietnam@rrc-ps.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Power Management IC Development Tools](#) *category:*

*Click to view products by* [RRC Power Solutions](#) *manufacturer:*

Other Similar products are found below :

[EVB-EP5348UI](#) [BQ25010EVM](#) [ISL80019AEVAL1Z](#) [ISLUSBI2CKIT1Z](#) [ISL8002AEVAL1Z](#) [ISL91108IIA-EVZ](#) [MAX8556EVKIT](#)  
[MAX15005AEVKIT+](#) [ISL28022EVKIT1Z](#) [STEVAL-ISA008V1](#) [DRI0043](#) [KITPF8100FRDMEVM](#) [EVB-EN6337QA](#)  
[SAMPLEBOXILD8150TOBO1](#) [MAX18066EVKIT#](#) [AP62300WU-EVM](#) [KITA2GTC387MOTORCTRTOBO1](#) [AEK-MOT-TK200G1](#)  
[EVLONE65W](#) [STEVAL-ILH006V1](#) [STEVAL-IPE008V2](#) [STEVAL-IPP001V2](#) [STEVAL-ISA013V1](#) [STEVAL-ISA067V1](#) [STEVAL-](#)  
[ISQ002V1](#) [TPS2306EVM-001](#) [TPS2330EVM-185](#) [TPS40001EVM-001](#) [SECO-HVDCDC1362-15W-GEVB](#) [BTS7030-2EPA](#)  
[LT8638SJV#WPBF](#) [LTC3308AIV#WTRPBF](#) [TLT807B0EPV](#) [BTS71033-6ESA](#) [EV13N91A](#) [EASYPIC V8 OVER USB-C](#) [EV55W64A](#)  
[CLICKER 4 FOR STM32F4](#) [EASYMX PRO V7A FOR STM32](#) [CLICKER 4 FOR PIC18F](#) [Si8285\\_86v2-KIT](#) [PAC52700EVK1](#) [NCP-](#)  
[NCV51752D2PAK3LGEVB](#) [ISL81807EVAL1Z](#) [AP33772S-EVB](#) [EVALM7HVIGBTFCINV4TOBO1](#) [903-0300-000](#) [902-0173-000](#) [903-](#)  
[0301-000](#) [ROA1286023/1](#)