



## Book-style EMC/RFI Filter for regenerative drive application

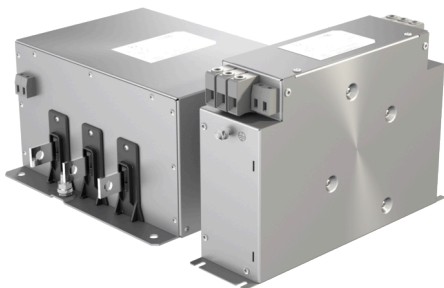


- Designed for usage together with LCL filter
- Easy design in with system approach documentation
- Footprint space-saving book-style housing
- Thermal shutdown capability
- Solid safety connector blocks
- Versions with low leakage current



## Performance indicators

### Attenuation performance

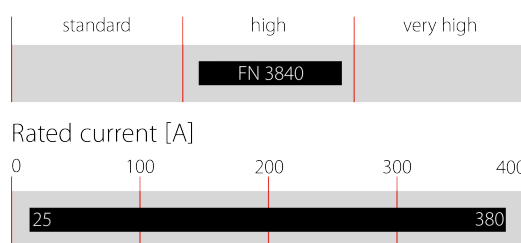

## Technical Specifications

Maximum continuous operating voltage	3x530/305 VAC
Nominal operating voltage	480 VAC
Rated currents	25 to 380 A 25 to 380 A @ 50°C
Overload capability	6x rated current for 1 sec, once per hour 1.6x rated current for 1 minute, once per hour
Operating frequency	DC to 50/60 Hz
High potential test voltage	TS/TS' -> 3P 2550 VDC for 2 s P -> E 2550 VDC for 2 s P -> P 2550 VDC for 2 s TS/TS' -> E 2550 VDC for 2 s TS/TS' -> E 2550 VDC for 2 s TS/TS' -> 3P 2550 VDC for 2 s TS/TS' -> E 2550 VDC for 2 s TS/TS' -> 3P 2550 VDC for 2 s TS/TS' -> E 2550 VDC for 2 s TS/TS' -> 3P 2550 VDC for 2 s
Overvoltage category	III acc. IEC 60664-1
Pollution degree	2 acc. IEC 60664-1
Surge withstand	2kV (P-P) / 4kV (3P - E) acc. to IEC 6100-4-5
Temperature range (operation and storage)	-40°C to +100°C (with current derating >50°C)
Climatic category	40/100/21 acc. to IEC 60068-1
Altitude	up to 2000m no derating applies. Above 2000m derating acc. to IEC 60664-1 applies
Protection category	IP 20 (terminal block versions) and IP00 (busbar versions) acc. to IEC 60529-1
Flammability corresponding to	Terminals: UL 94 V-0
Vibration and shock	3M4 (operation) acc. to IEC 60721-3-3
Design corresponding to	UL 60939-3, IEC 60939-3
Compliance with insulation requirement	> 1MΩ acc. to IEC 60204-1
MTBF (Mil-HB-217F)	>300,000 h @ 50°C/480 V

## Approvals & Compliances




## Features and Benefits

- FN 3840 series of filters provides state-of-the-art EMI attenuation based on an innovative filter topology. They help to ensure compliance with Class C2 or even C1 limits.
- The filters are built to fit perfectly to regenerative drive applications with LCL filters
- Internal thermocouples ensure reliability and thermal shutdown capabilities
- The slim book-style shape allows a convenient and space-saving installation next to inverters, converters or motor drives.
- The filters offer very high saturation performance, bundled with best EMI performance
- Fulfills the requirements in IEC/EN 61800-5-1 for electric strength, clearance and creepage
- Fulfills the requirements in IEC/EN 60204-1 for insulation resistance, electric strength, clearance and creepage
- Fulfills the requirements in IEC/EN 62477-1 for electric strength, clearance and creepage

## Typical Applications

- Regenerative drives in combination with LCL filters
- Active infeed converter (AIC)
- Active front end (AFE) variable frequency drives (VFD)
- Three-phase variable speed drives (VSD) and power drive systems (PDS)
- Renewable Energy
- Machine tool and machinery equipment
- Process automation equipment

### Typical electrical schematic

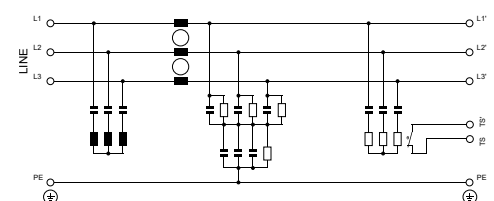

Filter Selection Table



Filter	Rated current @ 50°C [A]	Typical drive power rating* [kW]	Leakage current** @ 530 VAC/50 Hz [mA]	DC Resistance @ 25°C [mOhm]	Typical Power Dissipation*** (Cu + Damping) [W]	Terminal Type	Weight [kg]	Thermal Switch**** Switching Temp. [°C]
FN3840-25-33-C35-R65	25	15	4.3	9.5	22 (18 + 4)	-33	2.5	180
FN3840-50-53-C35-R65	50	30	4.3	5	43 (38 + 5)	-53	3.5	180
FN3840-80-34-C45-R65	80	45	7.7	1.5	40 (29 + 11)	-34	5.7	180
FN3840-160-40-C45-R65	160	90	7.7	0.4	40 (31 + 9)	-40	7.9	180
FN3840-250-99-C2835-R67	250	150	10.7	0.1	26 (19 + 7)	-99	4.3	150
FN3840-380-99-C2835-R67	380	200	10.7	0.07	33 (28 + 5)	-99	4.5	150

\* Typical power rating at 400 VAC with cos phi=0.85. The exact value depends upon the efficiency of the drive, the motor and the entire application.

\*\* Standardized calculated leakage current acc. IEC 60939 under normal operating conditions.

\*\*\* Losses on copper (conductor) plus damping resistor losses. For further details on damping resistor losses please refer to page 4: Damping resistor losses vs switching frequency

\*\*\*\* Normally closed thermal protector switch, 250VAC / 24VDC, 6.3A (with cos phi 0.6); reverse switching temperature = switching temp - 50K.

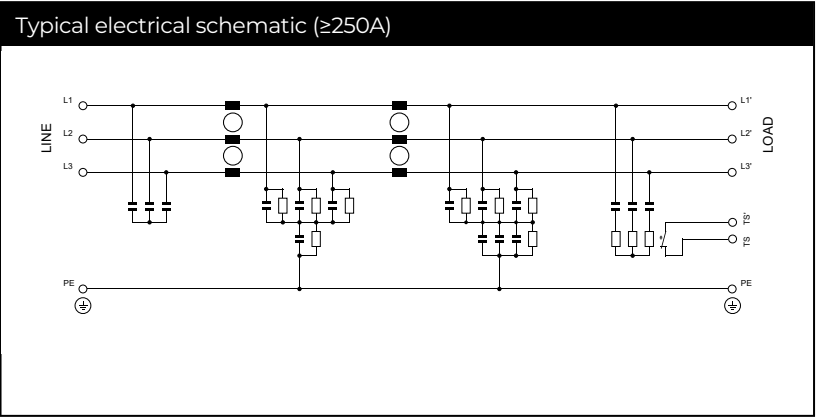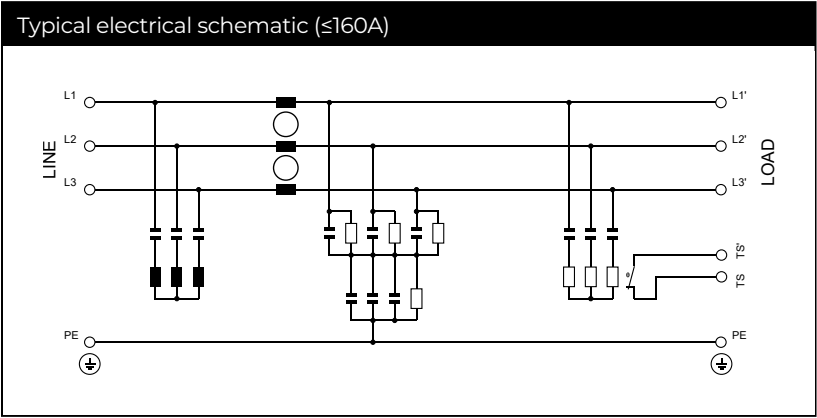


Tolerances apply: L +50%/-30% , C ±20%, R ±10%


Typical Filter Attenuation

Per CISPR 17: symmetrical 50 Ω/50 Ω -> Differential Mode (DM); asymmetrical 50 Ω/50 Ω -> Common Mode (CM)


FN3840-25-33-C35-R65

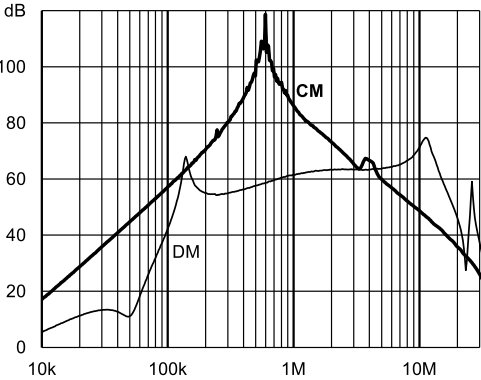


FN3840-50-53-C35-R65

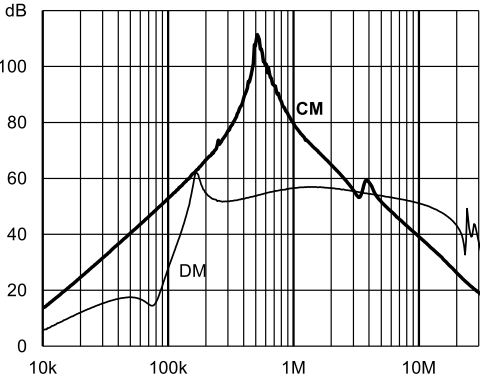


FN3840-80-34-C45-R65

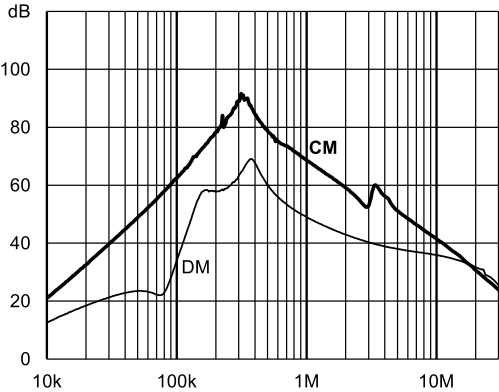


FN3840-160-40-C45-R65

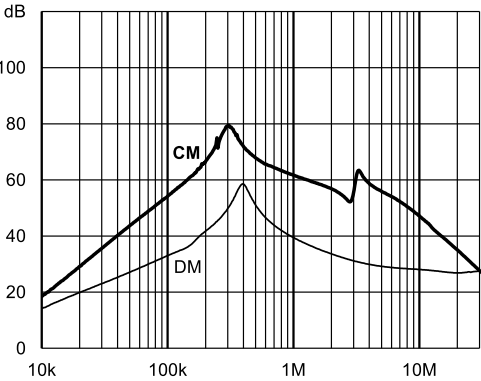

FN3840-250-99-C2835-R67

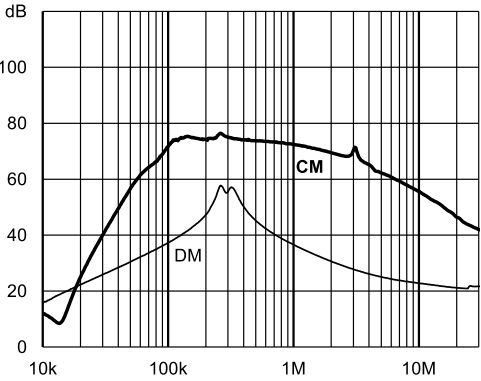


FN3840-380-99-C2835-R67

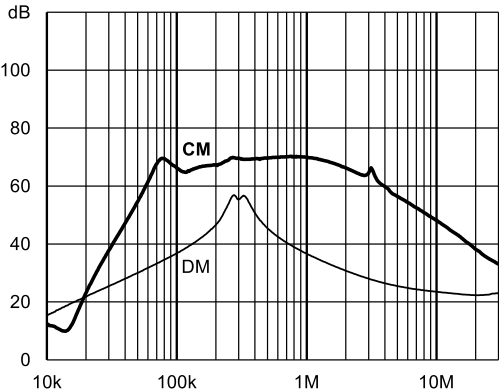

Typical Application


System diagram of an Active Front End (AFE) application



Frequency Response


Frequency response at different values of the grid inductance. The grid inductance is calculated with details mentioned at each graph. Each figure represents the normalized admittance transfer function between the grid current,  $i_g$ , and the converter voltage  $u_s$ . At low frequencies, the equivalent admittance is inversely proportional to the total DC resistance of the grid, and EMI and LCL filters ( $R_{GRID}+R_{EMI}+RLCL$ ), which is dominated mainly by the LCL filter  $RLCL$ .

FN3840-25-33-C35-R65

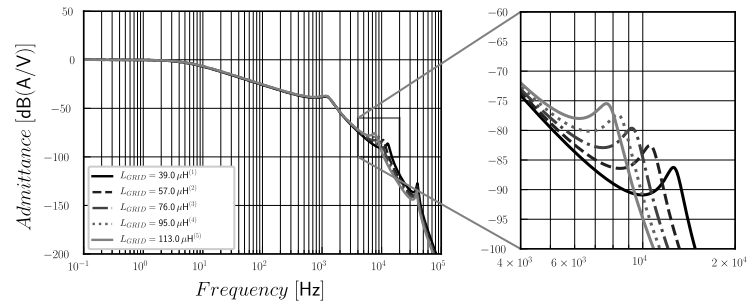


400 VAC/50 Hz, 250 kVA trafo with uk of (1) 1%, (2) 2%, (3) 3%, (4) 4%, (5) 5% and 50m cable.

FN3840-50-53-C35-R65

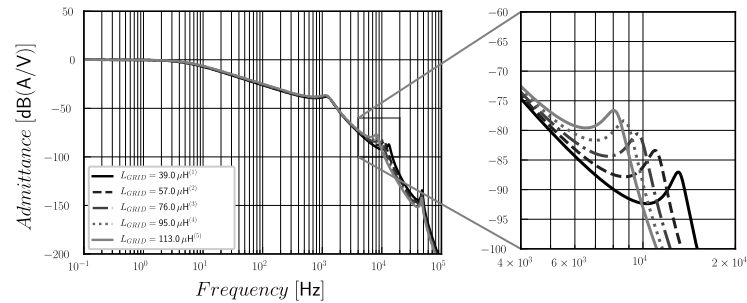


400 VAC/50 Hz, 250 kVA trafo with uk of (1) 1%, (2) 2%, (3) 3%, (4) 4%, (5) 5% and 50m cable.

FN3840-80-34-C45-R65

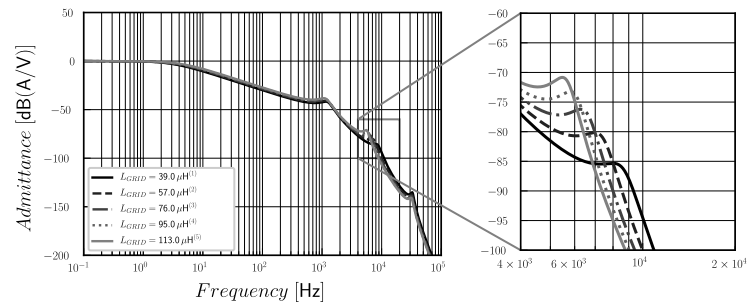


400 VAC/50 Hz, 250 kVA trafo with uk of (1) 1%, (2) 2%, (3) 3%, (4) 4%, (5) 5% and 50m cable.

FN3840-160-40-C45-R65

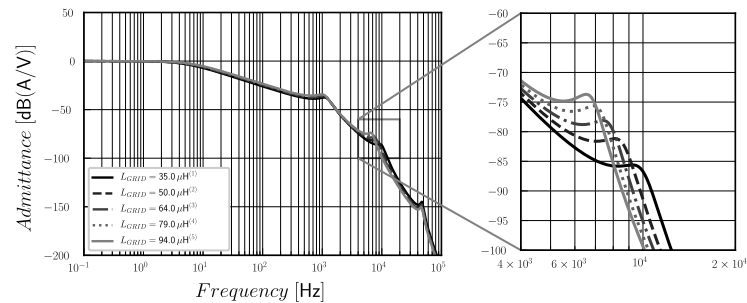


400 VAC/50 Hz, 315 kVA trafo with uk of (1) 1%, (2) 2%, (3) 3%, (4) 4%, (5) 5% and 50m cable.

FN3840-250-99-C2835-R67

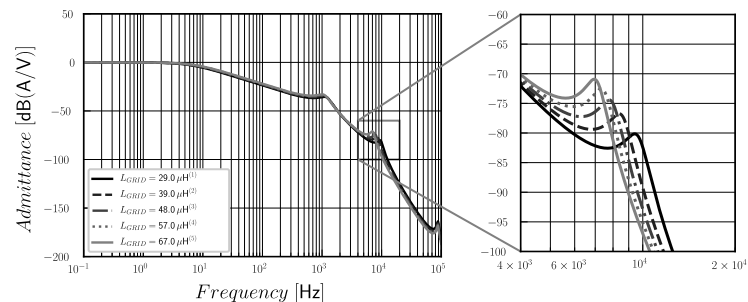

400 VAC/50 Hz, 500 kVA trafo with uk of (1) 1%, (2) 2%, (3) 3%, (4) 4%, (5) 5% and 50m cable.

FN3840-380-99-C2835-R67

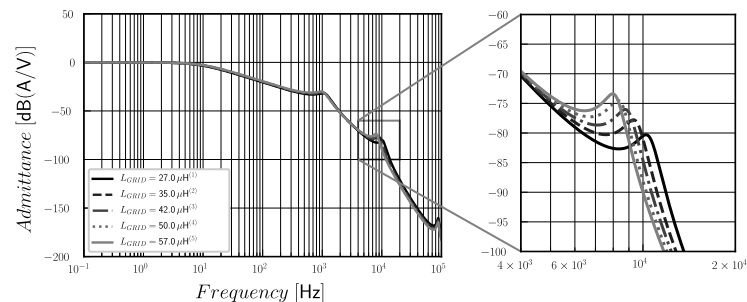


400 VAC/50 Hz, 630 kVA trafo with uk of (1) 1%, (2) 2%, (3) 3%, (4) 4%, (5) 5% and 50m cable.

Damping Resistor Losses Vs Switching Frequency


Typical losses at different values of the AFE-LCL L1 inductor with rated voltage (530 VAC/60 Hz) and differing grid inductance. (25A->95µH; 50A->95µH; 80A->95µH; 160A->79µH; 250A->57µH; 380A->50µH).

The highlighted gray area represents a non-operating area. Operating the filter in this area may cause overheating and damage to the filter, and may activate the temperature switch.


FN3840-25-33-C35-R65

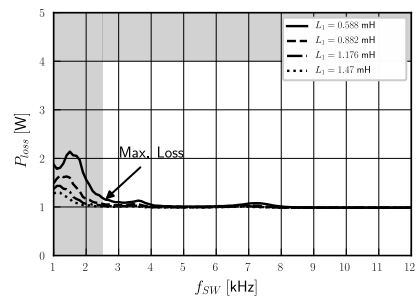


FN3840-50-53-C35-R65

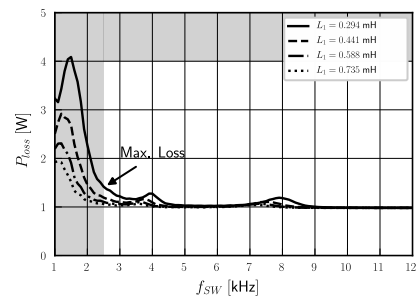


FN3840-80-34-C45-R65

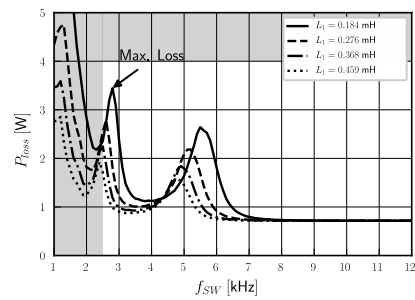


FN3840-160-40-C45-R65

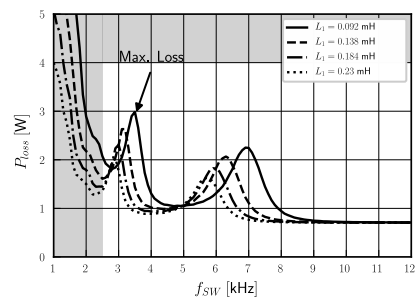



FN3840-250-99-C2835-R67

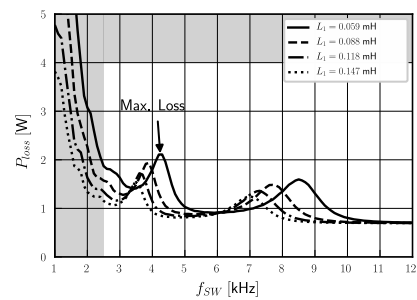


FN3840-380-99-C2835-R67

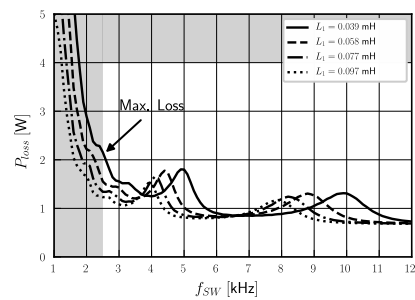

Mechanical Data For Filters With Terminal Blocks

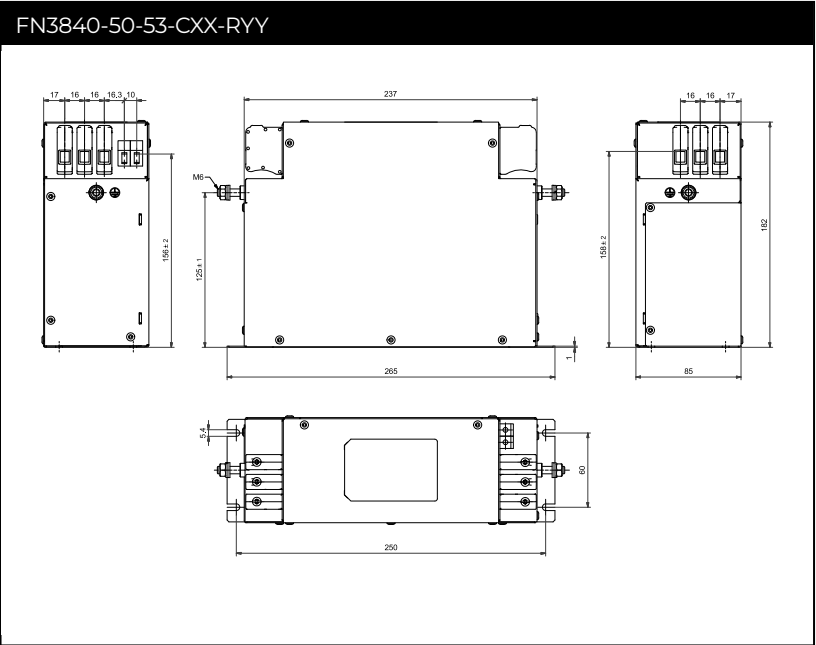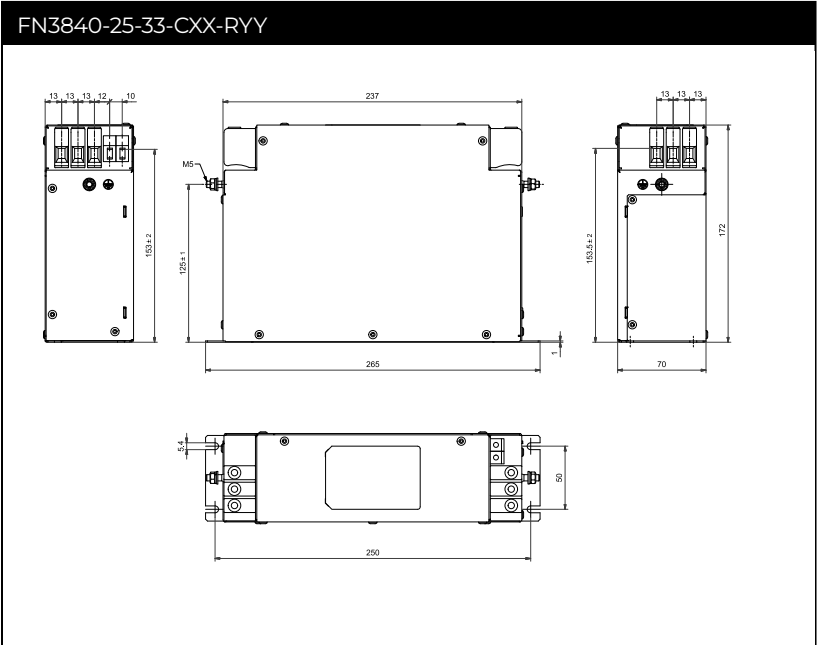

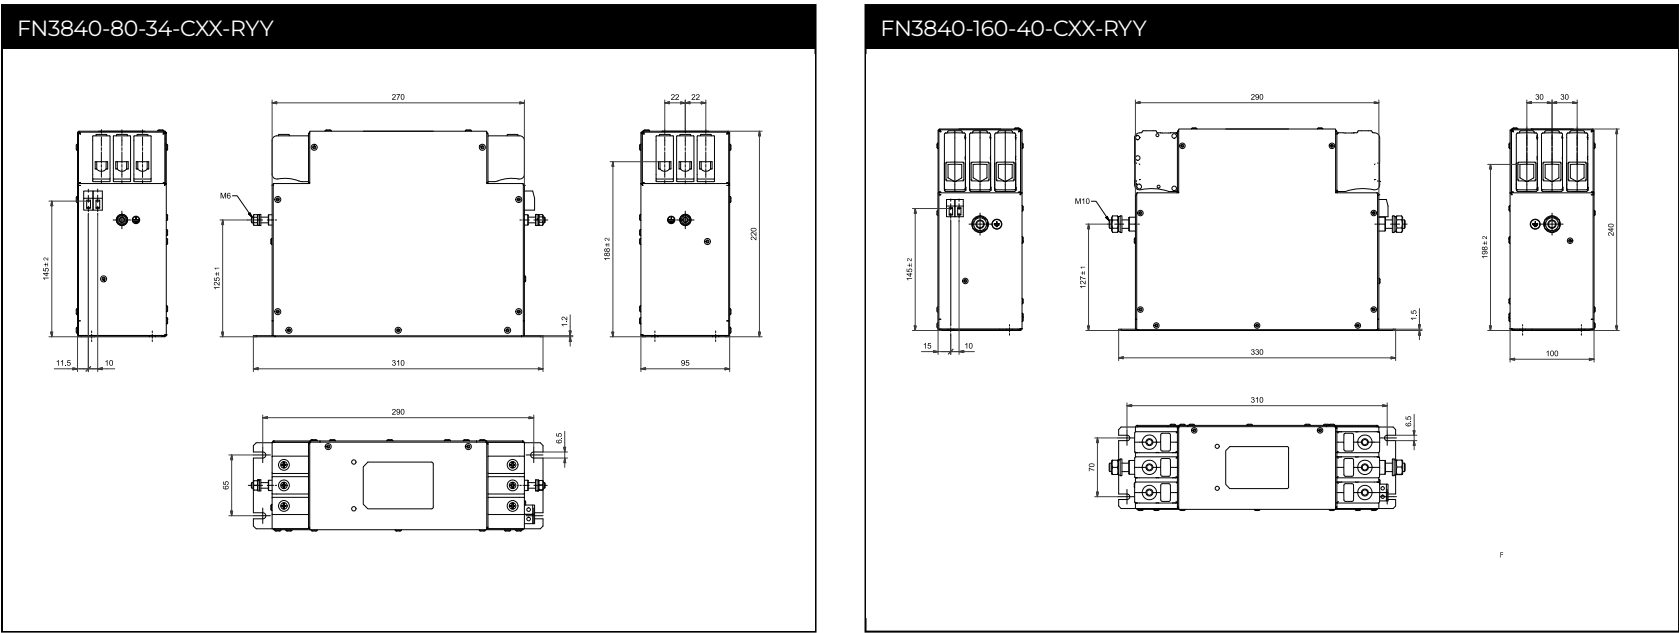


Filter Input/Output Connector Cross Sections

	<div>-33</div>	<div>-53</div>	<div>-34</div>	<div>-40</div>	<div>Thermal Switch</div>	<div>PE</div>	<div>PE</div>	<div>PE</div>	<div>PE</div>
	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div>M5</div>	<div>M6</div>	<div>M8</div>	<div>M10</div>
Solid wire	0.5-16 mm <sup>2</sup>	0.5-16 mm <sup>2</sup>	6-35 mm <sup>2</sup>	25-95 mm <sup>2</sup>	0.2-6 mm <sup>2</sup>				
Flex wire	0.5-10 mm <sup>2</sup>	0.5-16 mm <sup>2</sup>	6-25 mm <sup>2</sup>	25-95 mm <sup>2</sup>	0.2-4 mm <sup>2</sup>				
Flex wire AWG	AWG 22-6	AWG 20-4	AWG 6-2	AWG 4-4/0	AWG24-AWG10				
Recommended torque	1.5-1.8 Nm	2.0-2.3 Nm	4.0-4.5 Nm	17-20 Nm	0.7 -0.8mm	2.0-2.2 Nm	3.5-4.0 Nm	8.0-9.0 Nm	15-17 Nm

Please visit [www.schaffner.com](http://www.schaffner.com) to find more details on filter connectors.

Mechanical Data For Filters With Busbar Connection

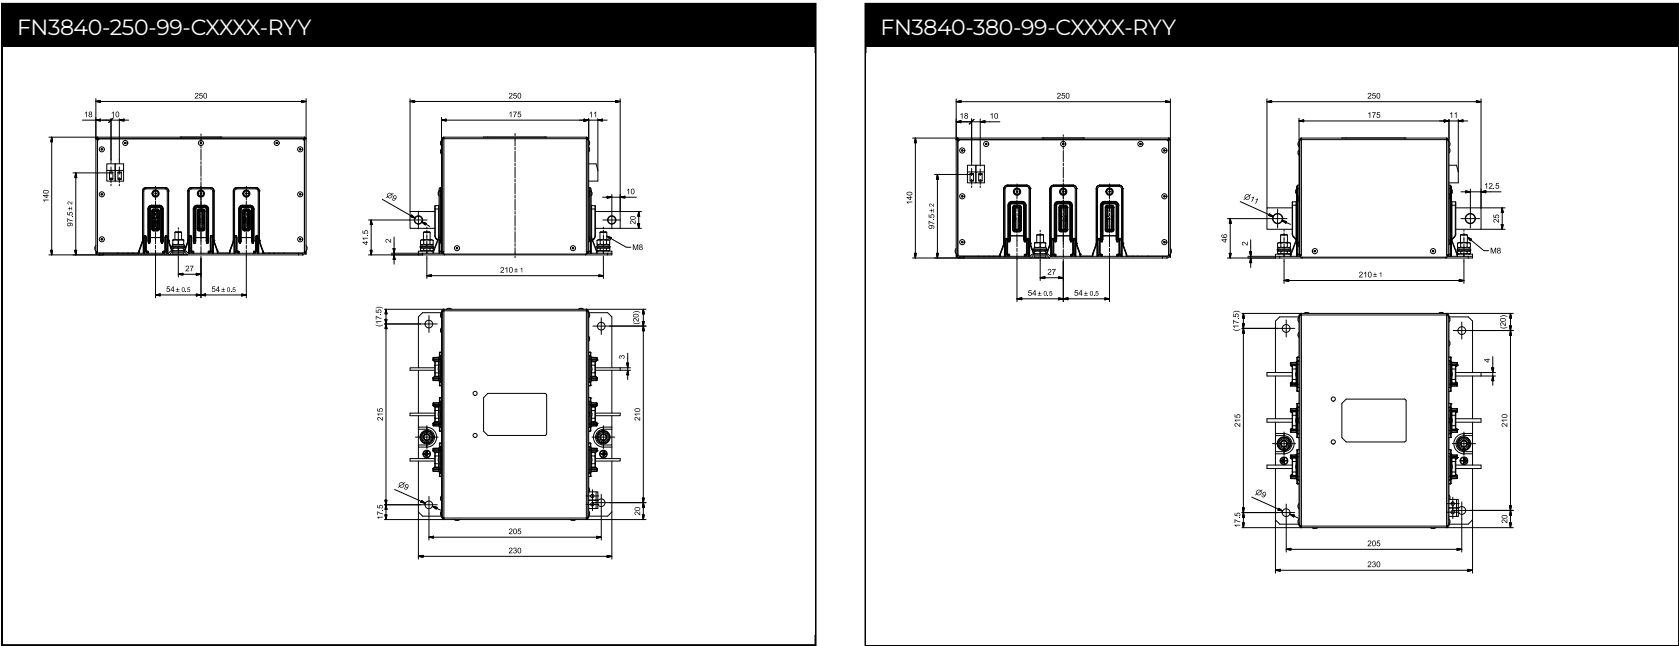

Headquarters, Global  
Innovation and  
Development

**Switzerland**  
**Schaffner Group**  
Industrie Nord  
Nordstrasse 5  
4542  
Luterbach  
+41 32 681 66 26  
[info@schaffner.com](mailto:info@schaffner.com)

To find your local partner within  
Schaffner's global network [schaffner.com](https://www.schaffner.com)

© 2025 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

Sales and Application  
Centers

**China**  
**Schaffner EMC Ltd. Shanghai**  
T20-3 C No 565 Chuangye Road Pudong district  
201201  
Shanghai  
+86 2138139500  
[cschina@schaffner.com](mailto:cschina@schaffner.com)

**Sweden**  
**Schaffner EMC AB**  
Östermalmstrorg 1  
114 42  
Stockholm  
+46 8 5050 2425  
[swedensales@schaffner.com](mailto:swedensales@schaffner.com)

**Switzerland**  
**Schaffner EMV AG**  
Industrie Nord  
Nordstrasse 5  
4542  
Luterbach  
+41 32 681 66 26  
[switzerlandsales@schaffner.com](mailto:switzerlandsales@schaffner.com)

**India**  
**Schaffner India Pvt. Ltd**  
Regus World Trade Centre  
WTC 22nd Floor Unit No 2238 Brigade  
Gateway Campus 26/1 Dr. Rajkumar Road  
Malleshwaram (W)  
560055  
Bangalore  
+91 8067935355  
[indiasales@schaffner.com](mailto:indiasales@schaffner.com)

**Italy**  
**Schaffner EMC S.r.l.**  
Via Ticino, 30  
20900  
Monza (MB)  
+39 335 120 44 32  
[italysales@schaffner.com](mailto:italysales@schaffner.com)

**Japan**  
**Schaffner EMC K.K.**  
ISM Sangenjaya 7F  
1-32-12 Kamiuma Setagaya-ku  
154-0011  
Tokyo  
+81 3 5712 3650  
[japansales@schaffner.com](mailto:japansales@schaffner.com)

**Singapore**  
**Schaffner EMC Pte Ltd.**  
Blk 3015A Ubi Road 1 #05-09 Kampong Ubi  
Industrial Estate  
408705  
Singapore  
+65 63773283  
[singaporesales@schaffner.com](mailto:singaporesales@schaffner.com)

**Finland**  
**Schaffner Oy**  
Lohjanharjuntie 1109  
08500  
Lohja  
+ 358 50 468 72 84  
[finlandsales@schaffner.com](mailto:finlandsales@schaffner.com)

**France**  
**Schaffner EMC S.A.S.**  
16-20 Rue Louis Rameau  
95875  
Bezons  
+33 1 34 34 30 60  
[francesales@schaffner.com](mailto:francesales@schaffner.com)

**Germany**  
**Schaffner Deutschland GmbH**  
Ohiostr. 8  
76149  
Karlsruhe  
+49 721 56910  
[germanysales@schaffner.com](mailto:germanysales@schaffner.com)

**Thailand**  
**Schaffner EMC Co. Ltd.**  
Sathorn Square Tower  
Room 3780 37FL 98 North-Sathorn Rd Silom  
Bangrak  
10500  
Bangkok  
+66 621056397  
[thailandsales@schaffner.com](mailto:thailandsales@schaffner.com)

**United Kingdom**  
**Schaffner Ltd.**  
Suite 1 Oakmede Place  
Terrace Road  
RG42 4JF  
Binfield  
+44 118 9770070  
[schaffner.uksales@te.com](mailto:schaffner.uksales@te.com)

**United States**  
**Schaffner EMC Inc.**  
52 Mayfield Avenue  
Edison, New Jersey  
+1 732 225 9533  
[usasales@schaffner.com](mailto:usasales@schaffner.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Line Filters](#) category:*

*Click to view products by [Schaffner](#) manufacturer:*

Other Similar products are found below :

[6609026-5](#) [6609030-6](#) [6609973-2](#) [D30A](#) [F2810](#) [F7140A](#) [F7863Z](#) [FAHAV3100ZC000](#) [806276](#) [FN2080B-10-06](#) [FN2410H-32-33](#) [FN2410H-80-34](#) [FP144](#) [FS4153-20-06](#) [DB4-393](#) [15811T200](#) [2B1](#) [1609080-2](#) [F1100AA02](#) [F1150CC10](#) [F1500CA10](#) [F1500CA15](#) [1B1](#) [FN2020B-3-06](#) [FN2070A-16-06](#) [FN2090A-20-06](#) [FN2090Z-1-06](#) [FN2410H-25-33](#) [FN2410H-8-44](#) [FN2412H-25-33](#) [FN2412H-8-44](#) [FN323B-6-01](#) [FN3258H-130-35](#) [20EHQ7](#) [20EHZ7](#) [20K1](#) [30B6](#) [01MK4](#) [03MK2](#) [03DEEG3BM](#) [100BCF6](#) [10K1](#) [STFV025-24L](#) [609-025](#) [7-6609082-0](#) [3W1A](#) [6609041-1](#) [6609019-2](#) [6609019-9](#) [STC-30](#)