

SenseCAP SOLO CO2 Sensor



Introduction

SenseCAP SOLO CO2 Sensor is a digital NDIR (nondispersive infrared) sensor, which enables the highest accuracy in the measurement of CO2 level in the atmosphere continuously and accurately for long-term use. It's designed with a built-in calibration functionality, making it more accurate and reliable in measurement. We've also added a specially-designed PTFE filter which allows airflow and ensures fast response. It comes with MODBUS RS485 and SDI-12 protocols, compact in size, can be easily integrated into various application scenarios.

Specifications

CO2

Range	400 ~ 5000 ppm
Accuracy	± (50ppm+5%*MV) (in 400~3000ppm)
Resolution	1 ppm

General Parameters

Product Model	SOLO CO2 5000
Interface	RS-485
Protocol	MODBUS-RTU RS485/ MODBUS-ASCII RS485/ SDI-12 (v1.4)
Response Time (T90)	<5 minutes for 90% step change typical
IP Rating	IPx5 (the PTFE filter is not waterproof)
Operating Temperature	-10 ~50 °C
Operating Humidity	0 ~ 85% (non-condensing)
Cable Length	2 meters
Probe Dimensions	110 * 50 * 35 mm
Device Weight	300g


Features

- NDIR CO2 sensor technology
- High accuracy, fast response, and superior stability
- Universal protocol: MODBUS RS-485 and SDI-12
- Wide-range power supply: 5V ~ 16V
- Easy to install and integrate

Applications

- Smart Agriculture
- Building ventilation systems
- Industry ventilation systems
- Airport, train station, shopping mall, office, classroom and other public places for air quality measurement and indication
- Lab., warehouse, and other places to detect CO2

Wiring Diagram

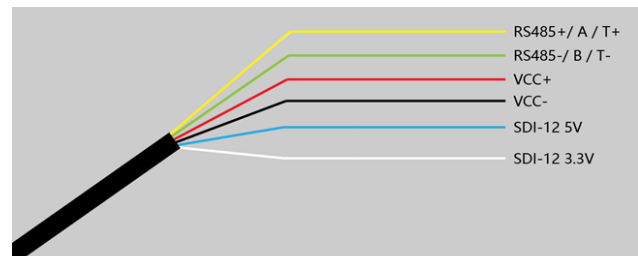

Refer to the user manual for more details.

MODBUS RS-485

Power Supply	5V ~ 16V
Current Consumption	Vin=16V: 22mA (typical) Vin=12V: 28mA (typical) Vin=9V: 34mA (typical) Vin=5V: 57mA (typical)
Warm-up Time	120s (typical)
Scan Interval	1s
Poll Rate	1Hz
Response Time	≤ 4ms

SDI-12

Power Supply	5V ~ 16V
Current Consumption (Sleep Mode)	Vin=16V: 28µA (typical) Vin=12V: 29µA (typical) Vin=9V: 30µA (typical) Vin=5V: 35µA (typical)
Current Consumption (Active Mode)	Vin=16V: 20mA (typical) Vin=12V: 27mA (typical) Vin=9V: 33mA (typical) Vin=5V: 55mA (typical)
Warm-up Time	15ms
Scan Interval	120s (typical)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Air Quality Sensors](#) category:

Click to view products by [Seeed Studio](#) manufacturer:

Other Similar products are found below :

[GMS-MSTH2.S.V.3](#) [MO86571](#) [MO86561](#) [076074 01](#) [DE800.A.1](#) [MF010-2-LC1](#) [MF020-2-LC3](#) [KGZ10-5PIN](#) [GMS10SENSORS](#) [IR25TT](#)
[208280-0001](#) [IR11BD](#) [IR11GM](#) [IR12GM](#) [IR21BD](#) [GMS10-18C](#) [KGZ12](#) [S-300L-3V-5000-SLEEP-UART](#) [MP7227-TC](#) [OXY-LC-A25-455](#)
[SGPC3-TR-2.5KS](#) [T6713-6H](#) [POLOLU-1482](#) [3.000.475](#) [3.000.496](#) [HPMA115S0-XXX](#) [SGPC3-2.5k](#) [SGP30-2.5k](#) [T3032-2-10K-24-P](#)
[VQ6MB](#) [INIR-CD-5%](#) [VQ23TB](#) [IR11GJ](#) [VQ31MB](#) [IR11BR](#) [GP2Y1026AU0F](#) [VQ549ZD](#) [MHM501-00](#) [MHM500-00A](#) [MHM305-01](#)
[MICS-4514](#) [VQ548ZD-S](#) [SEN-09403](#) [IR15TT](#) [MICS-5524](#) [MICS-5914](#) [MICS-2714](#) [INIR-ME-100%](#) [T8100-D](#) [VQ21TB](#)