



# Grove - 315MHz Simple RF Link Kit User Manual

Release date: 2015/9/22

Version: 1.0

Wiki: [http://www.seeedstudio.com/wiki/Grove - 315MHz RF Kit](http://www.seeedstudio.com/wiki/Grove_-_315MHz_RF_Kit)

Bazaar: <http://www.seeedstudio.com/depot/Grove-315MHz-Simple-RF-Link-Kit-p-1061.html>

## Document Revision History

---

Revision	Date	Author	Description
1.0	Sep 22, 2015	Jiankai.li	Create file

## Contents

Document Revision History .....	2
1. Introduction .....	2
2. Features .....	3
3. Application Ideas .....	4
4. Mechanic Dimensions .....	5
5. Usage .....	6
5.1 Hardware Installation .....	6
5.2 Programming .....	6
6. Resources .....	8

### *Disclaimer*

*For physical injuries and possessions loss caused by those reasons which are not related to product quality, such as operating without following manual guide, natural disasters or force majeure, we take no responsibility for that.*

*Under the supervision of Seeed Technology Inc., this manual has been compiled and published which covered the latest product description and specification. The content of this manual is subject to change without notice.*


### *Copyright*

*The design of this product (including software) and its accessories is under tutelage of laws. Any action to violate relevant right of our product will be penalized through law. Please consciously observe relevant local laws in the use of this product.*

## 1. Introduction

---

This kit is used for one way wireless communication at a frequency of 315MHz and includes a transmitter module and a receiver module. The twig configuration of this kit allows for around 40 meters of transmitting distance indoors, or around 100 meters outside. The 315 MHz frequency is suitable for use without a license in the United States. For use in Europe, please see the 433 MHz version of this product.

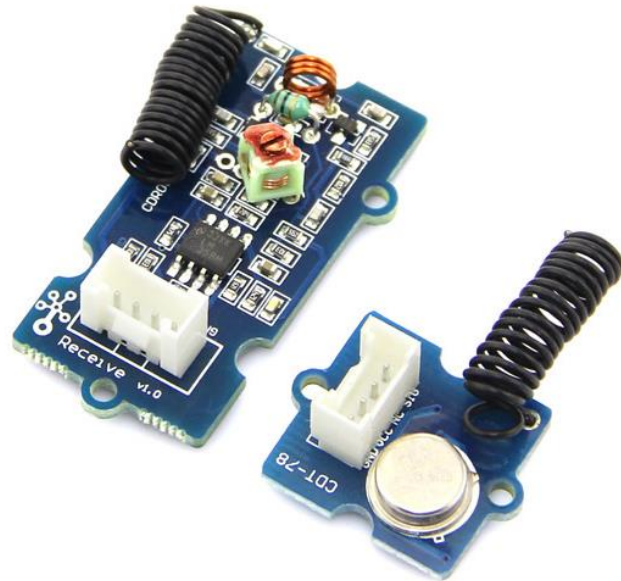

## 2. Features

---

- GROVE compatible interface.
- Uses ASK (Amplitude Shift Keying) Modulation.
- One way communication.

### 3. Application Ideas

---

- Remote control
- Remote automation
- Alarm

## 4. Mechanic Dimensions

---

- Receiver: 24mm by 42mm
- Transmitter: 20mm by 24mm



## 5. Usage

---

The transmitter and receiver modules both rely on a single wire for communication. Though using the UART supplied by the arduino platform can work, it is recommended, instead, to use the VirtualWire library which uses Amplitude Shift Keying for modulation which provides better communication.

Both the transmitter and receiver modules require three wires: Vcc, Ground, and signal. Pin 2 of both parts of the kit are not connected.

### 5.1 Hardware Installation

- Connect the Transmitter module to Digital I/O 2 of the [Stem\\_-\\_Base\\_Shield](#) on the arduino being used for transmission.
- Connect the Transmitter module to Digital I/O 2 of the [Stem\\_-\\_Base\\_Shield](#) on the receiving arduino.

### 5.2 Programming

Sample code for Transmitter:

```
#include <VirtualWire.h>

int RF_TX_PIN = 2;

void setup()
{
  vw_set_tx_pin(RF_TX_PIN); // Setup transmit pin
  vw_setup(2000); // Transmission speed in bits per second.
}

void loop()
{
  const char *msg = "hello";
  vw_send((uint8_t *)msg, strlen(msg)); // Send 'hello' every 400ms.
  delay(400);
}
```

Sample code for Receiver:

```
#include <VirtualWire.h>
```

```
int RF_RX_PIN = 2;

void setup()
{
  Serial.begin(9600);
  Serial.println("setup");
  vw_set_rx_pin(RF_RX_PIN); // Setup receive pin.
  vw_setup(2000); // Transmission speed in bits per second.
  vw_rx_start(); // Start the PLL receiver.
}

void loop()
{
  uint8_t buf[VW_MAX_MESSAGE_LEN];
  uint8_t buflen = VW_MAX_MESSAGE_LEN;
  if(vw_get_message(buf, &buflen) // non-blocking I/O
  {
    int i;
    // Message with a good checksum received, dump HEX
    Serial.print("Got: ");
    for(i = 0; i < buflen; ++i)
    {
      Serial.print(buf[i], HEX);
      Serial.print(" ");
    }
    Serial.println("");
  }
}
```

## 6. Resources

---

- Demo code: [File:433MHz demo.zip](#)
- [VirtualWire 1.20](#)
- [VirtualWire Documentation](#)
- [TI;LM358PSR](#)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sub-GHz Development Tools](#) category:*

*Click to view products by [Seeed Studio](#) manufacturer:*

Other Similar products are found below :

[EVAL-ADF7021DBJZ](#) [EVAL-ADF7021-NDBZ2](#) [EVAL-ADF7021-VDB3Z](#) [EVAL-ADF7023DB3Z](#) [MICRF219A-433 EV](#) [MICRF220-433 EV](#) [AD6679-500EBZ](#) [EVAL-ADF7901EBZ](#) [EVAL-ADF790XEBZ](#) [110976-HMC453QS16G](#) [STEVAL-IKR002V7D](#) [MAX2602EVKIT+](#) [MAX1472EVKIT-315](#) [MAX1479EVKIT-315](#) [STEVAL-IKR002V3D](#) [MAX7042EVKIT-315+](#) [MAX2902EVKIT#](#) [MAX9947EVKIT+](#) [MAX1470EVKIT-315](#) [SKY66188-11-EK1](#) [SKY66013-11-EVB](#) [EVAL-ADF7023DB5Z](#) [DRF1200/CLASS-E](#) [1096](#) [1097](#) [1098](#) [MDEV-900-PRO](#) [DVK-SFUS-1-GEVK](#) [DVK-SFUS-API-1-GEVK](#) [US-SIGFOX-GEVB](#) [STEVAL-IKR002V2D](#) [107755-HMC454ST89](#) [DM182017-2](#) [110961-HMC453ST89](#) [DM182017-1](#) [3179](#) [DC689A](#) [DC1513B-AB](#) [3229](#) [3230](#) [3231](#) [3232](#) [DC1250A-AA](#) [DC1513B-AC](#) [DC1513B-AD](#) [DC1513B-AA](#) [TEL0075](#) [RFX1010-EK1](#) [131903-HMC921LP4E](#) [EU-SIGFOX-GEVB](#)