

MQ303A Alcohol Sensor

Character

- * High sensitivity
- * Fast response and resume
- * Long life and low cost
- * Mini Size

Application





MQ303A is semiconductor sensor is for Alcohol detection, It has good sensitivity and fast response to alcohol, suitable for portable alcohol detector.

Technical Data

Model No.		MQ303A	
Sensor Type		Semiconductor	
Standard Encapsulation		Metal	
Detection Gas		Alcohol	
Concentration		20-1000ppm Alcohol	
Standard Circuit Conditions	Heater Voltage	V_H	$0.9V \pm 0.1V$ AC or DC
	Loop Voltage	V_e	$\leq 6V$ DC
	Load Resistance	R_L	Adjustable
	Heater Resistance	R_H	$4.5\Omega \pm 0.5\Omega$ (Room Tem.)
	Heater Current	I_H	$120 \pm 20mA$
	Heater Power	P_H	≤ 140 mW
Character	Sensor Consumption	P_S	≤ 10 mW
	Sensing Resistance	R_s	$4K\Omega - 400K\Omega$ (in air)
	Sensitivity	S	$R_s(\text{in air})/R_s(125\text{ppm Alcohol}) \geq 3$
	Slope	α	$0.50 \pm 0.15 (R_{300\text{ppm}}/R_{100\text{ppm Alcohol}})$
Condition	Tem. Humidity	$20^\circ\text{C} \pm 2^\circ\text{C}; 65\% \pm 5\%RH$	
	Standard test circuit	$V_c: 3.0 V \pm 0.1 V$ DC ; $V_H: 0.9 V \pm 0.1 V$ DC	
	Preheat time	Over 48 hours	



Configuration

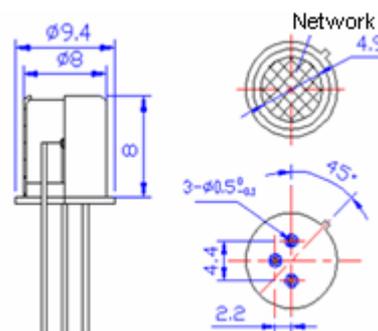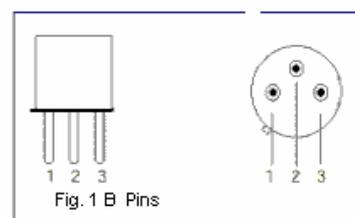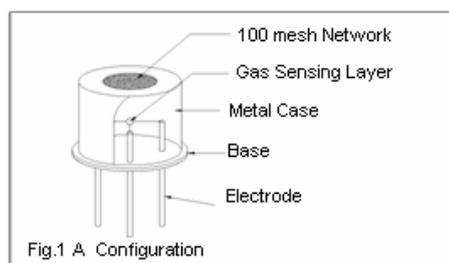

Sensing element of the semiconductor sensor is a micro-ball, heater and metal electrode are inside, and the sensing element is installed in anti-explosion double 100 mesh metal case (see the above)

Sensitivity Characteristics

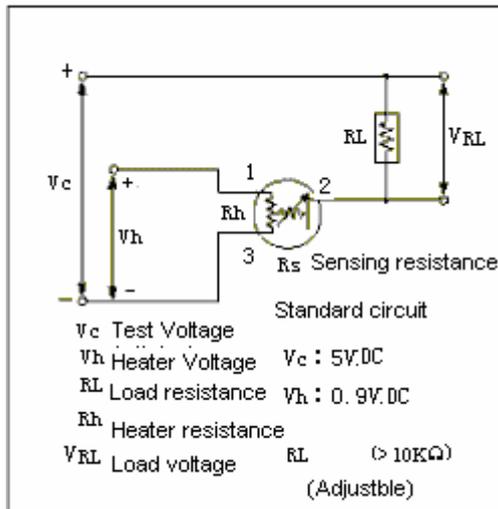


Fig 2 Standard Test Circuit

Fig.2 is the test circuit. You could get resistance change from voltage change on fixed or adjustable load resistance. Normally, it will take several minutes preheating for sensor enter into stable working after electrified; or you could give $2.2 \pm 0.2V$ high voltage for 5-10secs before test, which make sensor easily stable.

Influence of Temperature/Humidity

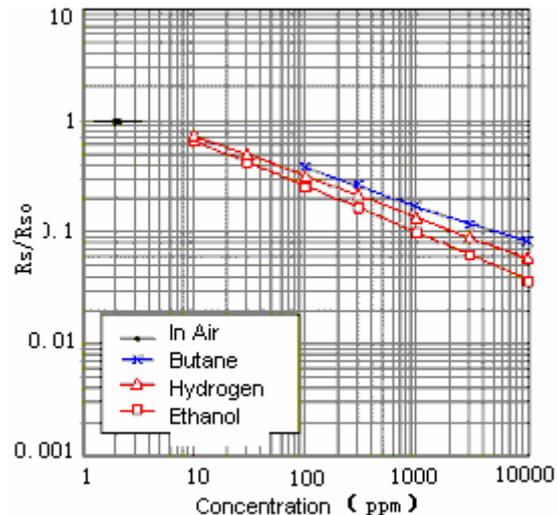


Fig 3 is sensitivity of MQ303A, it reflects relations between resistance and gas concentration, resistance of the sensor reduce when gas concentration increases

Notification

1 Following conditions must be prohibited

1.1 Exposed to organic silicon steam

Organic silicon steam cause sensors invalid, sensors must be avoid exposing to silicon bond, fixture, silicon latex, putty or plastic contain silicon environment

1.2 High Corrosive gas

If the sensors exposed to high concentration corrosive gas (such as H_2S , SO_x , Cl_2 , HCl etc), it will not only result in corrosion of sensors structure, also it cause sincere sensitivity attenuation.

1.3 Alkali, Alkali metals salt, halogen pollution

The sensors performance will be changed badly if sensors be sprayed polluted by alkali metals salt especially brine, or be exposed to halogen such as fluorin.

1.4 Touch water

Sensitivity of the sensors will be reduced when spattered or dipped in water.

1.5 Freezing


Do avoid icing on sensor's surface, otherwise sensor would lose sensitivity.

1.6 Applied voltage higher

Applied voltage on sensor should not be higher than stipulated value, otherwise it cause down-line or heater damaged, and bring on sensors' sensitivity characteristic changed badly.

1.7 Voltage on wrong pins

For 6 pins sensor, if apply voltage on 1、3 pins or 4、6 pins, it will make lead broken, and without signal when apply on 2、4 pins

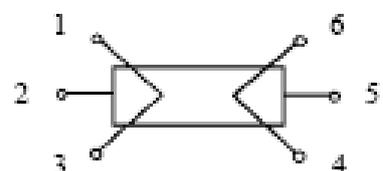

2 Following conditions must be avoided

2.1 Water Condensation

Indoor conditions, slight water condensation will effect sensors performance lightly. However, if water condensation on sensors surface and keep a certain period, sensor' sensitivity will be decreased.

2.2 Used in high gas concentration

No matter the sensor is electrified or not, if long time placed in high gas concentration, it will affect sensors characteristic.

2.3 Long time storage

The sensors resistance produce reversible drift if it's stored for long time without electrify, this drift is related with storage conditions. Sensors should be stored in airproof without silicon gel bag with clean air. For the sensors with long time storage but no electrify, they need long aging time for stability before using.

2.4 Long time exposed to adverse environment

No matter the sensors electrified or not, if exposed to adverse environment for long time, such as high humidity, high temperature, or high pollution etc, it will effect the sensors performance badly.

2.5 Vibration

Continual vibration will result in sensors down-lead response then repute. In transportation or assembling line, pneumatic screwdriver/ultrasonic welding machine can lead this vibration.

2.6 Concussion

If sensors meet strong concussion, it may lead its lead wire disconnected.

2.7 Usage

For sensor, handmade welding is optimal way. If use wave crest welding should meet the following conditions:

2.7.1 Soldering flux: Rosin soldering flux contains least chlorine

2.7.2 Speed: 1-2 Meter/ Minute

2.7.3 Warm-up temperature: $100\pm 20^{\circ}\text{C}$

2.7.4 Welding temperature: $250\pm 10^{\circ}\text{C}$

2.7.5 1 time pass wave crest welding machine

If disobey the above using terms, sensors sensitivity will be reduced.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Seed Studio Accessories](#) category:

Click to view products by [Seed Studio](#) manufacturer:

Other Similar products are found below :

[101990565](#) [101990564](#) [110990984](#) [114992111](#) [114992067](#) [114992283](#) [114991948](#) [106100003](#) [103060000](#) [101020004](#) [101020006](#)
[101020012](#) [101020018](#) [101020028](#) [101020038](#) [101020045](#) [101020049](#) [101020052](#) [101020055](#) [101020056](#) [101020058](#) [101020472](#)
[101020580](#) [101020603](#) [101990007](#) [101990028](#) [101990029](#) [101990053](#) [101990058](#) [101990059](#) [101990060](#) [101990061](#) [101990064](#)
[101990065](#) [101990647](#) [102020143](#) [102060105](#) [102070001](#) [102070002](#) [102070003](#) [102070004](#) [102070005](#) [102070007](#) [102070008](#)
[102070009](#) [102070010](#) [102070011](#) [102090024](#) [102110357](#) [102110377](#)