

Sefram
Sefram

SEFRAM 7310

3200 counts Digital Multimeter


**Make sure to visit
our Website**

<http://www.sefram.fr>

General purpose, compact and reliable

Capabilities

- Measure voltages up to 600V AC and 600V DC
- Measure DC currents: 300 μ A and 3000 μ A
- Measure resistance up to 30Mohms
- Continuity test with buzzer
- Autoranging
- Diode test
- LCD display with 65 segments bargraph
- Function: Hold
- Reliable and easy-to-use

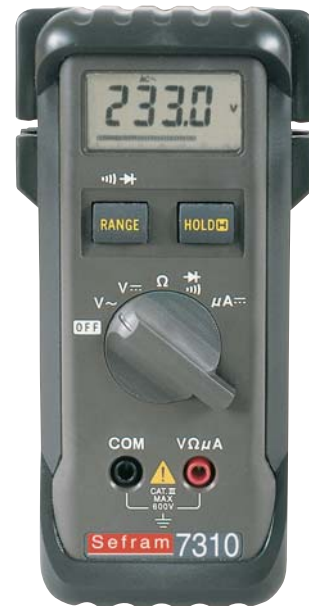

Sefram 7310

Specifications

DC voltages	
Ranges	300mV to 600V (5 ranges)
Basic accuracy	$\pm(0.5\% + 2\text{dgt})$
Resolution	100 μ V to 1V
AC voltages	
Ranges	3V to 600V (4 ranges)
Basic accuracy	$\pm(1.5\% + 6\text{dgt})$
Resolution	1mV to 1V
Bandwidth	
	50Hz to 400Hz
DC currents	
Ranges	300 μ A, 3000 μ A
Basic accuracy	$\pm(1.0\% + 2\text{dgt})$
Resolution	0.1 μ A to 1 μ A
Resistance	
Gammes	300 ohms to 30Mohms (6 ranges)
Basic accuracy	$\pm(1.0\% + 4\text{dgt})$
Open circuit volatge	1.3V max
Continuity test	yes, with buzzer
Diode test	yes, under 0.5mA typical
Function	Hold

General specifications

Display	LCD
Display counts	3 digits 3/4, 3200 counts and 65 segments bargraph
Measurement rate	2 measures/s
Operating temperature	0°C to 50°C (RH<70%)
Storage temperature	-20°C to 60°C (without battery and RH<80%)
Protection	electronic for all ranges
Safety	600V - CAT II
Power supply	2 x 1.5V (LR03) batteries
Autonomy	1000h typical (with alkaline batteries)
Dimensions	165 x 80 x 36mm
Weight	310g
Warranty	3 years

supplied with : a set of safety test leads, batteries (installed) and user's manual.



FT 7310A00 - Specifications can be updated without notice.



32, rue Edouard Martel • B.P. 55 • 42009 - St Etienne cedex 2



Fax. +33 (0).4.77.57.23.23

Web : www.sefram.fr • e-mail : sales@sefram.fr

For assistance and ordering



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Multimeters](#) category:

Click to view products by [Sefram](#) manufacturer:

Other Similar products are found below :

[6111-517](#) [FS881](#) [40705X](#) [C.A 6133 LAUNCH KIT P 1020 A](#) [SEFRAM7303](#) [BS K-CLIP 19290](#) [DM285-FLEX-KIT](#) [IBT6K](#) [1000-219](#)
[1001-613](#) [1006-969](#) [1008-221](#) [1012-597](#) [1013-099](#) [30XR](#) [34XR](#) [35XP](#) [TESTO 745](#) [0590 7450](#) [TESTO 760-2](#) [0590 7602](#) [TESTO 760-3](#)
[0590 7603](#) [440012](#) [AX-155](#) [AX-174](#) [AX-178](#) [AX-18B](#) [AX-190A](#) [AX-503](#) [AX-507B](#) [AX-594](#) [AX-LCR42A](#) [AX-MS811](#) [AX-MS8250](#) [AX-](#)
[PDM01](#) [AX-T520](#) [AX-T901](#) [AX-T903](#) [BAT-250-EUR](#) [BM525S](#) [BM805S](#) [BM807S](#) [BM817S](#) [BM827S](#) [BM829S](#) [BM857S](#) [BM859S](#)
[BM867S](#) [BM907S](#) [33XR](#)