



# MMBTRC116SS...MMBTRC122SS

## NPN Silicon Epitaxial Planar Transistors

For switching, interface circuit and drive circuit applications

### Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process

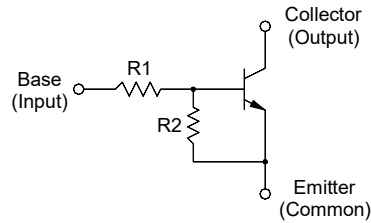

1.Base 2.Emitter 3.Collector  
SOT-23 Plastic Package

### Resistor Values

Type	R1 (KΩ)	R2 (KΩ)
MMBTRC116SS	1	10
MMBTRC117SS	2.2	2.2
MMBTRC118SS	2.2	10
MMBTRC119SS	4.7	10
MMBTRC120SS	10	4.7
MMBTRC121SS	47	10
MMBTRC122SS	100	100


### Absolute Maximum Ratings (T<sub>a</sub> = 25 °C)

Parameter		Symbol	Value	Unit
Output Voltage		V <sub>o</sub>	50	V
Input Voltage	MMBTRC116SS	V <sub>i</sub>	10, - 5	V
	MMBTRC117SS		12, - 10	
	MMBTRC118SS		12, - 5	
	MMBTRC119SS		20, - 7	
	MMBTRC120SS		30, - 10	
	MMBTRC121SS		40, - 15	
	MMBTRC122SS		40, - 10	
Output Current		I <sub>o</sub>	100	mA
Total Power Dissipation		P <sub>tot</sub>	200	mW
Junction Temperature		T <sub>j</sub>	150	°C
Storage Temperature Range		T <sub>Stg</sub>	- 55 to + 150	°C

### Thermal Characteristics

Parameter	Symbol	Max.	Unit
Thermal Resistance from Junction to Ambient <sup>1)</sup>	R <sub>θJA</sub>	625	°C/W

<sup>1)</sup> Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.




# MMBTRC116SS...MMBTRC122SS

## Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain					
at $V_O = 5\text{ V}$ , $I_O = 5\text{ mA}$	MMBTRC116SS	33	-	-	-
at $V_O = 5\text{ V}$ , $I_O = 20\text{ mA}$	MMBTRC117SS	20	-	-	-
at $V_O = 5\text{ V}$ , $I_O = 10\text{ mA}$	MMBTRC118SS	33	-	-	-
at $V_O = 5\text{ V}$ , $I_O = 10\text{ mA}$	MMBTRC119SS	30	-	-	-
at $V_O = 5\text{ V}$ , $I_O = 10\text{ mA}$	MMBTRC120SS	24	-	-	-
at $V_O = 5\text{ V}$ , $I_O = 5\text{ mA}$	MMBTRC121SS	33	-	-	-
at $V_O = 5\text{ V}$ , $I_O = 5\text{ mA}$	MMBTRC122SS	62	-	-	-
Output Cutoff Current at $V_O = 50\text{ V}$	$I_{O(OFF)}$	-	-	500	nA
Input Current at $V_I = 5\text{ V}$					
	MMBTRC116SS	-	-	7.2	mA
	MMBTRC117SS	-	-	3.8	
	MMBTRC118SS	-	-	3.8	
	MMBTRC119SS	-	-	1.8	
	MMBTRC120SS	-	-	0.88	
	MMBTRC121SS	-	-	0.16	
	MMBTRC122SS	-	-	0.15	
Output Voltage					
at $I_O = 10\text{ mA}$ , $I_I = 0.5\text{ mA}$	MMBTRC116SS	-	-	0.3	V
at $I_O = 10\text{ mA}$ , $I_I = 0.5\text{ mA}$	MMBTRC117SS	-	-	0.3	
at $I_O = 10\text{ mA}$ , $I_I = 0.5\text{ mA}$	MMBTRC118SS	-	-	0.3	
at $I_O = 10\text{ mA}$ , $I_I = 0.5\text{ mA}$	MMBTRC119SS	-	-	0.3	
at $I_O = 10\text{ mA}$ , $I_I = 0.5\text{ mA}$	MMBTRC120SS	-	-	0.3	
at $I_O = 10\text{ mA}$ , $I_I = 0.5\text{ mA}$	MMBTRC121SS	-	-	0.3	
at $I_O = 5\text{ mA}$ , $I_I = 0.25\text{ mA}$	MMBTRC122SS	-	-	0.3	
Input Voltage (ON)					
at $V_O = 0.3\text{ V}$ , $I_O = 20\text{ mA}$	MMBTRC116SS	-	-	3	V
at $V_O = 0.3\text{ V}$ , $I_O = 20\text{ mA}$	MMBTRC117SS	-	-	3	
at $V_O = 0.3\text{ V}$ , $I_O = 20\text{ mA}$	MMBTRC118SS	-	-	3	
at $V_O = 0.3\text{ V}$ , $I_O = 20\text{ mA}$	MMBTRC119SS	-	-	2.5	
at $V_O = 0.3\text{ V}$ , $I_O = 2\text{ mA}$	MMBTRC120SS	-	-	3	
at $V_O = 0.3\text{ V}$ , $I_O = 2\text{ mA}$	MMBTRC121SS	-	-	5	
at $V_O = 0.3\text{ V}$ , $I_O = 1\text{ mA}$	MMBTRC122SS	-	-	3	
Input Voltage (OFF)					
at $V_{CC} = 5\text{ V}$ , $I_O = 100\text{ }\mu\text{A}$	MMBTRC116SS	0.3	-	-	V
	MMBTRC117SS	0.5	-	-	
	MMBTRC118SS	0.3	-	-	
	MMBTRC119SS	0.3	-	-	
	MMBTRC120SS	0.8	-	-	
	MMBTRC121SS	1	-	-	
	MMBTRC122SS	0.5	-	-	
Transition Frequency at $V_O = 10\text{ V}$ , $I_O = 5\text{ mA}$	$f_T$ <sup>1)</sup>	-	250	-	MHz

<sup>1)</sup> Characteristic of transistor only.



# MMBTRC116SS...MMBTRC122SS

## Electrical Characteristics Curves

Fig 1. Output Current vs.  $V_{I(ON)}$

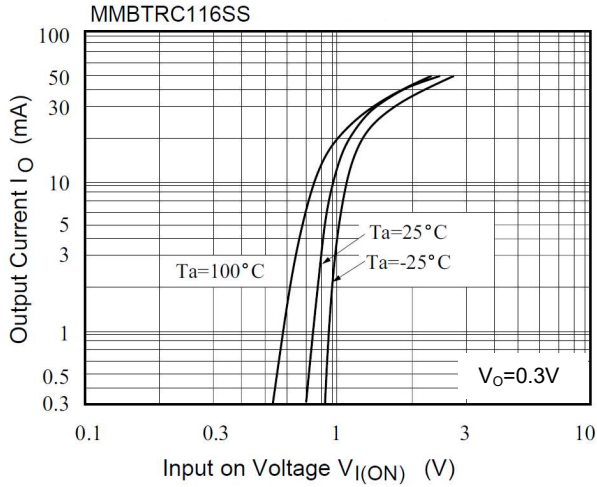


Fig 2. Output Current vs.  $V_{I(ON)}$

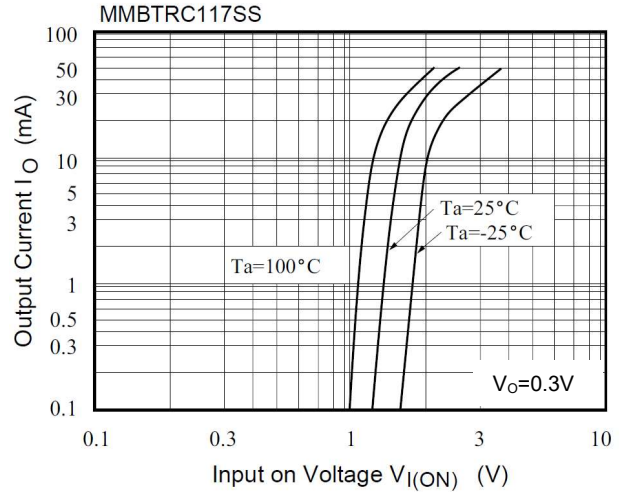


Fig 3. Output Current vs.  $V_{I(OFF)}$

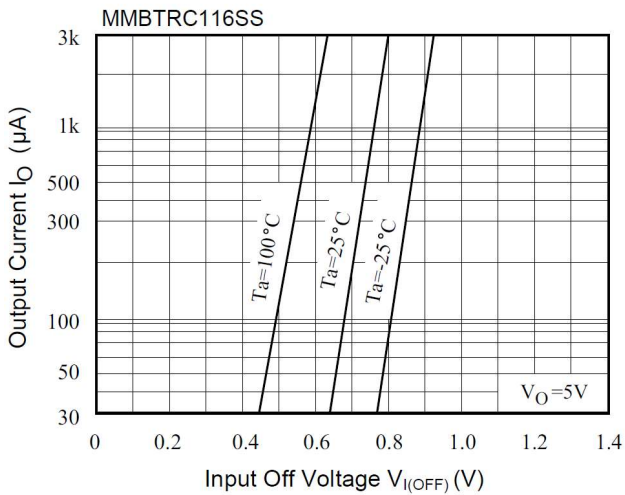


Fig 4. Output Current vs.  $V_{I(OFF)}$

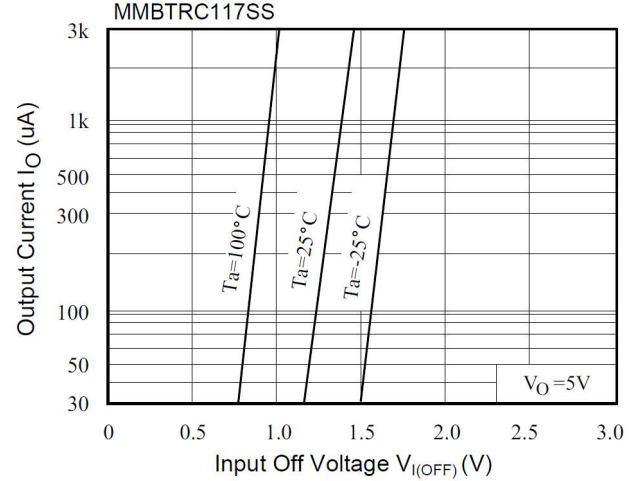


Fig 5. DC Current Gain vs. Output Current



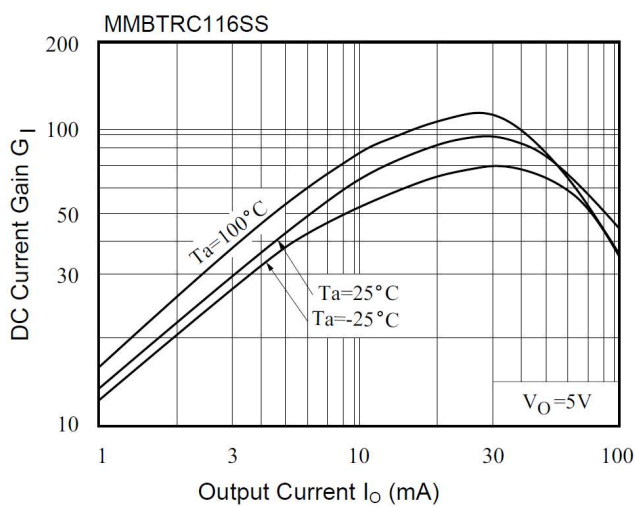


Fig 6. DC Current Gain vs. Output Current

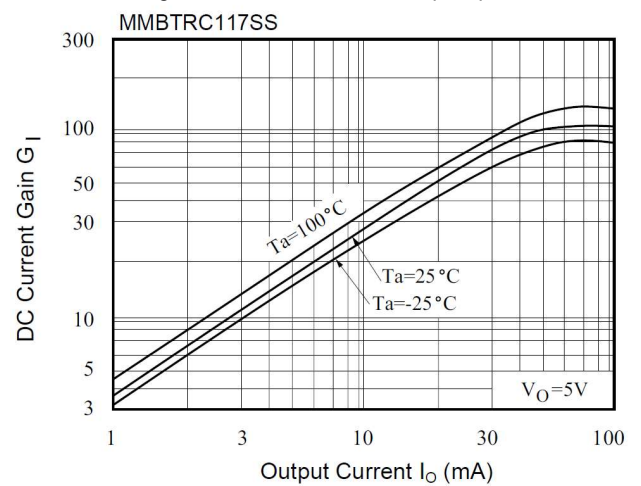

# MMBTRC116SS...MMBTRC122SS

## Electrical Characteristics Curves

Fig 1. Output Current vs.  $V_{I(ON)}$

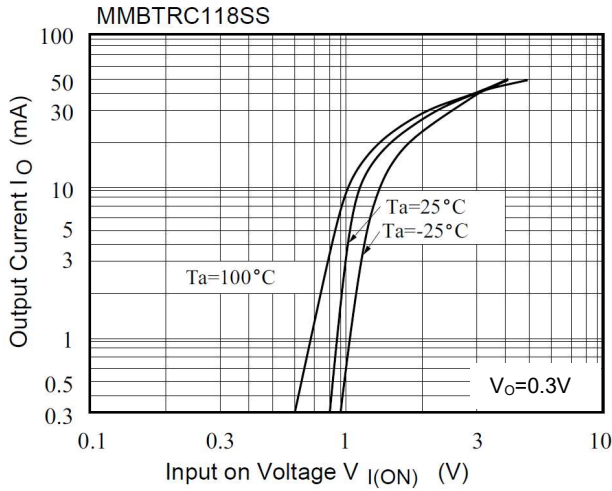


Fig 2. Output Current vs.  $V_{I(ON)}$

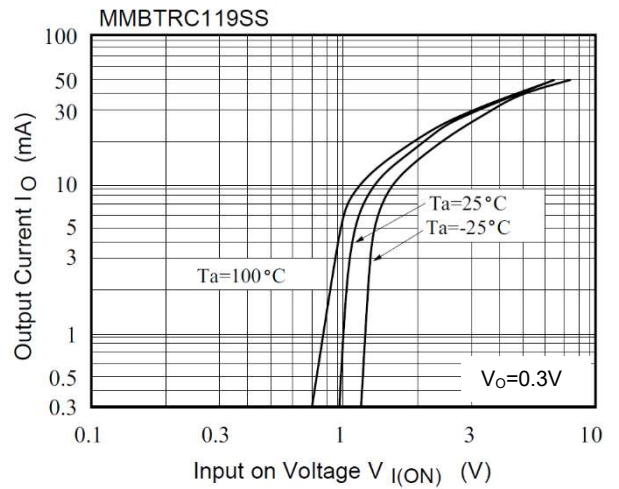


Fig 3. Output Current vs.  $V_{I(OFF)}$

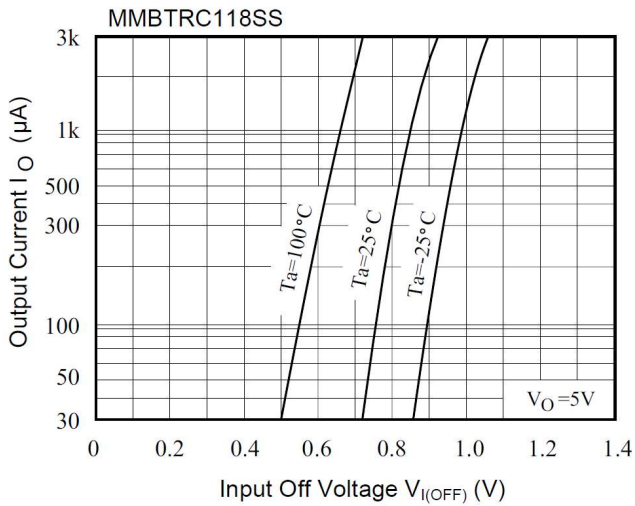


Fig 4. Output Current vs.  $V_{I(OFF)}$

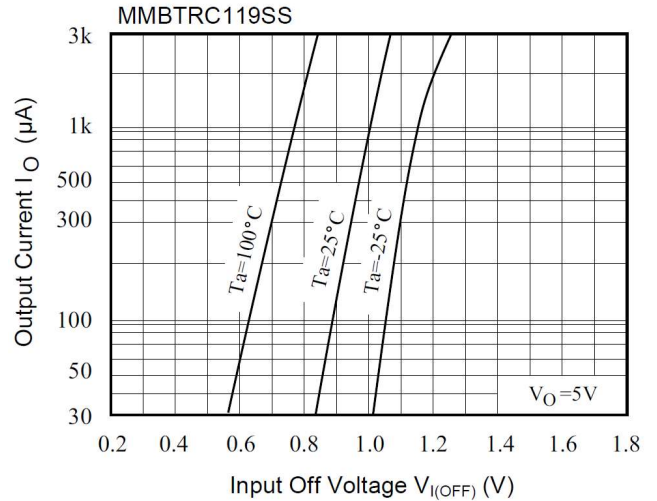


Fig 5. DC Current Gain vs. Output Current



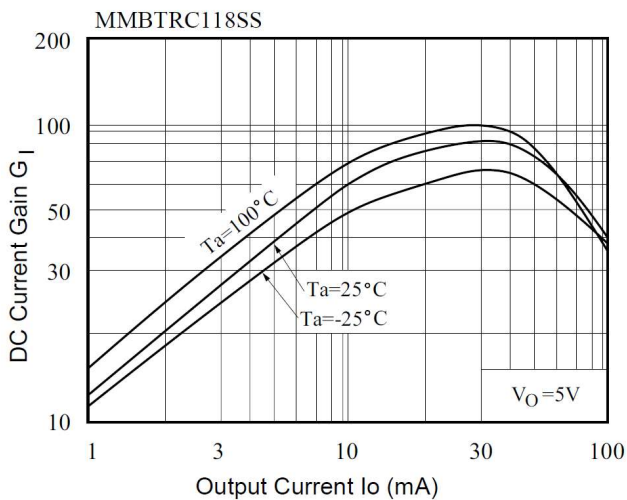


Fig 6. DC Current Gain vs. Output Current

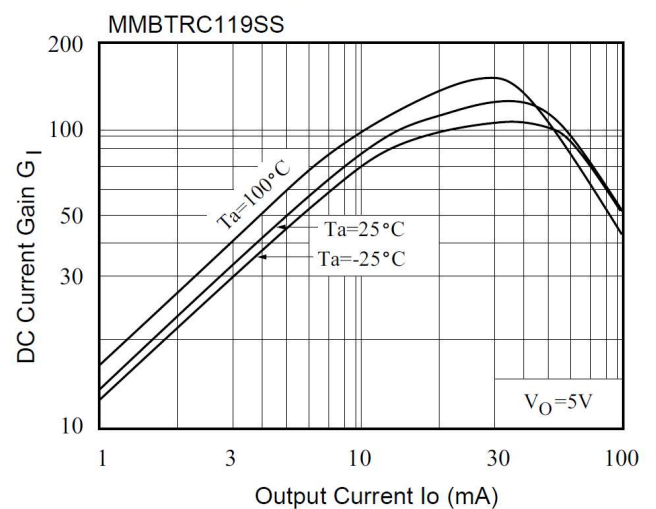

# MMBTRC116SS...MMBTRC122SS

## Electrical Characteristics Curves

Fig 1. Output Current vs.  $V_{I(ON)}$

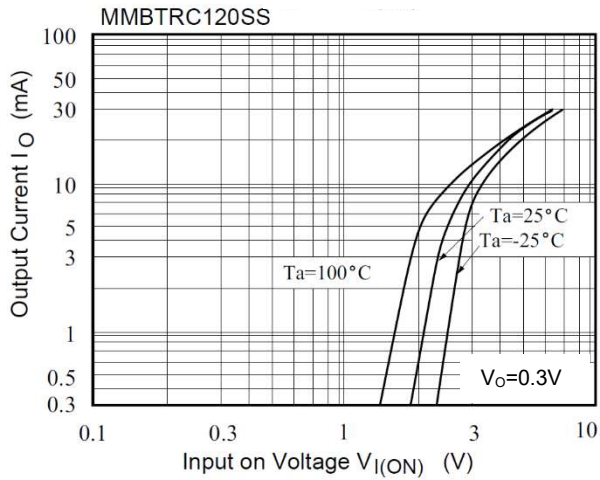


Fig 2. Output Current vs.  $V_{I(ON)}$

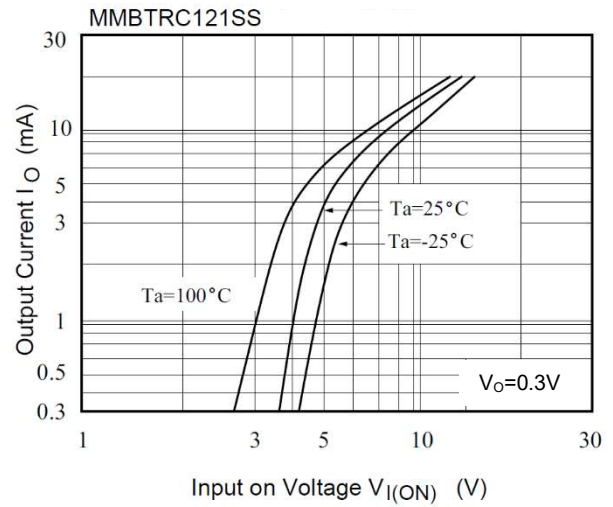


Fig 2. Output Current vs.  $V_{I(off)}$

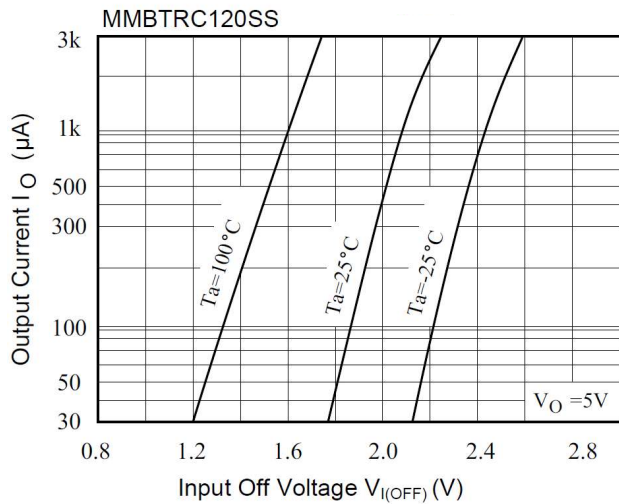


Fig 2. Output Current vs.  $V_{I(off)}$

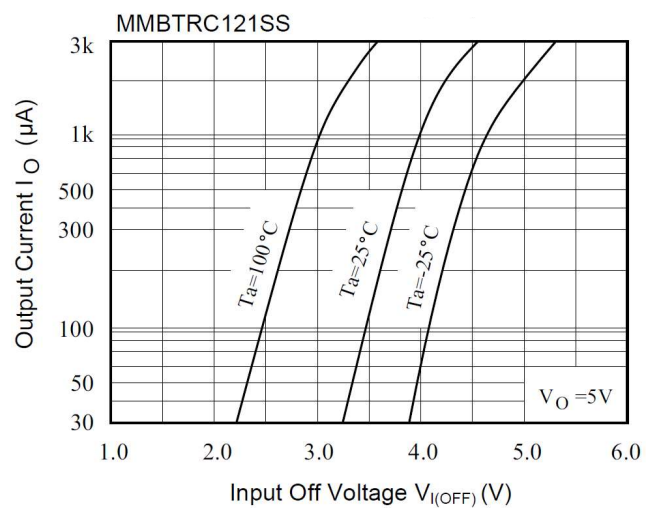


Fig 5. DC Current Gain vs. Output Current



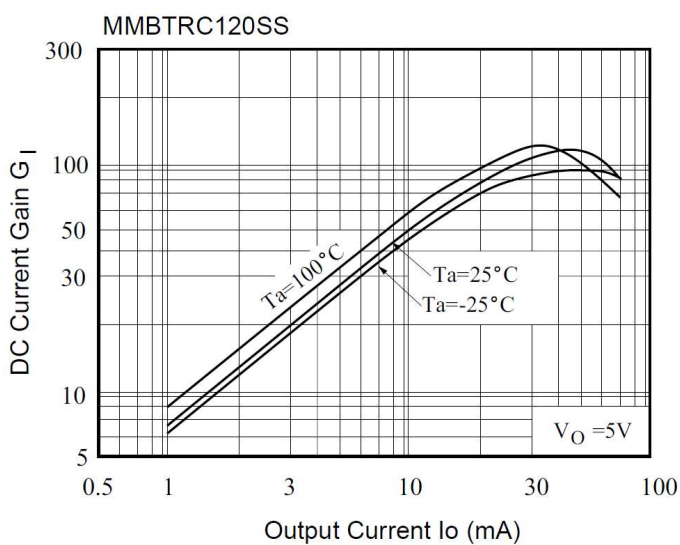


Fig 6. DC Current Gain vs. Output Current

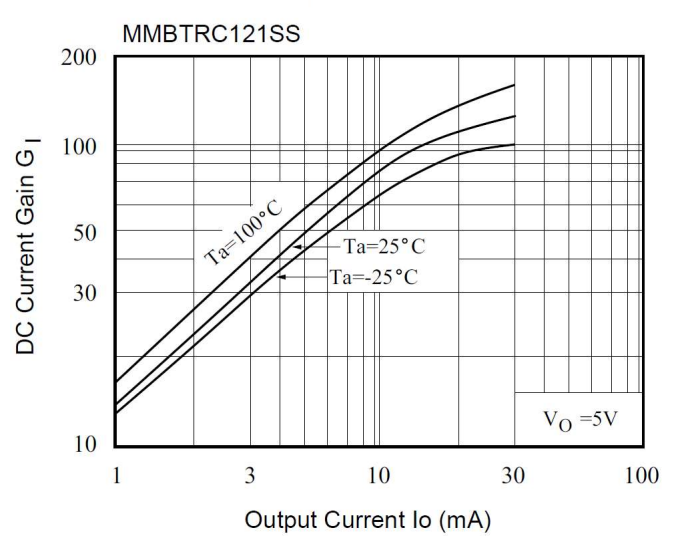

# MMBTRC116SS...MMBTRC122SS

## Electrical Characteristics Curves

Fig 1. Output Current vs.  $V_{I(ON)}$

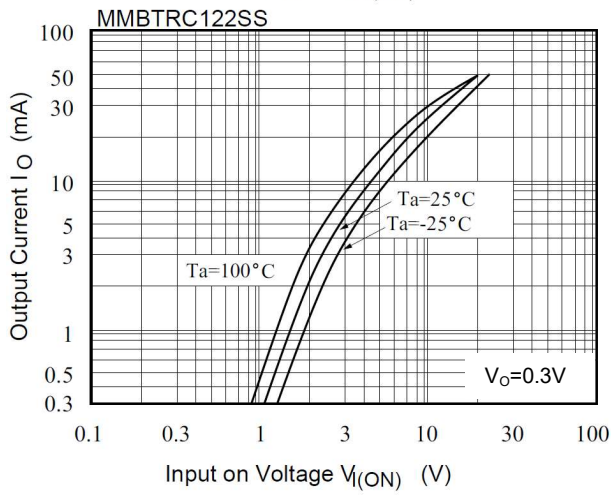


Fig 2. Output Current vs.  $V_{I(off)}$



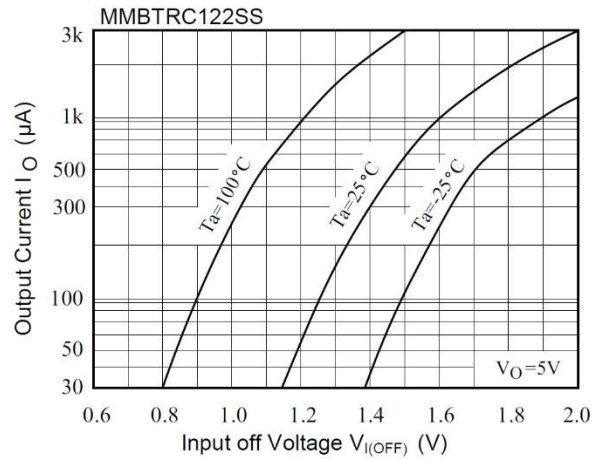



Fig 3. DC Current Gain vs. Output Current

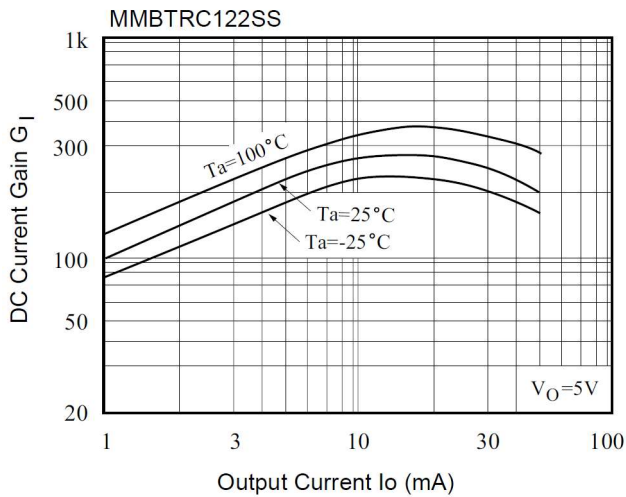

# MMBTRC116SS...MMBTRC122SS


## Package Outline (Dimensions in mm)

SOT-23

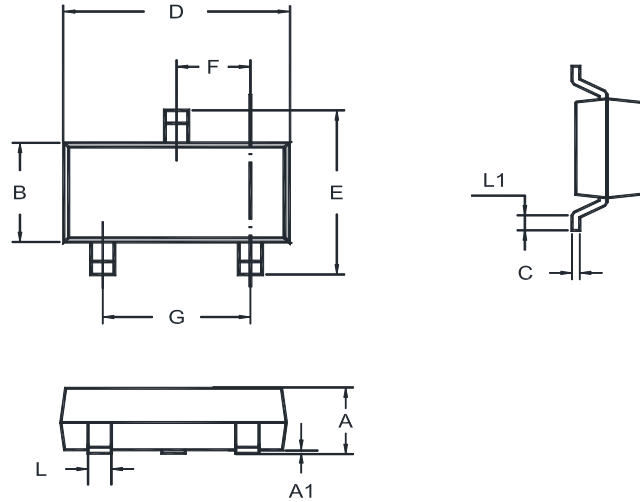

Unit	A	A1	B	C	D	E	F	G	L	L1
mm	1.20	0.100	1.40	0.19	3.04	2.6	1.02	2.04	0.51	0.2
	0.89	0.013	1.20	0.08	2.80	2.2	0.89	1.78	0.37	MIN

## Recommended Soldering Footprint



## Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOT-23	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

## Marking information

" \*\*\*" = Part No.



Type	Marking	Type	Marking	Type	Marking	Type	Marking
MMBTRC116SS	YN	MMBTRC118SS	YR	MMBTRC120SS	YY	MMBTRC122SS	ZA
MMBTRC117SS	YP	MMBTRC119SS	YX	MMBTRC121SS	YZ		

" YM " = Date Code Marking

" Y " = Year

" M " = Month

Font type: Arial



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - Pre-Biased](#) category:*

*Click to view products by [Semtech](#) manufacturer:*

Other Similar products are found below :

[DRC9A14E0L](#) [DTA124GKAT146](#) [DTA144WETL](#) [DTA144WKAT146](#) [DTC113EET1G](#) [DTC115TETL](#) [DTC115TKAT146](#)  
[DTC144VUAT106](#) [MUN5241T1G](#) [BCR158WH6327XTSA1](#) [NSBA114TDP6T5G](#) [SMUN5330DW1T1G](#) [SSVMUN5312DW1T2G](#)  
[RN1303\(TE85L,F\)](#) [RN1306\(TE85L,F\)](#) [EMH15T2R](#) [SMUN2214T3G](#) [SMUN5335DW1T1G](#) [NSBC143ZPDP6T5G](#) [NSVDTA143ZET1G](#)  
[SMUN2214T1G](#) [FMA7AT148](#) [DTC114EUA-TP](#) [SMUN5237DW1T1G](#) [SMUN5213DW1T1G](#) [SMUN5114DW1T1G](#) [SMUN2111T1G](#)  
[DTC124ECA-TP](#) [DTA114ECA-TP](#) [DTC113EM3T5G](#) [NSVMUN5135DW1T1G](#) [NSVMUN2237T1G](#) [NSVDTC143ZM3T5G](#)  
[SMUN5335DW1T2G](#) [SMUN5216DW1T1G](#) [NSVMUN5316DW1T1G](#) [NSVMUN5215DW1T1G](#) [NSVMUN5213DW1T3G](#)  
[NSVMUN2112T1G](#) [NSVIMD10AMT1G](#) [NSVEMC2DXV5T1G](#) [NSVDTC144WET1G](#) [NSVDTC123JET1G](#) [NSVDTA143EM3T5G](#)  
[NSVB1706DMW5T1G](#) [NSBC143EDP6T5G](#) [RN2101,LF\(CT](#) [NSBA144WDXV6T1G](#) [DTA115TET1G](#) [NSBC115TDP6T5G](#)