

Zener Voltage Regulators

200 mW SOD-323 Surface Mount

Specification Features:

- Standard Zener Breakdown Voltage Range – 2.0 V to 75 V
- Steady State Power Rating of 200 mW
- Small Body Outline Dimensions: 0.067" x 0.049" (1.7 mm x 1.25 mm)
- Low Body Height: 0.035" (0.9 mm)
- Package Weight: 4.507 mg/unit
- ESD Rating of Class 3 (>16 kV) per Human Body Model
- Pb-Free package is available.

Mechanical Characteristics:

CASE: Void-free, transfer-molded plastic

FINISH: All external surfaces are corrosion resistant


MAXIMUM CASE TEMPERATURE FOR SOLDERING PURPOSES:

260°C for 10 Seconds

POLARITY: Cathode indicated by polarity band

FLAMMABILITY RATING: UL94 V-0

MOUNTING POSITION: Any

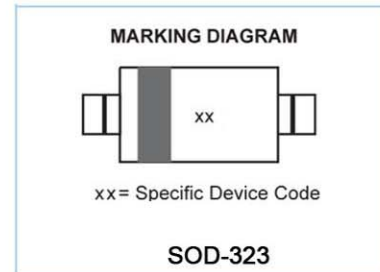

MAXIMUM RATINGS


| Rating | Symbol | Max | Unit |
|--|-----------------------------------|------------|-------------|
| Total Device Dissipation FR-5 Board, (Note 1.) @ TA = 25°C Derate above 25°C | P _D | 200 1.5 | mW mW/°C |
| Thermal Resistance from Junction to Ambient | R _{θJA} | 635 | °C/W |
| Junction and Storage Temperature Range | T _J , T _{stg} | -65 to+150 | °C |

1. FR-4 Minimum Pad

ELECTRICAL CHARACTERISTICS

(T_A = 25°C unless otherwise noted,
V_F = 0.9 V Max. @ I_F = 10 mA for all types)

| Symbol | Parameter |
|-----------------|---|
| V _Z | Reverse Zener Voltage @ I _{ZT} |
| I _{ZT} | Reverse Current |
| Z _{ZT} | Maximum Zener Impedance @ I _{ZT} |
| I _{ZK} | Reverse Current |
| Z _{ZK} | Maximum Zener Impedance @ I _{ZK} |
| I _R | Reverse Leakage Current @ V _R |
| V _R | Reverse Voltage |
| I _F | Forward Current |
| V _F | Forward Voltage @ I _F |
| θV _Z | Maximum Temperature Coefficient of V _Z |
| C | Max. Capacitance @ V _R = 0 and f = 1 MHz |

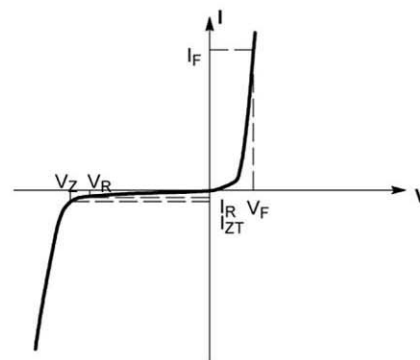

Zener Voltage Regulator

SHIKE MAKE CONSCIOUS PRODUCT

CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE

REV.07



ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 0.9\text{ V Max.}$ @ $I_F = 10\text{ mA}$ for all types)

| Device | Device Marking | Zener Voltage (Note 2.) | | | Zener Impedance | | | Leakage Current | | θ_{V_Z} (mV/k) @ I_{ZT} | | C @ $V_R = 0$ f = 1 MHz pF | |
|---------|----------------|-------------------------|-------|------|-----------------|---------------------|---------------------|-----------------|-------|----------------------------------|------|-------------------------------|-----|
| | | V_Z (Volts) | | | $@ I_{ZT}$ | Z_{ZT} @ I_{ZT} | Z_{ZK} @ I_{ZK} | I_R @ V_R | | Min | Max | | |
| | | Min | Nom | Max | mA | Ω | Ω | μA | Volts | Min | Max | | |
| MM3Z2V0 | WY | 1.91 | 2.0 | 2.09 | 5 | 100 | 600 | 1.0 | 150 | 1.0 | -3.5 | 0 | 450 |
| MM3Z2V4 | 00 | 2.2 | 2.4 | 2.6 | 5 | 100 | 1000 | 0.5 | 50 | 1.0 | -3.5 | 0 | 450 |
| MM3Z2V7 | 01 | 2.5 | 2.7 | 2.9 | 5 | 100 | 1000 | 0.5 | 20 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V0 | 02 | 2.8 | 3.0 | 3.2 | 5 | 100 | 1000 | 0.5 | 10 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V3 | 05 | 3.1 | 3.3 | 3.5 | 5 | 95 | 1000 | 0.5 | 5 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V6 | 06 | 3.4 | 3.6 | 3.8 | 5 | 90 | 1000 | 0.5 | 5 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V9 | 07 | 3.7 | 3.9 | 4.1 | 5 | 90 | 1000 | 0.5 | 3 | 1.0 | -3.5 | -2.5 | 450 |
| MM3Z4V3 | 08 | 4.0 | 4.3 | 4.6 | 5 | 90 | 1000 | 0.5 | 3 | 1.0 | -3.5 | 0 | 450 |
| MM3Z4V7 | 09 | 4.4 | 4.7 | 5.0 | 5 | 80 | 800 | 0.5 | 3 | 2.0 | -3.5 | 0.2 | 260 |
| MM3Z5V1 | 0A | 4.8 | 5.1 | 5.4 | 5 | 60 | 800 | 0.5 | 2 | 2.0 | -2.7 | 1.2 | 225 |
| MM3Z5V6 | 0C | 5.2 | 5.6 | 6.0 | 5 | 40 | 700 | 0.5 | 1 | 2.0 | -2.0 | 2.5 | 200 |
| MM3Z6V2 | 0E | 5.8 | 6.2 | 6.6 | 5 | 10 | 100 | 0.5 | 3 | 4.0 | 0.4 | 3.7 | 185 |
| MM3Z6V8 | 0F | 6.4 | 6.8 | 7.2 | 5 | 15 | 160 | 0.5 | 2 | 4.0 | 1.2 | 4.5 | 155 |
| MM3Z7V5 | 0G | 7.0 | 7.5 | 7.9 | 5 | 15 | 160 | 0.5 | 1 | 5.0 | 2.5 | 5.3 | 140 |
| MM3Z8V2 | 0H | 7.7 | 8.2 | 8.7 | 5 | 15 | 160 | 0.5 | 0.7 | 5.0 | 3.2 | 6.2 | 135 |
| MM3Z9V1 | 0K | 8.5 | 9.1 | 9.6 | 5 | 15 | 160 | 0.5 | 0.2 | 7.0 | 3.8 | 7.0 | 130 |
| MM3Z10V | 0L | 9.4 | 10 | 10.6 | 5 | 20 | 160 | 0.5 | 0.1 | 8.0 | 4.5 | 8.0 | 130 |
| MM3Z11V | 0M | 10.4 | 11 | 11.6 | 5 | 20 | 160 | 0.5 | 0.1 | 8.0 | 5.4 | 9.0 | 130 |
| MM3Z12V | 0N | 11.4 | 12 | 12.7 | 5 | 25 | 80 | 0.5 | 0.1 | 8.0 | 6.0 | 10 | 130 |
| MM3Z13V | 0P | 12.4 | 13.25 | 14.1 | 5 | 30 | 80 | 0.5 | 0.1 | 8.0 | 7.0 | 11 | 120 |
| MM3Z15V | 0T | 14.3 | 15 | 15.8 | 5 | 30 | 400 | 0.5 | 0.05 | 10.5 | 9.2 | 13 | 110 |
| MM3Z16V | 0U | 15.3 | 16.2 | 17.1 | 5 | 40 | 400 | 0.5 | 0.05 | 11.2 | 10.4 | 14 | 105 |
| MM3Z18V | 0W | 16.8 | 18 | 19.1 | 5 | 45 | 400 | 0.5 | 0.05 | 12.6 | 12.4 | 16 | 100 |
| MM3Z20V | 0Z | 18.8 | 20 | 21.2 | 5 | 55 | 500 | 0.5 | 0.05 | 14.0 | 14.4 | 18 | 85 |
| MM3Z22V | 10 | 20.8 | 22 | 23.3 | 5 | 55 | 500 | 0.5 | 0.05 | 15.4 | 16.4 | 20 | 85 |
| MM3Z24V | 11 | 22.8 | 24.2 | 25.6 | 5 | 70 | 120 | 0.5 | 0.05 | 16.8 | 18.4 | 22 | 80 |
| MM3Z27V | 12 | 25.1 | 27 | 28.9 | 2 | 80 | 300 | 0.5 | 0.05 | 18.9 | 21.4 | 25.3 | 70 |
| MM3Z30V | 14 | 28 | 30 | 32 | 2 | 80 | 300 | 0.5 | 0.05 | 21.0 | 24.4 | 29.4 | 70 |
| MM3Z33V | 18 | 31 | 33 | 35 | 2 | 80 | 300 | 0.5 | 0.05 | 23.2 | 27.4 | 33.4 | 70 |
| MM3Z36V | 19 | 34 | 36 | 38 | 2 | 90 | 500 | 0.5 | 0.05 | 25.2 | 30.4 | 37.4 | 70 |
| MM3Z39V | 20 | 37 | 39 | 41 | 2 | 130 | 500 | 0.5 | 0.05 | 27.3 | 33.4 | 41.2 | 45 |
| MM3Z43V | 21 | 40 | 43 | 46 | 2 | 150 | 500 | 0.5 | 0.05 | 30.1 | 37.6 | 46.6 | 40 |
| MM3Z47V | 1A | 44 | 47 | 50 | 2 | 170 | 500 | 0.5 | 0.05 | 32.9 | 42.0 | 51.8 | 40 |
| MM3Z51V | 1C | 48 | 51 | 54 | 2 | 180 | 500 | 0.5 | 0.05 | 35.7 | 46.6 | 57.2 | 40 |
| MM3Z56V | 1D | 52 | 56 | 60 | 2 | 200 | 500 | 0.5 | 0.05 | 39.2 | 52.2 | 63.8 | 40 |
| MM3Z62V | 1E | 58 | 62 | 66 | 2 | 215 | 500 | 0.5 | 0.05 | 43.4 | 58.8 | 71.6 | 35 |
| MM3Z68V | 1F | 64 | 68 | 72 | 2 | 240 | 500 | 0.5 | 0.05 | 47.6 | 65.6 | 79.8 | 35 |
| MM3Z75V | 1G | 70 | 75 | 79 | 2 | 255 | 500 | 0.5 | 0.05 | 52.5 | 73.4 | 88.6 | 35 |

2. Zener voltage is measured with a pulse test current I_Z at an ambient temperature of 25°C .



Typical Characteristics

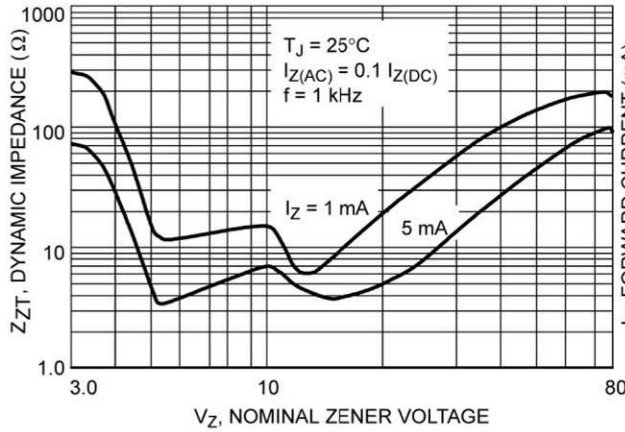


Figure 1. Effect of Zener Voltage on Zener Impedance

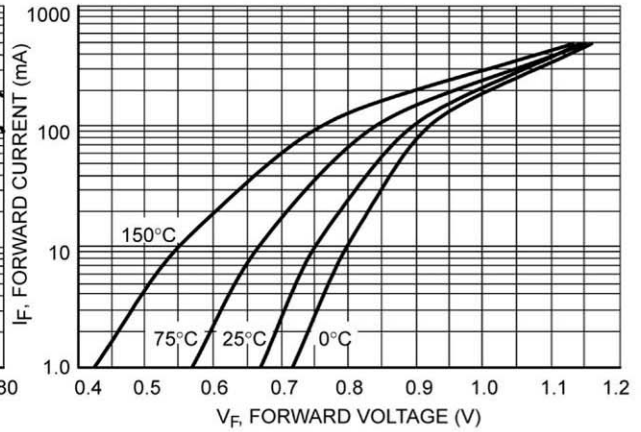


Figure 2. Typical Forward Voltage

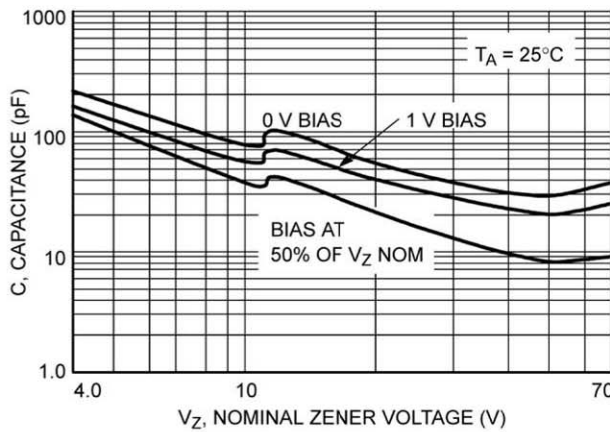


Figure 3. Typical Capacitance

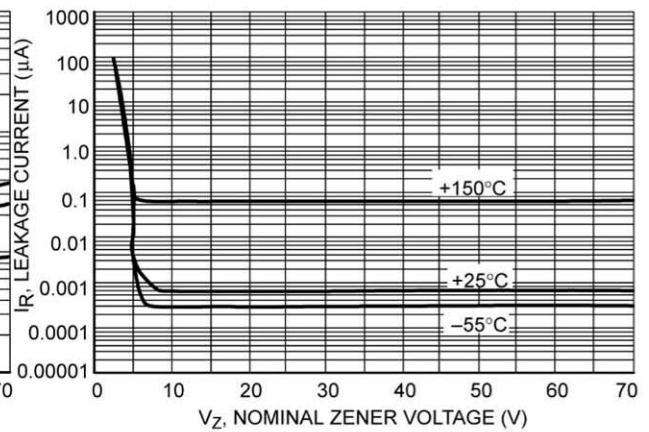


Figure 4. Typical Leakage Current



Typical Characteristics

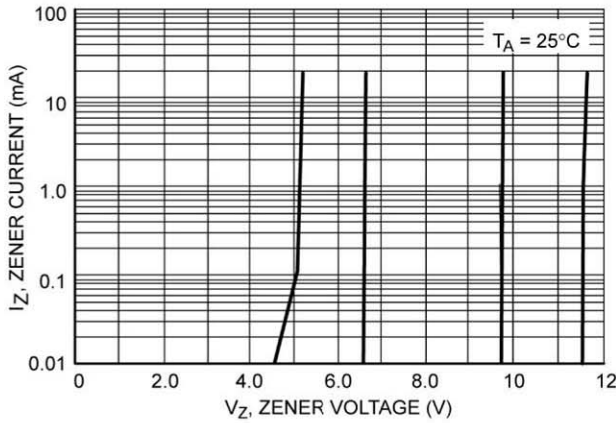


Figure 5. Zener Voltage versus Zener Current
(V_Z Up to 12 V)

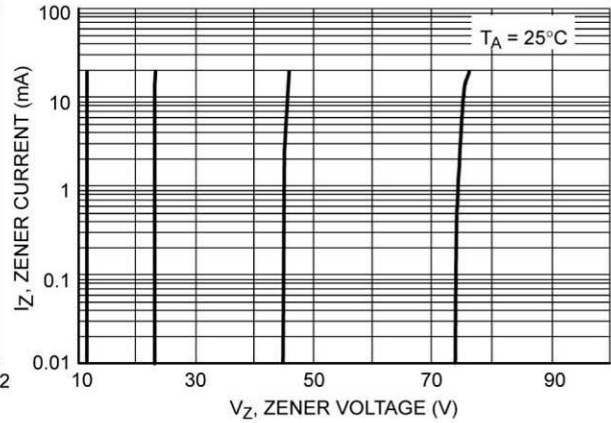


Figure 6. Zener Voltage versus Zener Current
(12 V to 75 V)

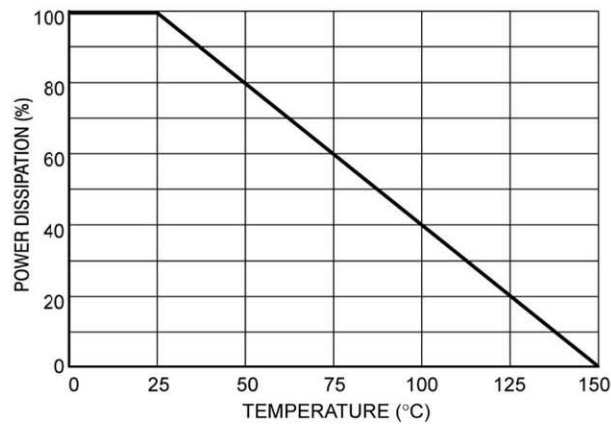


Figure 7. Steady State Power Derating



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [Shikues](#) manufacturer:

Other Similar products are found below :

[RKZ13B2KG#P1](#) [DL5234B](#) [EDZTE6113B](#) [1N4682](#) [1N4691](#) [1N4693](#) [1N4732A](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#) [1N5365B](#)
[1N5369B](#) [1N747A](#) [1N959B](#) [1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [NTE5121A](#) [NTE5147A](#) [NTE5152A](#) [NTE5155A](#) [NTE5164A](#)
[JANS1N4974US](#) [1N4692](#) [1N4700](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#) [1N4737A](#) [1N4745ARL](#) [1N4752A](#) [1N4752ARL](#) [1N4760ARL](#)
[1N5221B](#) [1N5236B](#) [1N5241BTR](#) [1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#) [3SMAJ5946B-TP](#)
[3SMAJ5950B-TP](#) [3SMBJ5925B-TP](#) [441774C](#) [BZX84C3V9](#)