

Overview

The FieldServer BACnet Router offers a complete BACnet Internetworking solution for BACnet/IP, BACnet Ethernet, and BACnet MS/TP networks.

This is the first standalone BACnet Router that has been certified by BTL to ensure the highest standard for BACnet integration.

The FieldServer BACnet Router is available in two models:

- The FS-ROUTER-BAC has two RS-485 ports enabling up to 64 BACnet MS/TP devices to be connected to it without the use of additional line drivers. Relative to a single port router, the dual port router halves device response time by distributing devices over the two RS-485 ports.
- The FS-ROUTER-BAC1 offers a single RS-485 port and is a cost-effective option for configurations of 32 or fewer BACnet MS/TP devices without the need for additional line drivers.

The FieldServer BACnet Router has an easy one page configuration, greatly simplifying the installation process. DeviceFind™, a unique discovery feature, allows the integrator to push a button and discover all the BACnet devices connected to the router, greatly simplifying the commissioning process.



BACnet Router Features and Benefits

Multiple BACnet Routing Connections


- BACnet/IP & BACnet MS/TP
- BACnet MS/TP & BACnet Ethernet
- BACnet MS/TP & BACnet MS/TP
- BACnet/IP & BACnet/IP
- BACnet/IP & BACnet Ethernet

Ease of Use

- DeviceFind™: a unique feature that discovers devices connected to the FieldServer BACnet Router.
- BACnet Broadcast Management Device (BBMD) for a connection between different subnets.
- Web Based configuration with no additional software needed for configuration.
- NAT support with secondary BACnet/IP connection for routing between public and private IP networks.
- Foreign Device Registration (FDR), exposing devices details on different subnets.
- **SMC Cloud** registration connects your devices to the cloud, allowing secure remote access for diagnostics, monitoring, alarming and configuration.
- On-board diagnostics allow easy troubleshooting for both serial and Ethernet communications.

Ease of Installation

- MDIX to use any Ethernet cable for commissioning and installation.
- DHCP to automatically obtain the IP setting from the network.
- Software “ToolBox” to find and diagnose all FieldServer BACnet routers on the network.
- Wide range of input power requirements, AC or DC.

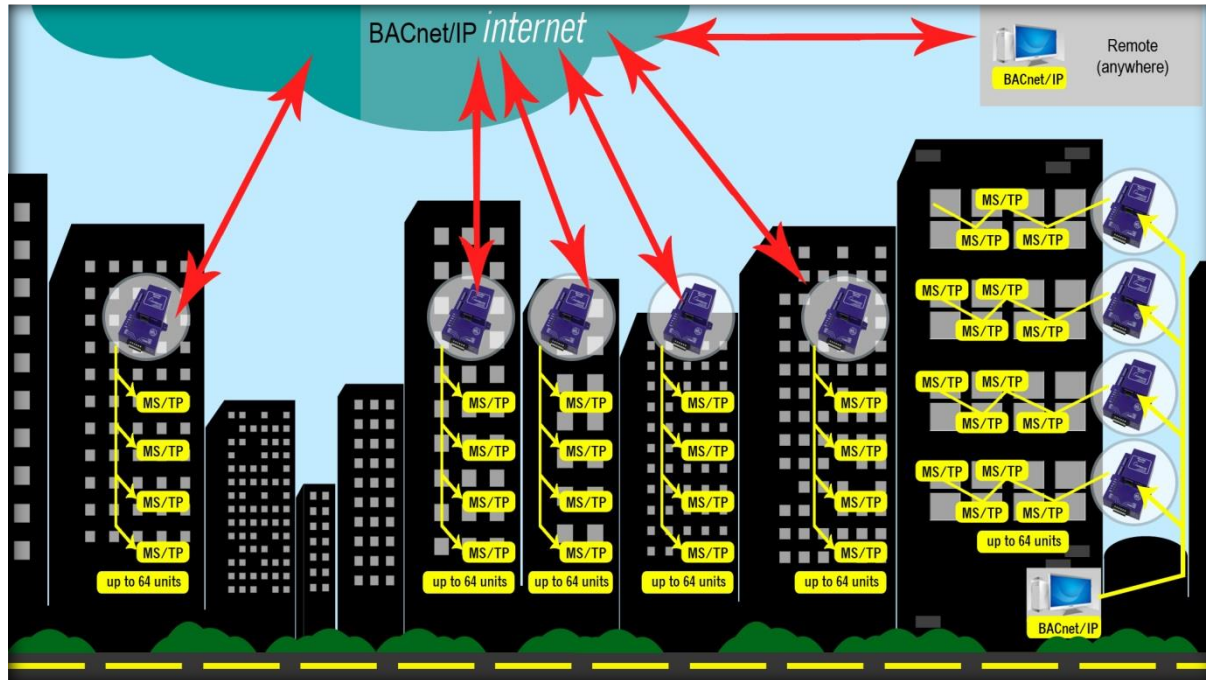

Specifications

Communication

Serial RS-485

Galvanic isolation
 Baud: 9600, 19200, 38400, 57600, 76800, 115200

Ethernet

10/100BaseT
 MDIX
 DHCP

Environment

Operating temperature: -40° to 75°C (-40° to 167°F)
Relative humidity: 5-90% RH
 non-condensing

Other

Web Configuration
 Toolbox diagnostic utility
 Table, Wall mount
 DIN rail mount included

Construction

Dimensions: (HxWxD)
 4.5 x 2.9 x 1.6 in.
 (11.5 x 7.4 x 4.1 cm)

Weight: 0.4 lbs (0.2 Kg)

Power Requirements

9-30VDC or 12-24VAC
 Current draw @ 12V: 240 mA

Approvals

CE & FCC

TUV approved to UL 916, EN 60950-1, EN 50491-3
 and CSA C22.2 standards

CSA C22.2 standards

BTL Certification Rev. 12

GOST-R Certified

RoHS Compliant



*Specifications subject to change without notice

Ordering Information

The FieldServer BACnet Router is available in the following hardware configurations:

- FS-ROUTER-BAC (2 Serial Ports)
- FS-ROUTER-BAC1 (1 Serial Port)

Options

The Accessory Kit consists of a power supply, Ethernet cable, screwdriver, DIN rail mount, and a USB flash drive that includes all manuals, data sheets, notes and the discovery tool.

- FS-8915-36-QS Accessory Kit, 110/220V

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Routers category](#):

Click to view products by [Sierra Monitor manufacturer](#):

Other Similar products are found below :

[LR54-AA401](#) [WR44-L900-AE1-RF](#) [WR31-U92A-DE1-TB](#) [SR30500020-SWH](#) [SR30510120](#) [SR30508010](#) [SR30500410](#) [UR2B612011](#)
[UR2L610011-SWH](#) [UR2L610710](#) [BB-ERT311](#) [BB-UR2B610011](#) [BB-UR2B610021](#) [SL30200110-XSWH](#) [SL30210110-SWH](#) [SL30210110-](#)
[XSWH](#) [SR30010110-SWH](#) [SR30510420-SWH](#) [SR30518120-SWH](#) [XR2F000711](#) [ASB-631R-DX06-OUS](#) [TX64-A121](#) [X2E-Z1R-E1-W](#)
[X2E-Z1R-W1-W](#) [X2E-Z1R-E1-A](#) [E224HPL2S](#) [1010462](#) [1010463](#) [1010461](#) [1010464](#) [1153078](#) [1153079](#) [2702529](#) [2702532](#) [2702888](#)
[RUT24006E000](#) [RUT950U022C0](#) [RUTX09000000](#) [RUTX11000000](#) [FS-BENG-C](#) [FS-Router-BAC2](#) [IX14-M301](#) [IX14-M401](#) [IX14-M601](#)
[RUT300000000](#) [RUT360000000](#) [RUT950V022C0](#) [RUT950K02400](#) [RUT950J02400](#) [RUT950U025A0](#)