

Overview

The FieldServer BACnet Router offers a complete BACnet Internetworking solution for BACnet/IP, BACnet Ethernet, and BACnet MS/TP networks.

This is the first standalone BACnet Router that has been certified by BTL to ensure the highest standard for BACnet integration.

The FieldServer BACnet Router has two RS-485 ports enabling up to 64 BACnet MS/TP devices to be connected to it without the use of additional line drivers. Relative to a single port router, the dual port router halves device response time by distributing devices over the two RS-485 ports.

The FieldServer BACnet Router has an easy one-page configuration, greatly simplifying the installation process. Included in the BACnet Router the BACnet Explorer, allows the integrator to push a button and discover all the BACnet devices connected to the router, greatly simplifying the commissioning process and troubleshooting the BACnet network.



BACnet Router Features and Benefits

Multiple BACnet Routing Connections


- BACnet/IP & BACnet MS/TP
- BACnet MS/TP & BACnet Ethernet
- BACnet MS/TP & BACnet MS/TP
- BACnet/IP & BACnet/IP
- BACnet/IP & BACnet Ethernet

Ease of Use

- BACnet Explorer: discovers devices connected to the FieldServer BACnet Router.
- BACnet Broadcast Management Device (BBMD) for a connection between different subnets, up to 50 devices supported on the Broadcast Distribution Table (BDT).
- Web Based configuration with no additional software needed for configuration.
- NAT support with secondary BACnet/IP connection for routing between public and private IP networks.
- Foreign Device Registration (FDR), exposing up to 147 devices details on different subnets.
- **SMC Cloud** registration connects your devices to the cloud, allowing secure remote access for diagnostics, monitoring, alarming and configuration.
- On-board diagnostics allow easy troubleshooting for both serial and Ethernet communications.
- **FieldSafe** adds a wealth of security options, including: web configuration page authentication (self-signed certificates), robust user and password management features.

Ease of Installation

- MDIX to use any Ethernet cable for commissioning and installation.
- DHCP to automatically obtain the IP setting from the network.
- Software "ToolBox" to find and diagnose all FieldServer BACnet routers on the network.
- Wide range of input power requirements, AC or DC.

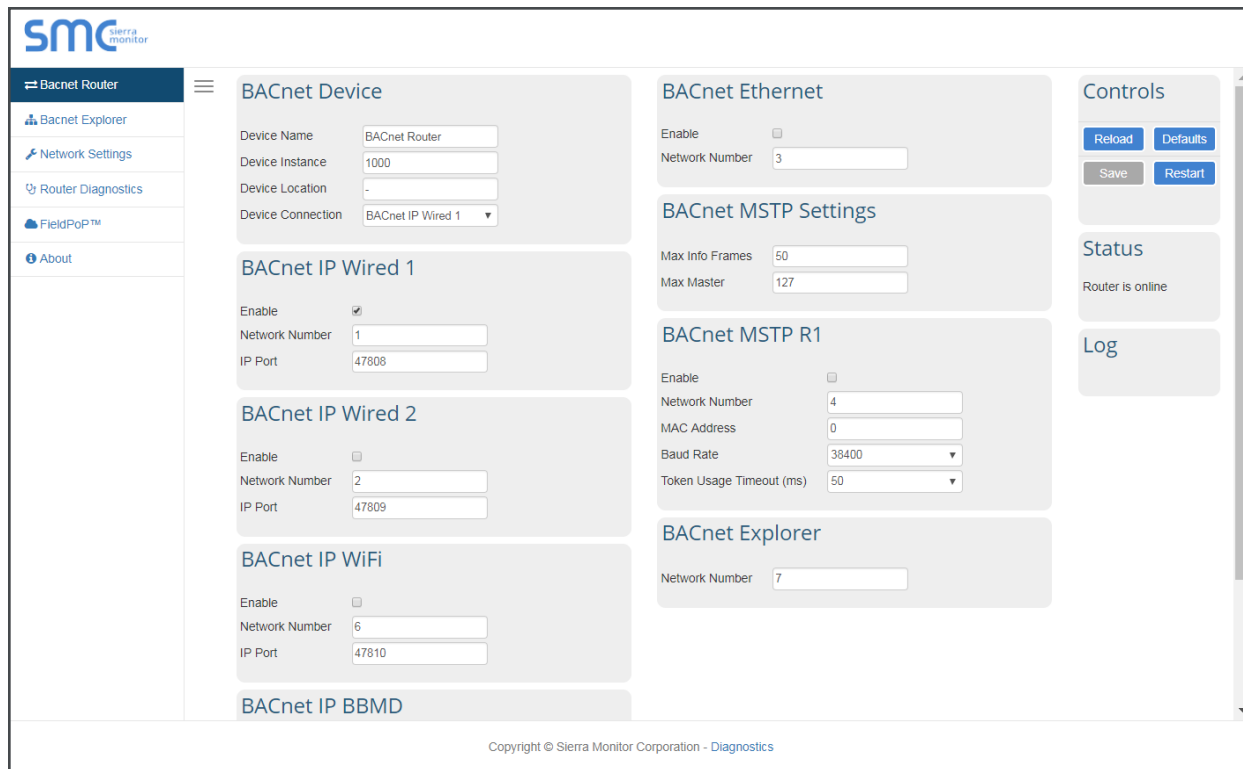

Hardware Specifications

Communication

Serial (Galvanic Isolation):

2 x RS-485

Baud: 9600, 19200, 38400, 57600, 76800

Ethernet

10/100BaseT

MDIX

DHCP

Environment

Operating Temperature: -20 to 70°C (-4 to 158°F)

Relative Humidity: 10-95% RH non-condensing

Other

Web configuration

On-board diagnostics

DIN rail mount included

Construction

Dimensions (HxWxD)

4 x 1.1 x 2.7 in (10.16 x 2.8 x 6.8cm)

Weight: 0.4 lbs (0.2 Kg)

Power Requirements

Input: 24VAC 0.125A

9-30VDC 0.25A @12 VDC

Max Power: 3W

Approvals

CE and FCC class B & C part 15

BTL Marked

UL 60950-1 and CAN/CSA C22.2

IC Canada

RoHS3 and WEEE compliant



Ordering Information

The FieldServer BACnet Router is available in the following hardware configurations:

- FS–Router–BAC2 (2 Serial Ports)

Options

The Accessory Kit consists of a power supply, Ethernet cable, screwdriver and a USB flash drive that includes all manuals, data sheets, notes and the discovery tool.

- FS-8915-38-QS Accessory Kit, 110/220V

Contact MSA sales for an easy proof of concept evaluation: SMC-insidesales@msasafety.com.

MSA Safety

1991 Tarob Court, Milpitas, California 95035 USA

O. +1 408 262-6611 TF. +1 800 727-4377 E. SMC-insidesales@msasafety.com

www.MSAsafety.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Routers](#) category:

Click to view products by [Sierra Monitor](#) manufacturer:

Other Similar products are found below :

[ICR-1601W](#) [LR54-AA401](#) [WR44-L900-AE1-RF](#) [WR31-U92A-DE1-TB](#) [SR30500020-SWH](#) [SR30508010](#) [SR30500410](#) [UR2B612011](#)
[UR2L610011-SWH](#) [UR2L610710](#) [BB-ERT311](#) [BB-UR2B610011](#) [BB-UR2B610021](#) [SL30200110-XSWH](#) [SL30210110-SWH](#) [SL30210110-](#)
[XSWH](#) [SR30010110-SWH](#) [SR30510420-SWH](#) [SR30518120-SWH](#) [XR2F000711](#) [ASB-631R-DX06-OUS](#) [TX64-A121](#) [X2E-Z1R-E1-W](#)
[X2E-Z1R-W1-W](#) [X2E-Z1R-E1-A](#) [E224HPL2S](#) [1010462](#) [1010463](#) [1010461](#) [1010464](#) [1153078](#) [1153079](#) [2702529](#) [2702532](#) [2702888](#)
[RUT24006E000](#) [RUT950U022C0](#) [RUTX09000000](#) [RUTX11000000](#) [FS-BENG-C](#) [FS-Router-BAC2](#) [IX14-M301](#) [IX14-M401](#) [IX14-M601](#)
[RUT300000000](#) [RUT360000000](#) [RUT950V022C0](#) [RUT950K02400](#) [RUT950J02400](#) [RUT950U025A0](#)