



# SBTA41G04B thru SBTA41G16B

## Discrete Triacs (Isolated)

T1



Unit:mm

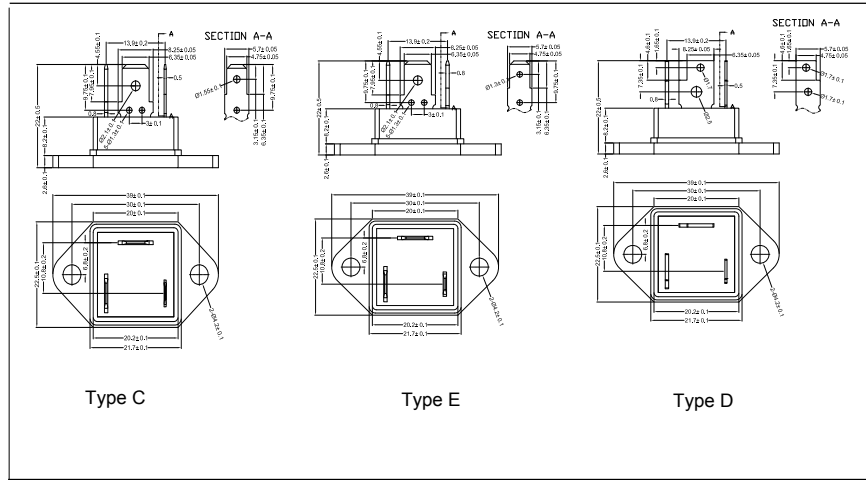

	VDRM/RRM	VDSM/RSM
	V	V
SBTA41G04B	400	500
SBTA41G06B	600	700
SBTA41G08B	800	900
SBTA41G10B	1000	1100
SBTA41G12B	1200	1300
SBTA41G16B	1600	1700

Symbol	Test Conditions	Maximum Ratings	Unit
$I_{TRMS}$	$T_{VJ}=80^{\circ}C$	40	A
$I_{TSM}$	$T_{VJ}=45^{\circ}C$ $V_R=0$ $t=10ms$ (50Hz), sine $t=8.3ms$ (60Hz), sine	420 400	A
	$T_{VJ}=T_{VJM}$ $V_R=0$ $t=10ms$ (50Hz), sine $t=8.3ms$ (60Hz), sine	350 320	
$i^2t$	$T_{VJ}=45^{\circ}C$ $V_R=0$ $t=10ms$ (50Hz), sine $t=8.3ms$ (60Hz), sine	880 850	$A^2s$
	$T_{VJ}=T_{VJM}$ $V_R=0$ $t=10ms$ (50Hz), sine $t=8.3ms$ (60Hz), sine	760 720	
$(di/dt)_{cr}$	$T_{VJ}=T_{VJM}$ $f=50Hz$ , $t_p=200us$ $V_D=2/3V_{DRM}$ $I_G=0.3A$ $di_G/dt=0.3A/us$	repetitive, $I_T=40A$ 50 non repetitive, $I_T=I_{TAVM}$ 300	$A/us$
	$T_{VJ}=T_{VJM}$ ; $R_{GK}=\infty$ ; method 1 (linear voltage rise)	$V_{DR}=2/3V_{DRM}$ 500	$V/us$
$P_{GM}$	$T_{VJ}=T_{VJM}$ $I_T=I_{TAVM}$ $t_p=30us$ $t_p=300us$	10 5	W
$P_{GA V}$		1	W
$V_{RGM}$		10	V
$T_{VJ}$ $T_{VJM}$ $T_{stg}$		-40...+125 125 -40...+125	$^{\circ}C$
$V_{ISOL}$	50/60Hz, RMS $t=1minute$ , leads-to-tab	2500	V~
$M_d$	Mounting torque (M4)	0.8...1.5	Nm
Weight		25	g

# SBTA41G04B thru SBTA41G16B

## Discrete Triacs(Isolated)

Symbol	Test Conditions	Characteristic Values	Unit				
$I_R, I_D$	$T_{VJ}=T_{VJM}; V_D=V_{DRM}$	10	mA				
$V_{TM}$	$I_T=60A; T_{VJ}=25^{\circ}C$	1.44	V				
$V_{TO}$	For power-loss calculations only ( $T_{VJ}=125^{\circ}C$ )	0.85	V				
$r_T$		10	$\Omega$				
$V_{GT}$	<table border="1"> <tr><td>I</td></tr> <tr><td>II</td></tr> <tr><td>III</td></tr> <tr><td>IV</td></tr> </table> $V_D=6V; I_T=1A; T_{VJ}=25^{\circ}C$	I	II	III	IV	1.3	V
		I					
		II					
		III					
IV							
1.3							
1.3							
1.5							
$I_{GT}$	<table border="1"> <tr><td>I</td></tr> <tr><td>II</td></tr> <tr><td>III</td></tr> <tr><td>IV</td></tr> </table> $V_D=6V; I_T=1A; T_{VJ}=25^{\circ}C$	I	II	III	IV	50	mA
		I					
		II					
		III					
IV							
50							
50							
100							
$V_{GD}$	$T_{VJ}=T_{VJM}; V_D=2/3V_{DRM}$	0.2	V				
$I_{GD}$		10	mA				
$I_H$	$T_{VJ}=25^{\circ}C; V_D=6V; R_{GK}=\infty$	100	mA				
$R_{thJC}$	DC current	1.3	K/W				
$R_{thJH}$	DC current	1.5	K/W				
<b>a</b>	Max. acceleration, 50 Hz	50	m/s <sup>2</sup>				

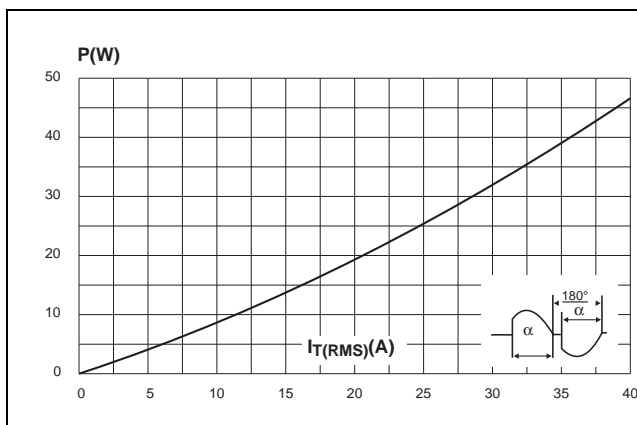


Figure 1. Maximum power dissipation versus on-state rms current (full cycle)

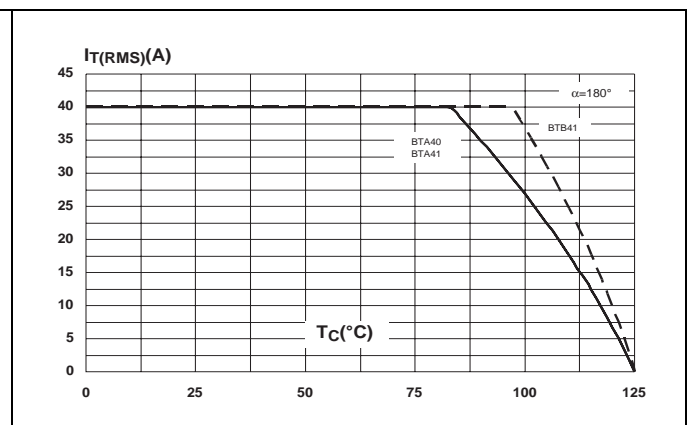


Figure 2. On-state rms current versus case temperature (full cycle)

# SBTA41G04B thru SBTA41G16B

## Discrete Triacs (Isolated)

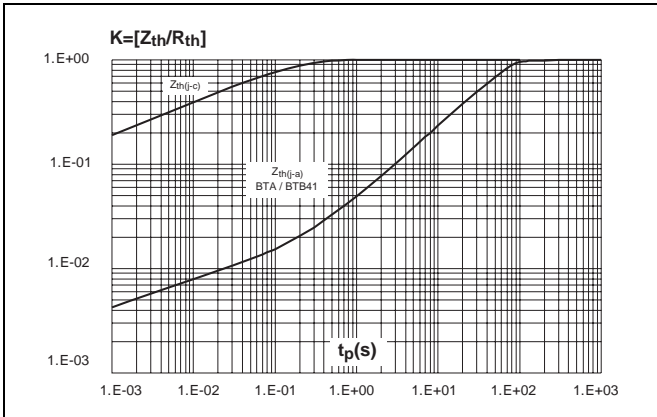


Figure 3. Relative variation of thermal impedance versus pulse duration

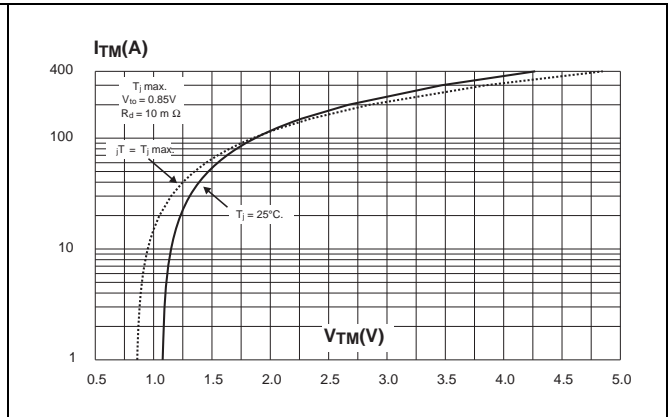


Figure 4. On-state characteristics (maximum values)

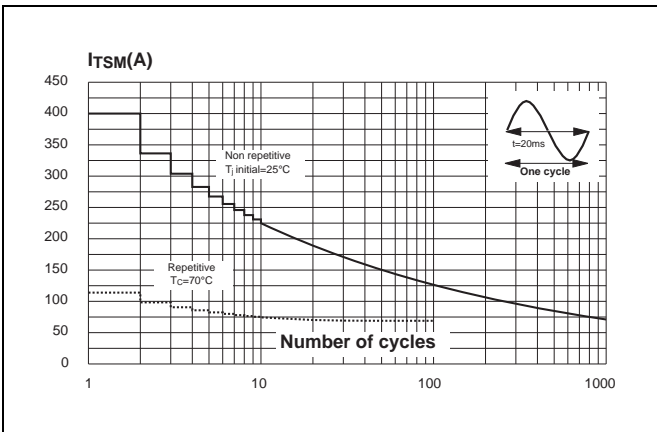


Figure 5. Surge peak on-state current versus number of cycles

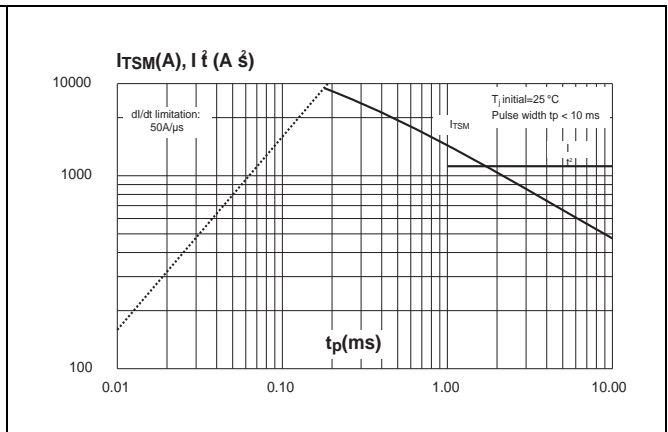


Figure 6. Non-repetitive surge peak on-state current for a sinusoidal pulse and corresponding value of  $I^2t$

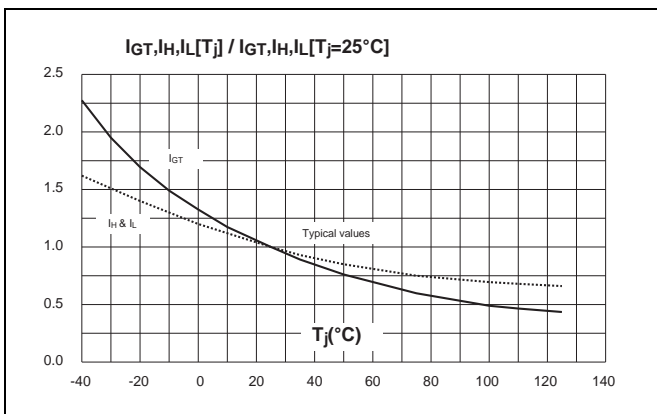


Figure 7. Relative variation of gate trigger, holding and latching current versus junction temperature

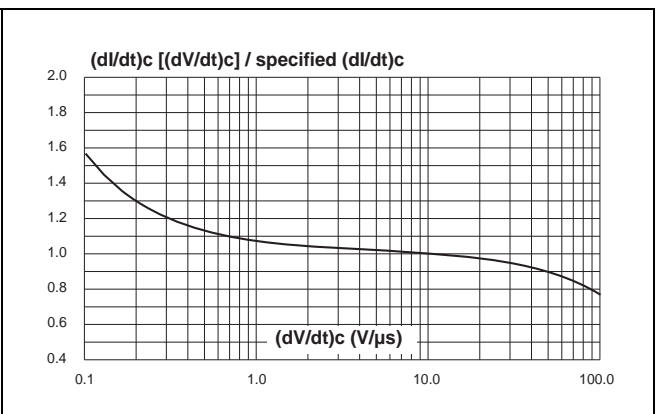


Figure 8. Relative variation of critical rate of decrease of main current versus  $(dV/dt)_c$  (typical values)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Triacs](#) category:*

*Click to view products by [Sirectifier](#) manufacturer:*

Other Similar products are found below :

[CTA08-1000CW](#) [CTB24-800BW](#) [CTA08-1000C](#) [CTA12-800BWPT](#) [CTA16-1000B](#) [CTB24-800B](#) [BT137-600-0Q](#) [5615](#) [OT415Q](#) [2N6075A](#)  
[NTE5629](#) [NTE5688](#) [CTB08-400CW](#) [D31410](#) [BTA416Y-600B.127](#) [T2535T-8I](#) [OT408,135](#) [BT136D](#) [BTB16Q-600BW](#) [Z0409MF](#) [BTA06-800BWRG](#) [BTA08-600BRG](#) [BTA08-800B](#) [BT136-600,127](#) [MAC97A6,116](#) [Z0103NN,135](#) [BT137-600E,127](#) [BTB16-600CW3G](#)  
[Z0109MN,135](#) [T825T-6I](#) [T1220T-6I](#) [NTE5638](#) [BT136X-600E,127](#) [MAC4DLM-1G](#) [BT134-600D,127](#) [BTA08-600BW3G](#) [NTE56008](#)  
[NTE56017](#) [NTE56018](#) [NTE56059](#) [NTE5608](#) [NTE5609](#) [NTE5656](#) [NTE56020](#) [NTE56022](#) [NTE56024](#) [NTE56026](#) [NTE56028](#) [NTE56071](#)  
[NTE5642](#)