


## 3-Terminal 0.5A Positive Voltage Regulator

### Description


The 78MXXA series of three-terminal package with several fixed output voltages making it useful in a wide range of applications.

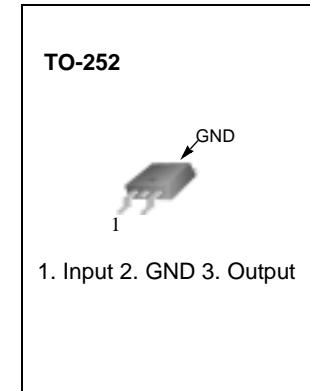

### Features

- Output Current up to 0.5A
- Output Voltages of 5, 6, 8, 12, 15, 18, 24V
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor Safe Operating Area (SOA)Protection

### Internal Block Diagram

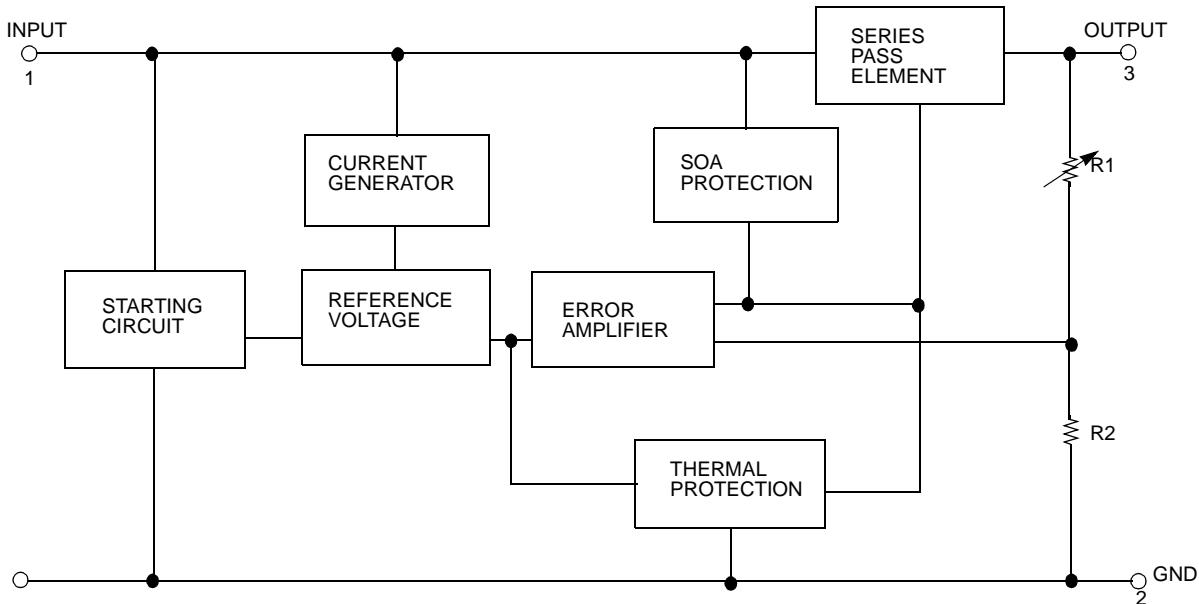

## Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input Voltage (for $V_O = 5V$ to $18V$ ) (for $V_O = 24V$ )	$V_I$	35 40	V
Thermal Resistance Junction-Case (Note1) TO-220 ( $T_c = +25^\circ C$ )	$R_{\theta JC}$	2.5	°C/W
Thermal Resistance Junction-Air (Note1, 2) TO-220 ( $T_a = +25^\circ C$ ) D-PAK ( $T_a = +25^\circ C$ )	$R_{\theta JA}$	66 92	°C/W
Operating Junction Temperature Range	$T_{OPR}$	0 ~ +150	°C
Storage Temperature Range	$T_{STG}$	-65 ~ +150	°C

**Note:**

1. Thermal resistance test board  
Size: 76.2mm \* 114.3mm \* 1.6mm(1S0P)  
JEDEC standard: JESD51-3, JESD51-7
2. Assume no ambient airflow

## Electrical Characteristics (78M05A)

(Refer to the test circuits,  $0 \leq T_J \leq +125^\circ C$ ,  $I_O=350mA$ ,  $V_I=10V$ , unless otherwise specified,  $C_I = 0.33\mu F$ ,  $C_O=0.1\mu F$ )

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^\circ C$		4.8	5	5.2	V
		$I_O = 5mA$ to $350mA$ $V_I = 7V$ to $20V$		4.75	5	5.25	
Line Regulation (Note3)	$\Delta V_O$	$I_O = 200mA$	$V_I = 7V$ to $25V$	-	-	100	mV
		$T_J = +25^\circ C$	$V_I = 8V$ to $25V$	-	-	50	
Load Regulation (Note3)	$\Delta V_O$	$I_O = 5mA$ to $0.5A$ , $T_J = +25^\circ C$		-	-	100	mV
		$I_O = 5mA$ to $200mA$ , $T_J = +25^\circ C$		-	-	50	
Quiescent Current	$I_Q$	$T_J = +25^\circ C$		-	4.0	6.0	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA$ to $350mA$		-	-	0.5	mA
		$I_O = 200mA$ $V_I = 8V$ to $25V$		-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$ $T_J = 0$ to $+125^\circ C$		-	-0.5	-	mV/°C
Output Noise Voltage	$V_N$	$f = 10Hz$ to $100kHz$		-	40	-	μV/Vo
Ripple Rejection	$RR$	$f = 120Hz$ , $I_O = 300mA$ $V_I = 8V$ to $18V$ , $T_J = +25^\circ C$		-	80	-	dB
Dropout Voltage	$V_D$	$T_J = +25^\circ C$ , $I_O = 500mA$		-	2	-	V
Short Circuit Current	$I_{SC}$	$T_J = +25^\circ C$ , $V_I = 35V$		-	300	-	mA
Peak Current	$I_{PK}$	$T_J = +25^\circ C$		-	700	-	mA

**Note:**

3. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**Electrical Characteristics (78M06A) (Continued)**(Refer to the test circuits,  $0 \leq T_J \leq +125^\circ\text{C}$ ,  $I_O = 350\text{mA}$ ,  $V_I = 11\text{V}$ , unless otherwise specified,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

<b>Parameter</b>	<b>Symbol</b>	<b>Conditions</b>		<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
Output Voltage	$V_O$	$T_J = +25^\circ\text{C}$		5.75	6	6.25	$\text{V}$
		$I_O = 5\text{mA}$ to $350\text{mA}$	$V_I = 8\text{V}$ to $21\text{V}$	5.7	6	6.3	
Line Regulation (Note1)	$\Delta V_O$	$I_O = 200\text{mA}$	$V_I = 8\text{V}$ to $25\text{V}$	-	-	100	$\text{mV}$
		$T_J = +25^\circ\text{C}$	$V_I = 9\text{V}$ to $25\text{V}$	-	-	50	
Load Regulation (Note1)	$\Delta V_O$	$I_O = 5\text{mA}$ to $0.5\text{A}$ , $T_J = +25^\circ\text{C}$		-	-	120	$\text{mV}$
		$I_O = 5\text{mA}$ to $200\text{mA}$ , $T_J = +25^\circ\text{C}$		-	-	60	
Quiescent Current	$I_Q$	$T_J = +25^\circ\text{C}$		-	4.0	6.0	$\text{mA}$
Quiescent Current Change	$\Delta I_Q$	$I_O = 5\text{mA}$ to $350\text{mA}$		-	-	0.5	$\text{mA}$
		$I_O = 200\text{mA}$ $V_I = 9\text{V}$ to $25\text{V}$		-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5\text{mA}$ $T_J = 0$ to $+125^\circ\text{C}$		-	-0.5	-	$\text{mV}/^\circ\text{C}$
Output Noise Voltage	$V_N$	$f = 10\text{Hz}$ to $100\text{kHz}$		-	45	-	$\mu\text{V}/V_O$
Ripple Rejection	$RR$	$f = 120\text{Hz}$ , $I_O = 300\text{mA}$ $V_I = 9\text{V}$ to $19\text{V}$ , $T_J = +25^\circ\text{C}$		-	80	-	$\text{dB}$
Dropout Voltage	$V_D$	$T_J = +25^\circ\text{C}$ , $I_O = 500\text{mA}$		-	2	-	$\text{V}$
Short Circuit Current	$I_{SC}$	$T_J = +25^\circ\text{C}$ , $V_I = 35\text{V}$		-	300	-	$\text{mA}$
Peak Current	$I_{PK}$	$T_J = +25^\circ\text{C}$		-	700	-	$\text{mA}$

**Note:**

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**Electrical Characteristics (78M08A) (Continued)**(Refer to the test circuits,  $0 \leq T_J \leq +125^\circ\text{C}$ ,  $I_O = 350\text{mA}$ ,  $V_I = 14\text{V}$ , unless otherwise specified,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^\circ\text{C}$		7.7	8	8.3	V
		$I_O = 5\text{mA}$ to $350\text{mA}$	$V_I = 10.5\text{V}$ to $23\text{V}$	7.6	8	8.4	
Line Regulation (Note1)	$\Delta V_O$	$I_O = 200\text{mA}$	$V_I = 10.5\text{V}$ to $25\text{V}$	-	-	100	mV
		$T_J = +25^\circ\text{C}$	$V_I = 11\text{V}$ to $25\text{V}$	-	-	50	
Load Regulation (Note1)	$\Delta V_O$	$I_O = 5\text{mA}$ to $0.5\text{A}$ , $T_J = +25^\circ\text{C}$		-	-	160	mV
		$I_O = 5\text{mA}$ to $200\text{mA}$ , $T_J = +25^\circ\text{C}$		-	-	80	
Quiescent Current	$I_Q$	$T_J = +25^\circ\text{C}$		-	4.0	6.0	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5\text{mA}$ to $350\text{mA}$		-	-	0.5	mA
		$I_O = 200\text{mA}$	$V_I = 10.5\text{V}$ to $25\text{V}$	-	-	0.8	
Output Voltage Drift	$R_R$	$I_O = 5\text{mA}$	$T_J = 0$ to $+125^\circ\text{C}$	-	-0.5	-	mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$f = 10\text{Hz}$ to $100\text{kHz}$		-	52	-	$\mu\text{V}/V_O$
Ripple Rejection	$R_R$	$f = 120\text{Hz}$ , $I_O = 300\text{mA}$ $V_I = 11.5\text{V}$ to $21.5\text{V}$ , $T_J = +25^\circ\text{C}$		-	80	-	dB
Dropout Voltage	$V_D$	$T_J = +25^\circ\text{C}$ , $I_O = 500\text{mA}$		-	2	-	V
Short Circuit Current	$I_{SC}$	$T_J = +25^\circ\text{C}$ , $V_I = 35\text{V}$		-	300	-	mA
Peak Current	$I_{PK}$	$T_J = +25^\circ\text{C}$		-	700	-	mA

**Note:**

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**Electrical Characteristics (78M12A) (Continued)**(Refer to the test circuits,  $0 \leq T_J \leq +125^\circ\text{C}$ ,  $I_O = 350\text{mA}$ ,  $V_I = 19\text{V}$ , unless otherwise specified,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^\circ\text{C}$		11.5	12	12.5	V
		$I_O = 5\text{mA}$ to $350\text{mA}$ $V_I = 14.5\text{V}$ to $27\text{V}$		11.4	12	12.6	
Line Regulation (Note1)	$\Delta V_O$	$I_O = 200\text{mA}$	$V_I = 14.5\text{V}$ to $30\text{V}$	-	-	100	mV
		$T_J = +25^\circ\text{C}$	$V_I = 16\text{V}$ to $30\text{V}$	-	-	50	
Load Regulation (Note1)	$\Delta V_O$	$I_O = 5\text{mA}$ to $0.5\text{A}$ , $T_J = +25^\circ\text{C}$		-	-	240	mV
		$I_O = 5\text{mA}$ to $200\text{mA}$ , $T_J = +25^\circ\text{C}$		-	-	120	
Quiescent Current	$I_Q$	$T_J = +25^\circ\text{C}$		-	4.1	6.0	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5\text{mA}$ to $350\text{mA}$		-	-	0.5	mA
		$I_O = 200\text{mA}$ $V_I = 14.5\text{V}$ to $30\text{V}$		-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5\text{mA}$ $T_J = 0$ to $+125^\circ\text{C}$		-	-0.5	-	mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$f = 10\text{Hz}$ to $100\text{kHz}$		-	75	-	$\mu\text{V}/V_O$
Ripple Rejection	$RR$	$f = 120\text{Hz}$ , $I_O = 300\text{mA}$ $V_I = 15\text{V}$ to $25\text{V}$ , $T_J = +25^\circ\text{C}$		-	80	-	dB
Dropout Voltage	$V_D$	$T_J = +25^\circ\text{C}$ , $I_O = 500\text{mA}$		-	2	-	V
Short Circuit Current	$I_{SC}$	$T_J = +25^\circ\text{C}$ , $V_I = 35\text{V}$		-	300	-	mA
Peak Current	$I_{PK}$	$T_J = +25^\circ\text{C}$		-	700	-	mA

**Note:**

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**Electrical Characteristics (78M15A) (Continued)**(Refer to the test circuits,  $0 \leq TJ \leq +125^\circ C$ ,  $I_O = 350mA$ ,  $V_I = 23V$ , unless otherwise specified,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ )

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^\circ C$		14.4	15	15.6	V
		$I_O = 5mA$ to $350mA$ $V_I = 17.5V$ to $30V$		14.25	15	15.75	
Line Regulation (Note1)	$\Delta V_O$	$I_O = 200mA$	$V_I = 17.5V$ to $30V$	-	-	100	mV
		$T_J = +25^\circ C$	$V_I = 20V$ to $30V$	-	-	50	
Load Regulation (Note1)	$\Delta V_O$	$I_O = 5mA$ to $0.5A$ , $T_J = +25^\circ C$		-	-	300	mV
		$I_O = 5mA$ to $200mA$ , $T_J = +25^\circ C$		-	-	150	
Quiescent Current	$I_Q$	$T_J = +25^\circ C$		-	4.1	6.0	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA$ to $350mA$		-	-	0.5	mA
		$I_O = 200mA$ $V_I = 17.5V$ to $30V$		-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$ $T_J = 0$ to $+125^\circ C$		-	-1	-	mV/ $^\circ C$
Output Noise Voltage	$V_N$	$f = 10Hz$ to $100kHz$		-	100	-	$\mu V/V_o$
Ripple Rejection	$RR$	$f = 120Hz$ , $I_O = 300mA$ $V_I = 18.5V$ to $28.5V$ , $T_J = +25^\circ C$		-	70	-	dB
Dropout Voltage	$V_D$	$T_J = +25^\circ C$ , $I_O = 500mA$		-	2	-	V
Short Circuit Current	$I_{SC}$	$T_J = +25^\circ C$ , $V_I = 35V$		-	300	-	mA
Peak Current	$I_{PK}$	$T_J = +25^\circ C$		-	700	-	mA

**Note:**

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**Electrical Characteristics (78M18A) (Continued)**(Refer to the test circuits,  $0 \leq T_J \leq +125^\circ\text{C}$ ,  $I_O = 350\text{mA}$ ,  $V_I = 26\text{V}$ , unless otherwise specified,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^\circ\text{C}$		17.3	18	18.7	V
		$I_O = 5\text{mA}$ to $350\text{mA}$ $V_I = 20.5\text{V}$ to $33\text{V}$		17.1	18	18.9	
Line Regulation (Note1)	$\Delta V_O$	$I_O = 200\text{mA}$	$V_I = 21\text{V}$ to $33\text{V}$	-	-	100	mV
		$T_J = +25^\circ\text{C}$	$V_I = 24\text{V}$ to $33\text{V}$	-	-	50	
Load Regulation (Note1)	$\Delta V_O$	$I_O = 5\text{mA}$ to $0.5\text{A}$ , $T_J = +25^\circ\text{C}$		-	-	360	mV
		$I_O = 5\text{mA}$ to $200\text{mA}$ , $T_J = +25^\circ\text{C}$		-	-	180	
Quiescent Current	$I_Q$	$T_J = +25^\circ\text{C}$		-	4.2	6.0	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5\text{mA}$ to $350\text{mA}$		-	-	0.5	mA
		$I_O = 200\text{mA}$ $V_I = 21\text{V}$ to $33\text{V}$		-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5\text{mA}$ at $T_J = 0$ to $125^\circ\text{C}$		-	-1.1	-	mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$f = 10\text{Hz}$ to $100\text{kHz}$		-	100	-	$\mu\text{V}/V_O$
Ripple Rejection	$RR$	$f = 120\text{Hz}$ , $I_O = 300\text{mA}$ , $V_I = 22\text{V}$ to $32\text{V}$ $T_J = +25^\circ\text{C}$		-	70	-	dB
Dropout Voltage	$V_D$	$T_J = +25^\circ\text{C}$ , $I_O = 500\text{mA}$		-	2	-	V
Short Circuit Current	$I_{SC}$	$T_J = +25^\circ\text{C}$ , $V_I = 35\text{V}$		-	300	-	mA
Peak Current	$I_{PK}$	$T_J = +25^\circ\text{C}$		-	700	-	mA

**Note:**

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.


**Electrical Characteristics (78M24A) (Continued)**(Refer to the test circuits,  $0 \leq T_J \leq +125^\circ C$ ,  $I_O = 350mA$ ,  $V_I = 33V$ , unless otherwise specified,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ )

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^\circ C$		23	24	25	V
		$I_O = 5mA$ to $350mA$ $V_I = 27V$ to $38V$		22.8	24	25.2	
Line Regulation (Note1)	$\Delta V_O$	$I_O = 200mA$	$V_I = 27V$ to $38V$	-	-	100	mV
		$T_J = +25^\circ C$	$V_I = 28V$ to $38V$	-	-	50	
Load Regulation (Note1)	$\Delta V_O$	$I_O = 5mA$ to $0.5A$ , $T_J = +25^\circ C$		-	-	480	mV
		$I_O = 5mA$ to $200mA$ , $T_J = +25^\circ C$		-	-	240	
Quiescent Current	$I_Q$	$T_J = +25^\circ C$		-	4.2	6.0	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA$ to $350mA$		-	-	0.5	mA
		$I_O = 200mA$ $V_I = 27V$ to $38V$		-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$ $T_J = 0$ to $+125^\circ C$		-	-1.2	-	mV/ $^\circ C$
Output Noise Voltage	$V_N$	$f = 10Hz$ to $100kHz$		-	170	-	$\mu V/V_o$
Ripple Rejection	$RR$	$f = 120Hz$ , $I_O = 300mA$ $V_I = 28V$ to $38V$ , $T_J = +25^\circ C$		-	70	-	dB
Dropout Voltage	$V_D$	$T_J = +25^\circ C$ , $I_O = 500mA$		-	2	-	V
Short Circuit Current	$I_{SC}$	$T_J = +25^\circ C$ , $V_I = 35V$		-	300	-	mA
Peak Current	$I_{PK}$	$T_J = +25^\circ C$		-	700	-	mA


**Note:**

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

## Typical Applications

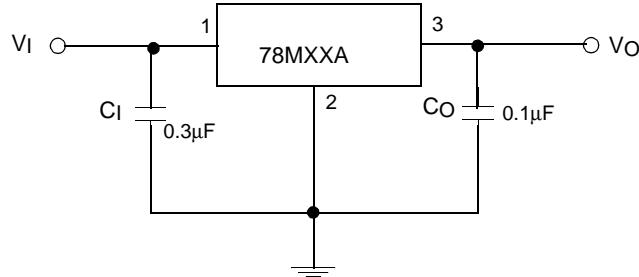


**Figure 1. Fixed Output Regulator**

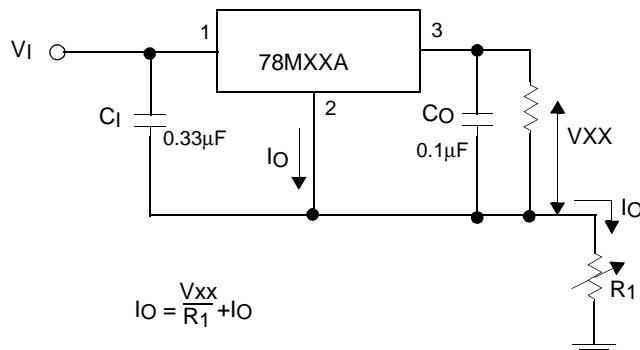

**Figure 2. Constant Current Regulator**

**Notes:**

1. To specify an output voltage, substitute voltage value for "XX"
2. Although no output capacitor is needed for stability, it does improve transient response.
3. CI is required if regulator is located an appreciable distance from power Supply filter

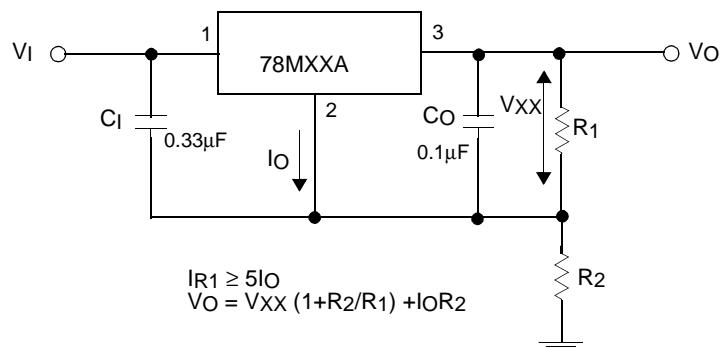

**Figure 3. Circuit for Increasing Output Voltage**

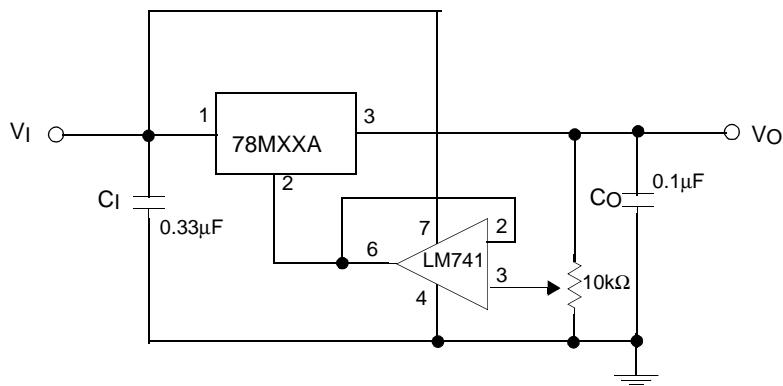


Figure 4. Adjustable Output Regulator (7 to 30V)

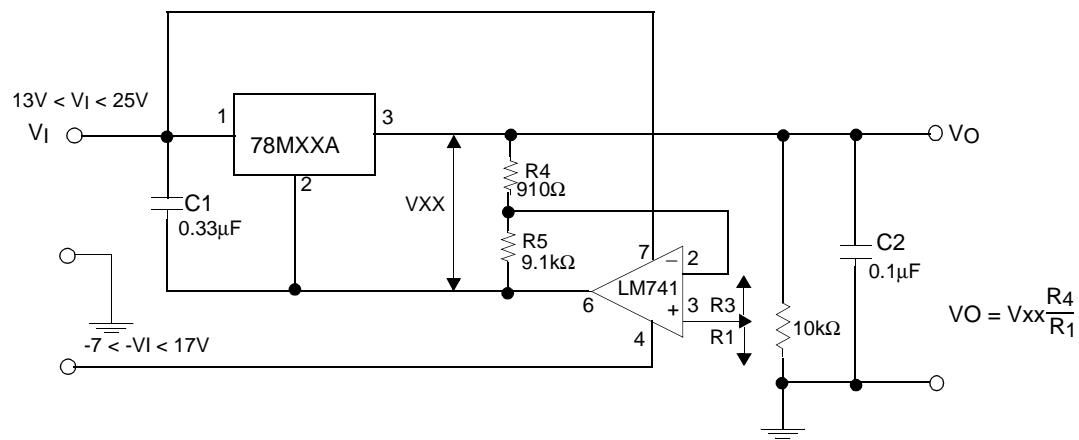


Figure 5. 0.5 to 10V Regulator

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Linear Voltage Regulators](#) category:***

***Click to view products by [SLKORMICRO](#) manufacturer:***

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [ZTS6538SE](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#) [78M05](#) [HT7150-1](#) [UM1540DB-18](#) [XC6234H281VR-G](#) [WL2834CA-6/TR](#) [TPL730F33-5TR](#) [TLS850F1TA V50](#) [TPS549B22RVFR](#) [UM1540DB-33](#) [WL9200P3-50B](#) [WL9100P3-33B](#) [WL9005D4-33](#) [XC6219B152MR](#) [WL2855K33-3/TR](#) [PJ54BM33SE](#) [PJ9500M25SA](#) [MD7218E33PC1](#) [H7533-2PR](#) [SK7812AU](#) [SD1A30](#) [78L33](#) [TP78L33T3](#) [L78L33ACUTR](#) [SK6513ST3A-50](#) [SK6054D4-09](#) [SK6054D4-18](#) [SK6054D4-11](#) [SK6054D4-10](#) [LM79L12F](#)