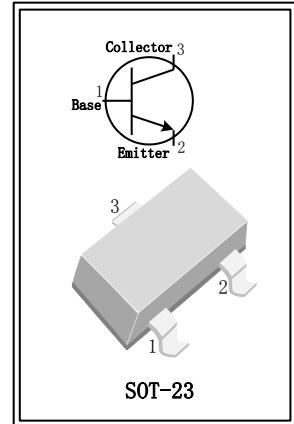


MICROWAVE LOW NOISE AMPLIFIER NPN SILICON EPITAXIAL TRANSISTOR

1. 简述:

- 本芯片采用硅外延工艺制造，具有高功率增益放大、宽带以及低噪声、低漏电流、小结电容特性，较大的动态范围，理想的电流线性；
- 主要应用于超高频微波、VHF、UHF 和 CATV 高频宽带低噪声放大器中，如卫星电视调谐器、CATV 放大器、模拟数字无绳电话、雷达感应开关、射频模块和光纤传输中的中继放大器等产品；
- 集电极-发射极击穿电压： $BV_{CEO}=12V$ ，最大集电极电流： $I_C=70mA$ ，集电极耗散功率： $P_C=300mW$ ，特征频率： $f_T=9GHz$ ；

2. 极限参数 ($T_{amb}=25^{\circ}C$) :

参数名称	符号	额定值	单位
集电极-基极电压	V_{CBO}	20	V
集电极-发射极电压	V_{CEO}	12	V
发射极-基极电压	V_{EBO}	2.5	V
集电极电流	I_C	70	mA
耗散功率	P_T	300	mW
最高结温	T_J	150	°C
储存温度	T_{stg}	-65 ~ +150	°C





3. 电参数及规格 ($T_{amb}=25^{\circ}C$) :







参数名称	符号	测试条件	最小值	典型值	最大值	单位
集电极-基极击穿电压	BV_{CBO}		20			V
集电极-发射极击穿电压	BV_{CEO}		12			V
发射极-基极击穿电压	BV_{EBO}		2.5			V
集电极截止电流	I_{CBO}	$V_{CB}=6V, I_E=0$	-	-	0.05	μA
直流电流放大系数	h_{FE}	$V_{CE}=6V, I_C=20mA$	60	120	250	
特征频率	f_T	$V_{CE}=6V, I_C=20mA$	-	9	-	GHz
反馈电容	C_{re}	$I_C=i_e=0, V_{CB}=6V, f=1MHz$	-	0.4	-	pF
集电极电容	C_C	$I_E=i_e=0, V_{CB}=6V, f=1MHz$	-	0.5	-	pF
发射极电容	C_e	$I_C=i_e=0, V_{EB}=0.5V, f=1MHz$	-	1.0	-	pF
插入功率增益	$ S_{21} ^2$	$I_C=20mA, V_{CE}=6V, f=900MHz$	14	15	-	dB
噪声系数	NF	$V_{CE}=6V, I_C=5mA, f=900MHz$	-	1.1	1.6	dB
		$V_{CE}=6V, I_C=20mA, f=900MHz$	-	1.6	2.1	dB
		$V_{CE}=8V, I_C=5mA, f=2GHz$	-	1.9	-	dB
最大单边功率增益	G_{UM}	$I_C=20mA, V_{CE}=6V, f=900MHz$	15	16	-	dB
		$I_C=20mA, V_{CE}=6V, f=2GHz$	-	9	-	dB
输出电压	V_O		270			mV
输出功率在 1dB 的增益压缩	PL1	$I_C=20mA, V_{CE}=6V, R_L=50\Omega, f=900MHz$	-	17	-	dB
ITO 第三阶截点			-	26	-	dBm

其中： $G_{UM} = 10 \log \frac{|S_{21}|^2}{(1 - S_{11})^2 (1 - S_{22})^2} dB$


4. 典型特征曲线:

TYPICAL CHARACTERISTICS
($T_A=25^\circ\text{C}$, unless otherwise specified)

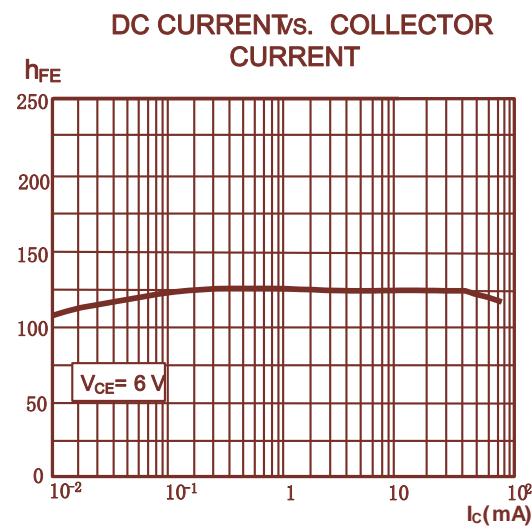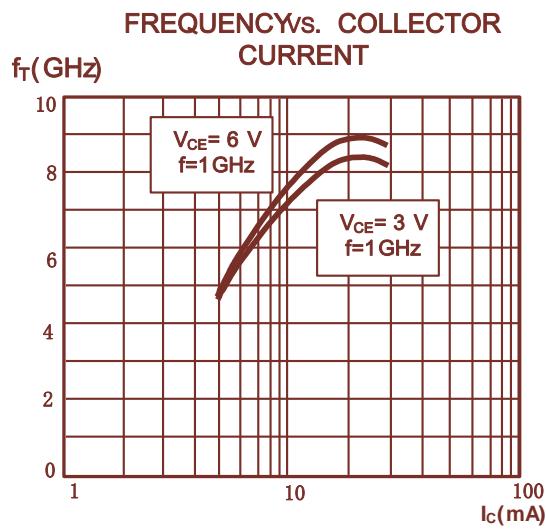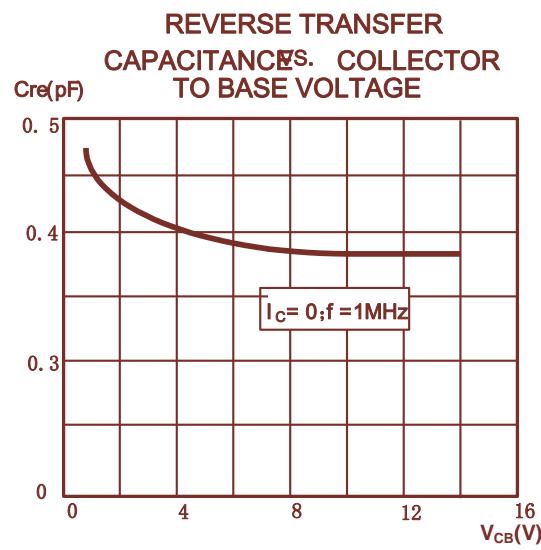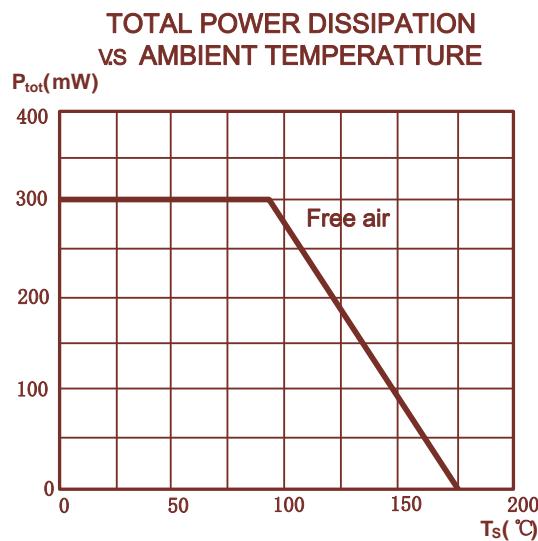

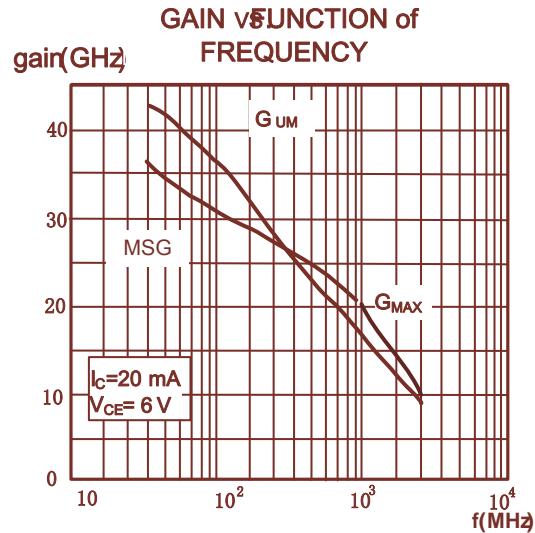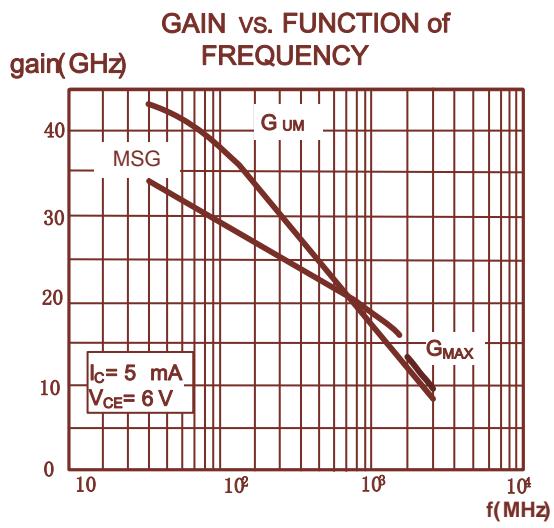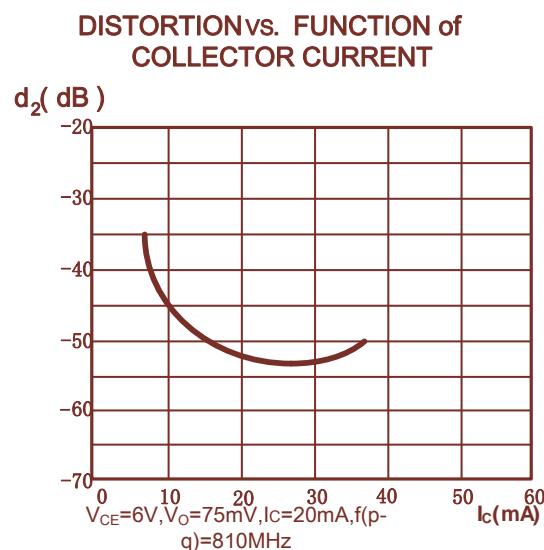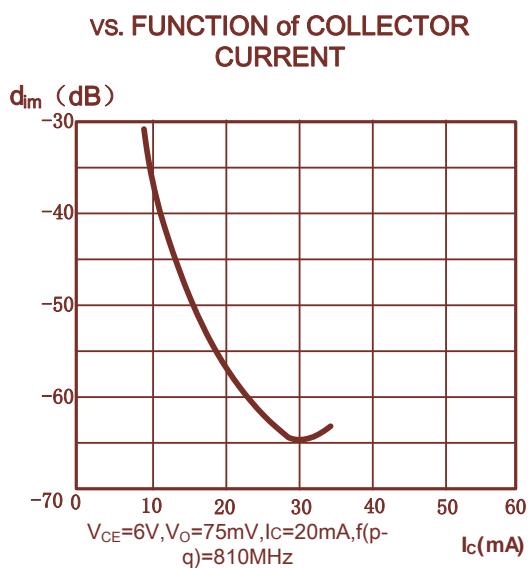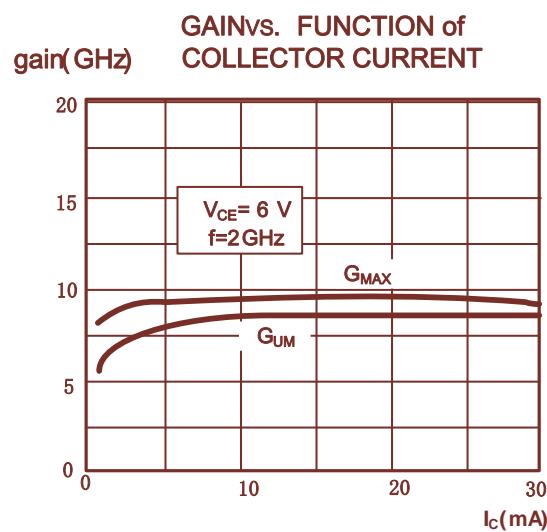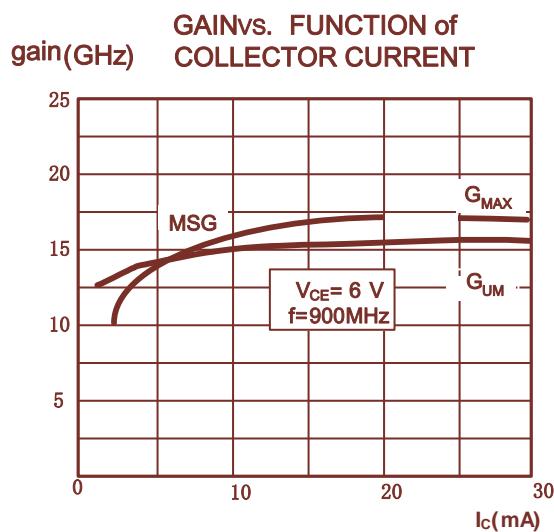

5. 封装尺寸示意图：

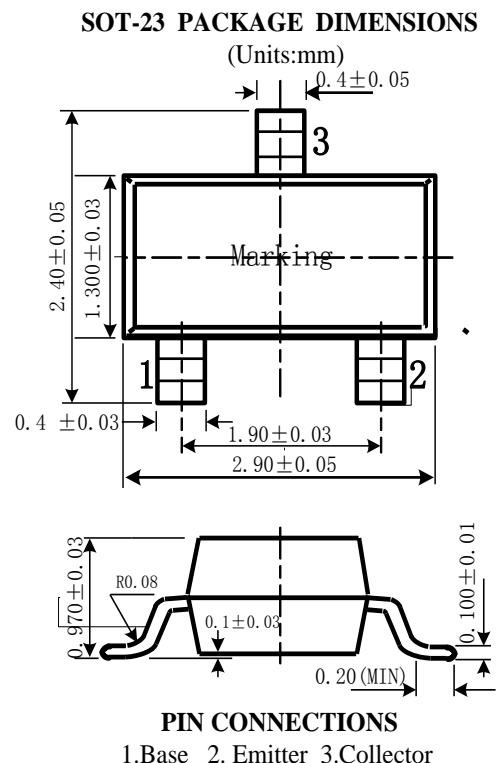

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by SLKORMICRO manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)