


SparkFun Thing Plus - SAMD51 (DEV-14713)

Name	ADC
Power	Interrupt
GND	Serial
Control	Sercom
Arduino	DAC
Port	Misc


3:0/5:1	SDA	INT6	PA22	D20	SDA
3:1/5:0	SCL	INT7	PA23	D21	SCL
	2:3/4:3	INT15	PA15	D5	D5
	5:2/3:2	INT4	PA20	D6	D6
0:3	INT7	AIN7	PA07	D9	D9
	1:2/3:2	INT2	PA18	D10	D10
	1:0/3:1	INT0	PA16	D11	D11
	1:3/3:3	INT3	PA19	D12	D12
LED	1:0/3:1	INT12	PA17	D13	D13

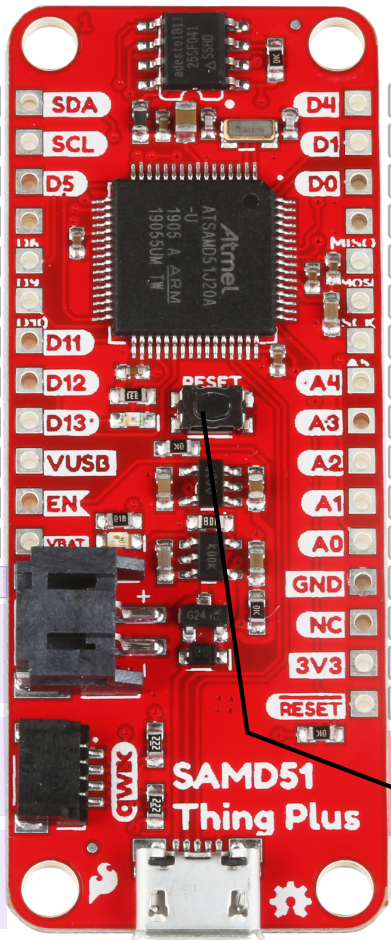

D4	D4	PA06	AIN6	INT6	0:2	VREFC
D1	D1	PA12	INT12	RX	2:0/4:1	
D0	D0	PA13	INT13	TX	2:1/4:0	
MISO	D22	PB11	INT11	MISO	4:3	
MOSI	D23	PB12	INT12	MOSI	4:0	
SCK	D24	PB13	INT13	SCK	4:1	
A5	A5	PB02	AIN14	INT2	5:0	
A4	A4	PA05	AIN5	INT5	0:1	DAC1
A3	A3	PA04	AIN4	INT4	0:0	VREFB
A2	A2	PB09	AIN3	INT9	4:1	
A1	A1	PB08	AIN2	INT8	4:0	
A0	A0	PA02	AIN0	INT2	DAC0	
GND	GND					
NC	NC					
3V3	3V3					
RESET	RESET					

Reset Button
Must double tap to program

I2C Pullups Jumpers



SWDIO	1:3	INT15	PA31	SWDIO
SWCLK	1:2	INT14	PA30	SWCLK
1:0/3:1	INT12	PA17	D13	LED

- Connectors**
- JST- PH (2-pin)
Single Cell Lipo
 - JST-SH (4-pin)
Qwiic (I2C)
Connector
 - microB USB
Power, Programming
Battery Charging

Power


Vin: 2.5V - 6V
 VCC: 3.3V @ 600mA
 JST: Single Cell LiPo battery
 Battery Charging via USB
 Vreg Enable: On by default with 10k resistor

SAMD51J20A

120MHz ARM Cortex - M4
 VCC: 1.71V - 3.63V
 6 Sercom Channels
 1MB Flash Memory
 256kB SRAM

Hardware

4Mb Flash Memory
 UF2 Bootloader
 Feather compatible
 PWM available on all GPIO
 Charge LED: Yellow
 D13 LED: Blue

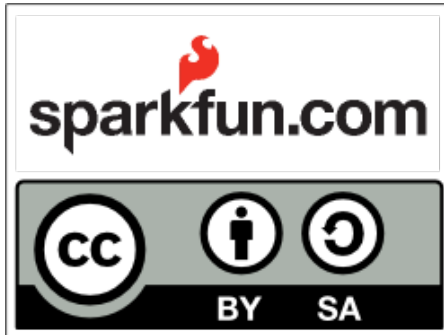

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - ARM category](#):

Click to view products by [SparkFun manufacturer](#):

Other Similar products are found below :

[SAFETI-HSK-RM48](#) [PICOHOBBITFL](#) [CC-ACC-MMK-2443](#) [TWR-MC-FRDMKE02Z](#) [EVALSPEAR320CPU](#) [EVB-SCMIMX6SX](#)
[MAX32600-KIT#](#) [TMDX570LS04HDK](#) [TXSD-SV70](#) [OM13080UL](#) [EVAL-ADUC7120QSPZ](#) [OM13082UL](#) [TXSD-SV71](#)
[YGRPEACHNORMAL](#) [OM13076UL](#) [PICODWARFFL](#) [YR8A77450HA02BG](#) [3580](#) [32F3348DISCOVERY](#) [ATTINY1607](#) [CURIOSITY](#)
[NANO](#) [PIC16F15376](#) [CURIOSITY NANO BOARD](#) [PIC18F47Q10](#) [CURIOSITY NANO](#) [VISIONSTK-6ULL V.2.0](#) [80-001428](#) [DEV-17717](#)
[EAK00360](#) [YR0K77210B000BE](#) [RTK7EKA2L1S00001BE](#) [MAX32651-EVKIT#](#) [SLN-VIZN-IOT](#) [LV18F V6 DEVELOPMENT SYSTEM](#)
[READY FOR AVR BOARD](#) [READY FOR PIC BOARD](#) [READY FOR PIC \(DIP28\)](#) [EVB-VF522R3](#) [AVRPLC16 V6 PLC SYSTEM](#)
[MIKROLAB FOR AVR XL](#) [MIKROLAB FOR PIC L](#) [MINI-AT BOARD - 5V](#) [MINI-M4 FOR STELLARIS](#) [MOD-09.Z](#) [BUGGY +](#)
[CLICKER 2 FOR PIC32MX + BLUETOOT](#) [1410](#) [LETS MAKE PROJECT PROGRAM. RELAY PIC](#) [LETS MAKE - VOICE](#)
[CONTROLLED LIGHTS](#) [LPC-H2294](#) [DSPIC-READY2 BOARD](#) [DSPIC-READY3 BOARD](#) [MIKROBOARD FOR ARM 64-PIN](#)
[MIKROLAB FOR AVR](#)