


## Discovery kit with STM32L496AG MCU

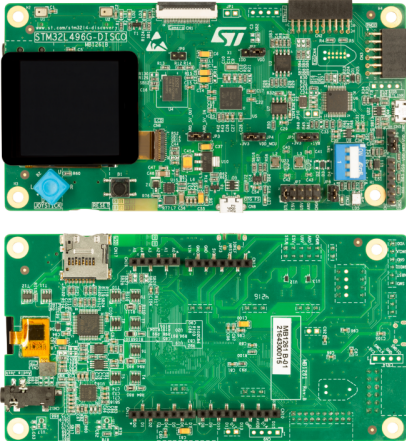

32L496GDISCOVERY top and bottom views. Pictures are not contractual.

### Product status link

[32L496GDISCOVERY](#)

### Features

- **STM32L496AGI6** Arm® Cortex®-M4 core-based microcontroller with 1 Mbyte of flash memory and 320 Kbytes of RAM, in a UFBGA169 package
- 1.54 inch 240 x 240-pixel TFT color LCD with parallel interface
- SAI audio codec, with stereo output, including analog microphone input
- Stereo digital MEMS microphones
- 8-Mbit PSRAM
- 64-Mbit Quad-SPI flash
- 8 LEDs
- Reset push-button
- 4-way joystick with selection
- Board connectors:
  - 8-bit camera
  - Stereo headset jack
  - microSD™ card connector with included card
  - USB Micro-B
  - USB Micro-AB
  - STMod+ and Pmod™
  - ARDUINO® Uno V3
- On-board ST-LINK/V2-1 debugger/programmer with USB re-enumeration capability: mass storage, Virtual COM port, and debug port
- Flexible power-supply options: ST-LINK USB V<sub>BUS</sub>, USB OTG FS connector, or external sources
- 1.8 and 3.3 V possible MCU supply voltages
- IDD measurement
- Comprehensive free software libraries and examples available with the STM32Cube MCU Package
- Support of a wide choice of Integrated Development Environments (IDEs) including IAR Embedded Workbench®, MDK-ARM, and STM32CubeIDE

### Description

The 32L496GDISCOVERY Discovery kit is a complete demonstration and development platform for STMicroelectronics Arm® Cortex®-M4 core-based STM32L496AG microcontroller. Thanks to the innovative ultra-low-power-oriented features, extended RAM, and graphics performance (Chrom-ART Accelerator™) offered by the STM32L496AG, the 32L496GDISCOVERY Discovery kit is designed to enable easy prototyping for many applications, including audio and graphics, with state-of-the-art energy efficiency. For even more user-friendliness, the on-board ST-LINK/V2-1 debugger provides out-of-the-box loading and debugging capabilities.

# 1 Ordering information

To order the 32L496GDISCOVERY Discovery kit, refer to [Table 1](#). For a detailed description, refer to its user manual on the product web page. Additional information is available from the datasheet and reference manual of the target microcontroller.

**Table 1. List of available products**

Order code	Board reference	User manual	Target STM32
STM32L496G-DISCO	MB1261	UM2160	STM32L496AGI6

## 1.1 Product marking

The stickers located on the top or bottom side of the PCB provide product information:

- Product order code and product identification for the first sticker
- Board reference with revision, and serial number for the second sticker

On the first sticker, the first line provides the product order code, and the second line the product identification.

On the second sticker, the first line has the following format: "MBxxx-Variant-yyz", where "MBxxx" is the board reference, "Variant" (optional) identifies the mounting variant when several exist, "y" is the PCB revision and "zz" is the assembly revision, for example B01. The second line shows the board serial number used for traceability.

Evaluation tools marked as "ES" or "E" are not yet qualified and therefore not ready to be used as reference design or in production. Any consequences deriving from such usage will not be at ST charge. In no event, ST will be liable for any customer usage of these engineering sample tools as reference designs or in production.

"E" or "ES" marking examples of location:

- On the targeted STM32 that is soldered on the board (For an illustration of STM32 marking, refer to the STM32 datasheet "Package information" paragraph at the [www.st.com](http://www.st.com) website).
- Next to the evaluation tool ordering part number that is stuck or silk-screen printed on the board.

Some boards feature a specific STM32 device version, which allows the operation of any bundled commercial stack/library available. This STM32 device shows a "U" marking option at the end of the standard part number and is not available for sales.

To use the same commercial stack in their applications, the developers may need to purchase a part number specific to this stack/library. The price of those part numbers includes the stack/library royalties.

## 1.2 Codification

The meaning of the codification is explained in [Table 2](#).

**Table 2. Codification explanation**

32L4XXYDISCOVERY	Description	Example: 32L496GDISCOVERY
32L4	MCU series in STM32 32-bit Arm Cortex MCUs	STM32L4 Series
XX	MCU product line in the series	STM32L4x6 product line
Y	STM32 flash memory size: • G for 1 Mbyte	1 Mbyte
DISCOVERY	Discovery kit	Discovery kit

## 2 Development environment

The 32L496GDISCOVERY board runs with the STM32L496AGI6 32-bit microcontroller based on the Arm® Cortex®-M4 core.

*Note:* Arm is a registered trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.



### 2.1 System requirements

- Multi-OS support: Windows® 10, Linux® 64-bit, or macOS®
- USB Type-A or USB Type-C® to Micro-B cable

*Note:* macOS® is a trademark of Apple Inc., registered in the U.S. and other countries and regions.  
Linux® is a registered trademark of Linus Torvalds.  
All other trademarks are the property of their respective owners.

### 2.2 Development toolchains

- IAR Systems® - IAR Embedded Workbench®<sup>(1)</sup>
- Keil® - MDK-ARM<sup>(1)</sup>
- STMicroelectronics - STM32CubeIDE

1. On Windows® only.

## Revision history

**Table 3. Document revision history**

Date	Revision	Changes
1-Feb-2017	1	Initial release.
14-Apr-2022	2	Reshuffled document to the latest standards, including the removal of <i>Demonstration software</i> and <i>Technology partners</i> obsolete sections.

**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2022 STMicroelectronics – All rights reserved

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Development Boards & Kits - ARM category](#):*

*Click to view products by [STMicroelectronics manufacturer](#):*

Other Similar products are found below :

[SAFETI-HSK-RM48](#) [CC-ACC-MMK-2443](#) [TWR-MC-FRDMKE02Z](#) [EVALSPEAR320CPU](#) [EVB-SCMIMX6SX](#) [MAX32600-KIT#](#)  
[TMDX570LS04HDK](#) [TXSD-SV70](#) [EVAL-ADUC7120QSPZ](#) [OM13082UL](#) [TXSD-SV71](#) [YGRPEACHNORMAL](#) [OM13076UL](#)  
[PICODWARFFL](#) [3580](#) [EVAL-ADUCM355EMCZ](#) [80-001428](#) [EAK00360](#) [YR0K77210B000BE](#) [RTK7EKA2L1S00001BE](#) [E104-BT5032A-](#)  
[TB](#) [TG-01M-KIT](#) [NODEMCU\(12F\)](#) [NODEMCU-32-\(ESP-32S\)](#) [NODEMCU\(12S-8285-2M\)](#) [ESP-12H-KIT](#) [TB-04-KIT](#) [TB-03F-KIT](#)  
[BW16-KIT](#) [BW15-KIT](#) [TG-12F-KIT](#) [MAX32651-EVKIT#](#) [SLN-VIZN-IOT](#) [T4WK-F01EU6](#) [RT8498GE](#) [LV18F V6 DEVELOPMENT](#)  
[SYSTEM](#) [READY FOR AVR BOARD](#) [READY FOR PIC BOARD](#) [READY FOR PIC \(DIP28\)](#) [EVB-VF522R3](#) [AVRPLC16 V6 PLC](#)  
[SYSTEM](#) [MIKROLAB FOR AVR XL](#) [MIKROLAB FOR PIC L](#) [MINI-AT BOARD - 5V](#) [MINI-M4 FOR STELLARIS](#) [MOD-09.Z](#) [1410](#)  
[LETS MAKE PROJECT PROGRAM. RELAY PIC](#) [LPC-H2294](#) [DSPIC-READY2 BOARD](#)