


60 W, digital 3-LED channel evaluation board with STNRG388A-controlled current regulation and dimming

Data brief

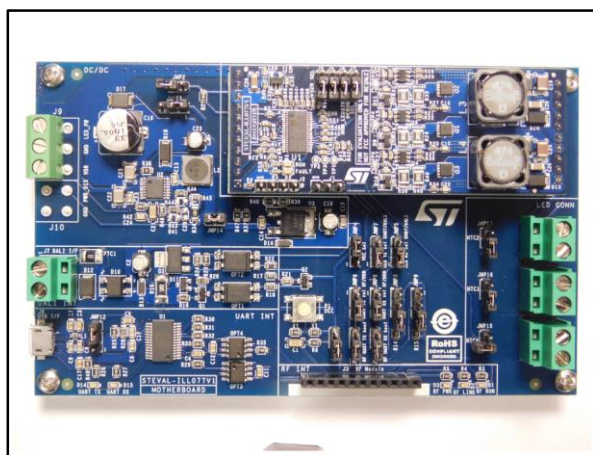

Features

- Based on the STNRG388A digital controller
- Up to 3 LED channels
- Maximum total output power: 60 W
- Maximum single LED channel output power: 30 W
- Adjustable LED channel current: 10 - 700 mA
- LED channel current setting resolution: 1 mA
- Dimming mode programmable for every LED channel (analogue or digital)
- LED channel voltage range: 6 - 44 V
- LED channel voltage estimated without the need for measurement circuitry
- LED channel current regulation (as opposed to input power supply or LED channel voltage regulation)
- Real-time fault detection and protection (e.g., short or open circuit)
- Opto-isolated DALI interface
- Opto-isolated bridge USB to serial UART interface
- Single input power supply: 48 V - 56 V
- PCB board dimensions: 135 mm x 82 mm
- RoHS compliant

Description

The STEVAL-ILL077V1 evaluation board is a complete and configurable solution able to independently manage up to 3 LED channels using the features of the STNRG388A digital controller.


The STNRG388A is a part of the STMicroelectronics STLUX product family and embeds advanced peripherals tailored to generate high resolution PWM signals (SMED). Every LED channel current is adjusted with a reverse buck converter that, via appropriate SMED peripheral configuration, can implement fixed off time and frequency fold back control techniques, for analogue (10 - 700 mA current range) and digital (50 - 700 mA current range) dimming modes, respectively.

Current dimming can be managed via USB, using a PC GUI to send serial commands to the board, or via DALI interface to send protocol commands through the connected DALI master.

Every LED channel can be configured through the same GUI to set certain parameters like maximum LED channel voltage and current, and dimming mode.

1 Schematic diagram

Figure 1: STEVAL-ILL077V1 Daughter board circuit schematic (1 of 3)

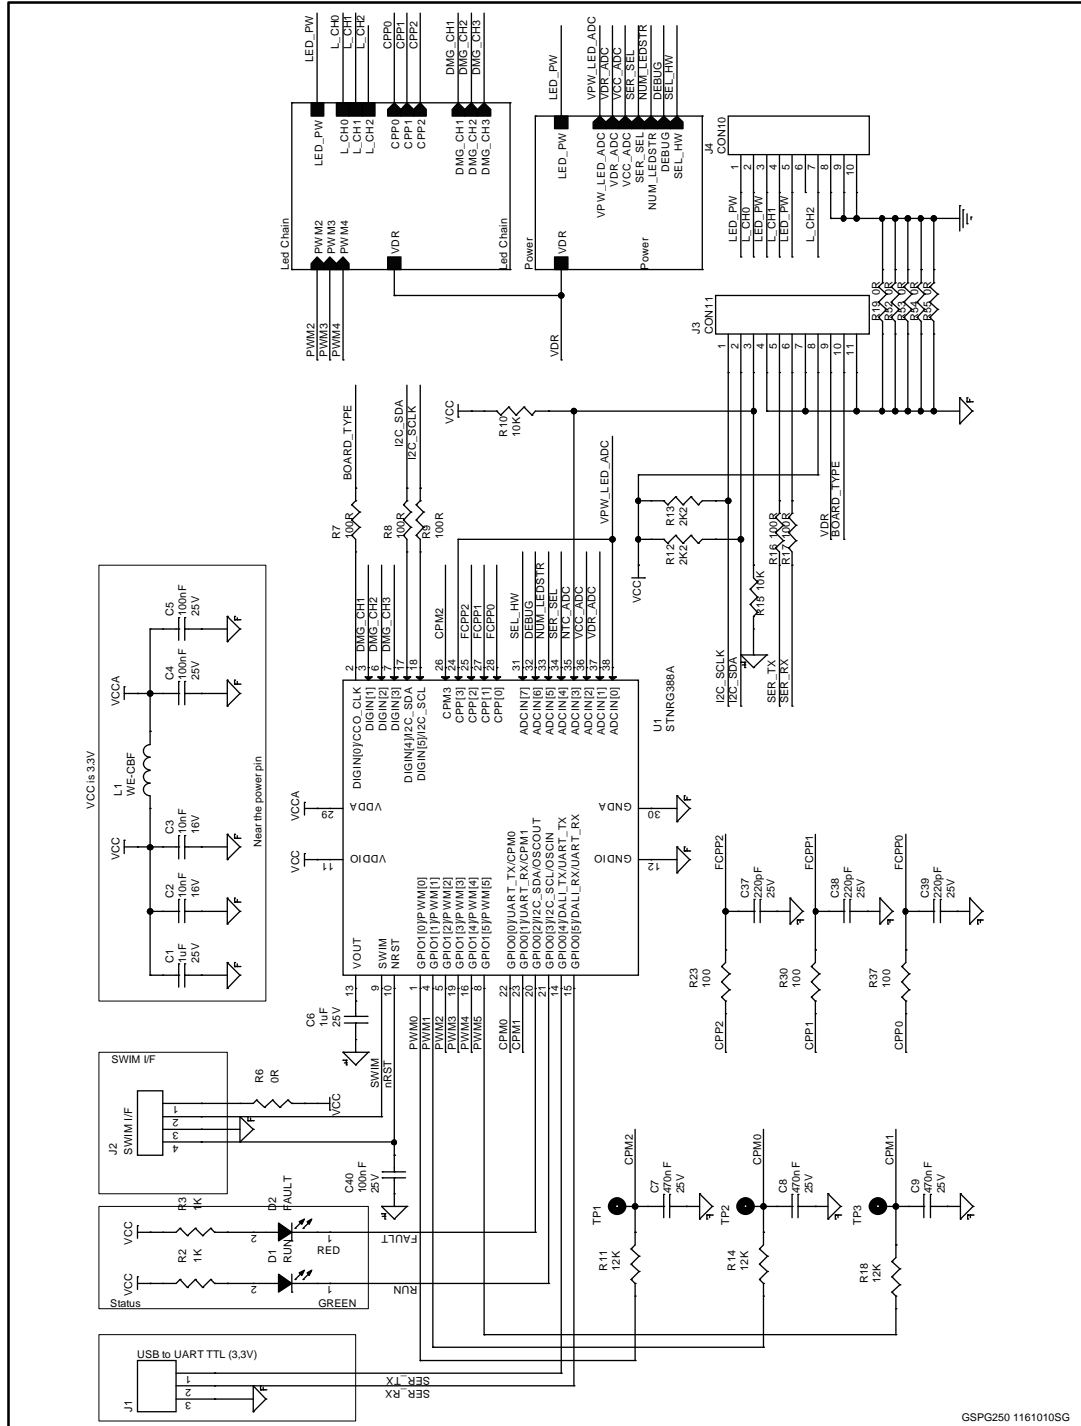

GSPG250 1161010SG



Figure 2: STEVAL-ILL077V1 Daughter board circuit schematic (2 of 3)

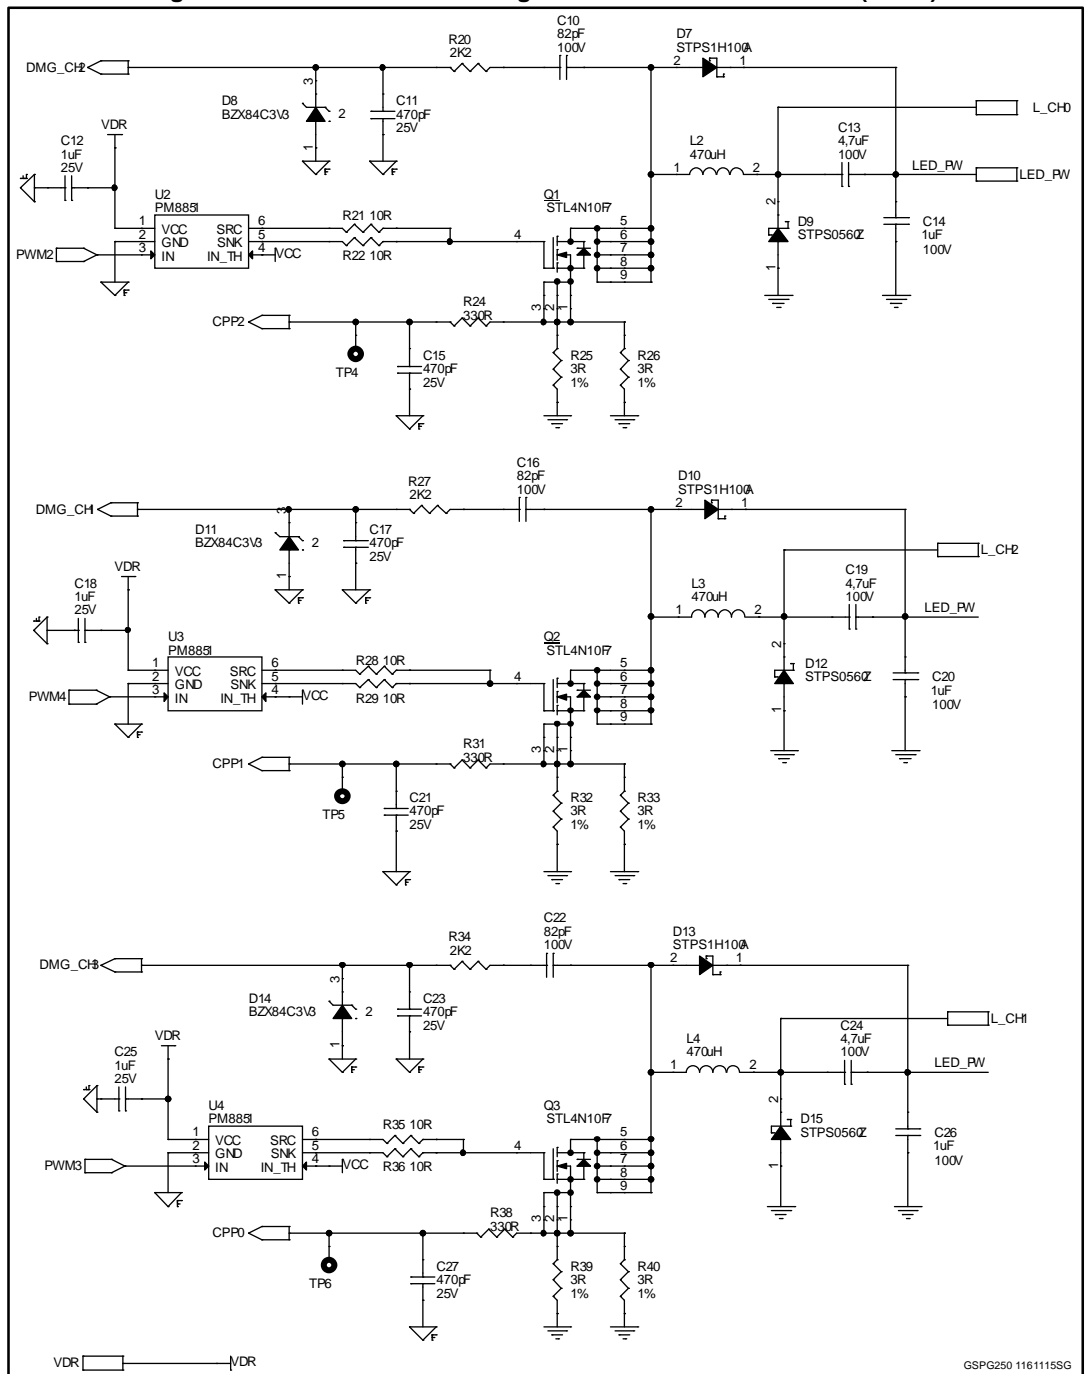


Figure 4: STEVAL-ILL077V1 Mother board circuit schematic (1 of 3)



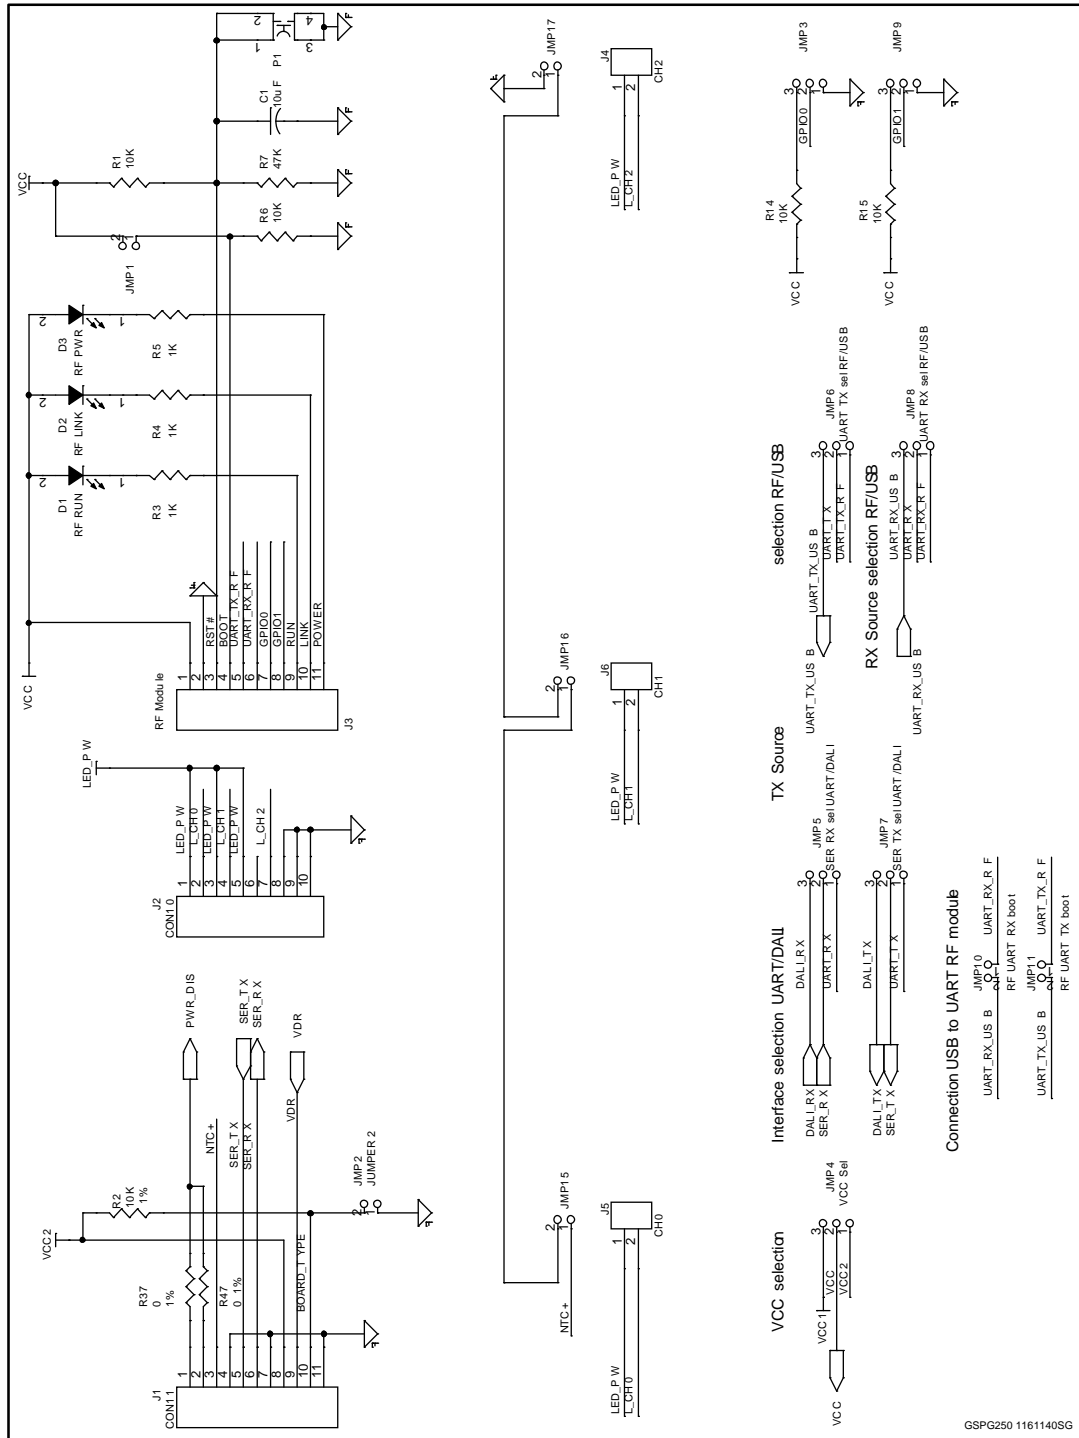


Figure 5: STEVAL-ILL077V1 Mother board circuit schematic (2 of 3)

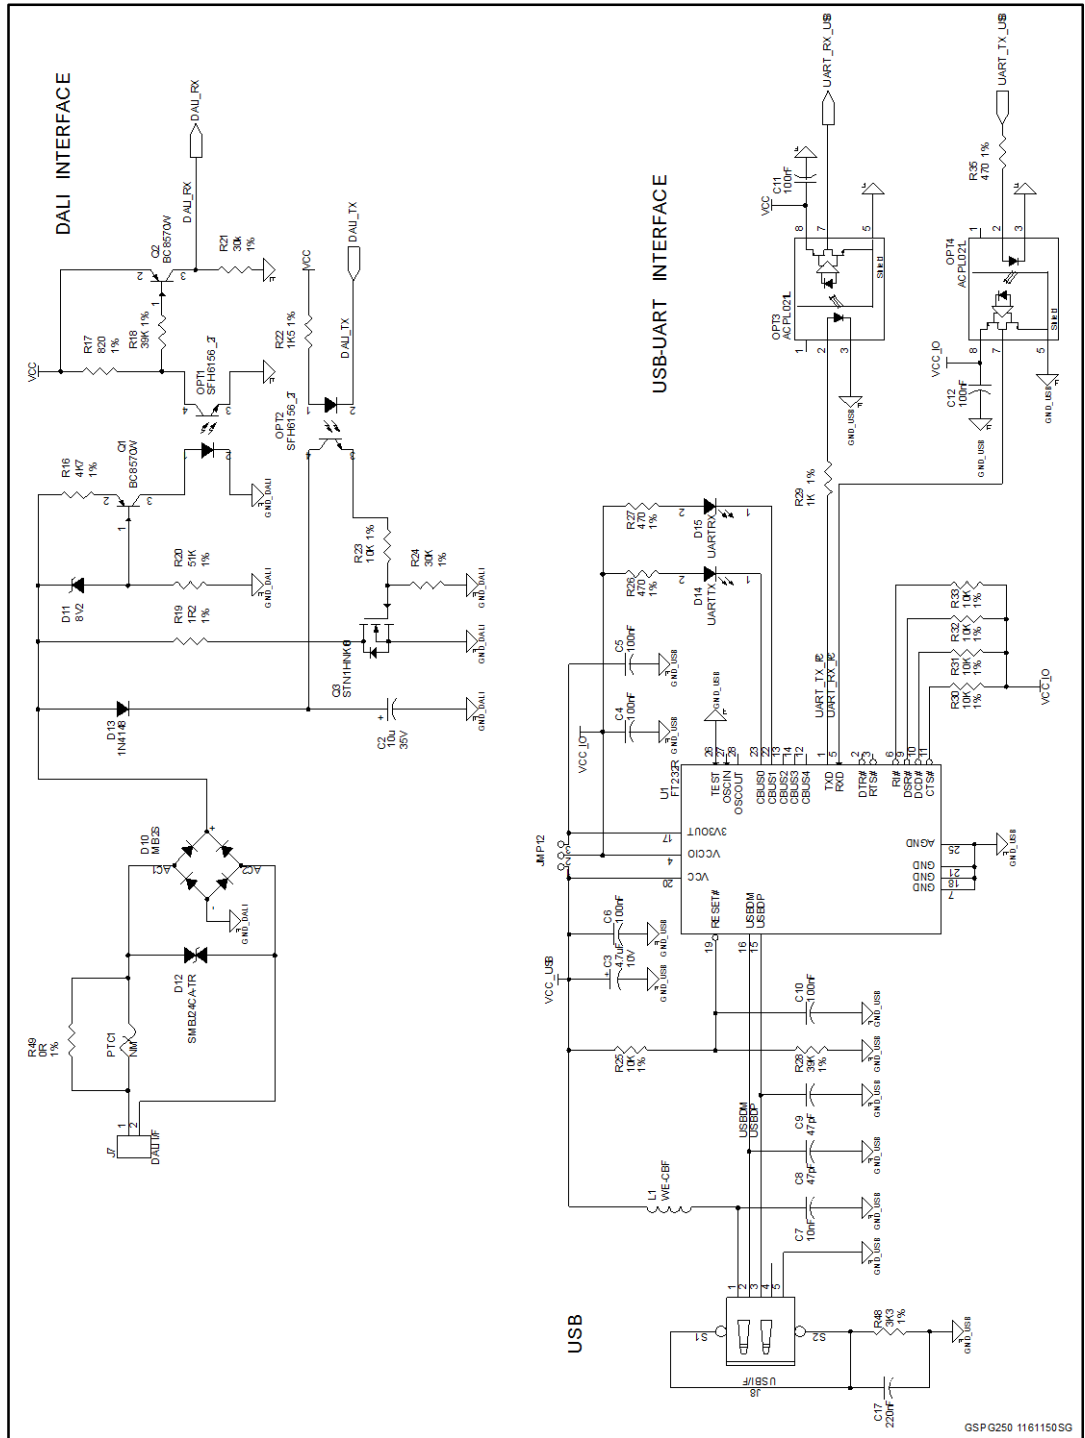

GSPQ250 11611505SG

Figure 6: STEVAL-ILL077V1 Mother board circuit schematic (3 of 3)

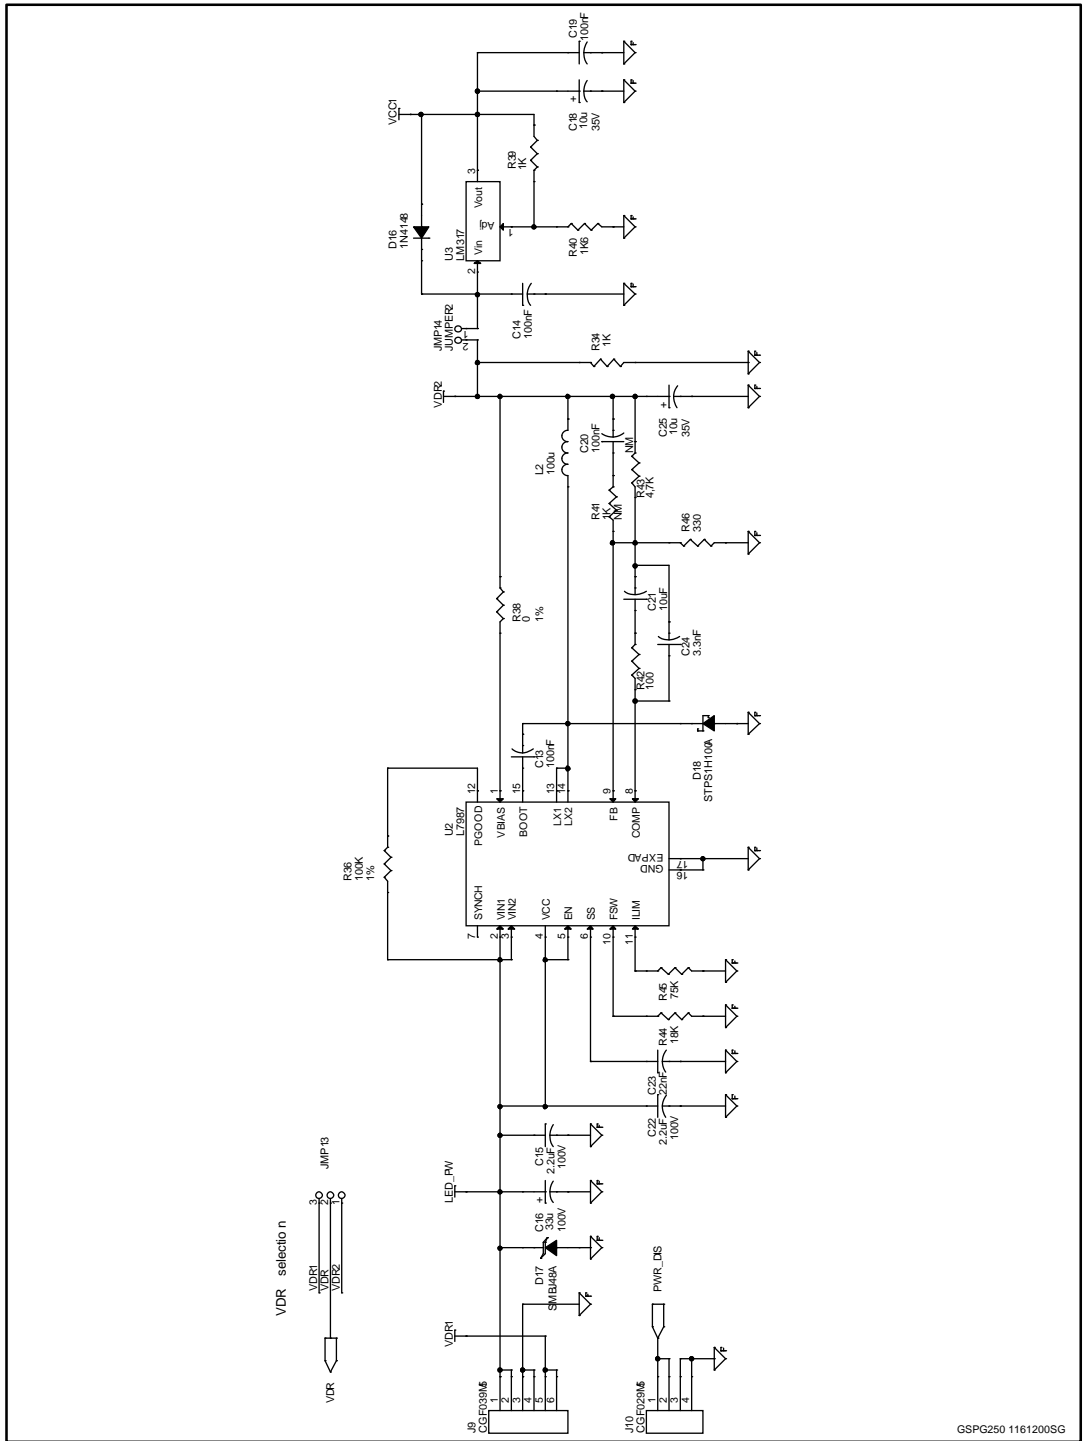

GSPG250 1161200SG

2 Revision history

Table 1: Document revision history

Date	Version	Changes
27-Jan-2016	1	Initial release.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Development Tools](#) category:

Click to view products by [STMicroelectronics](#) manufacturer:

Other Similar products are found below :

[MIC2870YFT EV](#) [ADP8860DBCP-EVALZ](#) [LM3404MREVAL](#) [ADM8843EB-EVALZ](#) [TDGL014](#) [ISL97682IRTZEVALZ](#) [LM3508TLEV](#)
[EA6358NH](#) [MAX16826EVKIT](#) [MAX16839EVKIT+](#) [TPS92315EVM-516](#) [MAX6956EVKIT+](#) [OM13321,598](#) [DC986A](#) [DC909A](#) [DC824A](#)
[STEVAL-LLL006V1](#) [IS31LT3948-GRLS4-EB](#) [PIM526](#) [PIM527](#) [MAX6946EVKIT+](#) [MAX20070EVKIT#](#) [MAX21610EVKIT#](#)
[MAX6951EVKIT](#) [MAX20090BEVKIT#](#) [MAX20092EVSYS#](#) [PIM498](#) [AP8800EV1](#) [ZXLD1370/1EV4](#) [MAX6964EVKIT](#) [TLC59116EVM-](#)
[390](#) [1216.1013](#) [TPS61176EVM-566](#) [TPS61197EVM](#) [TPS92001EVM-628](#) [1270](#) [1271.2004](#) [1272.1030](#) [1273.1010](#) [1278.1010](#) [1279.1002](#)
[1279.1001](#) [1282.1000](#) [1293.1900](#) [1293.1800](#) [1293.1700](#) [1293.1500](#) [1293.1100](#) [1282.1400](#) [1282.1100](#)