



STEVAL-ISA112V1

Wide range non-isolated flyback demonstration board, single-output
12 V/4 W based on the VIPER06HN

Data brief

Features


- Universal input mains range:
 - input voltage 90 - 265 V_{AC}
 - frequency 45 - 65 Hz
- Single-output voltage: 12 V at 350 mA continuous operation
- Standby mains consumption: < 30 mW at 230 V_{AC}
- Average efficiency: > 75%
- Complying with EuP Lot 6 requirements
- Fully protected against short-circuit
- Fully protected against overheating
- Compliant to EMC norm EN55022-Class-B
- RoHS compliant

Description

The STEVAL-ISA112V1 demonstration board implements a 4 W single-output wide range mains power supply to be used in applications such as white goods, smaller home appliances, home automation, LED driver, etc.

The board uses the new VIPER06HN, a new offline high voltage converter from the VIPerPlus family by STMicroelectronics. The VIPER06 is specifically designed for fixed frequency flyback converters, combining a high-performance low voltage PWM controller chip and a max. 32 Ω RDS(on), 800 V BV(DSS), avalanche-rugged Power MOSFET in the same package.

The application is optimized for less than 30 mW standby consumption and meets the EPA 2.0 limits, therefore helping to meet the most stringent energy saving requirements.

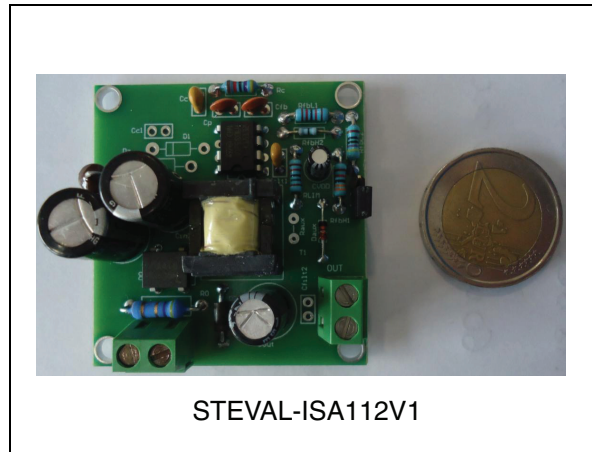

The STEVAL-ISA112V1 demonstration board implements several forms of protection that considerably increase end-product safety and reliability: overload protection, feedback disconnection, thermal shutdown.

Contents

1	Adapter features	3
2	Schematic, bill of material and layout	4
3	Transformer	7
4	Measurements	8
	4.1 Electrical performance	8
5	Thermal performances	10
	5.1 EMI performance	12
6	Revision history	13

1 Adapter features

The electrical specifications of the demonstration board are listed in [Table 1](#).

Table 1. STEVAL-ISA112V1 electrical specifications

Parameter	Symbol	Value
Input voltage range	V_{IN}	90 V _{AC} - 265 V _{AC}
Output voltage	V_{OUT}	12 V
Max. output current	I_{OUT}	0.35 A
Precision of output regulation	ΔV_{OUT_LF}	± 5%
High frequency output voltage ripple	ΔV_{OUT_HF}	50 mV
Max. ambient operating temperature	T_{AMB}	60 °C

2 Schematic, bill of material and layout

The schematic of the board is reported in [Figure 1](#) and the bom in [Table 2](#).

Figure 1. STEVAL-ISA112V1 electrical diagram


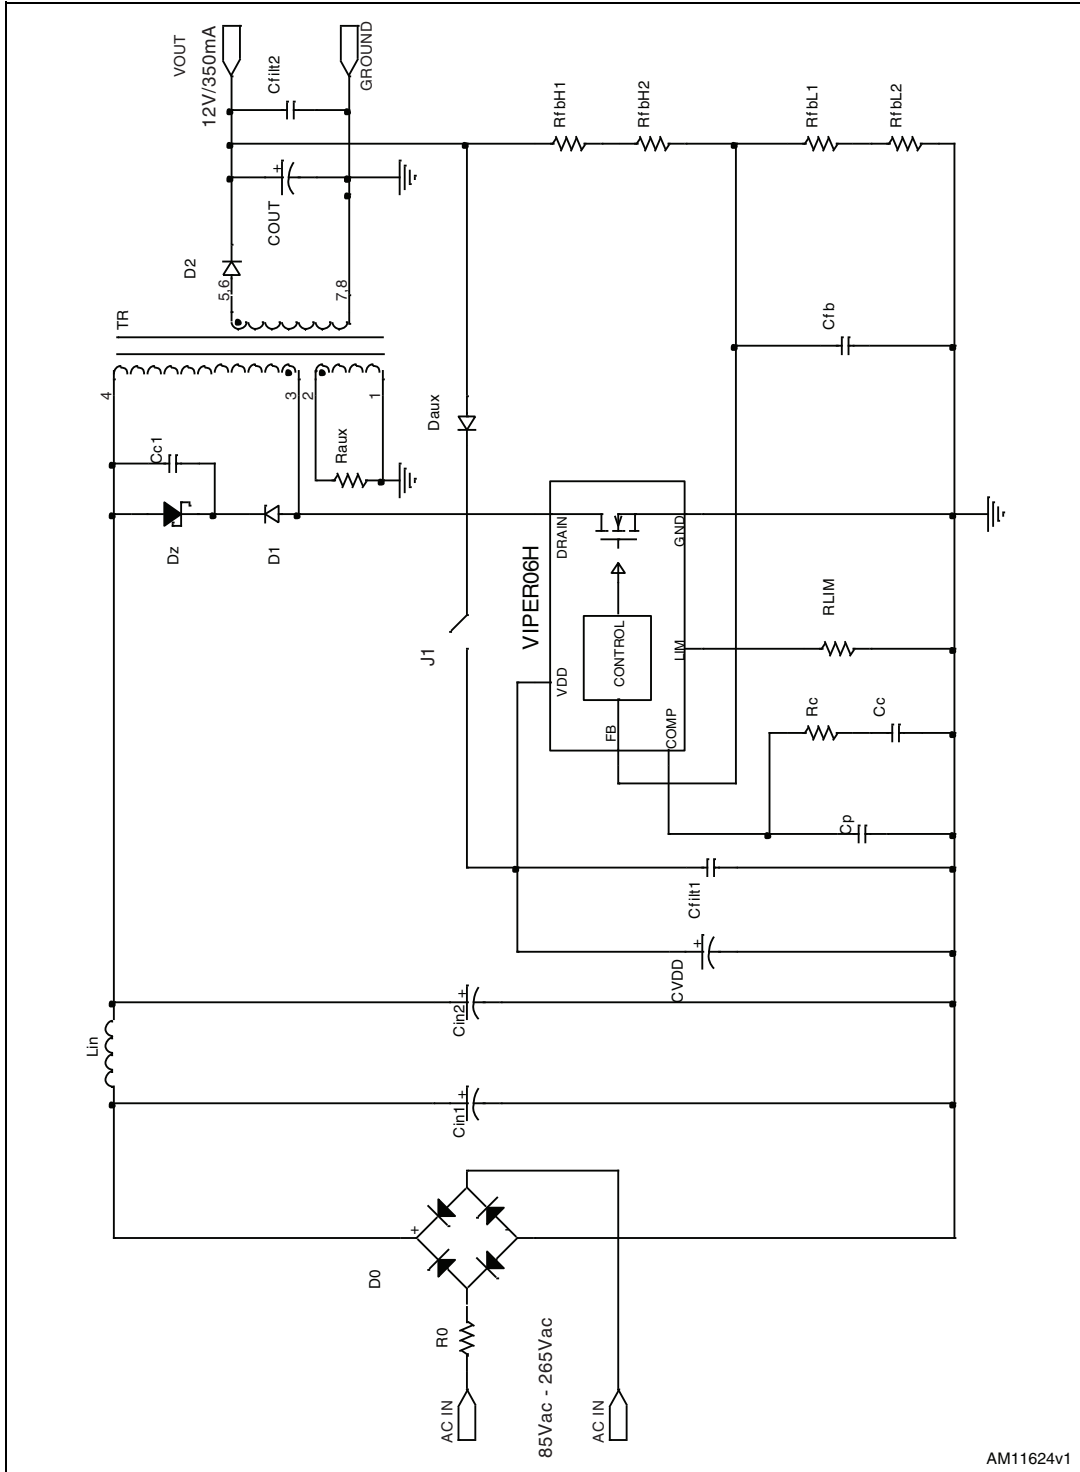


Table 2. Bill of material

Ref.	Part	Description	Manufacturer
Cin1		3.3 μ F, 400 V NHG series electrolytic capacitor	
Cin2		3.3 μ F, 400 V NHG series electrolytic capacitor	
CVDD		1 μ F, 50 V electrolytic capacitor	
Cfilt1		100 nF, 50 V ceramic capacitor	
Cc		10 nF, 50 V ceramic capacitor	
Cp		1 nF, 50 V ceramic capacitor	
Cfb		1 nF, 50 V ceramic capacitor	
Cout		330 μ F, 16 V ZL series ultra-low ESR electrolytic capacitor	Rubycon
Ccl	Not mounted		
Cfilt2	Not mounted		
D0	DF06M	600 V 1 A diode bridge	Vishay
D1	Not mounted		
D2	STPS2H100	100 V, 2 A, power Schottky rectifier	ST
Daux	1N4148	Small signal diode	
Dz	Not mounted		
R0		4.7 Ω 3/4 W resistor	
RLIM		15 k Ω 5% 1/4 W resistor	
Rc		47 k Ω 5% 1/4 W resistor	
RfbH1		33 k Ω 1% 1/4 W resistor	
RfbH2		0 Ω	
RfbL1		12 k Ω 1% 1/4 W resistor	
RfbL2		0.47 k Ω 1% 1/4 W resistor	
Raux	Not mounted		
IC1	VIPer06HN	Offline high-voltage PWM controller	ST
T1	1921.0040	Transformer	Magnetics
Lin	B82144A2105J000	1 mH inductor LBC series	Epcos

Figure 2. Demonstration board layout

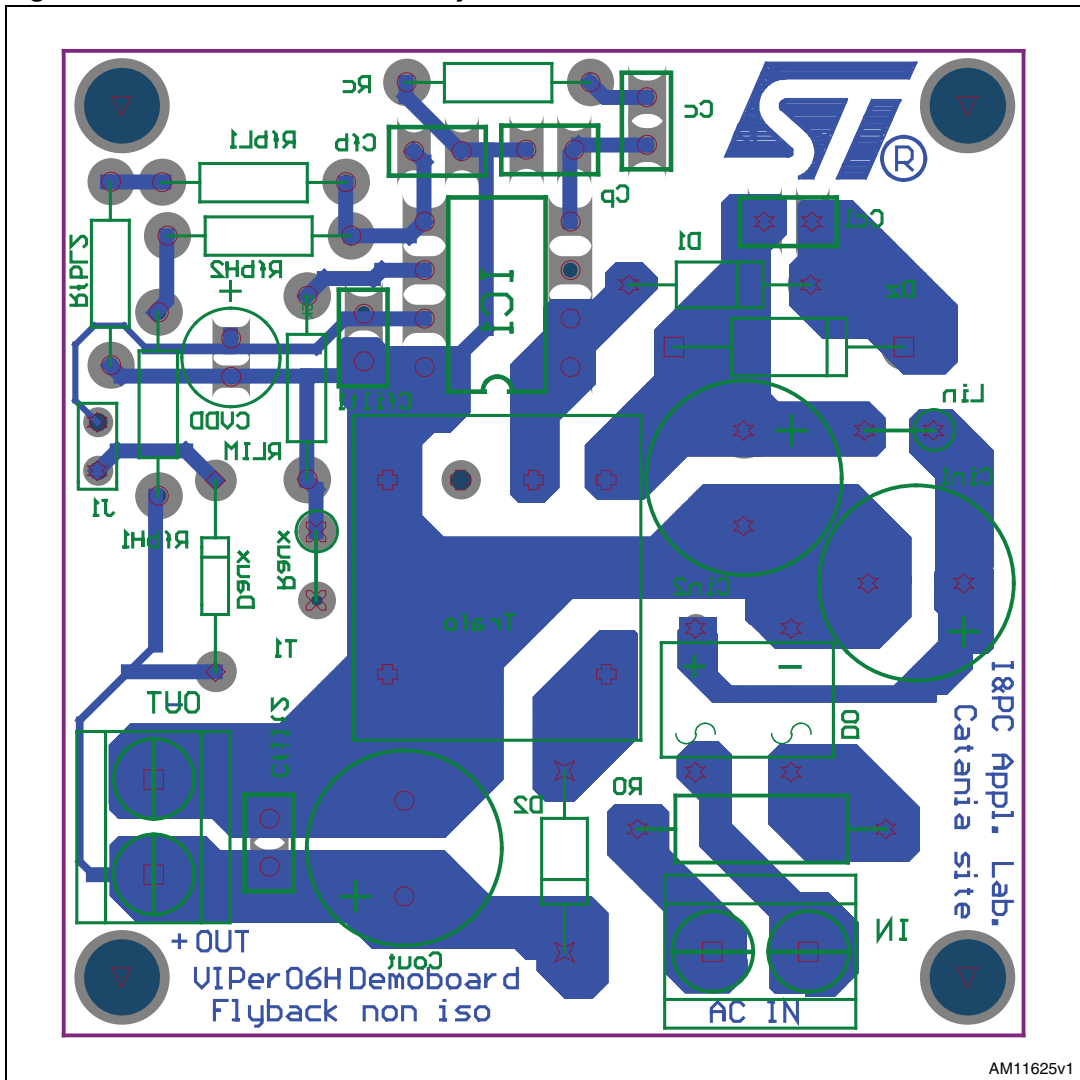

3 Transformer

The transformer characteristics are listed in the table below.

Table 3. Transformer characteristics

Parameter	Value	Test Conditions
Manufacturer	Magnetica	
Part number	1921.0040	
Primary inductance (pins 3-4)	1.2 mH ± 15%	Measured at 1 kHz 0.1 V
Leakage inductance	2.8%	Measured at 10 kHz 0.1 V
Primary to secondary turn ratio (3 - 4)/(5 - 8)	6.11 ± 5%	Measured at 10 kHz 0.1 V
Primary to auxiliary turn ratio (3 - 4)/(2 - 1)	5 ± 5%	Measured at 10 kHz 0.1 V

The images below show size and pin distances ([mm]) of the transformer.

Figure 3. Transformer size and pin diagram pin distances

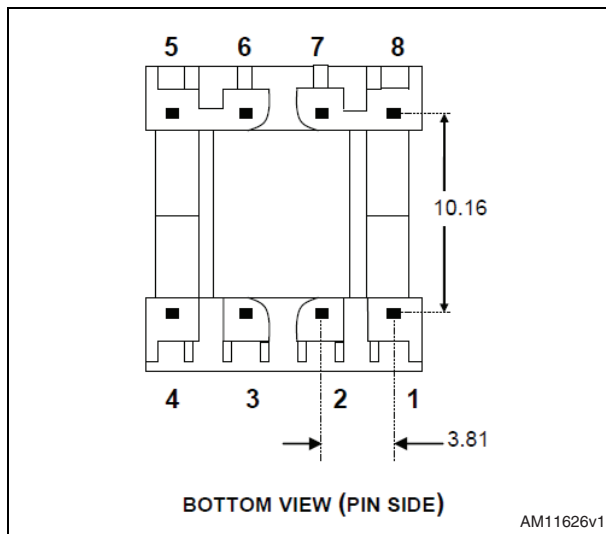


Figure 4. Transformer size and pin diagram electrical diagram

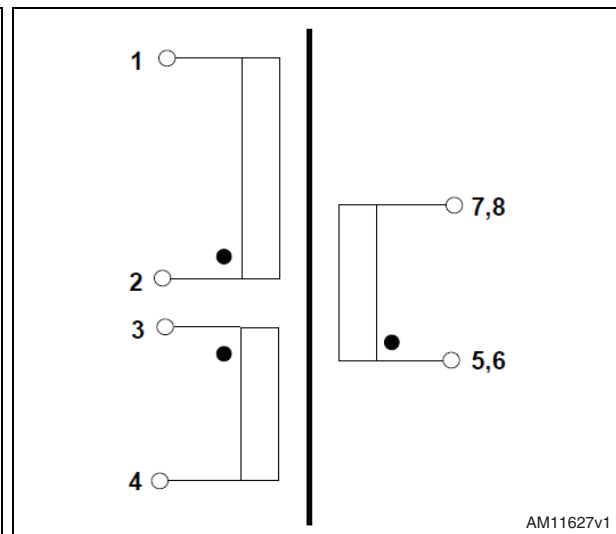


Figure 5. Transformer size side view 1


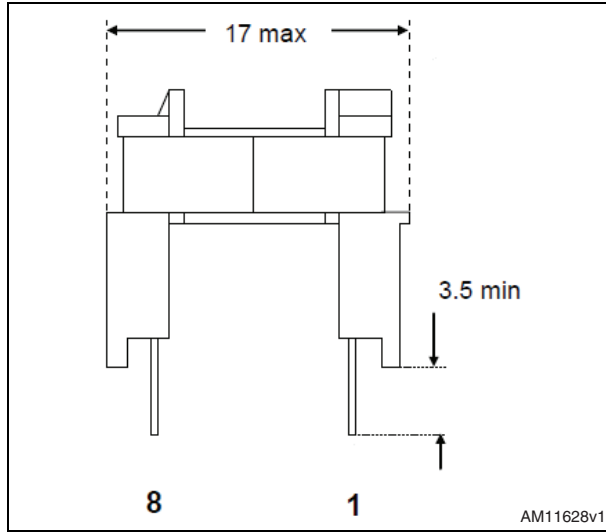


Figure 6. Transformer size side view 2

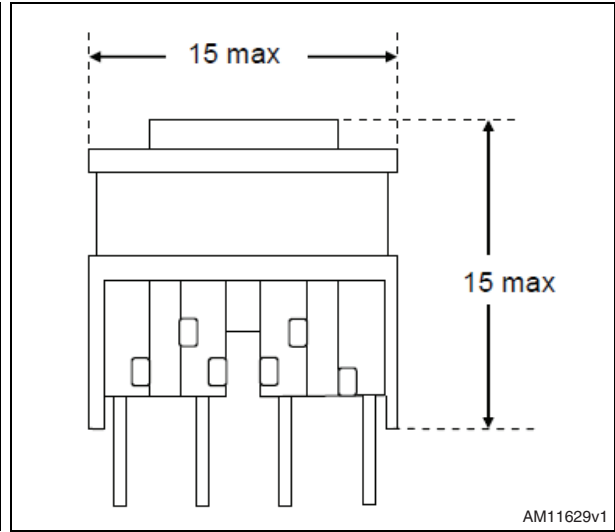

4 Measurements

4.1 Electrical performance

Figure 7. Standby consumption at no load: IC supplied from the output (J1 selected)

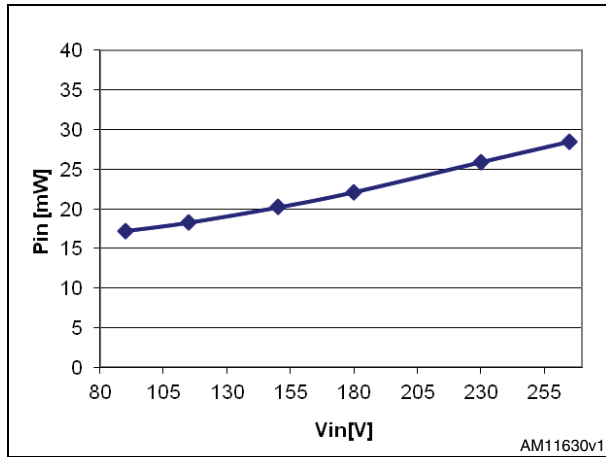


Figure 8. Standby consumption at no load: IC self-supplied (J1 not selected)

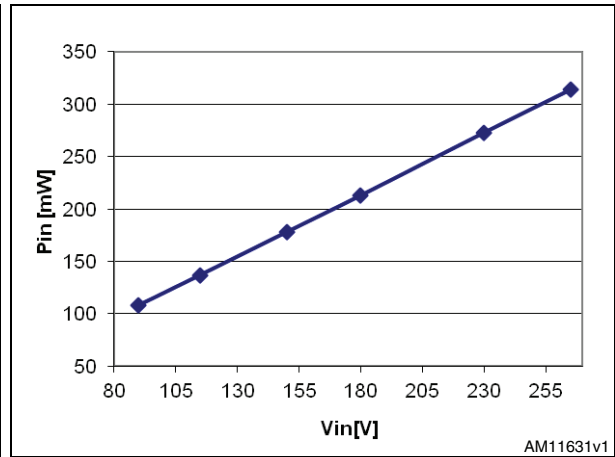


Figure 9. Efficiency at different input voltages: IC supplied from the output (J1 selected)

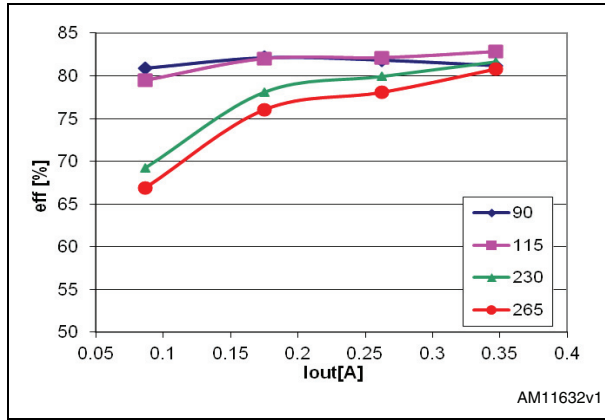


Figure 10. Efficiency at different input voltages: IC self-supplied (J1 not selected)

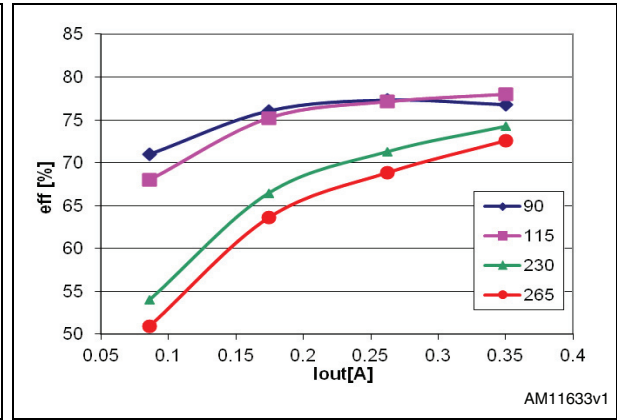


Figure 11. Line regulation at different loads: IC supplied from the output (J1 selected)

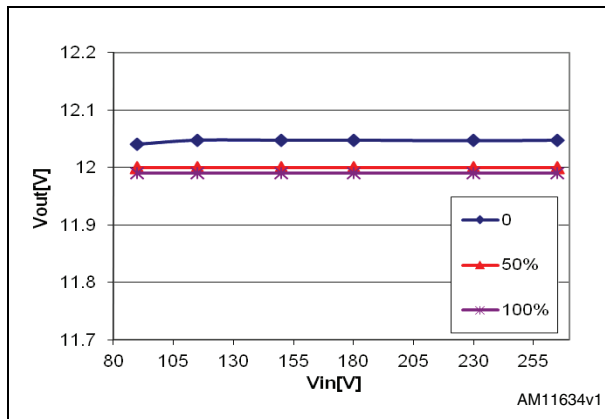


Figure 12. Line regulation at different loads: IC self-supplied (J1 not selected)

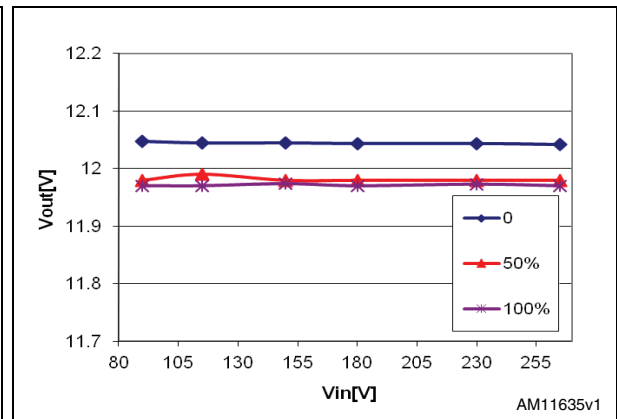


Figure 13. Load regulation at different input voltages: IC supplied from the output (J1 selected)


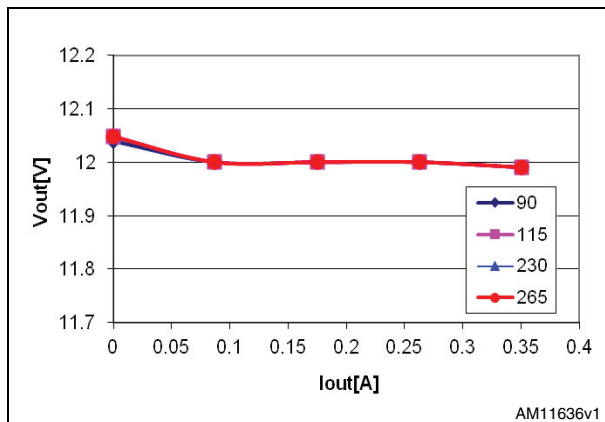


Figure 14. Load regulation at different input voltages: IC self-supplied (J1 not selected)

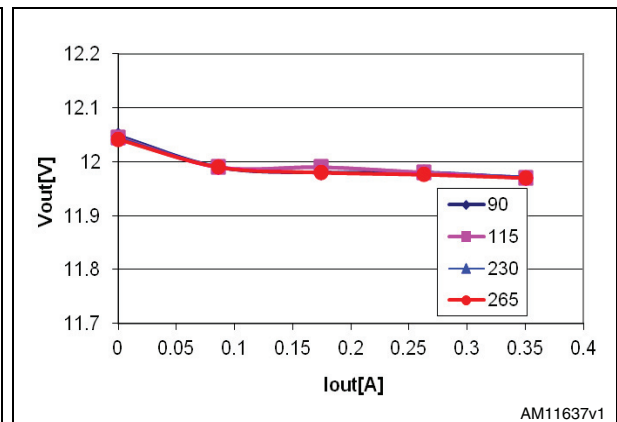

5 Thermal performances

A thermal analysis of the board has been performed using an IR camera for 85 V_{AC}, 115 V_{AC}, 230 V_{AC} and 265 V_{AC} mains input, full load condition, both with and without the self supply function. The results are shown in the following figures. When the self-supply function is used the VIPER06 temperature is higher, due to the power dissipated by the HV-startup generator.

Figure 15. Thermal map at V_{IN} = 85 V_{AC}, I_{out} = 350 mA, T_{AMB} = 25 °C: IC supplied from the output (J1 selected)

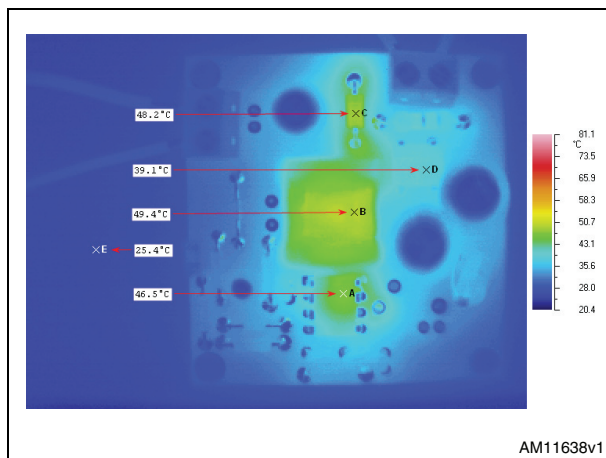


Figure 16. Thermal map at V_{IN} = 85 V_{AC}, I_{out} = 350 mA, T_{AMB} = 25 °C: IC self supplied (J1 not selected)

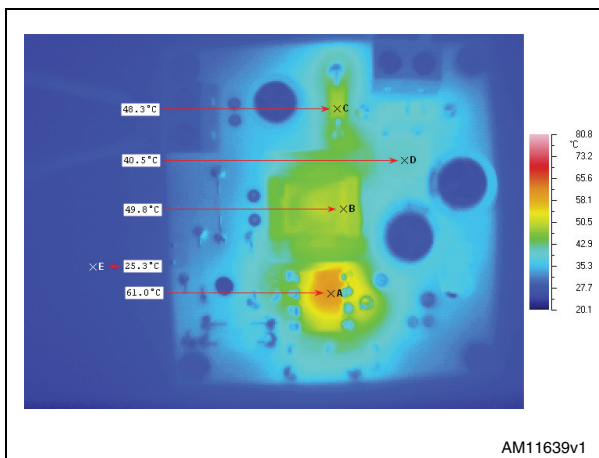


Figure 17. Thermal map at V_{IN} = 115 V_{AC}, I_{out} = 350 mA, T_{AMB} = 25 °C: IC supplied from the output (J1 selected)

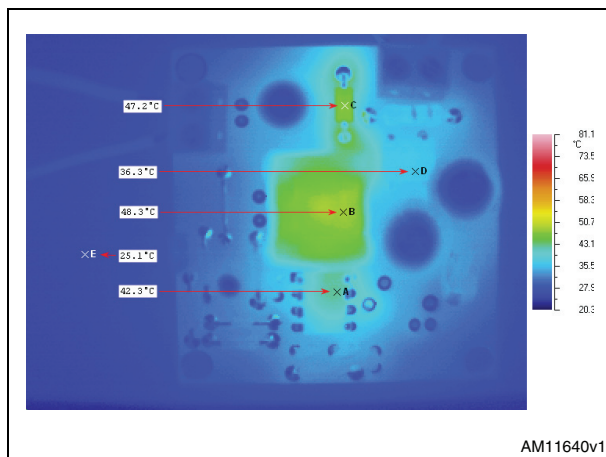


Figure 18. Thermal map at V_{IN} = 115 V_{AC}, I_{out} = 350 mA, T_{AMB} = 25 °C: IC self supplied (J1 not selected)

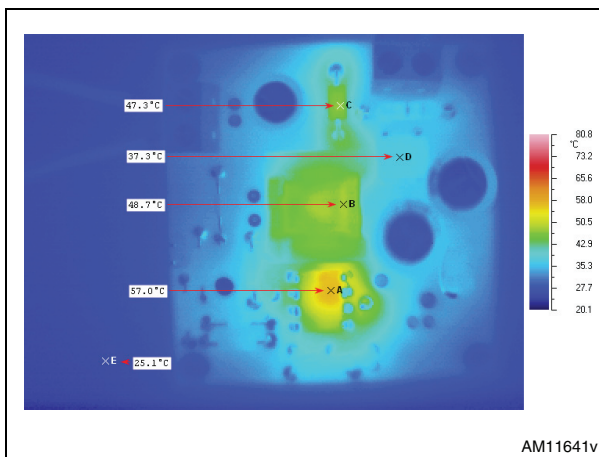


Figure 19. Thermal map at $V_{IN} = 230 V_{AC}$,
 $I_{out} = 350 mA$, $T_{AMB} = 25 ^\circ C$:
 IC supplied from the output
 (J1 selected)

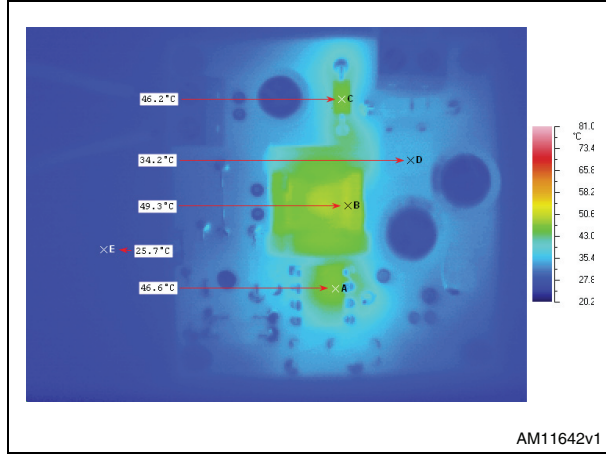


Figure 20. Thermal map at $V_{IN} = 230 V_{AC}$,
 $I_{out} = 350 mA$, $T_{AMB} = 25 ^\circ C$:
 IC self supplied (J1 not selected)

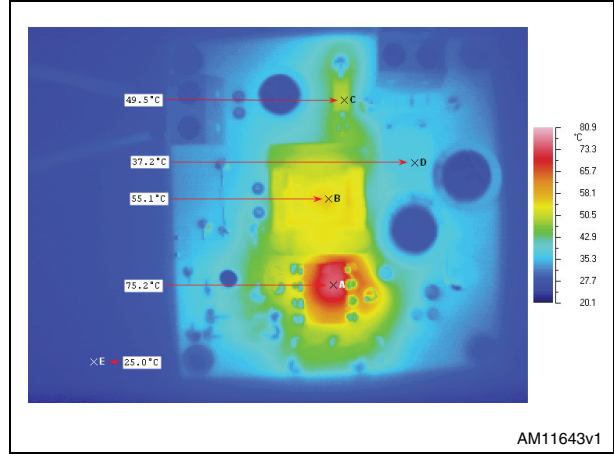


Figure 21. Thermal map at $V_{IN} = 265 V_{AC}$,
 $I_{out} = 350 mA$, $T_{AMB} = 25 ^\circ C$:
 IC supplied from the output
 (J1 selected)


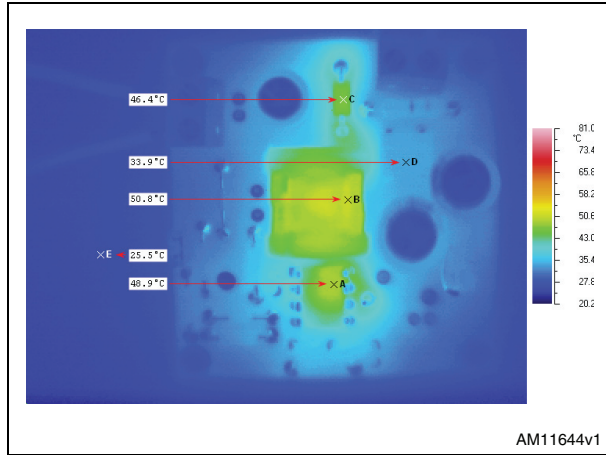


Figure 22. Thermal map at $V_{IN} = 265 V_{AC}$,
 $I_{out} = 350 mA$, $T_{AMB} = 25 ^\circ C$:
 IC self supplied (J1 not selected)

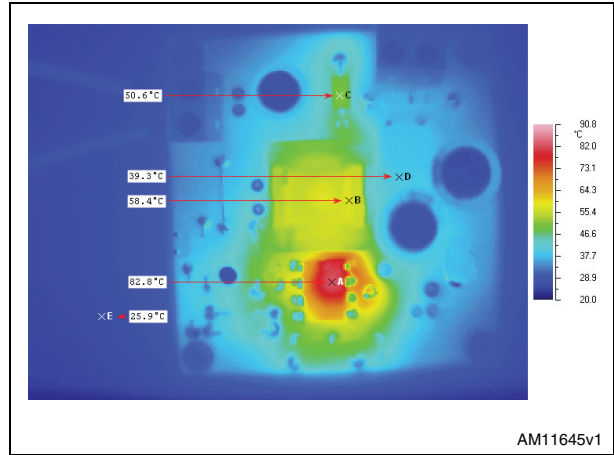

5.1 EMI performance

Figure 23. Average measurements at $V_{IN} = 115$ V_{AC}, full load, $T_{AMB} = 25$ °C; IC supplied from the output


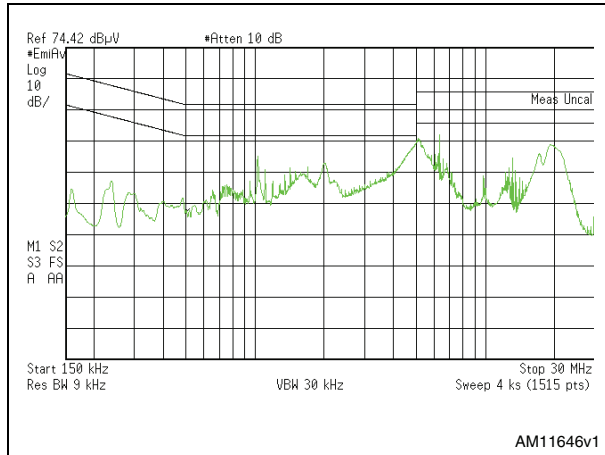


Figure 24. Average measurements at $V_{IN} = 230$ V_{AC}, full load, $T_{AMB} = 25$ °C; IC supplied from the output

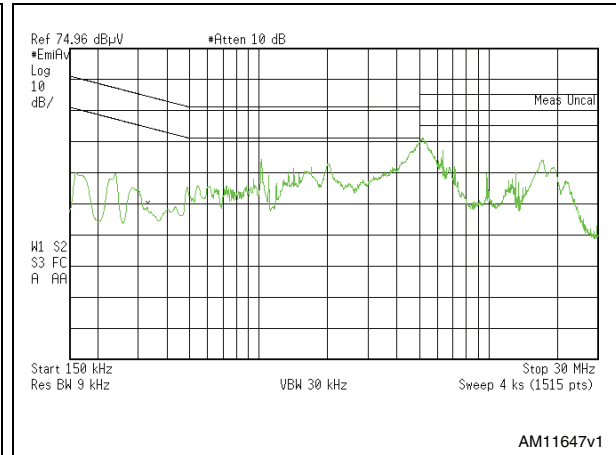

6 Revision history

Table 4. Document revision history

Date	Revision	Changes
08-Jan-2013	1	Initial release.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Management IC Development Tools](#) category:

Click to view products by [STMicroelectronics](#) manufacturer:

Other Similar products are found below :

[EVAL-ADM1168LQEBZ](#) [EVB-EP5348UI](#) [MIC23451-AAAYFL EV](#) [MIC5281YMME EV](#) [DA9063-EVAL](#) [ADP122-3.3-EVALZ](#) [ADP130-0.8-EVALZ](#) [ADP130-1.2-EVALZ](#) [ADP130-1.5-EVALZ](#) [ADP130-1.8-EVALZ](#) [ADP1712-3.3-EVALZ](#) [ADP1714-3.3-EVALZ](#) [ADP1715-3.3-EVALZ](#) [ADP1716-2.5-EVALZ](#) [ADP1740-1.5-EVALZ](#) [ADP1752-1.5-EVALZ](#) [ADP1828LC-EVALZ](#) [ADP1870-0.3-EVALZ](#) [ADP1871-0.6-EVALZ](#) [ADP1873-0.6-EVALZ](#) [ADP1874-0.3-EVALZ](#) [ADP1882-1.0-EVALZ](#) [ADP199CB-EVALZ](#) [ADP2102-1.25-EVALZ](#) [ADP2102-1.875EVALZ](#) [ADP2102-1.8-EVALZ](#) [ADP2102-2-EVALZ](#) [ADP2102-3-EVALZ](#) [ADP2102-4-EVALZ](#) [ADP2106-1.8-EVALZ](#) [ADP2147CB-110EVALZ](#) [AS3606-DB](#) [BQ24010EVM](#) [BQ24075TEVM](#) [BQ24155EVM](#) [BQ24157EVM-697](#) [BQ24160EVM-742](#) [BQ24296MEVM-655](#) [BQ25010EVM](#) [BQ3055EVM](#) [NCV891330PD50GEVB](#) [ISLUSBI2CKIT1Z](#) [LM2744EVAL](#) [LM2854EVAL](#) [LM3658SD-AEV/NOPB](#) [LM3658SDEV/NOPB](#) [LM3691TL-1.8EV/NOPB](#) [LM4510SDEV/NOPB](#) [LM5033SD-EVAL](#) [LP38512TS-1.8EV](#)