


## Discovery kits with STM32MP157 MPUs

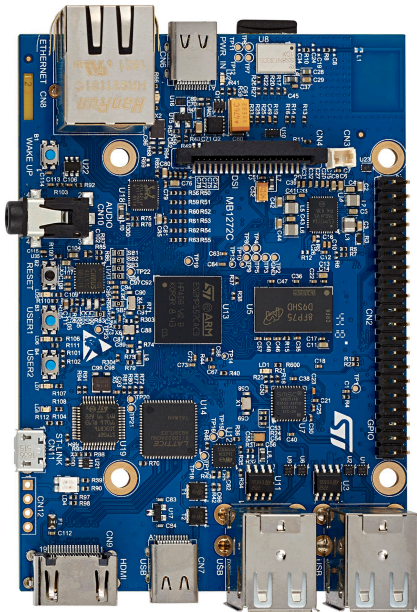

STM32MP157C-DK2 top view with display removed. Picture is not contractual.

### Product status link

[STM32MP157A-DK1](#)

[STM32MP157C-DK2](#)

## Features

- Common features
  - STM32MP157 Arm<sup>®</sup>-based dual Cortex<sup>®</sup>-A7 32 bits + Cortex<sup>®</sup>-M4 32 bits MPU in TFBGA361 package
  - ST PMIC [STPMIC1](#)
  - 4-Gbit DDR3L, 16 bits, 533 MHz
  - 1-Gbps Ethernet (RGMII) compliant with IEEE-802.3ab
  - USB OTG HS
  - Audio codec
  - 4 user LEDs
  - 2 user and reset push-buttons, 1 wake-up button
  - 5 V / 3 A USB Type-C<sup>™</sup> power supply input (not provided)
  - Board connectors:
    - Ethernet RJ45
    - 4 × USB Host Type-A
    - USB Type-C<sup>™</sup> DRP
    - MIPI DSI<sup>SM</sup>
    - HDMI<sup>®</sup>
    - Stereo headset jack including analog microphone input
    - microSD<sup>™</sup> card
    - GPIO expansion connector (Raspberry Pi<sup>®</sup> shields capability)
    - ARDUINO<sup>®</sup> Uno V3 expansion connectors
  - On-board ST-LINK/V2-1 debugger/programmer with USB re-enumeration capability: Virtual COM port and debug port
  - [STM32CubeMP1](#) and full mainline open-source Linux<sup>®</sup> STM32 MPU OpenSTLinux Distribution (such as [STM32MP1Starter](#)) software and examples
  - Support of a wide choice of Integrated Development Environments (IDEs) including IAR<sup>™</sup>, Keil<sup>®</sup>, GCC-based IDEs
- Board-specific features
  - 4" TFT 480×800 pixels with LED backlight, MIPI DSI<sup>SM</sup> interface, and capacitive touch panel
  - Wi-Fi<sup>®</sup> 802.11b/g/n
  - Bluetooth<sup>®</sup> Low Energy 4.1

## Description

The [STM32MP157A-DK1](#) and [STM32MP157C-DK2](#) Discovery kits leverage the capabilities of STM32MP1 Series microprocessors to allow users easily develop applications using STM32 MPU OpenSTLinux Distribution software for the main processor and STM32CubeMP1 software for the co-processor.

They include an ST-LINK embedded debug tool, LEDs, push-buttons, one Ethernet 1-Gbps connector, one USB Type-C™ OTG connector, four USB Type-A Host connectors, one HDMI® transceiver, one stereo headset jack with analog microphone, and one microSD™ connector.

To expand the functionality of the [STM32MP157A-DK1](#) and [STM32MP157C-DK2](#) Discovery kits, two GPIO expansion connectors are also available for ARDUINO® and Raspberry Pi® shields.

Additionally, the [STM32MP157C-DK2](#) Discovery kit features an LCD display with a touch panel, and Wi-Fi® and Bluetooth® Low Energy capability.

# 1 Ordering information

To order an STM32MP157 Discovery kit, refer to [Table 1](#). For a detailed description, refer to the user manual on the product web page. Additional information is available from the datasheet and reference manual of the target STM32.

**Table 1. List of available products**

Order code	Board reference	User manual	Target STM32	Differentiating feature
STM32MP157A-DK1	• MB1272	UM2534	STM32MP157AAC3	• Basic security
STM32MP157C-DK2	• MB1272 • MB1407 <sup>(1)</sup>		STM32MP157CAC3	• Secure Boot and cryptography • LCD • Wi-Fi® • Bluetooth® Low Energy

1. LCD extension board.

## 1.1 Product marking

Evaluation tools marked as “ES” or “E” are not yet qualified and therefore not ready to be used as reference design or in production. Any consequences deriving from such usage will not be at ST charge. In no event, ST will be liable for any customer usage of these engineering sample tools as reference design or in production.

“E” or “ES” marking examples of location:

- On the targeted STM32 that is soldered on the board (for illustration of STM32 marking, refer to the STM32 datasheet “Package information” paragraph at the [www.st.com](http://www.st.com) website).
- Next to the evaluation tool ordering part number that is stuck or silk-screen printed on the board.

## 1.2 Codification

The meaning of the codification is explained in [Table 2](#).

**Table 2. Codification explanation**

STM32MP1XXY-DKZ	Description	Example: STM32MP157C-DK2
STM32MP1	MPU series in STM32 Arm Cortex MPUs	STM32MP1 Series
XX	MPU product line in the series	STM32MP157
Y	Security option: <ul style="list-style-type: none"> <li>• A: basic security</li> <li>• C: Secure Boot and cryptography</li> </ul>	Secure Boot and cryptography
DKZ	Discovery kit configuration: <ul style="list-style-type: none"> <li>• DK1: basic</li> <li>• DK2: LCD, Wi-Fi®, and Bluetooth® Low Energy</li> </ul>	LCD, Wi-Fi®, and Bluetooth® Low Energy

The order code is mentioned on a sticker placed on the top side of the board.

## 2 Development environment

STM32 Arm Cortex MPUs are based on the Arm® Cortex®-A and Cortex®-M processors.

*Note:* Arm is a registered trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.



### 2.1 System requirements

- Windows® OS (7, 8 and 10), Linux® 64-bit, or macOS®
- USB Type-C™ to USB Type-C™ charger 5 V / 3 A
- USB Type-C™ to Type-A cable
- USB Type-A to Micro-B cable

*Note:* macOS® is a trademark of Apple Inc. registered in the U.S. and other countries.

### 2.2 Development toolchains

- Keil® MDK-ARM (see [note](#))
- IAR™ EWARM (see [note](#))
- GCC-based IDEs
- GCC

*Note:* On Windows® only.

### 2.3 Demonstration software

The STM32 MPU OpenSTLinux Distribution and STM32CubeMP1 base demonstration software is preloaded in the microSD™ for easy demonstration of the device peripherals in standalone mode. The latest versions of the demonstration source code and associated documentation can be downloaded from [www.st.com](http://www.st.com).

### 3 Technology partners

---

#### MICRON

- 4-Gbit DDR3L, 16 bits, part number MT41K256M16TW-107-P-V00H

#### MURATA

- Wi-Fi® 802.11b/g/n + Bluetooth® Low Energy 4.1, part number LBEE5KL1DX-883

## Revision history

**Table 3. Document revision history**

Date	Version	Changes
5-Feb-2019	1	Initial release.
26-Aug-2019	2	Updated ST PMIC in <a href="#">Features</a> . Reorganized <a href="#">Ordering information</a> .

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Development Boards & Kits - ARM category](#):*

*Click to view products by [STMicroelectronics manufacturer](#):*

Other Similar products are found below :

[SAFETI-HSK-RM48](#) [PICOHOBBITFL](#) [CC-ACC-MMK-2443](#) [TWR-MC-FRDMKE02Z](#) [EVALSPEAR320CPU](#) [EVB-SCMIMX6SX](#)  
[MAX32600-KIT#](#) [TMDX570LS04HDK](#) [TXSD-SV70](#) [OM13080UL](#) [EVAL-ADUC7120QSPZ](#) [OM13082UL](#) [TXSD-SV71](#)  
[YGRPEACHNORMAL](#) [OM13076UL](#) [PICODWARFFL](#) [YR8A77450HA02BG](#) [3580](#) [32F3348DISCOVERY](#) [ATTINY1607](#) [CURIOSITY](#)  
[NANO](#) [PIC16F15376](#) [CURIOSITY NANO BOARD](#) [PIC18F47Q10](#) [CURIOSITY NANO](#) [VISIONSTK-6ULL V.2.0](#) [80-001428](#) [DEV-17717](#)  
[EAK00360](#) [YR0K77210B000BE](#) [RTK7EKA2L1S00001BE](#) [MAX32651-EVKIT#](#) [SLN-VIZN-IOT](#) [LV18F V6 DEVELOPMENT SYSTEM](#)  
[READY FOR AVR BOARD](#) [READY FOR PIC BOARD](#) [READY FOR PIC \(DIP28\)](#) [EVB-VF522R3](#) [AVRPLC16 V6 PLC SYSTEM](#)  
[MIKROLAB FOR AVR XL](#) [MIKROLAB FOR PIC L](#) [MINI-AT BOARD - 5V](#) [MINI-M4 FOR STELLARIS](#) [MOD-09.Z](#) [BUGGY +](#)  
[CLICKER 2 FOR PIC32MX + BLUETOOT](#) [1410](#) [LETS MAKE PROJECT PROGRAM. RELAY PIC](#) [LETS MAKE - VOICE](#)  
[CONTROLLED LIGHTS](#) [LPC-H2294](#) [DSPIC-READY2 BOARD](#) [DSPIC-READY3 BOARD](#) [MIKROBOARD FOR ARM 64-PIN](#)  
[MIKROLAB FOR AVR](#)