

SK4554 High Input Voltage Charger with OVP Protection

GENERAL DESCRIPTION

The SK4554 is a cost-effective, fully integrated high input voltage single-cell Li-ion battery charger. The charger uses a CC/CV charge profile required by Li-ion battery. The charger accepts an input voltage up to 24V but is disabled when the input voltage exceeds the OVP threshold, typically 6.8V, to prevent excessive power dissipation. The 24V rating eliminates the over-voltage protection circuit required in a low input voltage charger.

The charge current and the Full-of-charge (FOC) current are programmable with external resistors. When the battery voltage is lower than 2.55V, the charger preconditions the battery with typically 20% of the programmed charge current. When the charge current reduces to the programmable FOC current level during the CV charge phase, an FOC indication is provided by the \overline{CHG} pin, which is an open-drain output. An internal thermal foldback function protects the charger from any thermal failure. Two indication pins (\overline{PBR} and \overline{CHG}) allow simple interface to a microprocessor or LEDs. When no adapter attached, the charger draws less than 1 μ A leakage current from the battery.

The SK4554 is available in Green DFN-2x2-8L,ESOP8 packages and is rated between -40 °C to 85 °C temperature range.



FEATURES

- Complete Charger for Single-Cell-Li-ion or Polymer Batteries
- Integrated Pass Element and Current Sensor
- No External Blocking Diode Required
- Low Component Count and Cost
- Programmable Charger Current
- Programmable Full-of-Charger Current
- Charger Current Thermal Foldback for Thermal Protection
- 2.55V Trickle Charge Threshold
- 6.8V Input Over-Voltage Protection
- 24V Maximum Voltage for the Power Input
- Power Presence and Charge Indications
- Less than 1 μ A Leakage Current from the Battery When No Input Power Attached
- Less than 200uA Supply Current when Charging is terminated
- Available in Green DFN-2x2-8L,ESOP8 Packages

APPLICATIONS

- Mobile Phones
- Blue-Tooth Devices
- PDAs
- MP3 Players
- Stand-Alone Chargers
- Other Handheld Devices

PIN ASSIGNMENT

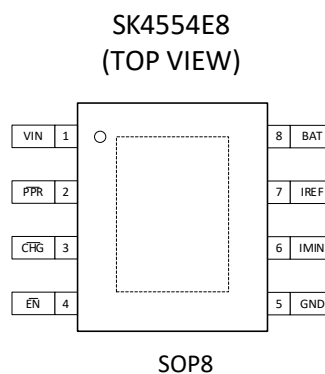

ORDERING INFORMATION

| PART NO | PACAKGE | TEMPERATURE | TAPE & REEL |
|--------------|------------|-------------|-------------|
| SK4554D8-42 | DFN-2x2-8L | -40 ~ +85°C | 4000/REEL |
| SK4554D8-43 | DFN-2x2-8L | -40 ~ +85°C | 4000/REEL |
| SK4554D8-435 | DFN-2x2-8L | -40 ~ +85°C | 4000/REEL |
| SK4554D8-44 | DFN-2x2-8L | -40 ~ +85°C | 4000/REEL |
| SK4554E8-42 | ESOP8 | -40 ~ +85°C | 4000/REEL |
| SK4554E8-435 | ESOP8 | -40 ~ +85°C | 4000/REEL |

D5FHBI A69F'FI @G


SK4554^[1]-^[2]

| Code | Description |
|------|--|
| [1] | Package: D8: DFN-2x2-8L |
| [2] | Charge voltage: 42/43/435/44: Battery charge voltage are 4.2V/4.3V/4.35V/4.4V |

| Code | Description |
|------|--|
| [1] | Package: E8: ESOP8 |
| [2] | Charge voltage: 42/435: Battery charge voltage are 4.2V/4.35V |


MARKING DESCRIPTION:

DFN-2x2-8L



“XXXX”: Part number, here is “4554”.

“JYWA”: “J” stands for Internal Control Code, “Y” stands for Internal Control Code, “W” stands for the week of manufacturing, “A” stands for charge voltage.



“X”, “BB”: Internal control code.

“YM”: Year and Month code.

“AA”: Serial Number.

“V”: Voltage Code.

TYPICAL APPLICATION CIRCUIT

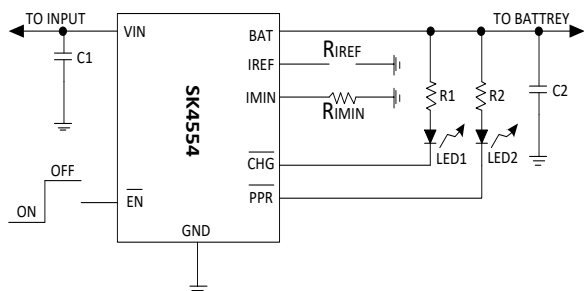


Figure 1. Typical application circuit interfacing to indication LEDs

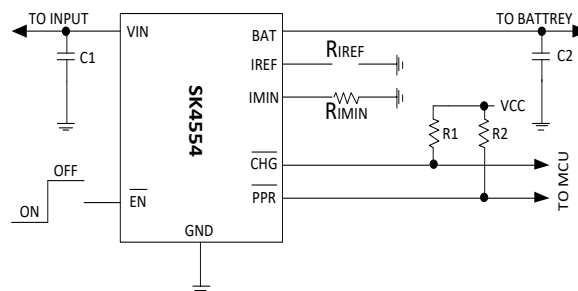


Figure 2. Typical application circuit with the indication signals interfacing to an MCU

Component Description for Figure 1

| PART | DESCRIPTION |
|-------------------|--|
| C1, C2 | 1 μ F X5R ceramic cap |
| R _{IREF} | 24K Ω , 1% for 500mA charge current |
| R _{IMIN} | 270K Ω , 1% for 40mA FOC current |
| R1, R2 | 1K Ω , 5% |

Component Description for Figure 2

| PART | DESCRIPTION |
|-------------------|--|
| C1, C2 | 1 μ F X5R ceramic cap |
| R _{IREF} | 24K Ω , 1% for 500mA charge current |
| R _{IMIN} | 270K Ω , 1% for 40mA FOC current |
| R1, R2 | 100K Ω , 5% |

PIN DESCRIPTION

| PIN NO | SYMBOL | FUNCTION |
|--------|------------------|---|
| 1 | VIN | Power Input. A 1 μ F or larger value X5R ceramic capacitor is recommended to be placed as close as possible to the input pin for decoupling purpose. Additional capacitance may be required to provide a stable input voltage. |
| 2 | \overline{PPR} | Open-drain Power Presence Indication. The open-drain MOSFET turns on when the input voltage is above the POR threshold but below the OVP threshold, and turns off otherwise. This pin is capable of sinking 15mA (MIN) current to drive an LED. The maximum voltage rating for this pin is 5.5V. This pin is independent on the \overline{EN} pin input. |
| 3 | \overline{CHG} | Open-drain Charge Indication. This pin outputs a logic low when a charge cycle starts and turns to high impedance when the full-of-charge (FOC) condition is qualified. This pin is able to sink 15mA (MIN) current to drive an LED. When the charger is disabled, the \overline{CHG} pin outputs high impedance. |
| 4 | \overline{EN} | Enable Input. This is a logic input pin to disable or enable the charger. Drive high to disable the charger. When this pin is driven to low or left floating, the charger is enabled. This pin has an internal 200k Ω pull-down resistor. |
| 5 | GND | System Ground. |
| 6 | IMIN | Full-of-Charge (FOC) Current Programming Pin. Connect a resistor between this pin and the GND pin to set the FOC current. The FOC current I_{MIN} can be programmed by the following equation: $I_{MIN} = \frac{9700}{R_{IMIN}} + 4 (mA)$ where R_{IMIN} is in k Ω . The programmable range covers from 5mA to 120mA. FOC current will be influenced by battery internal impedance and results in a small drift. When programmed to less than 5mA, the stability is not guaranteed. |
| 7 | IREF | Charge-Current Programming and Monitoring Pin. Connect a resistor between this pin and the GND pin to set the charge current limit determined by the following equation: $I_{REF} = \frac{12000}{R_{IREF}} (mA)$ where R_{IREF} is in k Ω . The resistor should be placed very close to this pin. The IREF pin voltage also monitors the actual charge current during the entire charge cycle, including the trickle, constant-current, and constant-voltage phases. When disabled, $V_{IREF} = 0V$. |
| 8 | BAT | Charger Output Pin. Connect this pin to the battery. A 1 μ F or larger X5R ceramic capacitor is recommended for decoupling and stability purposes. When the \overline{EN} pin is pulled to logic high, the BAT output is disabled. |

ABSOLUTE MAXIMUM RATINGS (Note)

| SYMBOL | ITEMS | VALUE | UNIT |
|-----------------|--|------------|------|
| V_{IN} | Input Voltage | -0.3~27 | V |
| | Voltage of other PINs | -0.3~6 | V |
| $R_{\theta JA}$ | Thermal Resistance | DFN-2x2-8L | 118 |
| | | ESOP8 | 67 |
| T_J | Junction Temperature | 150 | °C |
| T_{STG} | Storage Temperature | -65 ~ +150 | °C |
| T_{SOLDER} | Package Lead Soldering Temperature (10s) | 260 | °C |
| ESD MM | Machine Mode | 200 | V |
| ESD HBM | Human Body Mode | 8 | KV |

Note: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED OPERATING RANGE

| SYMBOL | ITEMS | VALUE | UNIT |
|-----------|---------------------------|--------------|------|
| V_{MAX} | Maximum Supply Voltage | ≤ 24 | V |
| V_{IN} | Operating Supply Voltage | 4.55 to 6.10 | V |
| I_{REF} | Programmed Charge Current | 20 to 700 | mA |
| T_{OPT} | Operating Temperature | -40 to +85 | °C |

TYPICAL CHARGE PROFILE

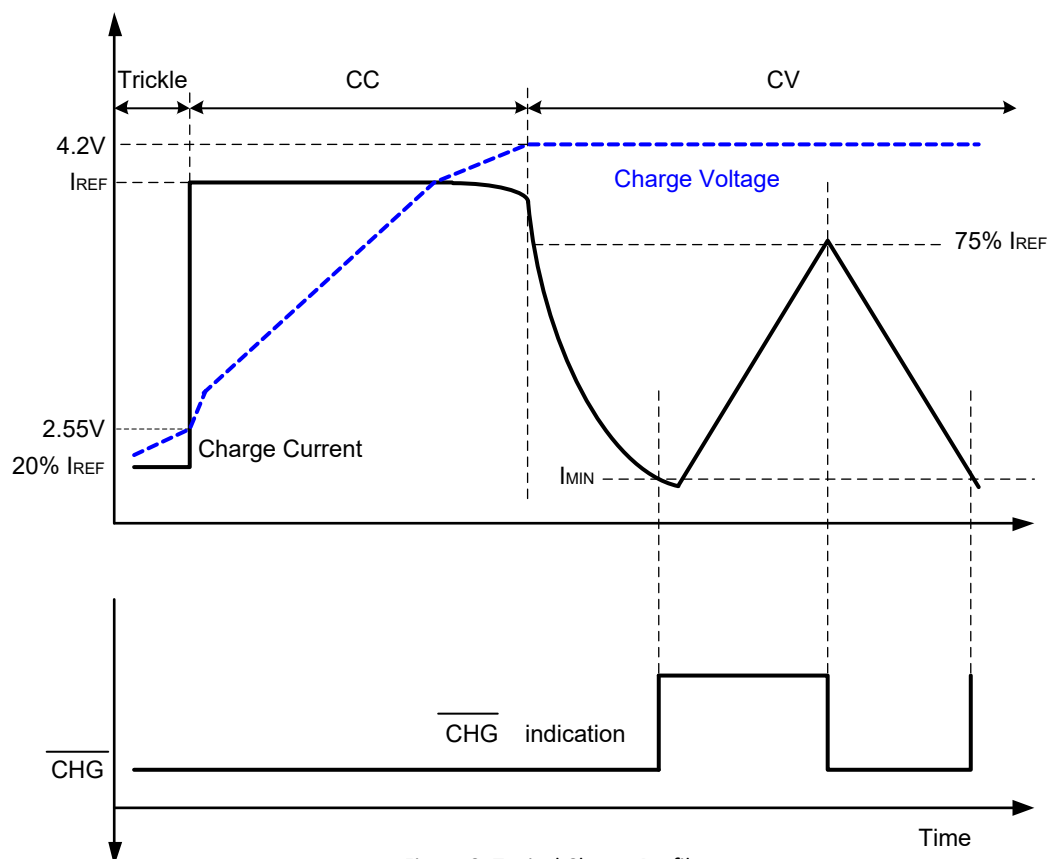


Figure 3. Typical Charge Profile

ELECTRICAL CHARACTERISTICS

$V_{IN}=5V$, $R_{IMIN}=243K\Omega$, $T_A=25^\circ C$, unless otherwise noted.

| SYMBOL | ITEMS | CONDITIONS | MIN | TYP | MAX | UNIT | |
|---|-------------------------------|---|------------|-------|------|----------|---|
| Power-ON Reset | | | | | | | |
| V_{POR} | Rising POR Threshold | $V_{BAT}=3.0V$, $R_{IREF}=120K\Omega$, use \overline{PPR} to indicate the comparator output. | 3.4 | 3.9 | 4.2 | V | |
| V_{POR} | Falling POR Threshold | | 3.1 | 3.6 | 3.9 | V | |
| $V_{IN}-V_{BAT}$ Offset Voltage | | | | | | | |
| V_{OS} | Rising Edge | $V_{BAT}=4.5V$, $R_{IREF}=120K\Omega$, use \overline{PPR} to indicate the comparator output. ⁽¹⁾ | | 100 | 150 | mV | |
| V_{OS} | Falling Edge | | 10 | 80 | | mV | |
| Over-Voltage Protection | | | | | | | |
| V_{OVP} | OVP Threshold | $V_{BAT}=4.5V$, $R_{IREF}=120K\Omega$, use \overline{PPR} to indicate the comparator output. | 6.5 | 6.80 | 7.1 | V | |
| V_{OVPHYS} | OVP Threshold Hysteresis | | 170 | 250 | 300 | mV | |
| Standby Current | | | | | | | |
| I_{VINSTD} | standby Mode VIN Pin Current | $V_{IN}=5V$, $V_{BAT}=4.5V$, $\overline{EN} = L$, $R_{IREF}=120K\Omega$ | | 135 | 200 | μA | |
| I_{BATSTD} | Standby Mode BAT Pin Current | $V_{IN}=5V$, $V_{BAT}=4.5V$, $\overline{EN} = L$, $R_{IREF}=120K\Omega$ | | 1.7 | 2 | μA | |
| Shutdown Current | | | | | | | |
| I_{VINDIS} | Shutdown Mode VIN Pin Current | $V_{IN}=5V$, $R_{IREF}=120K\Omega$, Charger disabled | | 130 | 200 | μA | |
| I_{VINASD} | Shutdown Mode VIN Pin Current | $V_{BAT}=4.5V$, $V_{IN}=4.3V$ | | 92 | | μA | |
| I_{BATASD} | Shutdown Mode BAT Pin Current | $V_{BAT}=4.5V$, $V_{IN}=4.3V$ | | 1.8 | | μA | |
| $I_{VINUVLO}$ | UVLO Mode Supply Current | $V_{IN}=V_{BAT}=3.6V$ | | 88 | | μA | |
| $I_{BATUVLO}$ | UVLO Mode BAT Pin Current | $V_{IN}=V_{BAT}=3.6V$ | | 1 | | μA | |
| Sleep Current | | | | | | | |
| $I_{BATSLEEP}$ | BAT Pin Current | Input is floating or 0V | | | 1 | μA | |
| Voltage Regulation | | | | | | | |
| V_{OUT} | Output Voltage | $R_{IREF}=120K\Omega$, $4.55V < V_{IN} < 6.10V$, charge current=20mA | DFN-2x2-8L | 4.158 | 4.2 | 4.242 | V |
| | | | | 4.257 | 4.3 | 4.343 | |
| | | | | 4.306 | 4.35 | 4.394 | |
| | | | | 4.356 | 4.4 | 4.444 | |
| | | | ESOP8 | 4.158 | 4.2 | 4.242 | V |
| | | | | 4.306 | 4.35 | 4.394 | |
| $R_{DS(ON)}$ | PMOS On Resistance | $V_{BAT}=3.8V$, charge current=500mA, $R_{IREF}=10K\Omega$ | | 1.2 | | Ω | |
| Charge Current ⁽²⁾ | | | | | | | |
| V_{IREF} | IREF Pin Output Voltage | $V_{BAT}=3.8V$, $R_{IREF}=120K\Omega$ | | 1.213 | | V | |
| I_{REF} | Constant Charge Current | $R_{IREF}=120K\Omega$, $V_{BAT}=2.8V$ to $3.8V$ | 90 | 100 | 110 | mA | |
| I_{TRK} | Trickle Charge Current | $R_{IREF}=120K\Omega$, $V_{BAT}=2.4V$ | 13 | 22 | 31 | mA | |
| I_{MIN} | Full-of-Charge Current | $R_{IMIN}=243K\Omega$ | 22 | 44 | 66 | mA | |
| I_{CHR} | FOC Rising Threshold | $R_{IREF}=24.3K\Omega$ | 337 | 375 | 413 | mA | |


| Preconditioning Charge Threshold | | | | | | |
|----------------------------------|--|---|------|------|------|----|
| V _{MIN} | Preconditioning Charge Threshold Voltage | R _{IREF} =24.3KΩ, V _{OUT} =4.2V DFN-2x2-8L | 2.45 | 2.55 | 2.65 | V |
| | | R _{IREF} =24.3KΩ, V _{OUT} =4.3V DFN-2x2-8L | 2.5 | 2.6 | 2.7 | V |
| | | R _{IREF} =24.3KΩ, V _{OUT} =4.35V DFN-2x2-8L | 2.55 | 2.65 | 2.75 | V |
| | | R _{IREF} =24.3KΩ, V _{OUT} =4.4V DFN-2x2-8L | 2.6 | 2.7 | 2.8 | V |
| | | R _{IREF} =24.3KΩ, V _{OUT} =4.2V ESOP8 | 2.45 | 2.55 | 2.65 | V |
| | | R _{IREF} =24.3KΩ, V _{OUT} =4.35V ESOP8 | 2.55 | 2.65 | 2.75 | V |
| V _{MINHYS} | Preconditioning Voltage Hysteresis | R _{IREF} =24.3KΩ | 70 | 100 | 130 | mV |
| Internal Temperature Monitoring | | | | | | |
| T _{FOLD} | Charge Current Foldback Threshold | | | 115 | | °C |
| Logic input and outputs | | | | | | |
| V _{EN_H} | \overline{EN} Pin Logic Input High | | 1.5 | | | V |
| V _{EN_L} | \overline{EN} Pin Logic Input Low | | | | 0.8 | V |
| R _{EN} | \overline{EN} Pin Internal Pull Down Resistance | | 150 | 200 | 250 | KΩ |
| I _{CHG_sink} | \overline{CHG} Sink Current when LOW | Pin Voltage = 1V | 10 | 18 | | mA |
| I _{CHG_leakage} | \overline{CHG} Leakage Current when High Impedance | V _{CHG} = 5.5V | | | 1 | μA |
| I _{PPR_sink} | \overline{PPR} Sink Current when LOW | Pin Voltage = 1V | 10 | 18 | | mA |
| I _{PPR_leakage} | \overline{PPR} Leakage Current when High Impedance | V _{PPR} = 5.5V | | | 1 | μA |

Note:


1. The 4.5V V_{BAT} is selected so that the \overline{PPR} output can be used as the indication for the offset comparator output indication. If the V_{BAT} is lower than the POR threshold, no output pin can be used for indication.
2. The charge current can be affected by the thermal foldback function if the IC under the test setup cannot dissipate the heat.

TYPICAL PERFORMANCE CHARACTERISTICS


$V_{\text{FLOAT}} \text{ vs } V_{\text{IN}}$

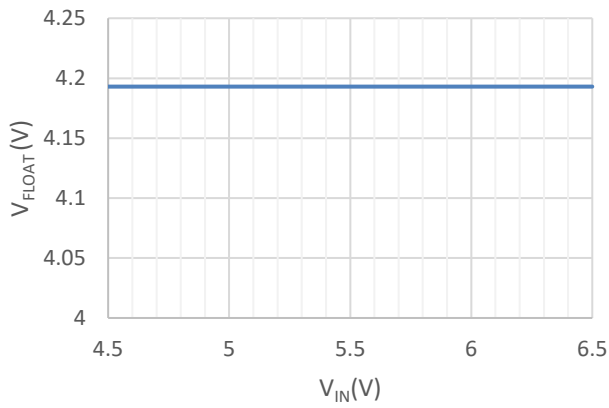


$V_{\text{IREF}} \text{ vs } I_{\text{BAT}}$

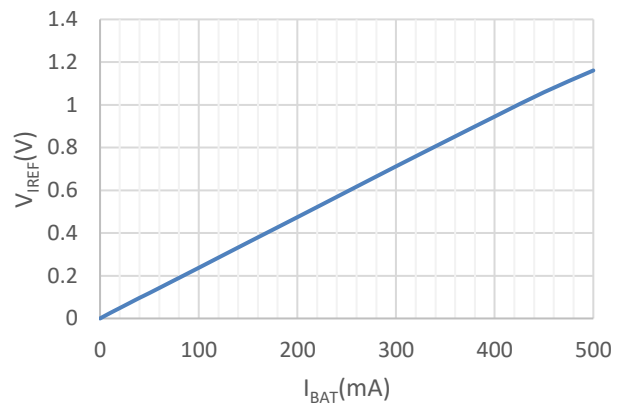


$I_{\text{BAT}} \text{ vs } V_{\text{IN}}$

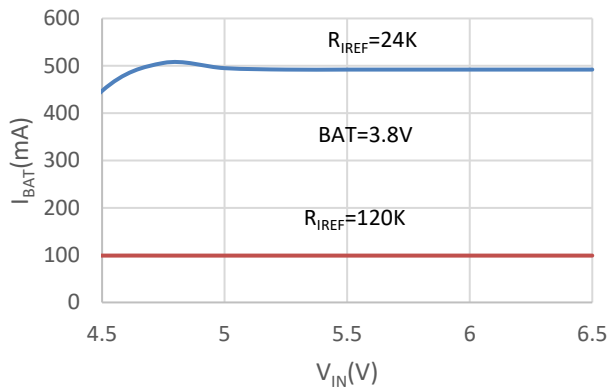


$V_{\text{IREF}} \text{ vs } V_{\text{IN}}$

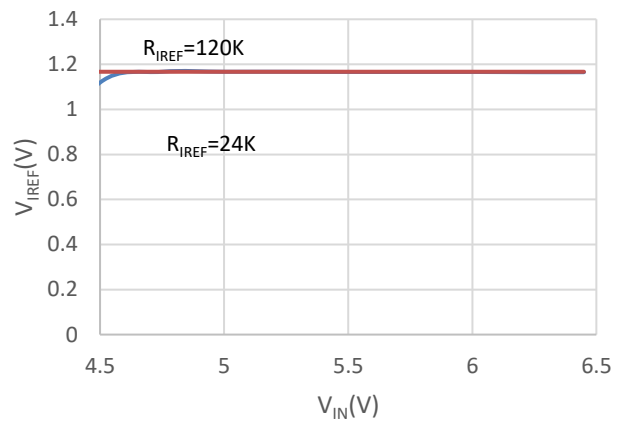


$I_{\text{TRK}} \text{ vs } V_{\text{IN}}$

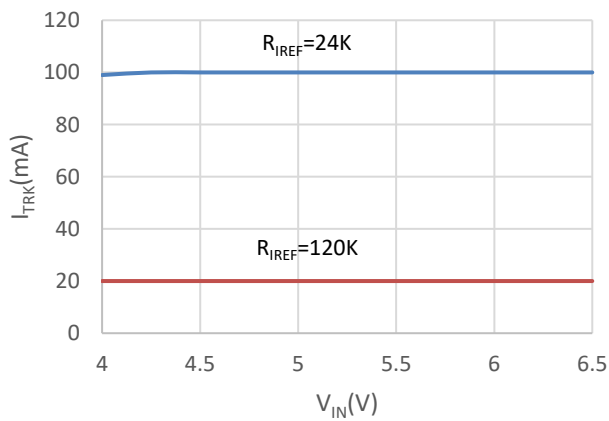


$I_{\text{CHG}} \text{ vs } V_{\text{CHG}}$

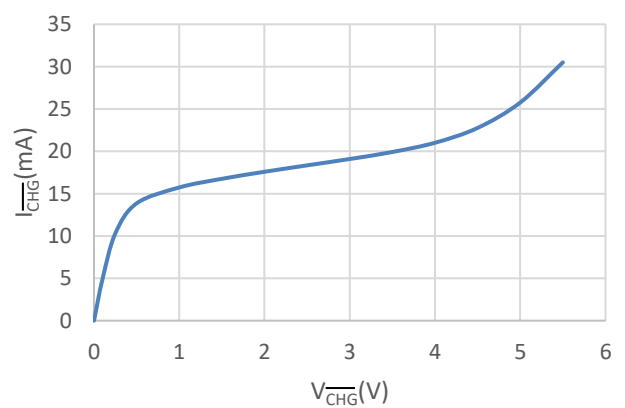


I_{PPR} vs V_{PPR}

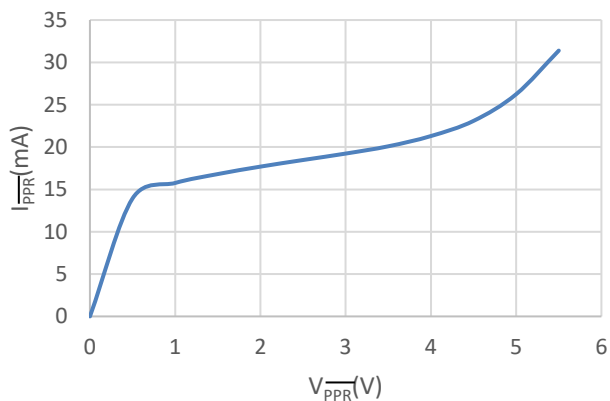


V_{IREF} vs Ta

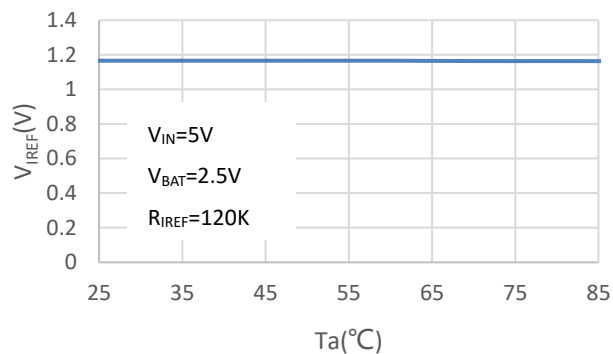


V_{BAT} vs Ta

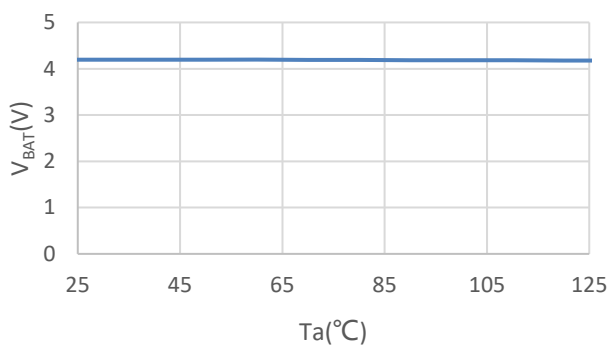


OVP vs Ta

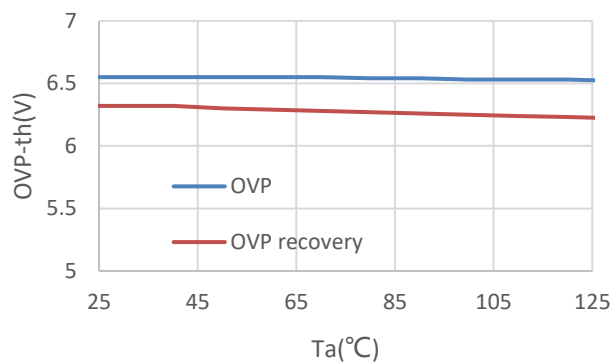


Pre-charge Threshold vs Ta

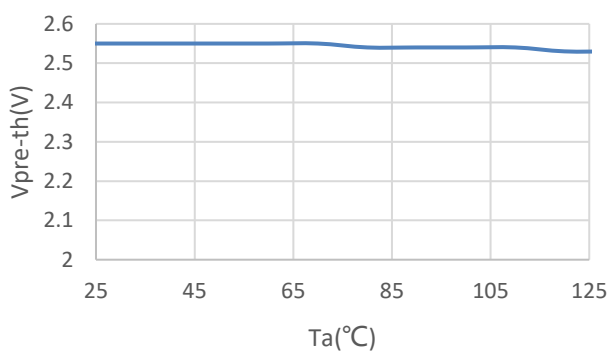


V_{IMIN} vs Ta

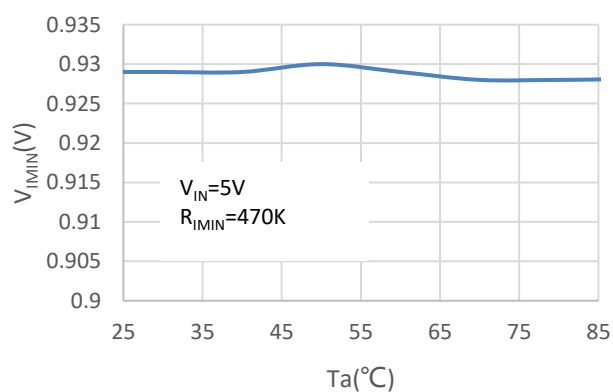


I_{CHG} vs Ta

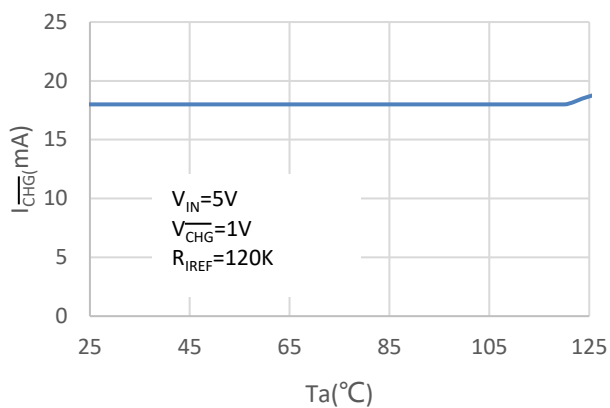


I_{BAT} vs Ta

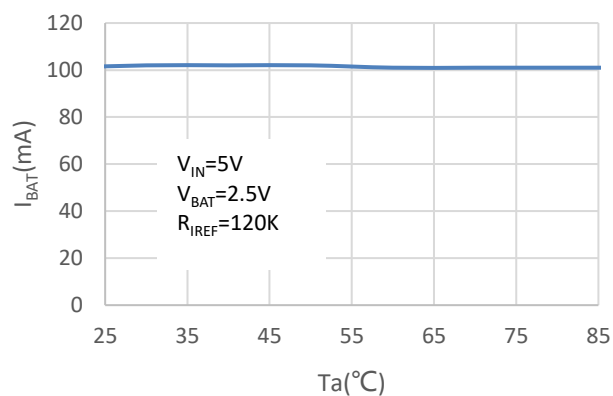


I_{TRK} vs Ta

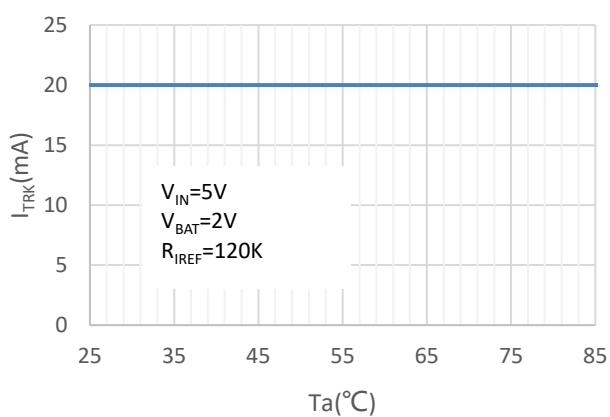


I_{CC} vs Ta

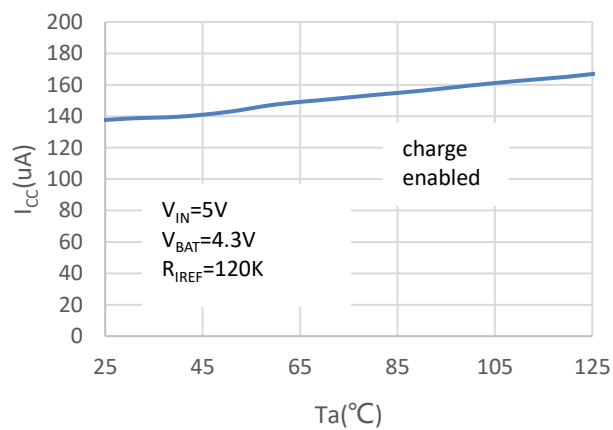


I_{CC} vs Ta

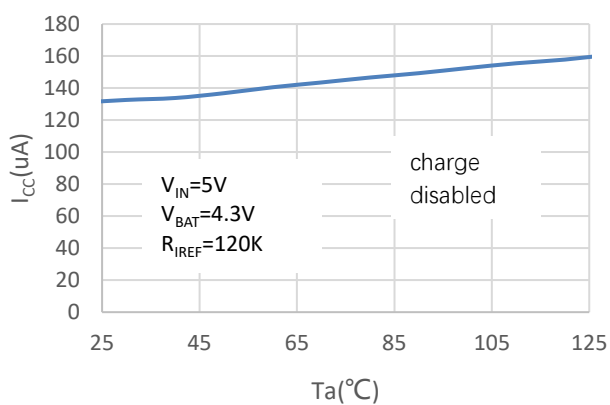


I_{BAT} vs R_{IREF}

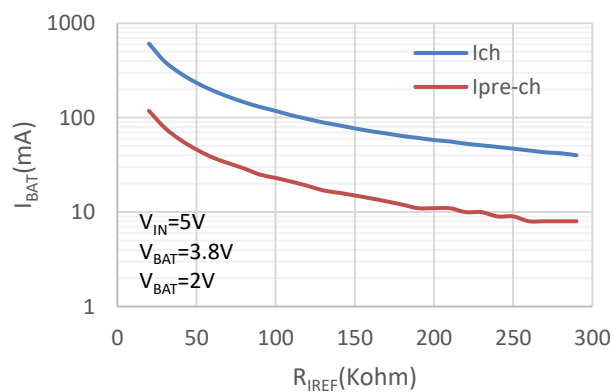

Charge Curve

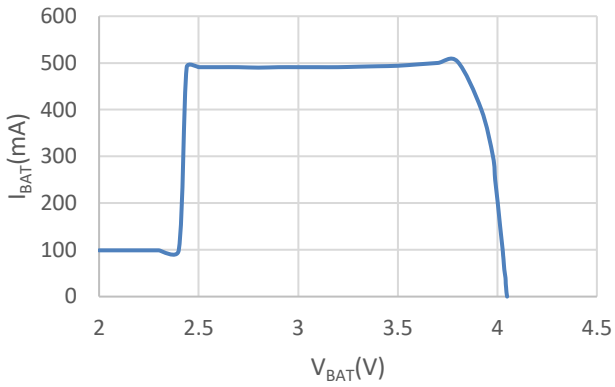

I_{MIN} vs R_{MIN}

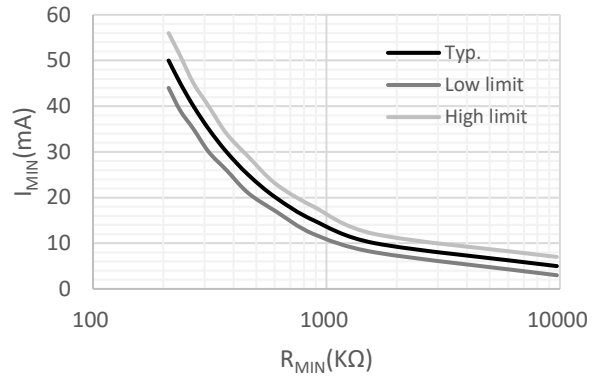

OVP Test


CH1:V_{IN}

V_{IN}=0V to 10V



CH3:V_{BAT}


V_{IN}=0V to 15V

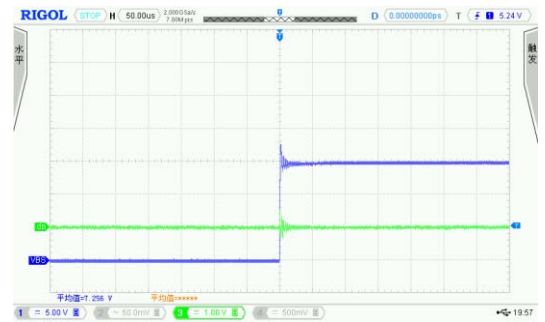


V_{IN}=0V to 20V




V_{IN}=5V to 10V

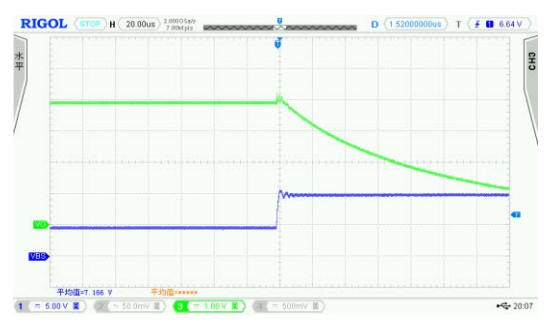

V_{IN}=5V to 15V

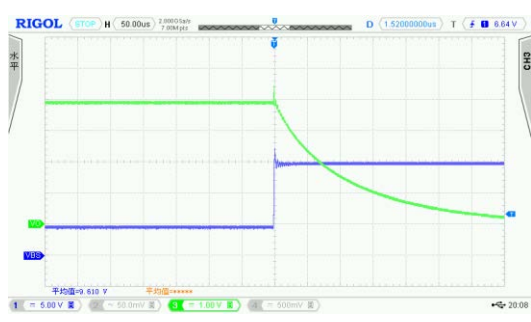

V_{IN}=5V to 20V

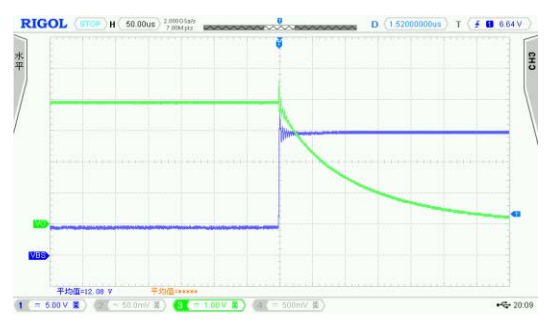

OPERATION

The SK4554 charges a Li-ion battery using a CC/CV profile. The constant current I_{REF} is set with the external resistor R_{IREF} (see Figure 1) and the constant voltage is fixed at 4.2V (or 4.3V, or 4.35V, or 4.4V). If the battery voltage is below a typical 2.55V trickle charge threshold, the SK4554 charges the battery with a trickle current of 20% of I_{REF} until the battery voltage rises above the trickle charge threshold. Fast charge CC mode is maintained at the rate determined by programming I_{REF} until the cell voltage rises to 4.2V (or 4.3V, or 4.35V, or 4.4V). When the battery voltage reaches 4.2V (or 4.3V, or 4.35V, or 4.4V), the charger enters a CV mode and regulates the battery voltage at 4.2V (or 4.3V, or 4.35V, or 4.4V) to fully charge the battery without the risk of over charge. Upon reaching an full-of-charge (FOC) current, the charger indicates the charge completion with the \overline{CHG} pin, but the charger continues to output the 4.2V (or 4.3V, or 4.35V, or 4.4V) voltage. Figure 3 shows the typical charge waveforms after the power is on.

The FOC current level I_{MIN} is programmable with the external resistor R_{IMIN} (see Figure 1). The \overline{CHG} pin turns to low when the trickle charge starts and rises to high impedance at the FOC. After the FOC is reached, the charge current has to rise to typically 75% I_{REF} for the \overline{CHG} pin to turn on again, as shown in Figure 3. The current surge after FOC can be caused by a load connected to the battery.

A thermal foldback function reduces the charge current anytime when the die temperature reaches typically 115 °C . This function guarantees safe operation when the printed circuit board (PCB) is not capable of dissipating the heat generated by the linear charger. The SK4554 accepts an input voltage up to 24V but disables charging when the input voltage exceeds the OVP threshold, typically 6.8V for SK4554, to protect against unqualified or faulty AC adapters.

\overline{PPR} Indication

The \overline{PPR} pin is an open-drain output to indicate the presence of the AC adapter. Whenever the input voltage is higher than the POR threshold, the \overline{PPR} pin turns on the internal open-drain MOSFET to indicate a logic low signal, independent on the \overline{EN} pin input. When the internal open-drain FET is turned off, the \overline{PPR} pin leaks less than 20 μ A current. When turned on, the \overline{PPR} pin is able to sink at least 15mA current under all operating conditions. The \overline{PPR} pin can be used to drive an LED (see Figure 1) or to interface with a micro-processor.

Power Good Range

The power good range is defined by the following three conditions:

1. $V_{IN} > V_{POR}$
2. $V_{IN} - V_{BAT} > V_{OS}$
3. $V_{IN} < V_{OVP}$

where the V_{OS} is the offset voltage for the input and output voltage comparator, discussed shortly, and the V_{OVP} is the over-voltage protection threshold given in the Electrical Characteristics table. All V_{POR} , V_{OS} , and V_{OVP} have hysteresis, as given in the Electrical Characteristics table. The charger will not charge the battery if the input voltage is not in the power good range.

Input and Output Comparator

The charger will not be enabled unless the input voltage is higher than the battery voltage by an offset voltage V_{OS} . The purpose of this comparator is to ensure that the charger is turned off when the input power is removed from the charger. Without this comparator, it is possible that the charger will fail to power down when the input is removed and the current can leak through the PFET pass element to continue biasing the POR and the Pre-Regulator blocks.

Dropout Voltage

The constant current may not be maintained due to the $R_{DS(ON)}$ limit at a low input voltage. The worst case $R_{DS(ON)}$ is at the maximum allowable operating temperature.

\overline{CHG} Indication

The \overline{CHG} is an open-drain output capable of sinking at least 15mA current when the charger starts to charge, and turns off when the FOC current is reached. The \overline{CHG} signal is interfaced either with a microprocessor GPIO or an LED for indication.

\overline{EN} Input

\overline{EN} is an active-low logic input to enable the charger. Drive the \overline{EN} pin to low or leave it floating to enable the charger. This pin has a 200k Ω internal pull-down resistor so when left floating, the input is equivalent to logic low. Drive this pin to high to disable the charger. The threshold for high is given in the Electrical Characteristics table.

IREF Pin

The IREF pin has the two functions as described in the Pin Description section. When setting the fast charge current, the charge current is guaranteed to have 10% accuracy with the charge current set at 100mA. When monitoring the charge current, the accuracy of the IREF pin voltage vs. the actual charge current has the same accuracy as the gain from the IREF pin current to the actual charge current.

Operation without the Battery

The SK4554 relies on a battery for stability and works under LDO mode if the battery is not connected. With a battery, the charger will be stable with an output ceramic decoupling capacitor in the range of 1 μ F to 220 μ F. In LDO mode, its stability depends on load current, C_{OUT} , etc. The maximum load current is limited by the dropout voltage 4.2V, the programmed IREF and the thermal foldback.

Thermal Foldback

The thermal foldback function starts to reduce the charge current when the internal temperature reaches a typical value of 115 $^{\circ}$ C.

APPLICATION INFORMATION

Input Capacitor Selection

The input capacitor is required to suppress the power supply transient response during transitions. Mainly this capacitor is selected to avoid oscillation during the start up when the input supply is passing the POR threshold and the VIN-BAT comparator offset voltage. When the battery voltage is above the POR threshold, the $V_{IN} - V_{BAT}$ offset voltage dominates the hysteresis value. Typically, a 1 μ F X5R ceramic capacitor should be sufficient to suppress the power supply noise.

Output Capacitor Selection

The criterion for selecting the output capacitor is to maintain the stability of the charger as well as to bypass any transient load current. The minimum capacitance is a 1 μ F X5R ceramic capacitor. The actual capacitance connected to the output is dependent on the actual application requirement.

Layout Guidance

The SK4554 uses thermally-enhanced DFN packages that have an exposed thermal pad at the bottom side of the packages. The layout should connect as much as possible to copper on the exposed pad. Typically, the component layer is more effective in dissipating heat. The thermal impedance can be further reduced by using other layers of copper connecting to the exposed pad through a thermal via array. Each thermal via is recommended to have 0.3mm diameter and 1mm distance away from other thermal vias.

Input Power Sources

The input power source is typically a well-regulated wall cube with 1-meter length wire or a USB port. The SK4554 can withstand up to 24V on the input without damaging the IC. If the input voltage is higher than typically 6.8V, the charger stops charging.

IMIN Setting




The FOC current level I_{MIN} is programmable with the external resistor R_{MIN} , the accuracy is +/-10% for $I_{MIN}>50mA$. Table1 is 5mA~50mA I_{MIN} setting for design reference. This is promised by design, not test in mass production.

| RMIN(K Ω) | IMIN Min | IMIN Typ | IMIN Max |
|-------------------|----------|----------|----------|
| 10000 | 3 | 5 | 7 |
| 1617 | 8 | 10 | 12 |
| 882 | 12 | 15 | 18 |
| 606 | 17 | 20 | 23 |
| 462 | 21 | 25 | 29 |
| 373 | 26 | 30 | 34 |
| 313 | 30 | 35 | 40 |
| 269 | 35 | 40 | 45 |
| 237 | 39 | 45 | 51 |
| 211 | 44 | 50 | 56 |

Table 1

In the equation: $I_{MIN} = \frac{9700}{R_{IMIN}} + 4 (mA)$, 4mA is a composition current for various different batteries applications, and this is a typical value for most batteries. If deviation is very big from the equation, you can adjust it according to the test result of I_{MIN} .


PACKAGE OUTLINE

| Package | DFN-2x2-8L | Devices per reel | 4000pcs | Unit | mm | |
|--|---------------------------|---|---------|----------------------|--------|-------|
| Package Dimension: | | | | | | |
|  <p>TOP VIEW</p> | |  <p>BOTTOM VIEW</p> | | | | |
|  <p>SIDE VIEW</p> | | | | | | |
| Symbol | Dimensions in Millimeters | | | Dimensions in Inches | | |
| | Min | Typ | Max | Min | Typ | Max |
| A | 0.700 | 0.750 | 0.800 | 0.028 | 0.0295 | 0.031 |
| A1 | 0.000 | 0.025 | 0.050 | 0.000 | 0.001 | 0.002 |
| A2 | | 0.203 | | | 0.008 | |
| D | 1.900 | 2.000 | 2.100 | 0.075 | 0.079 | 0.083 |
| D1 | 1.100 | 1.200 | 1.300 | 0.043 | 0.047 | 0.051 |
| E | 1.900 | 2.000 | 2.100 | 0.075 | 0.079 | 0.083 |
| E1 | 0.500 | 0.600 | 0.700 | 0.020 | 0.024 | 0.028 |
| b | 0.180 | 0.24 | 0.300 | 0.007 | 0.0095 | 0.012 |
| e | | 0.500 | | | 0.020 | |
| k | 0.200 | | | 0.008 | | |
| L | 0.250 | 0.350 | 0.450 | 0.010 | 0.014 | 0.018 |

PACKAGE OUTLINE

| | | | | | |
|---------|-------|------------------|---------|------|----|
| Package | ESOP8 | Devices per reel | 4000pcs | Unit | mm |
|---------|-------|------------------|---------|------|----|

Package Dimension:

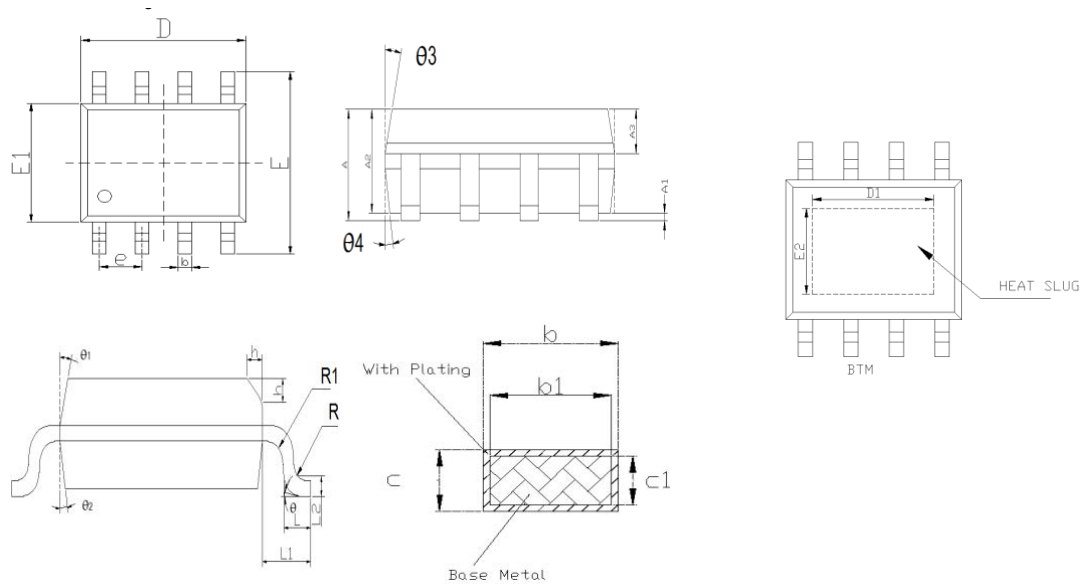

| SYMBOL | MIN | NOM | MAX | |
|--------|-----------|------|------|------|
| A | 1.35 | 1.50 | 1.65 | |
| A1 | 0.05 | 0.10 | 0.15 | |
| A2 | 1.35 | 1.40 | 1.50 | |
| A3 | 0.50 | 0.60 | 0.70 | |
| b | 0.38 | - | 0.50 | |
| b1 | 0.37 | 0.40 | 0.43 | |
| c | 0.17 | - | 0.25 | |
| c1 | 0.17 | 0.20 | 0.23 | |
| D | 4.80 | 4.90 | 5.00 | |
| D1 | Option 1 | 3.20 | 3.30 | 3.40 |
| | Option 2 | 2.19 | 2.29 | 2.39 |
| e | 1.27(BSC) | | | |
| E | 5.80 | 6.00 | 6.20 | |
| E1 | 3.80 | 3.90 | 4.00 | |

| SYMBOL | MIN | NOM | MAX | |
|--------|----------|------|------|------|
| E2 | Option 1 | 2.31 | 2.41 | 2.51 |
| | Option 2 | 2.19 | 2.29 | 2.39 |
| L | 0.45 | 0.60 | 0.80 | |
| L1 | 1.04REF | | | |
| L2 | 0.25BSC | | | |
| R | 0.07 | - | - | |
| R1 | 0.07 | - | - | |
| h | 0.30 | 0.40 | 0.50 | |
| .0 | 0° | - | 8° | |
| .01 | 10° | 12° | 14° | |
| .02 | 8° | 10° | 12° | |
| .03 | 10° | 12° | 14° | |
| .04 | 8° | 10° | 12° | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Battery Management](#) category:

Click to view products by [Suntek](#) manufacturer:

Other Similar products are found below :

[VN5R003HTR-E](#) [NCP1855FCCT1G](#) [FAN54063UCX](#) [LC05132C01NMTTGTG](#) [ISL78714ANZ](#) [CM1104-EH](#) [CM1104-DBB](#) [CM1104-MBB](#)
[XC6801A421MR-G](#) [ISL95521BHRZ](#) [ISL95521BIRZ](#) [MP2639AGR-P](#) [S-82D1AAE-A8T2U7](#) [S-82D1AAA-A8T2U7](#) [S-8224ABA-I8T1U](#)
[MC33772CTC0AE](#) [BQ28Z610DRZR-R1](#) [MCP73832-4ADI/MC](#) [MCP73832T-2DCIMC](#) [MCP73833T-AMIMF](#) [MCP73833T-AMI/UN](#)
[MCP73838-NVI/MF](#) [MCP73213-A6BI/MF](#) [MCP73831-2ACI/MC](#) [MCP73831T-2ATIMC](#) [MCP73832-2ACI/MC](#) [MCP73832T-3ACIMC](#)
[MCP73833T-FCI/MF](#) [MCP73853-IML](#) [BQ25895RTWR](#) [BQ29704DSER](#) [BQ78Z100DRZR](#) [ISL78610ANZ](#) [FAN5403UCX](#)
[NCP367DPMUECTBG](#) [FAN54015BUCX](#) [MAX8934BETI+](#) [BQ24311DSGR](#) [BQ25100HYFPR](#) [BQ29707DSER](#) [MAX17048G+T10](#)
[BQ24130RHLLR](#) [BQ25120AYFPR](#) [BQ29703DSER](#) [BQ771807DPJR](#) [BQ25120AYFPT](#) [MAX17710GB+T](#) [MAX14634EWC+](#)
[BQ25121AYFPR](#) [BD99954GW-E2](#)